

Product specification

Quick Reference Data

Antenna Type	PCB Antenna	
Frequenc Range	2400 ~ 2500MHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.2	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	6 0.2 %	
Gain (dBi)	1.9 (Avg Gain XZ-plane)	
Maximum Power (dBm)	1.7 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Input Impendence(ohm)	50	
Polarization Type	V ertical & Horizontal	
V . S .W . R	< 1.4	

All the technical data and information contained herein are subject to change without prior notice

Manufacturer: IDEA PLUS INTERNATIONAL(HK)LTD

Address: RM-1318-19,HOLLYWOOD PLAZA MONG KOK,KOWLOON

Antenna Layout & module on the system board

Size: 1.5mm X 1.8 mm



Antenna Gain

Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.2	-0.5	1.9	-3.6	1.1	-3.0	6 0.2 %

Return Loss



The Environment of Antenna Radiation Pattern



3D radiation pattern diagram




XY-plane

Far-field Power Distribution(H+V) on X-Y Plane



XZ-plane

Far-field Power Distribution(H+V) on X-Z Plane

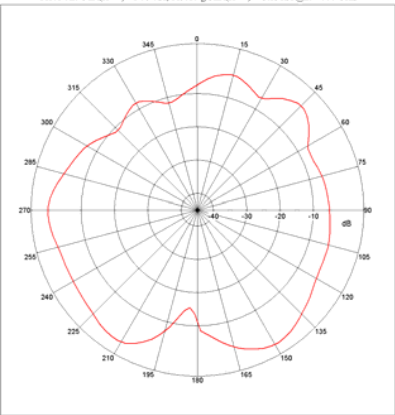

YZ-plane

Far-field Power Distribution(H+V) on Y-Z Plane

