



MPE TEST REPORT

Report No:STS2106051H01

Issued for

Shenzhen dilili trading co., Ltd.

9ceng B1, zhiyuan dasha Bzuo, gongye balu
89hao,shekoudong tianhaiqu, shekou jiedao, nanshanqu
shenzhen guangdong china

Product Name:	10W Wireless Charger
Brand Name:	N/A
Model Name:	IR-PM-01
Series Model:	N/A
FCC ID:	2AZSTIRPM01
Test Standard:	FCC CFR 47 part 1, 1.1310

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, all test data presented in this report is only applicable to presented test sample.

Shenzhen STS Test Services Co., Ltd.
A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ,
Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com



**TEST RESULT CERTIFICATION**

Applicant's Name: Shenzhen dilili trading co., ltd.
Address: 9ceng B1, zhiyuan dasha Bzuo, gongye balu 89hao,shekoudong tianhaiqu, shekou jiedao, nanshanqu shenzhen guangdong china
Manufacturer's Name: Shenzhen dilili trading co., ltd.
Address: 9ceng B1, zhiyuan dasha Bzuo, gongye balu 89hao,shekoudong tianhaiqu, shekou jiedao, nanshanqu shenzhen guangdong china

Product Description

Product Name: 10W Wireless Charger

Brand Name: N/A

Model Name: IR-PM-01

Series Model: N/A

Standards: FCC CFR 47 part 1, 1.1310

Test Procedure: 680106 D01 RF Exposure Wireless Charging Apps v03r01

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test:

Date of receipt of test item: 08 June 2021

Date of performance of tests ...: 08 June 2021 ~ 16 June 2021

Date of Issue: 16 June 2021

Test Result.....: **Pass**

Testing Engineer : 

(Chris Chen)

Technical Manager : 

(Sean She)

Authorized Signatory : 

(Vita Li)





Table of Contents

Page

1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	5
1.2 MEASUREMENT UNCERTAINTY	5
1.3 GENERAL DESCRIPTION OF THE EUT	6
1.4 EQUIPMENTS LIST FOR ALL TEST ITEMS	7
1.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	7
2. MAXIMUM PERMISSIBLE EXPOSURE	8
2.1 MAXIMUM PERMISSIBLE EXPOSURE	8
2.2 TEST PROCEDURE	9
2.3 TEST SETUP	9
2.4 TEST RESULTS	9
2.5 MAXIMUM PERMISSIBLE EXPOSURE	10



Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	16 June 2021	STS2106051H01	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
FCC KDB 680106 D01 RF Exposure Wireless Charging Apps v03r01

FCC CFR 47			
Standard Section	Test Item	Judgment	Remark
FCC CFR 47 part1, 1.1310 KDB680106 D01v03r01	Electric Field Strength (E) (V/m)	PASS	
	Magnetic Field Strength (H) (A/m)	PASS	

1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.84\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.39\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 5.10\text{dB}$
6	All emissions, radiated>6G	$\pm 5.48\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.79\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.80\text{dB}$



1.3 GENERAL DESCRIPTION OF THE EUT

Product Name	10W Wireless Charger
Trade Name	N/A
Model Name	IR-PM-01
Series Model	N/A
Model Difference	N/A
Equipment Category	Non-ISM frequency
Antenna Type	Please refer to the Note 2.
Operating frequency	115-205KHz
Modulation Type	FSK
Rating	Input: 5Vdc, 2A / 9Vdc, 2A / 12Vdc 1.5A Output: 5W, 7.5W, 10W
Hardware version number	N/A
Software version number	N/A
Connecting I/O Port(s)	Please refer to the Note 1.

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	NOTE
1	N/A	IR-PM-01	Coil	NA	Antenna

The EUT antenna is Coil Antenna. No antenna other than that furnished by the responsible party shall be used with the device.



1.4 EQUIPMENTS LIST FOR ALL TEST ITEMS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Electromagnetic field strength analyzer	Coliy Technology GmbH	E300	13945	2010.10.19	2021.10.18
Three-dimensional omnidirectional electric field probe	Coliy Technology GmbH	EP0650	N/A	2010.10.19	2021.10.18
Three-dimensional omnidirectional magnetic field probe	Coliy Technology GmbH	HP0350	N/A	2010.10.19	2021.10.18
Three-dimensional omnidirectional electric and magnetic field combo probe	Coliy Technology GmbH	EHP150	N/A	2010.10.19	2021.10.18

Note:

1. The Three-dimensional omnidirectional electric field probe frequency rang is 100 KHz - 6.5 GHz, the Three-dimensional omnidirectional magnetic field probe frequency rang is 100 KHz - 35 MHz, and the Three-dimensional omnidirectional electric and magnetic field combo probe frequency rang is 5 Hz - 150 KHz, their selectable resolution bandwidth (RBW) is 1Hz/10Hz/30Hz.
2. The isotropic probes mean deviation response is not greater than 1 dB.

1.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS
Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
/	Charging Box	N/A	IR-PM-01	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
/	Mobile Phone	Apple	iPhone 8	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in『Length』column.
- (2) "YES" is means "with core"; "NO" is means "without core".



2. MAXIMUM PERMISSIBLE EXPOSURE

2.1 MAXIMUM PERMISSIBLE EXPOSURE

Limit of Maximum Permissible Exposure

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

Note 1: f = frequency in MHz ; *Plane-wave equivalent power density

Note 2: For the applicable limit, see FCC 1.1310, 680106 D01 RF Exposure Wireless Charging Apps v03r01

Note 3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.


Note 4: The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

2.2 TEST PROCEDURE

a. For devices designed for typical desktop applications, such a wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 20 cm(Top) and 15cm(Edge). E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 20 cm(Top) and 15cm(Edge) measured from the center of the probe(s) to the edge of the device.

Output: 5W, 7.5W, 10W mode all have been tested, only worse case 10W mode is reported.

2.3 TEST SETUP

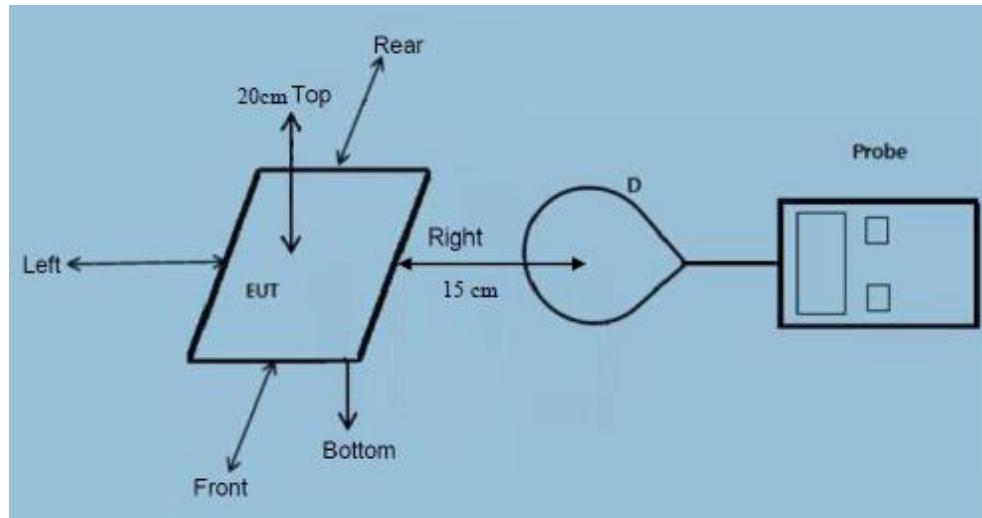

2.4 TEST RESULTS

The EUT does comply with item 5 KDB680106 D01 v03r01.

- (1) Power transfer frequency is less than 1 MHz.
(Conform)
- (2) Output power from each primary coil is less than or equal to 15 watts.
(Conform)
- (3) The system may consist of more than one source primary coils, charging one or more clients.
If more than one primary coil is present, the coil pairs may be powered on at the same time.
(Conform)
- (4) Client device is placed directly in contact with the transmitter.
(Conform)
- (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
(Conform)
- (6) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.
(Conform)



2.5 MAXIMUM PERMISSIBLE EXPOSURE

Maximum Permissible Exposure				
Charging	Separation	Probe from EUT Side	E-field (V/m)	H-field (A/m)
< 1% Battery	15cm	Front	3.275	0.188
< 1% Battery	15cm	Rear	3.125	0.188
< 1% Battery	15cm	Left	3.426	0.187
< 1% Battery	15cm	Right	3.322	0.194
< 1% Battery	20cm	Top	3.025	0.177
Limit			614	1.63
Margin Limit (%)			0.49%	10.86%

Maximum Permissible Exposure				
Charging	Separation	Probe from EUT Side	E-field (V/m)	H-field (A/m)
50% Battery	15cm	Front	3.268	0.183
50% Battery	15cm	Rear	3.115	0.184
50% Battery	15cm	Left	3.420	0.170
50% Battery	15cm	Right	3.314	0.201
50% Battery	20cm	Top	3.029	0.189
Limit			614	1.63
Margin Limit (%)			0.49%	11.57%

Maximum Permissible Exposure				
Charging	Separation	Probe from EUT Side	E-field (V/m)	H-field (A/m)
>99% Battery	15cm	Front	3.262	0.183
>99% Battery	15cm	Rear	3.123	0.176
>99% Battery	15cm	Left	3.406	0.161
>99% Battery	15cm	Right	3.300	0.194
>99% Battery	20cm	Top	3.038	0.202
Limit			614	1.63
Margin Limit (%)			0.49%	12.39%

MPE SETUP PHOTO



*****END OF THE REPORT*****