

**FCC - TEST REPORT**Report Number : **709502405776-00C** Date of Issue: November 19, 2024Model : Refer to page 4Product Type : Acoustic Thermal ImagerApplicant : FOTRIC INC.Address : No. 14, Lane 2500, Xiupu Road, Pudong, 201201 Shanghai,
PEOPLE'S REPUBLIC OF CHINAManufacturer : FOTRIC INC.Address : No. 14, Lane 2500, Xiupu Road, Pudong, 201201 Shanghai,
PEOPLE'S REPUBLIC OF CHINATest Result : ☒ **Positive** ☐ **Negative**Total pages including
Appendices : 46

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.



1 Table of Contents

1	Table of Contents	2
2	Report Modification Record.....	3
3	Details about the Test Laboratory.....	3
4	Description of the Equipment under Test.....	4
5	Summary of Test Standards	9
6	Summary of Test Results	10
7	General Remarks	11
8	Test Setups	12
9	Systems test configuration	15
10	Technical Requirement	16
10.1	Conducted Emission.....	16
10.2	Conducted peak output power	21
10.3	6dB bandwidth.....	25
10.4	Power spectral density.....	27
10.5	Spurious RF conducted emissions	29
10.6	Band edge	33
10.7	Spurious radiated emissions for transmitter.....	36
11	Test Equipment List.....	43
12	System Measurement Uncertainty	44
13	Photographs of Test Set-ups.....	45
14	Photographs of EUT	46



2 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
709502405776-00C	First Issue	11/19/2024

3 Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch
No.16 Lane, 1951 Du Hui Road,
Shanghai 201108,
P.R. China

Test Firm FCC
Registration
Number: 820234

Designation
number: CN1183

IC Company
Number: 31668

CAB identifier: CN0101

Telephone: +86 21 6141 0123
Fax: +86 21 6140 8600

4 Description of the Equipment under Test

Product: Acoustic Thermal Imager

Model no.:

Fotric 330MiX	Fotric 340MiX	Fotric 850MiX	Fotric V0MiX	Fotric EE0VM	Fotric EE0IM
Fotric 331MiX	Fotric 341MiX	Fotric 851MiX	Fotric V1MiX	Fotric EE1VM	Fotric EE1IM
Fotric 332MiX	Fotric 342MiX	Fotric 852MiX	Fotric V2MiX	Fotric EE2VM	Fotric EE2IM
Fotric 333MiX	Fotric 343MiX	Fotric 853MiX	Fotric V3MiX	Fotric EE3VM	Fotric EE3IM
Fotric 334MiX	Fotric 344MiX	Fotric 854MiX	Fotric V4MiX	Fotric EE4VM	Fotric EE4IM
Fotric 335MiX	Fotric 345MiX	Fotric 855MiX	Fotric V5MiX	Fotric EE5VM	Fotric EE5IM
Fotric 336MiX	Fotric 346MiX	Fotric 856MiX	Fotric V6MiX	Fotric EE6VM	Fotric EE6IM
Fotric 337MiX	Fotric 347MiX	Fotric 857MiX	Fotric V7MiX	Fotric EE7VM	Fotric EE7IM
Fotric 338MiX	Fotric 348MiX	Fotric 858MiX	Fotric V8MiX	Fotric EE8VM	Fotric EE8IM
Fotric 339MiX	Fotric 349MiX	Fotric 859MiX	Fotric V9MiX	Fotric EE9VM	Fotric EE9IM
Fotric 3310MiX	Fotric 3410MiX	Fotric 8510MiX	Fotric V10MiX	Fotric EE10VM	Fotric EE10IM
WWZDH2	WVZDH2	RUZDH2	4ZDH2	LLZ4D	LLZHD
WWYDH2	WVYDH2	RUYDH2	4YDH2	LLY4D	LLYHD
WWXDH2	WVXDH2	RUXDH2	4XDH2	LLX4D	LLXHD
WWWDH2	WVWDH2	RUWDH2	4WDH2	LLW4D	LLWHD
WWVDH2	WVVDH2	RUVDH2	4VDH2	LLV4D	LLVHD
WWUDH2	WVUDH2	RUUDH2	4UDH2	LLU4D	LLUHD
WWTDH2	WVTDH2	RUTDH2	4TDH2	LLT4D	LLTHD
WWSDH2	WVSDH2	RUSDH2	4SDH2	LLS4D	LLSHD
WWRDH2	WVRDH2	RURDH2	4RDH2	LLR4D	LLRHD
WWQDH2	WVQDH2	RUQDH2	4QDH2	LLQ4D	LLQHD
WWYZDH2	WVYZDH2	RUYZDH2	4YZDH2	LLYZ4D	LLYZHD
UniC78Mix	5CHNDH2				

FCC ID: 2AZTCFCAC2IN1F

Options and accessories: NA

Rating: DC 7.4V for Acoustic Thermal Imager
Input: AC 100-240V, 50/60Hz, Output DC 12V for adapter

RF Transmission Frequency:
For Bluetooth: 2402~2480MHz
For 2.4G Wi-Fi: 802.11b/g/n-HT20: 2412~2462 MHz
802.11n-HT40: 2422~2452 MHz
For 5G Wi-Fi: 5180~5240 MHz (U-NII-1)
5260~5320 MHz (U-NII-2A)
5500~5720 MHz (U-NII-2C)
5745~5825 MHz (U-NII-3)

No. of Operated
Channel:

79 channels for Bluetooth EDR

Ch	Fre (MH)	Ch	Fre (MH)	Ch	Fre (MH)	Ch	Fre (MH)	Ch	Fre (MH)
1	2402	17	2418	33	2434	49	2450	65	2466
2	2403	18	2419	34	2435	50	2451	66	2467
3	2404	19	2420	35	2436	51	2452	67	2468
4	2405	20	2421	36	2437	52	2453	68	2469
5	2406	21	2422	37	2438	53	2454	69	2470
6	2407	22	2423	38	2439	54	2455	70	2471
7	2408	23	2424	39	2440	55	2456	71	2472
8	2409	24	2425	40	2441	56	2457	72	2473
9	2410	25	2426	41	2442	57	2458	73	2474
10	2411	26	2427	42	2443	58	2459	74	2475
11	2412	27	2428	43	2444	59	2460	75	2476
12	2413	28	2429	44	2445	60	2461	76	2477
13	2414	29	2430	45	2446	61	2462	77	2478
14	2415	30	2431	46	2447	62	2463	78	2479
15	2416	31	2432	47	2448	63	2464	79	2480
16	2417	32	2433	48	2449	64	2465		

40 channels for Bluetooth 4.2 BLE

Ch	Fre(MHz)	Ch	Fre(MHz)	Ch	Fre(MHz)	Ch	Fre(MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

2.4GHz WIFI: 11 for 802.11b/802.11g/802.11(H20);
7 for 802.11n(HT40)

802.11b/g/n(HT20)					802.11n(HT40)		
Ch	Fre(MHz)	Ch	Fre(MHz)	Ch	Fre(MHz)	Ch	Fre(MHz)
1	2412	7	2442	3	2422	8	2447MHz
2	2417	8	2447	4	2427	9	2452MHz
3	2422	9	2452	5	2432		
4	2427	10	2457	6	2437		
5	2432	11	2462	7	2442		
6	2437						

5180~5240 MHz (U-NII-1):

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
40	5200	48	5240

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency (MHz)
42	5210

5260~5320 MHz (U-NII-2A)

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300
56	5280	64	5320

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
54	5270	62	5310

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
58	5290		

5500~5720 MHz (U-NII-2C)

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency (MHz)	Channel	Frequency(MHz)
100	5500	124	5620
104	5520	128	5640
108	5540	132	5660
112	5560	136	5680
116	5580	140	5700
120	5600	144	5720

6 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency (MHz)	Channel	Frequency(MHz)
102	5510	126	5630
110	5550	134	5670
118	5590	142	5710

3 channels are provided for 802.11ac (VHT80):

Channel	Frequency (MHz)	Channel	Frequency(MHz)
106	5530	138	5690
122	5610		

5745~5825 MHz (U-NII-3): Channel 149 – 165

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency (MHz)
155	5755

Modulation:Bluetooth EDR FHSS: GFSK, $\pi/4$ DQPSK, 8DPSK

Bluetooth 4.2+BLE DHSS: GFSK

For Wi-Fi: Direct Sequence Spread Spectrum (DSSS) for 802.11b
Orthogonal Frequency Division Multiplexing (OFDM) for
802.11a/b/g/n/ac**Hardware Version:**

V01

Software Version:

V6.2.0

Data speed:

1. Bluetooth EDR FHSS: 1Mbps, 2Mbps, 3Mbps
2. Bluetooth 4.2+BLE DHSS: 1Mbps
3. Wi-Fi: 11b 1 ~ 11Mbps,
11g/a 6 ~ 54Mbps, 11n HT20 6.5 ~ 72.2Mbps,
11n HT 40 13.5 ~ 150Mbps,
11ac VHT40 13.5 ~ 200Mbps,
11ac VHT80 29.3 ~ 433.3Mbps

Antenna Type:

PIFA Antenna

Antenna Gain:

1.76dBi for 2.4GHz; 5.96dBi for 5GHz

Description of the EUT:

The Equipment Under Test (EUT) is an Acoustic Thermal Imager with Bluetooth and Wi-Fi Module. The EUT support Bluetooth EDR, BLE function, Wi-Fi 2.4GHz and Wi-Fi 5GHz.

According to the client's declaration, all the models share the same schematic, hardware circuit, PCB layout, including RF parameters, except for the number of enabled microphone modules. We chose model Fotric V0MiX to perform all the tests and listed the worst data in this report. Only 2.4GHz BLE RF testing results were included in this report.

Test sample no.:

SHA-832647-2 (RF Conducted); SHA-832647-3 (RF Radiated)



The sample's mentioned in this report is/are submitted/ supplied/ manufactured by client. The laboratory therefore assumes no responsibility for accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.



5 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2023 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10-2020.

6 Summary of Test Results

Technical Requirements						
FCC Part 15 Subpart C						
Test Condition		Pages	Test Site	Test Result		
				Pass	Fail	N/A
§15.207	Conducted emission AC power port	16-20	Site 1	☒	☐	☐
§15.247 (b) (3)	Conducted peak output power	21-24	Site 1	☒	☐	☐
§15.247(a)(1)	20dB bandwidth	---	---	☐	☐	☒
§15.247(a)(1)	Carrier frequency separation	---	---	☐	☐	☒
§15.247(a)(1)(iii)	Number of hopping frequencies	---	---	☐	☐	☒
§15.247(a)(1)(iii)	Dwell Time	---	---	☐	☐	☒
§15.247(a)(2)	6dB bandwidth	25-26	Site 1	☒	☐	☐
§15.247(e)	Power spectral density	27-28	Site 1	☒	☐	☐
§15.247(d)	Spurious RF conducted emissions	29-32	Site 1	☒	☐	☐
§15.247(d)	Band edge	33-35	Site 1	☒	☐	☐
§15.247(d) & §15.209	Spurious radiated emissions for transmitter	36-42	Site 1	☒	☐	☐
§15.203	Antenna requirement	See note 1		☒	☐	☐

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses a PIFA antenna, which gain is 1.76dBi for 2.4GHz and 5.96dBi for 5GHz. In accordance to §15.203, It is considered sufficiently to comply with the provisions of this section.



7 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2AZTCFCAC2IN1F complies with Section 15.205, 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C rules.

This report is only for 2.4GHz BLE.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: July 12, 2024

Testing Start Date: July 12, 2024

Testing End Date: October 23, 2024

-TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch

Reviewed by:

Prepared by:

Tested by:




Hui TONG
Review Engineer

Wenqiang LU
Project Engineer

Chengjie GUO
Test Engineer


8 Test Setups

8.1 AC Power Line Conducted Emission test setups

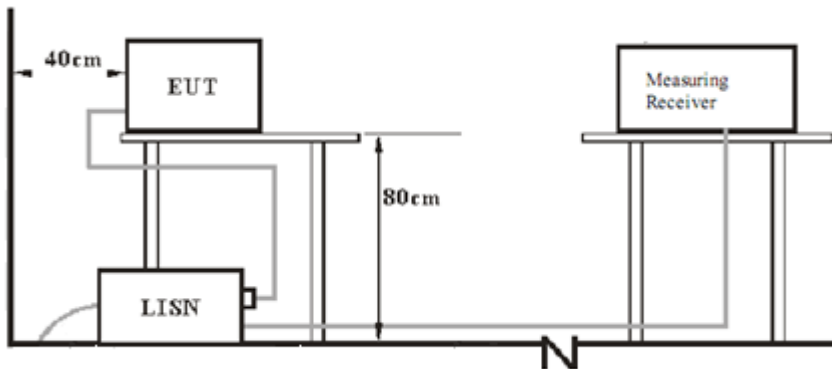


8.2 Radiated test setups


9kHz ~ 30MHz Test Setup:

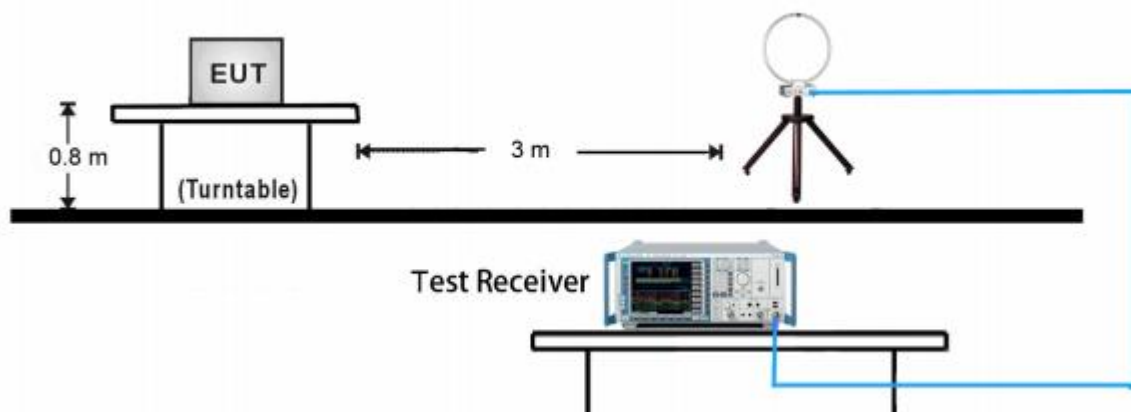


30MHz ~ 1GHz Test Setup:

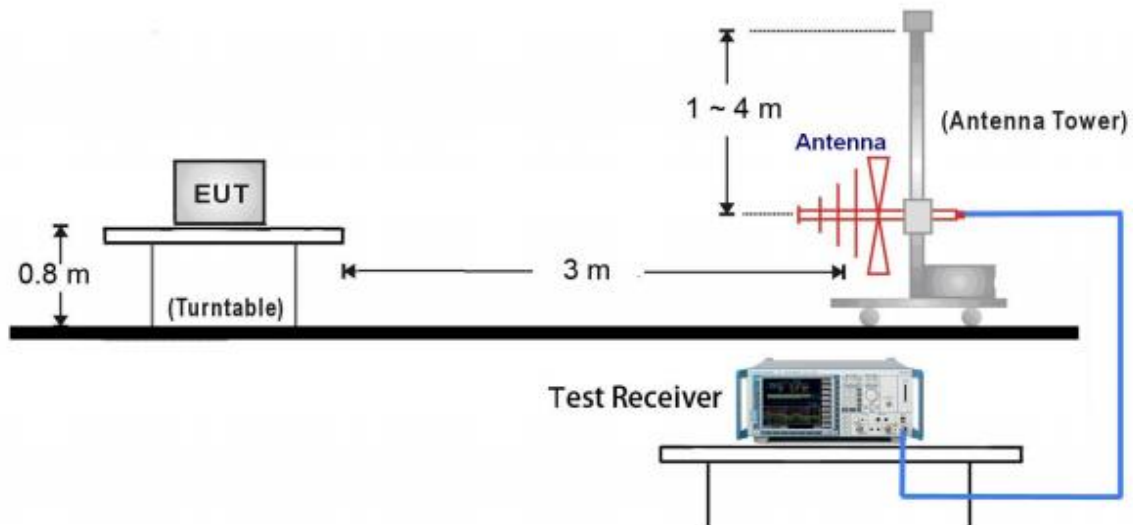


1GHz ~ 18GHz Test Setup:

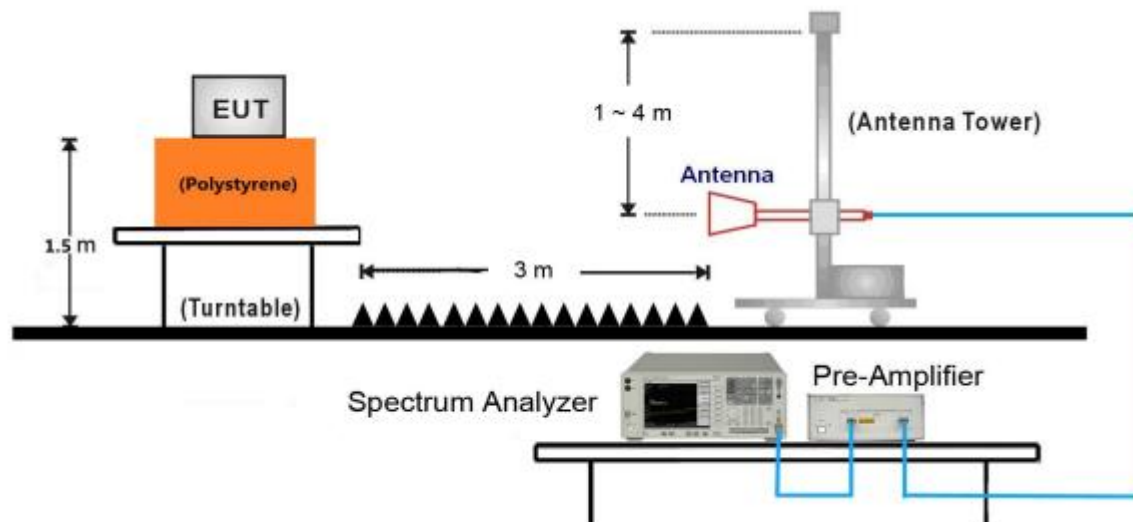

18GHz ~ 25GHz Test Setup:

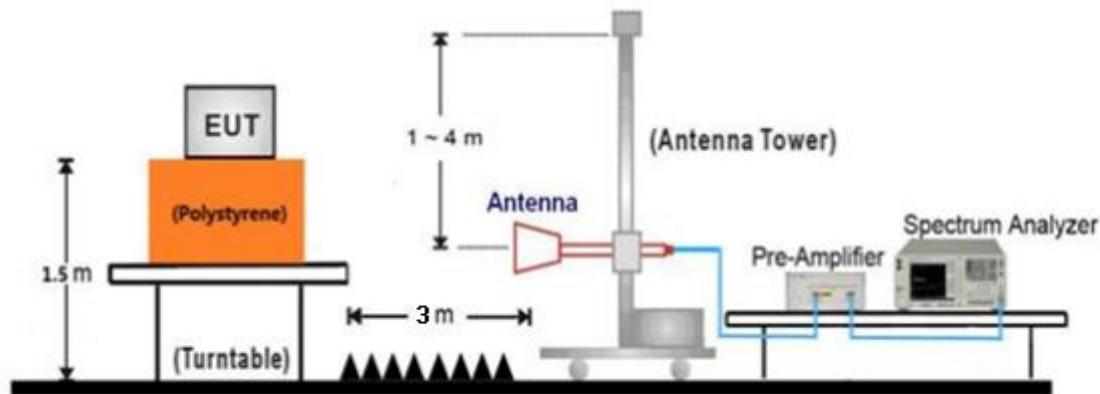

8.3 Conducted RF test setups



9 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
Notebook	Lenove	E470	PF-OU5TS7 17/09

Test software: QRCT.exe, which used to control the EUT in continues transmitting mode

The system was configured to channel 0, 19, and 39 for the test.

Test Mode Applicability and Tested Channel Detail:

Mode	Tested Channel	Data Rate (Mbps)	Modulation	Index Value (Power level setting)
BLE	1	1	GFSK	By manufacturer
	19	1	GFSK	By manufacturer
	39	1	GFSK	By manufacturer

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.

10 Technical Requirement

10.1 Conducted Emission

Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line

Limit

According to §15.207, conducted emissions limit as below:

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

*Decreasing linearly with logarithm of the frequency

Conducted Emission

Conducted Emission worse case test result as below:

150k-30MHz Conducted Emission Test


EUT Information

EUT Name: Acoustic Thermal Imager
 Model: Fotric V0MiX
 Client: FOTRIC INC
 Op Cond: Power on, TX at 2480MHz, AC 120V/60Hz (worse case)
 Operator: Chengjie GUO
 Standard: FCC Part 15.207(a)
 Comment: Phase L
 Sample No.: SHA-832647-2

Scan Setup: Voltage with 2-Line-LISN pre [EMI conducted]

Hardware Setup: Voltage with 2-Line-LISN
 Receiver: [ESR 3]
 Level Unit: dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamplifier
9 kHz - 150 kHz	100 Hz	PK+	200 Hz	0.02 s	0 dB
150 kHz - 30 MHz	4.5 kHz	PK+; AVG	9 kHz	0.01 s	0 dB

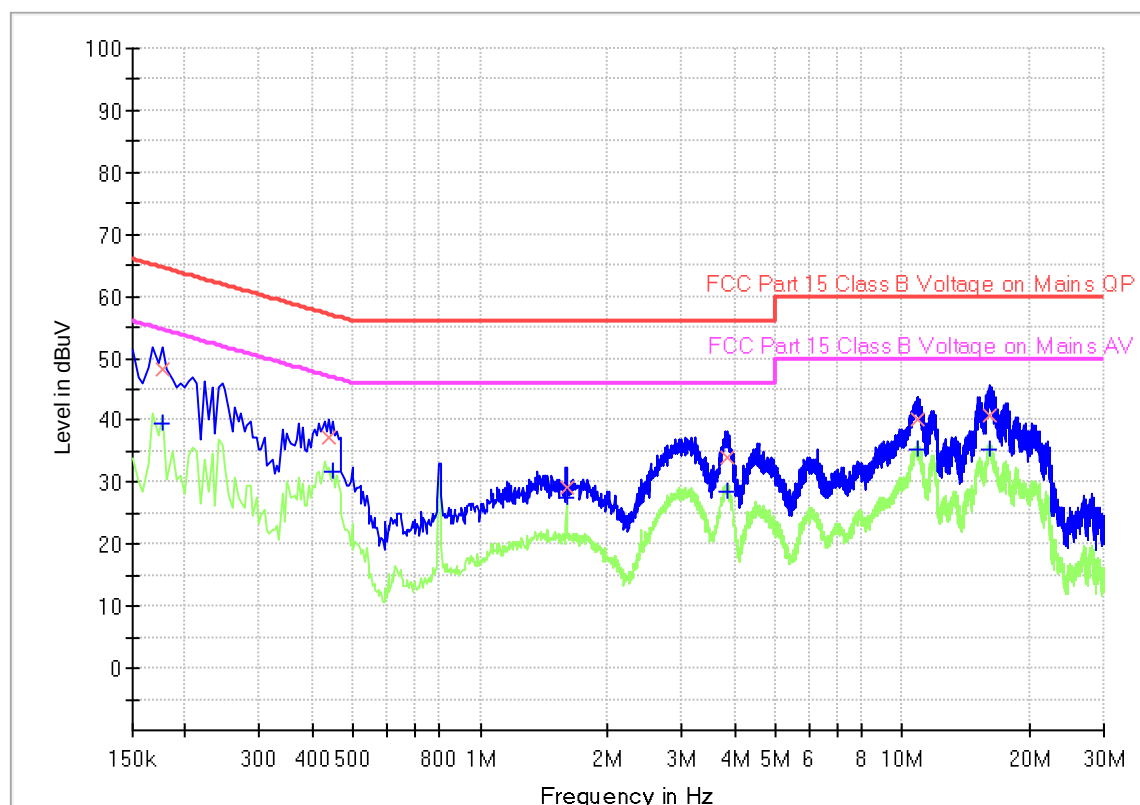



Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.177000	---	39.51	54.63	15.12	1000.0	9.000	L1	19.4
0.177000	48.30	---	64.63	16.33	1000.0	9.000	L1	19.4
0.438000	37.15	---	57.10	19.95	1000.0	9.000	L1	19.5
0.447000	---	31.62	46.93	15.31	1000.0	9.000	L1	19.5
1.599000	---	27.43	46.00	18.57	1000.0	9.000	L1	19.5
1.603500	29.28	---	56.00	26.72	1000.0	9.000	L1	19.5
3.858000	33.86	---	56.00	22.14	1000.0	9.000	L1	19.6
3.862500	---	28.64	46.00	17.36	1000.0	9.000	L1	19.6
10.810500	40.10	---	60.00	19.90	1000.0	9.000	L1	19.8
10.851000	---	35.15	50.00	14.85	1000.0	9.000	L1	19.8
16.035000	---	35.19	50.00	14.81	1000.0	9.000	L1	20.1
16.084500	40.82	---	60.00	19.18	1000.0	9.000	L1	20.1

Note 1: Measure Level = Reading Level + Factor

Factor = Cable Loss + LISN Factor + 10dB Attenuator

(The Reading Level is recorded by software which is not shown in the sheet)

150k-30MHz Conducted Emission Test

EUT Information

EUT Name: Acoustic Thermal Imager
 Model: Fotric V0MiX
 Client: FOTRIC INC
 Op Cond: Power on, TX at 2480MHz, AC 120V/60Hz (worse case)
 Operator: Chengjie GUO
 Standard: FCC Part 15.207(a)
 Comment: Phase N
 Sample No.: SHA-832647-2

Scan Setup: Voltage with 2-Line-LISN pre [EMI conducted]

Hardware Setup: Voltage with 2-Line-LISN
 Receiver: [ESR 3]
 Level Unit: dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamplifier
9 kHz - 150 kHz	100 Hz	PK+	200 Hz	0.02 s	0 dB
150 kHz - 30 MHz	4.5 kHz	PK+; AVG	9 kHz	0.01 s	0 dB



Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.177000	50.08	---	64.63	14.55	1000.0	9.000	N	19.4
0.181500	---	38.16	54.42	16.26	1000.0	9.000	N	19.4
0.451500	---	35.65	46.85	11.20	1000.0	9.000	N	19.5
0.451500	41.03	---	56.85	15.82	1000.0	9.000	N	19.5
1.599000	---	28.13	46.00	17.87	1000.0	9.000	N	19.5
1.599000	29.55	---	56.00	26.45	1000.0	9.000	N	19.5
3.741000	---	29.18	46.00	16.82	1000.0	9.000	N	19.6
3.849000	33.51	---	56.00	22.49	1000.0	9.000	N	19.6
10.936500	39.72	---	60.00	20.28	1000.0	9.000	N	19.7
11.773500	---	35.25	50.00	14.75	1000.0	9.000	N	19.8
16.093500	40.15	---	60.00	19.85	1000.0	9.000	N	20.0
16.192500	---	34.30	50.00	15.70	1000.0	9.000	N	20.0

Note 1: Measure Level = Reading Level + Factor

Factor = Cable Loss + LISN Factor + 10dB Attenuator

(The Reading Level is recorded by software which is not shown in the sheet)

10.2 Conducted peak output power

Test Method (1)

1. Use the following spectrum analyzer settings:
RBW > the 6 dB bandwidth of the emission being measured, VBW $\geq$ 3RBW, Span $\geq$ 3RBW
Sweep = auto, Detector function = peak, Trace = max hold.
2. Add a correction factor to the display.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

Test Method (2)

1. Measure the duty cycle D of the transmitter output signal.
2. Set span to at least 1.5 times the OBW.
3. Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
4. Set VBW $\geq$ [3 $\times$ RBW].
5. Number of points in sweep $\geq$ [2 $\times$ span / RBW]. (This gives bin-to-bin spacing $\leq$ RBW / 2, so that narrowband signals are not lost between frequency bins.)
6. Sweep time = auto.
7. Detector = RMS (i.e., power averaging), if available. Otherwise, use the sample detector mode.
8. Do not use sweep triggering. Allow the sweep to "free run."
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
10. Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
11. Add [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission).

Limits

According to §15.247 (b) (3), conducted peak (average) output power limit as below:


Conducted peak output power

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 1	≤ 30



Test result (conducted peak) as below:

Data transmission rate:1Mbps		
Frequency	Conducted Peak Output Power	Result
MHz	dBm	
Low channel 2402MHz	-0.83	Pass
Middle channel 2440MHz	-0.48	Pass
High channel 2480MHz	-0.32	Pass

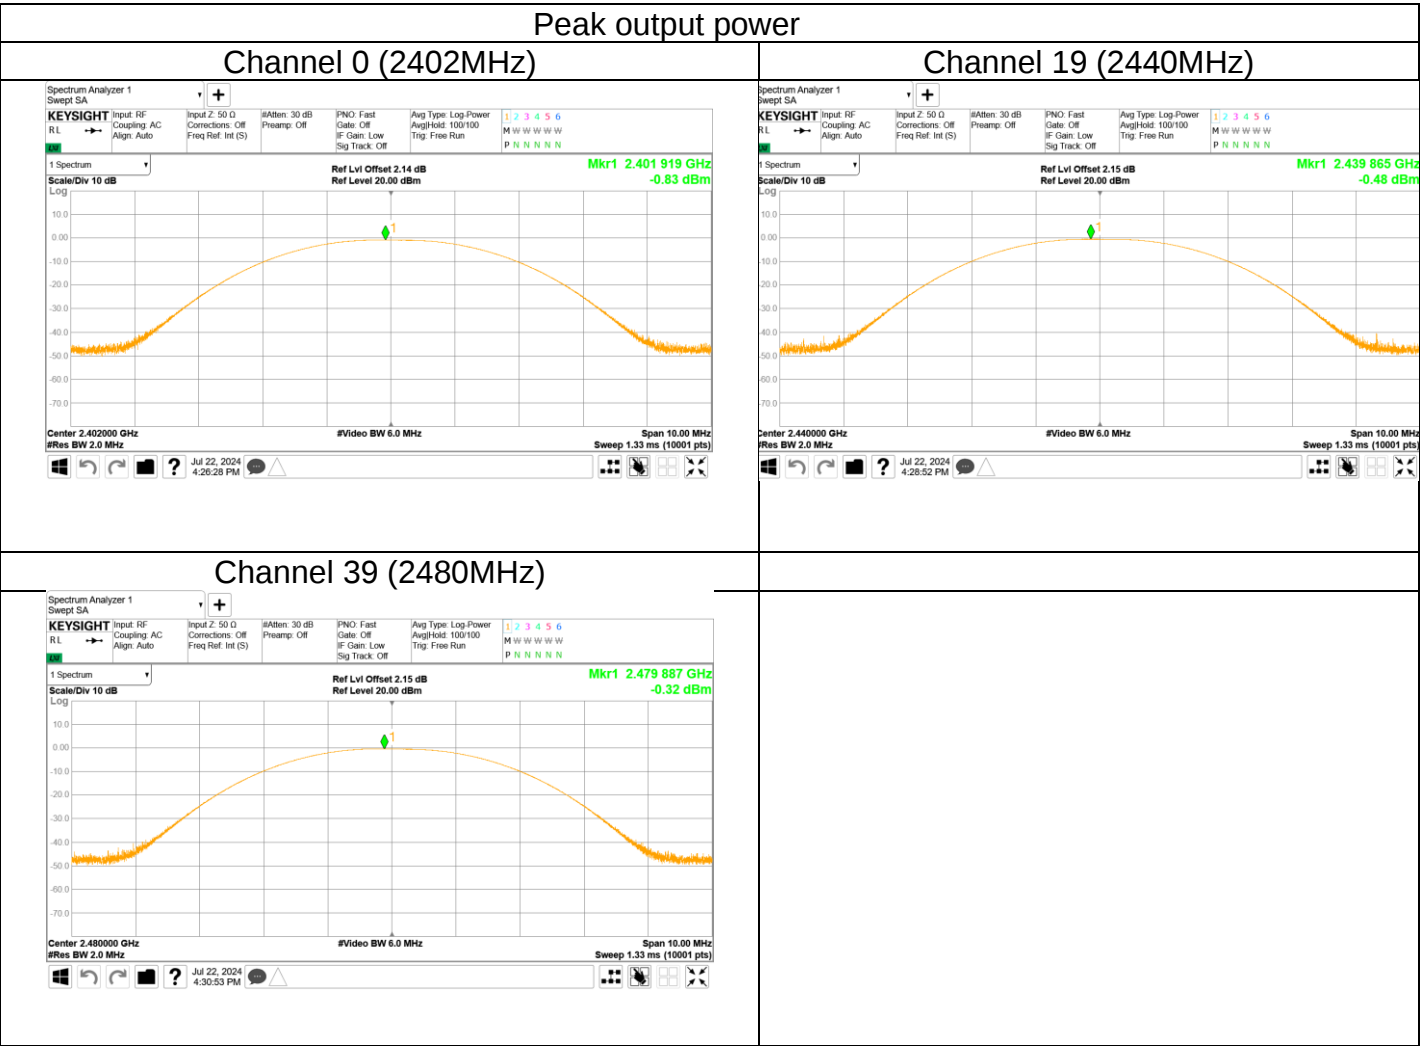


Test result (average power) as below table:

Frequency (MHz)	Duty cycle Factor (dB)	Conducted Power (dBm)	Total Power (dBm)	Result
2402MHz	2.02	-2.93	-0.91	Pass
2440MHz	2.02	-2.74	-0.72	Pass
2480MHz	2.02	-1.98	0.04	Pass




Duty cycle

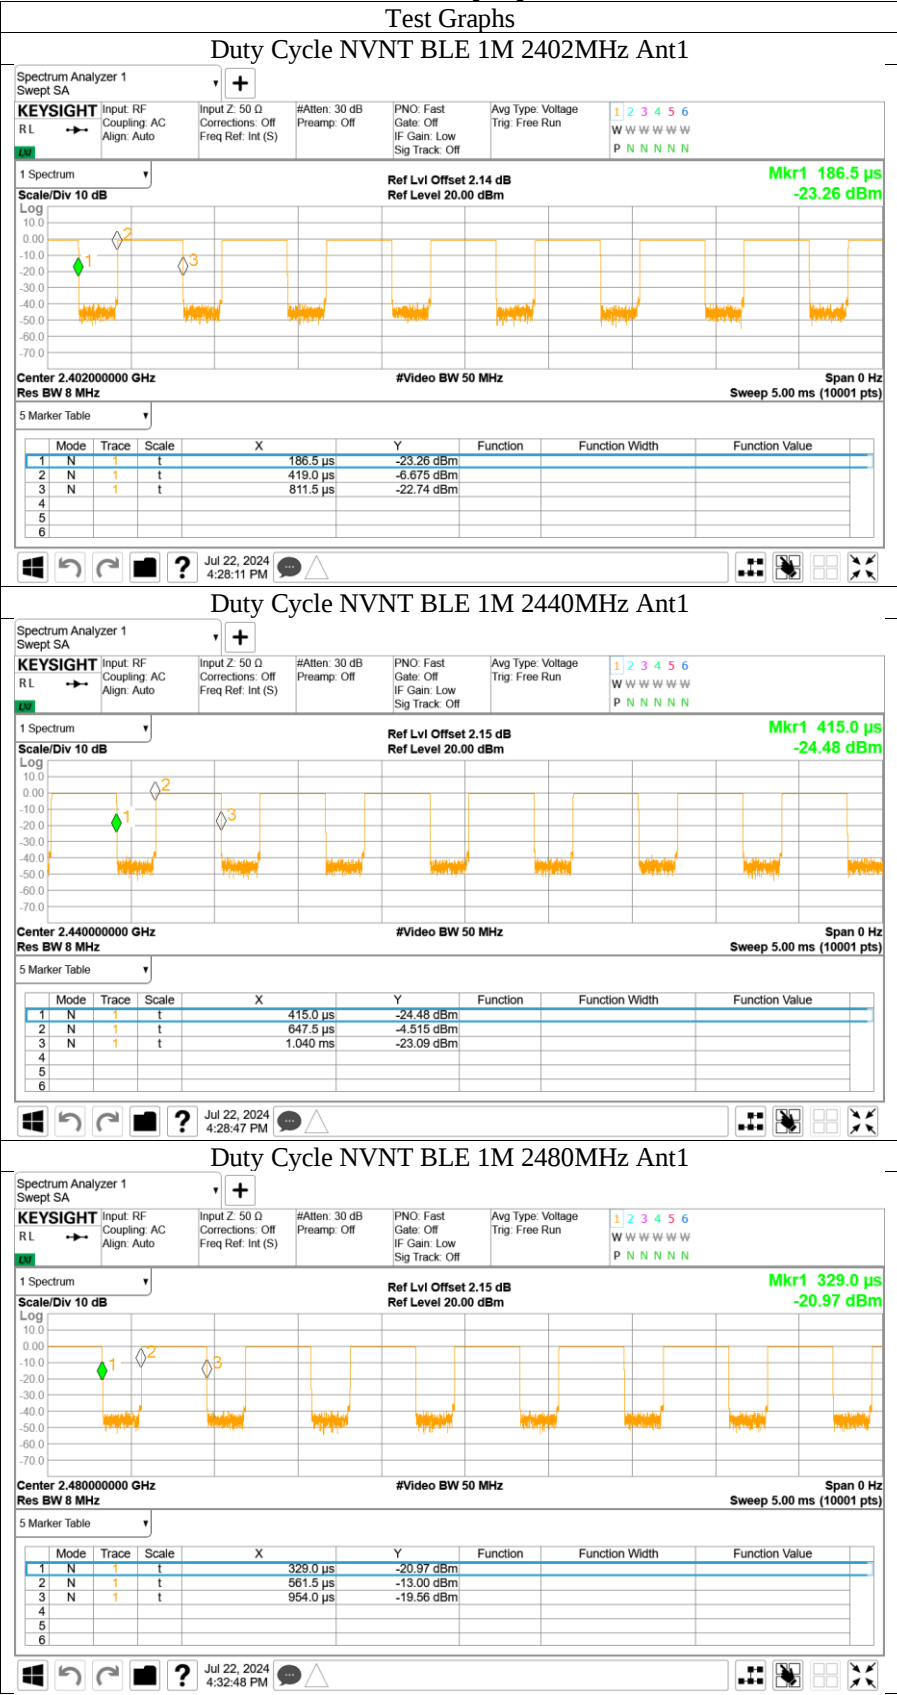



Conducted Output Power

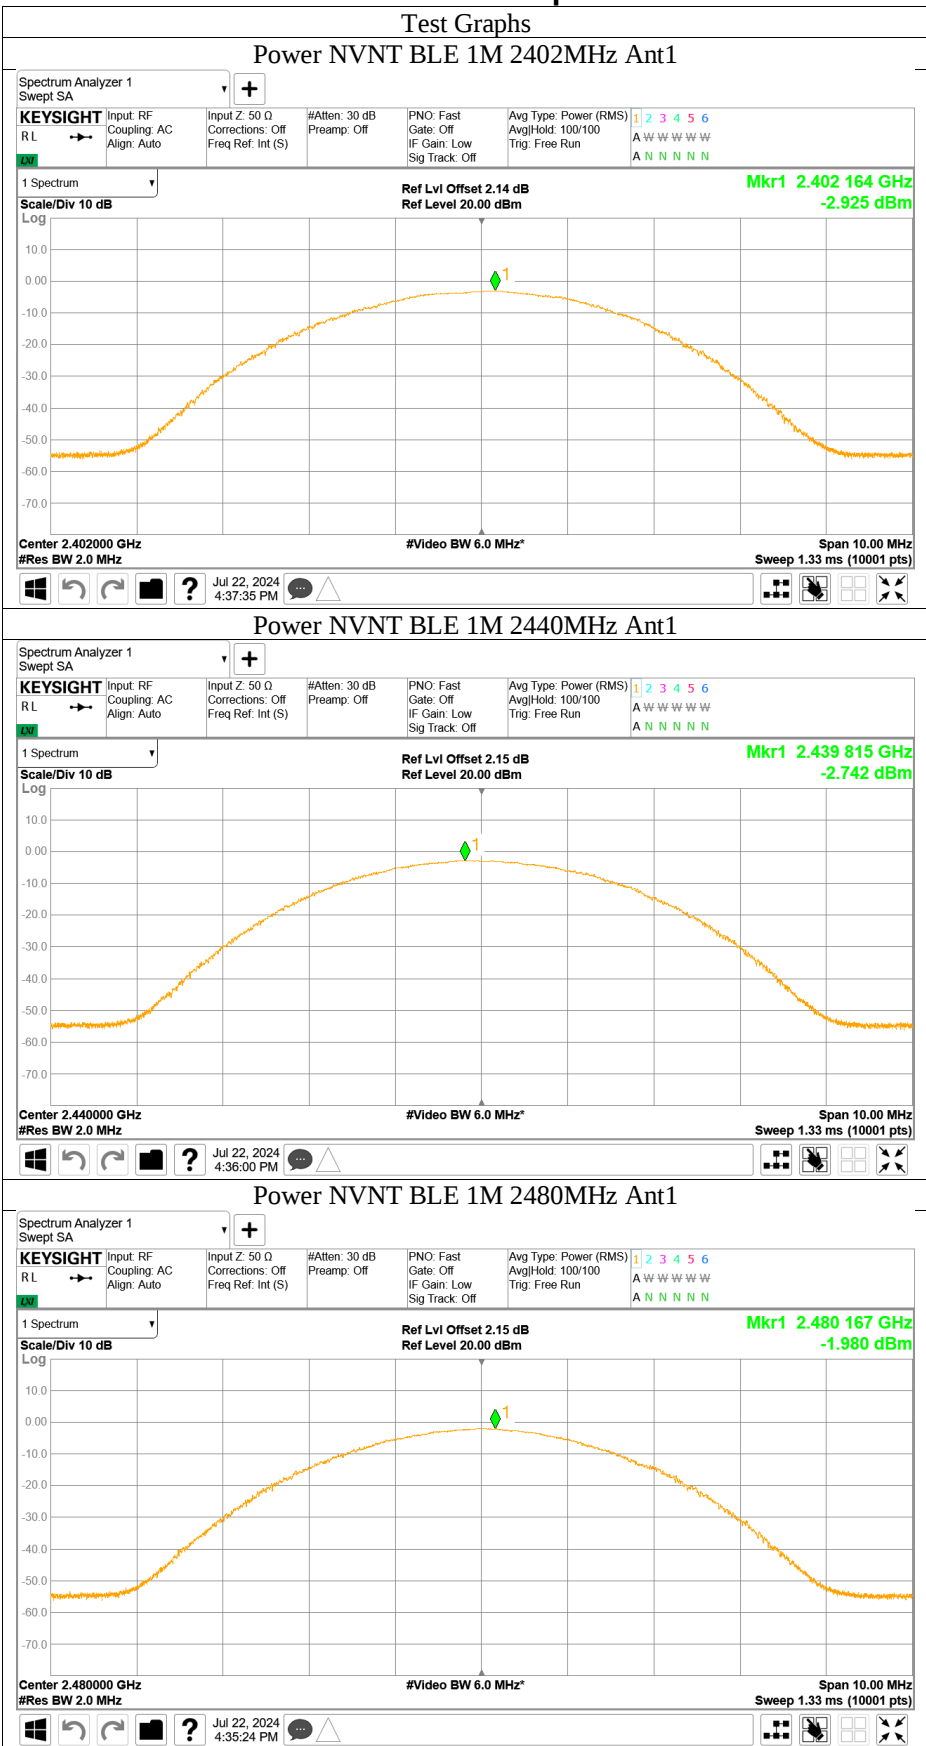

10.36dB bandwidth

Test Method for 6 dB Bandwidth

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW=100KHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Use the automatic bandwidth measurement capability of an instrument, use the X dB bandwidth mode with X set to 6 dB.
5. Allow the trace to stabilize, record the 6 dB Bandwidth value.

Limit

6dB bandwidth Limit [kHz]


≥ 500

Test result

Data transmission rate	Frequency MHz	6dB bandwidth (MHz)		Result
		result	limit	verdict
1Mbps	2402	0.657	≥ 0.5	Pass
	2440	0.663	≥ 0.5	Pass
	2480	0.645	≥ 0.5	Pass



6dB Bandwidth

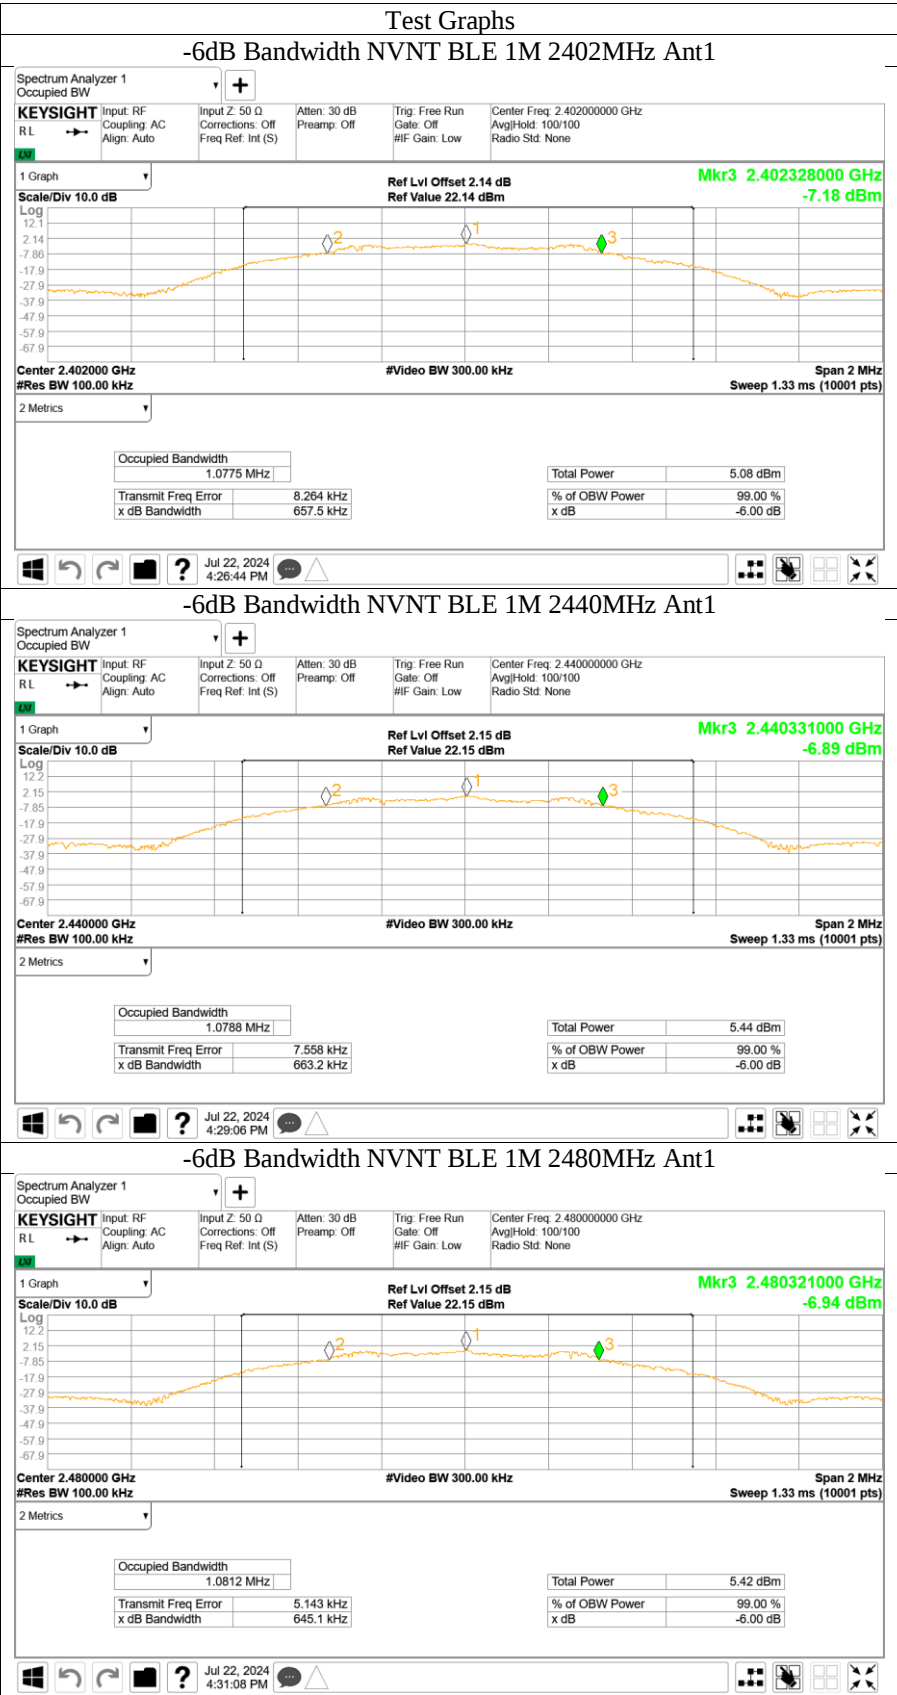

10.4 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW $\geq$ 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.


Limit

Limit [dBm/3kHz]

≤ 8

Test result

Data transmission rate	Frequency	Power spectral density	Result
1Mbps	MHz	dBm/3kHz	
	Top channel 2402MHz	-15.96	Pass
	Middle channel 2440MHz	-15.59	Pass
	Bottom channel 2480MHz	-15.48	Pass

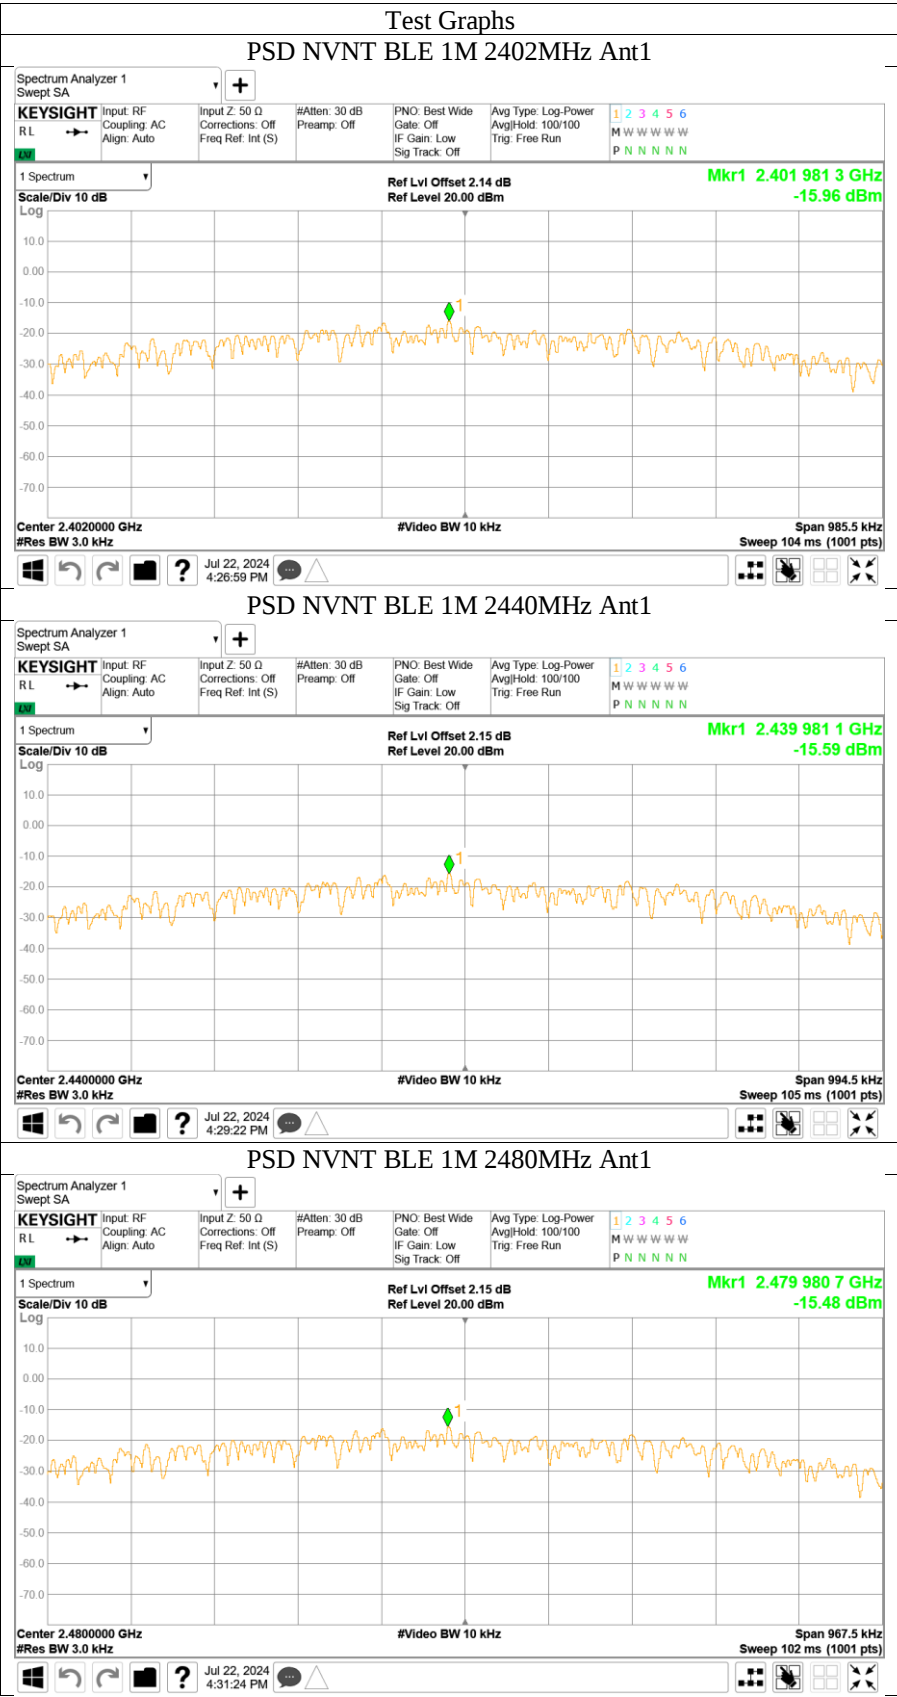

10.5 Spurious RF conducted emissions

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.


Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20




Spurious RF conducted emissions

Out-of-Band Emissions
Channel 0 (2402MHz)

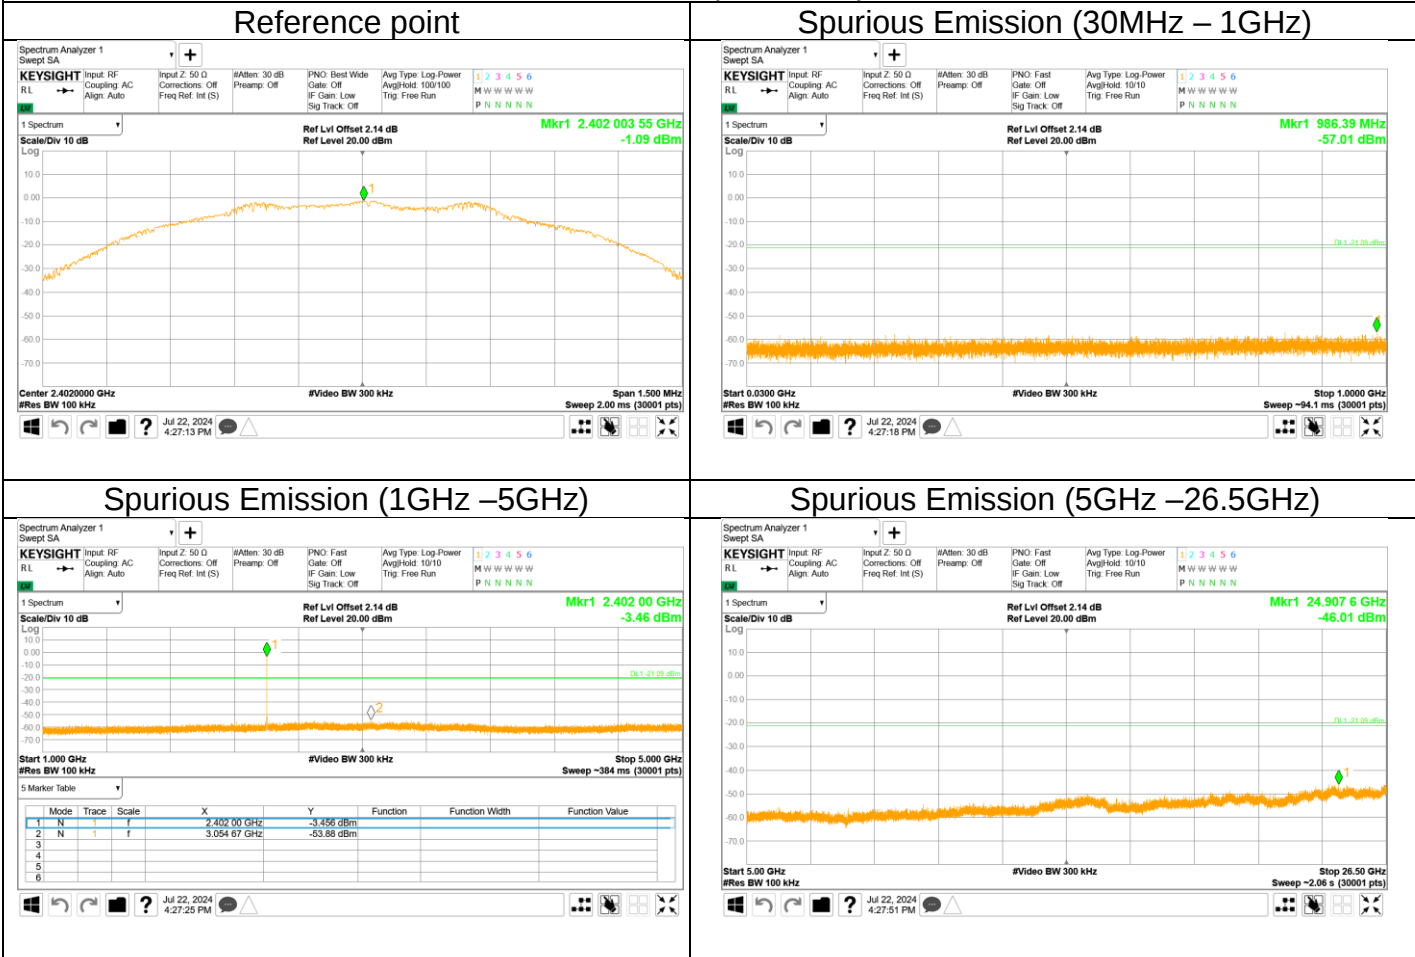




Out-of-Band Emissions
Channel 19 (2440MHz)

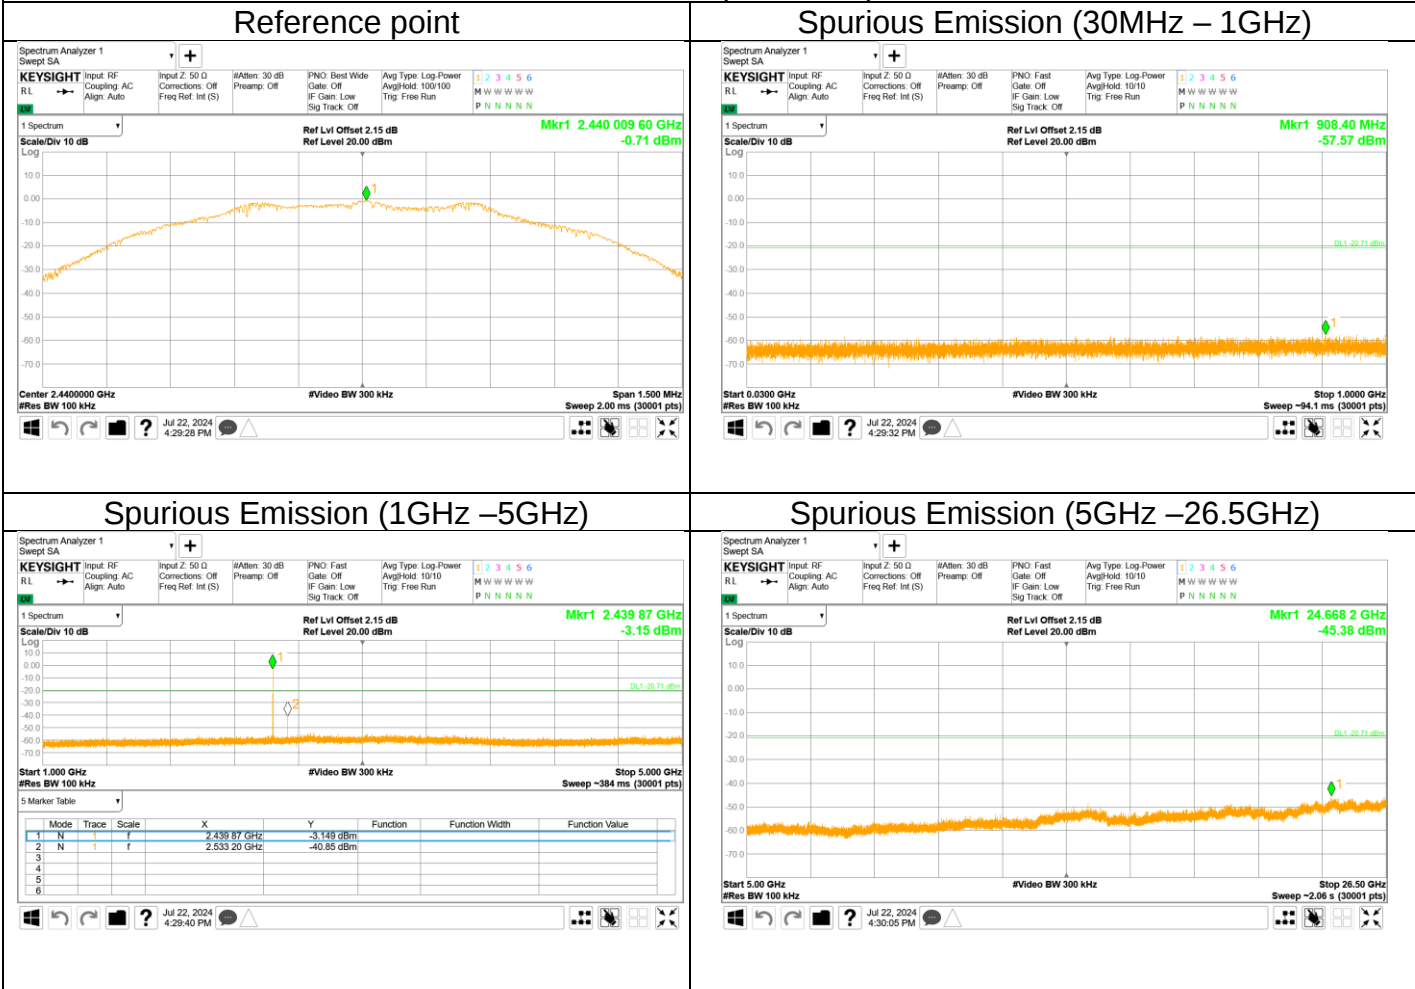



Out-of-Band Emissions
Channel 39 (2480MHz)

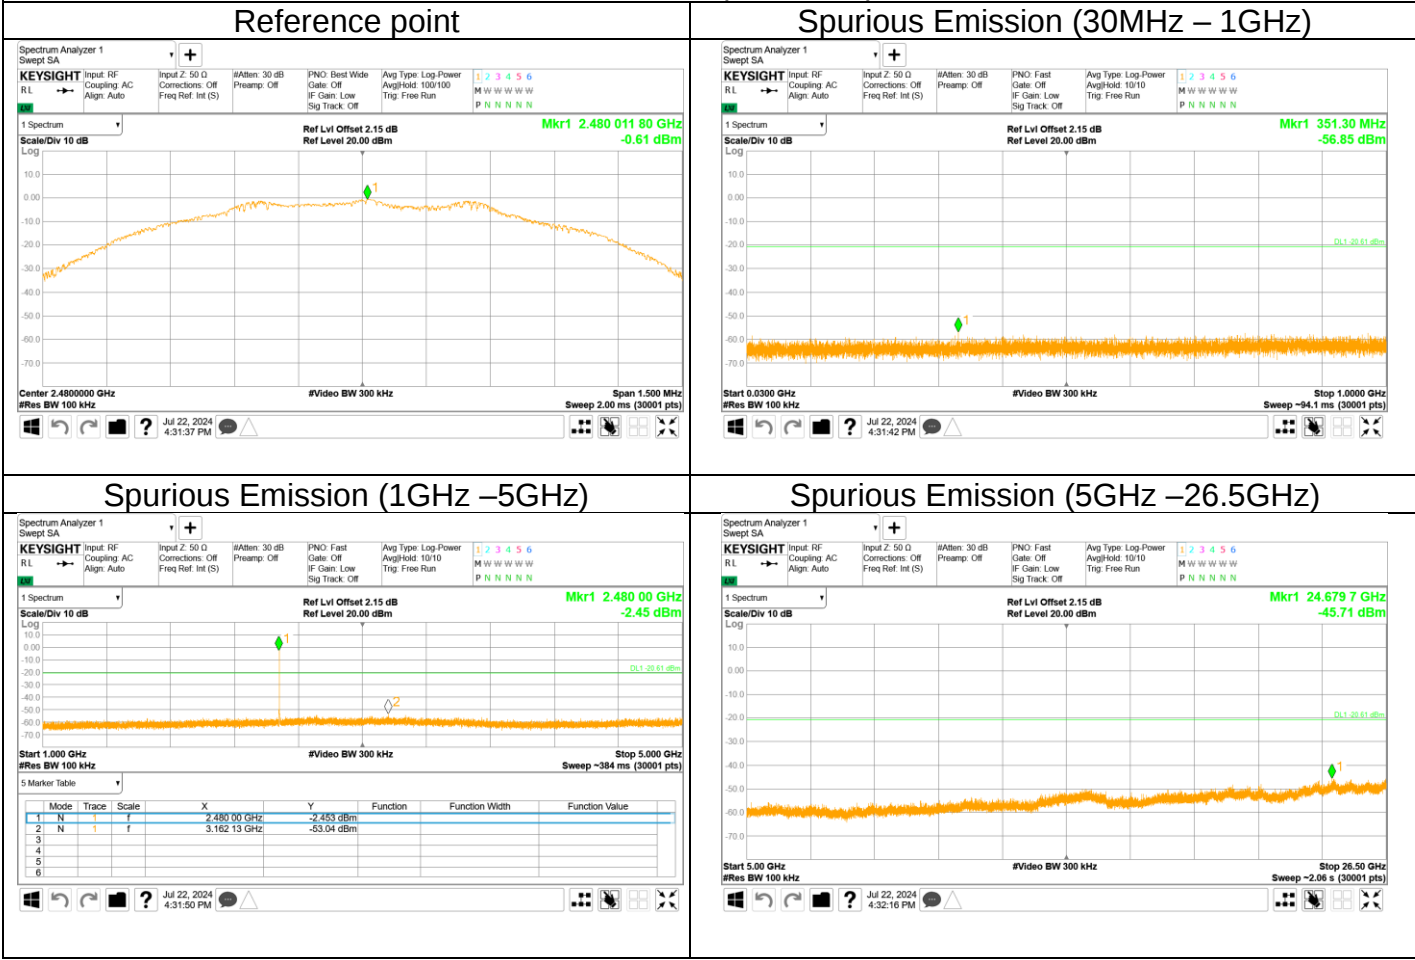

10.6 Band edge

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize, use the peak and delta measurement to record the result.
5. The level displayed must comply with the limit specified in this Section.
6. Repeat above procedures until all frequencies measured were complete and submit all the plots.


Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3), the attenuation required shall be 30 dB instead of 20 dB.

Frequency Range MHz	Limit (dBc)
30-25000	-20



Test result

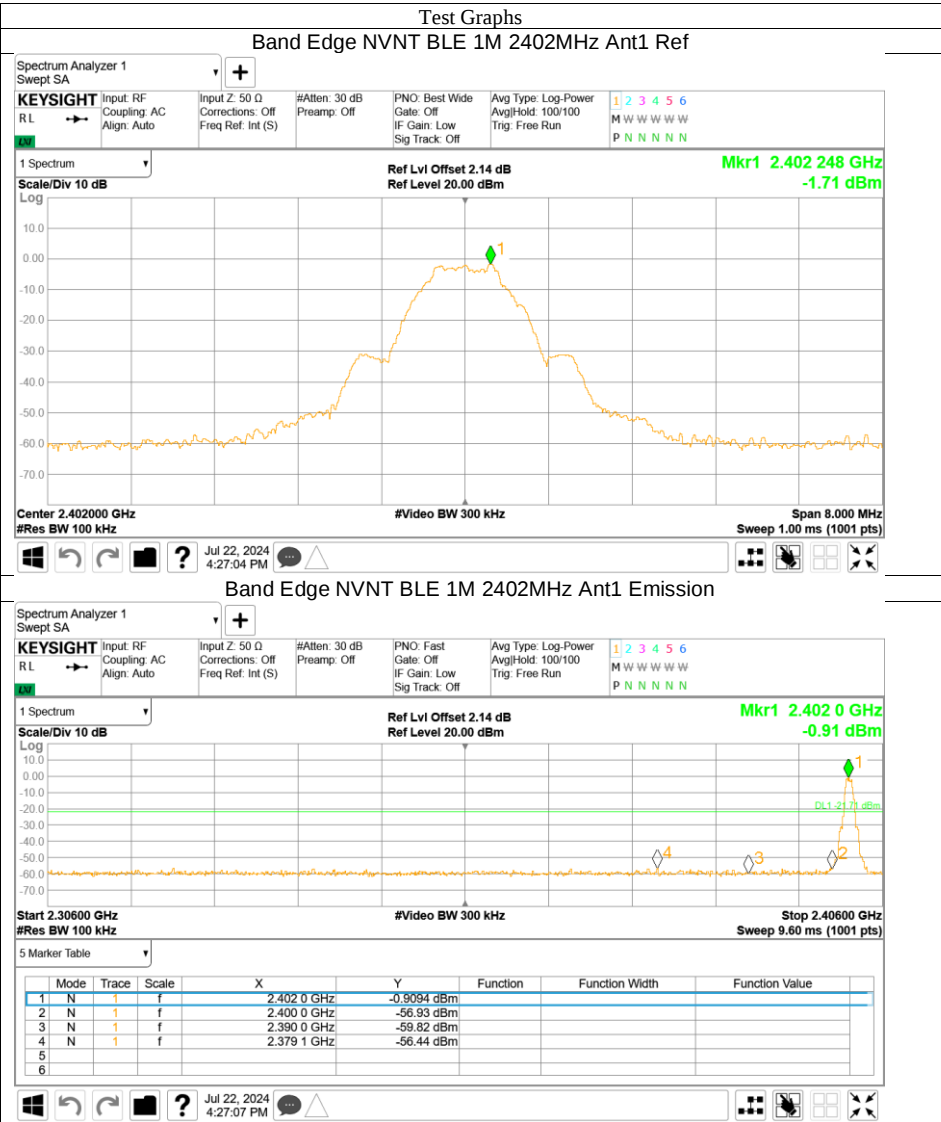

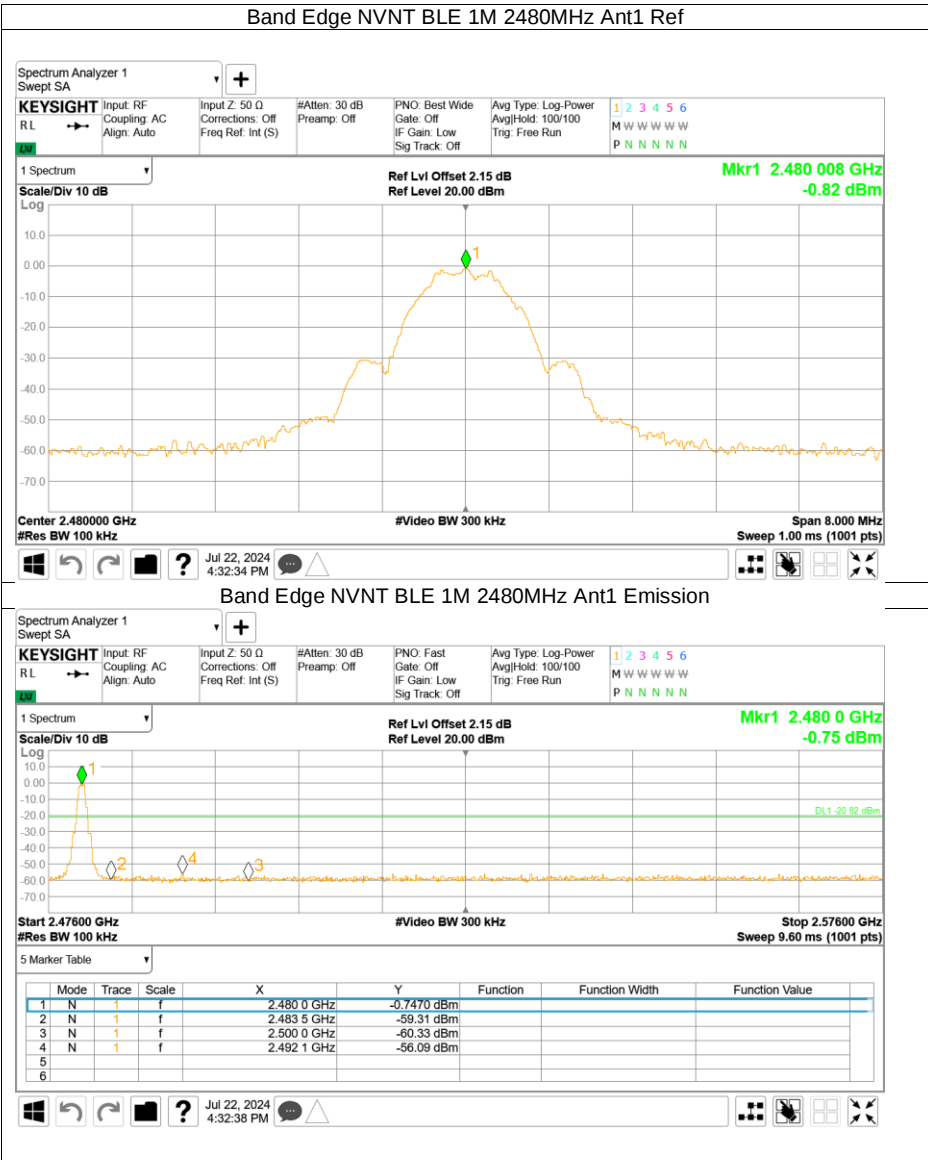

10.7 Spurious radiated emissions for transmitter

Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10
 - 1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz to 120kHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.
 - 2) For Peak unwanted emissions Above 1GHz:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.
Procedures for average unwanted emissions measurements above 1GHz
 - a) RBW = 1MHz.
 - b) $VBW \setminus [3 \times RBW]$.
 - c) Detector = RMS (power averaging), if $[span / (\# \text{ of points in sweep})] \setminus RBW / 2$.
Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
 - d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
 - e) Sweep time = auto.
 - f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
 - g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission (AV) at frequency above 1GHz.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

Frequency MHz	Field Strength $\mu\text{V/m}$	Field Strength $\text{dB}\mu\text{V/m}$	Detector	Measurement distance meters
0.009-0.490	2400/F(kHz)	48.5-13.8	AV	300
0.490-1.705	24000/F(kHz)	33.8-23.0	QP	30
1.705-30	30	29.5	QP	30
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3

Note 1: Limit $3\text{m}(\text{dB}\mu\text{V/m}) = \text{Limit } 300\text{m}(\text{dB}\mu\text{V/m}) + 40\text{Log}(300\text{m}/3\text{m})$ (Below 30MHz)

Note 2: Limit $3\text{m}(\text{dB}\mu\text{V/m}) = \text{Limit } 30\text{m}(\text{dB}\mu\text{V/m}) + 40\text{Log}(30\text{m}/3\text{m})$ (Below 30MHz)

Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Data of measurement within frequency range 9kHz-30MHz and 18-25GHz is the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report.

Test result

Above 1GHz Transmitting spurious emission test result as below:

Test mode:2.4G_BLE_2402MHz					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
2381.62	40.49	74.00	33.51	PK	Horizontal
2383.10	40.79	74.00	33.21	PK	Vertical
4805.34	41.64	74.00	32.36	PK	Horizontal
4803.75	41.70	74.00	32.30	PK	Vertical

Test mode:2.4G_BLE_2440MHz					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
4880.78	40.51	74.00	33.49	PK	Horizontal
4880.78	40.84	74.00	33.16	PK	Vertical

Test mode:2.4G_BLE_2480MHz					
Frequency MHz	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
2483.55	43.22	74.00	30.78	PK	Vertical
2483.59	45.75	74.00	28.25	PK	Horizontal
4960.47	41.44	74.00	32.56	PK	Vertical
4958.88	41.64	74.00	32.36	PK	Horizontal

Remark:

- (1) Emission level= Original Receiver Reading + Correct Factor
- (2) Correct Factor = Antenna Factor + Cable Loss -Amplifier gain
- (3) Margin = limit – Corrected Reading

The worst case of Radiated Emission below 1GHz:

30-1000MHz Radiated Emission

EUT Information


EUT Name: Acoustic Thermal Imager
Model: Fotric V0MiX
Client: FOTRIC INC
Op Cond: Power on, TX at 2480MHz, AC120V/60Hz
Operator: Chengjie GUO
Test Spec: FCC Part 15.209(a)
Comment: Horizontal
Sample No: SHA-832647-2

Sweep Setup: RE_VULB9168_pre_Cont_30-1000 [EMI radiated]

Hardware Setup: RE_VULB9168
Receiver: [ESR 3]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamplifier
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	0.2 s	20 dB

RE_VULB9168_pre_Cont_30-1000

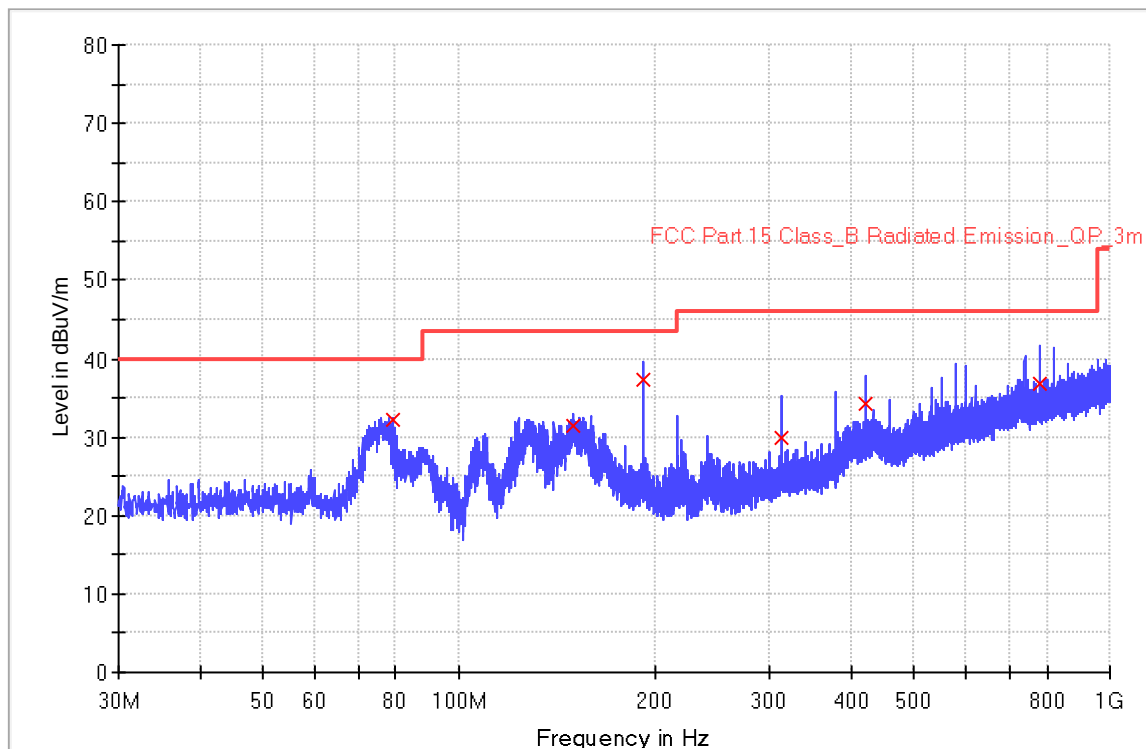

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)
79.360000	32.3	1000.0	120.000	162.0	H	132.0	16.1	7.8
149.880000	31.5	1000.0	120.000	134.0	H	124.0	20.9	12.0
192.000000	37.2	1000.0	120.000	222.0	H	168.0	18.3	6.3
311.960000	29.9	1000.0	120.000	194.0	H	182.0	21.9	16.1
420.000000	34.2	1000.0	120.000	150.0	H	116.0	24.7	11.8
780.000000	36.7	1000.0	120.000	157.0	H	178.0	32.0	9.3

(continuation of the "Limit and Margin" table from column 16 ...)

Frequency (MHz)	Limit - QPK (dBuV/m)	Comment
79.360000	40.0	
149.880000	43.5	
192.000000	43.5	
311.960000	46.0	
420.000000	46.0	
780.000000	46.0	

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.



30-1000MHz Radiated Emission

EUT Information


EUT Name: Acoustic Thermal Imager
Model: Fotric V0MiX
Client: FOTRIC INC
Op Cond: Power on, TX at 2480MHz, AC120V/60Hz
Operator: Chengjie GUO
Test Spec: FCC Part 15.209(a)
Comment: Vertical
Sample No: SHA-832647-2

Sweep Setup: RE_VULB9168_pre_Cont_30-1000 [EMI radiated]

Hardware Setup: RE_VULB9168
Receiver: [ESR 3]
Level Unit: dBuV/m

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	48.5 kHz	PK+	120 kHz	0.2 s	20 dB

RE_VULB9168_pre_Cont_30-1000

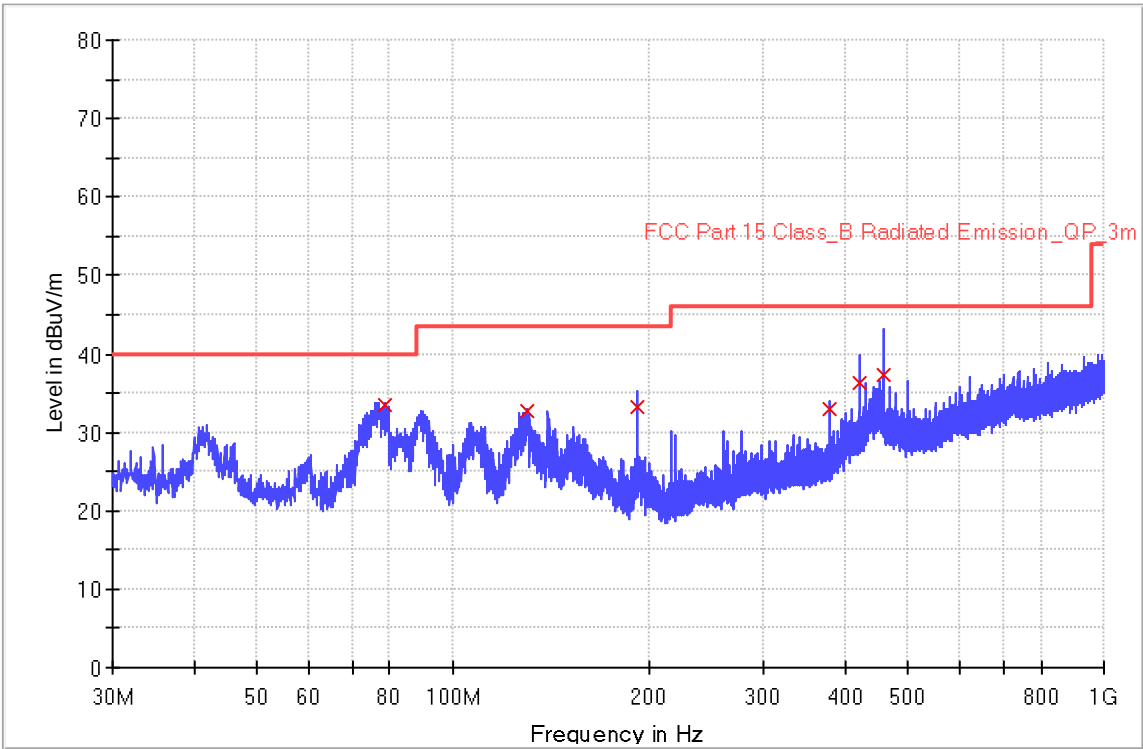

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)
78.560000	33.5	1000.0	120.000	100.0	V	165.0	16.4	6.5
130.280000	32.7	1000.0	120.000	135.0	V	125.0	19.3	10.8
192.000000	33.3	1000.0	120.000	162.0	V	109.0	18.3	10.2
380.040000	33.0	1000.0	120.000	184.0	V	94.0	23.7	13.0
420.000000	36.2	1000.0	120.000	196.0	V	254.0	24.7	9.8
460.000000	37.3	1000.0	120.000	154.0	V	266.0	25.8	8.7

(continuation of the "Limit and Margin" table from column 16 ...)

Frequency (MHz)	Limit - QPK (dBuV/m)	Comment
78.560000	40.0	
130.280000	43.5	
192.000000	43.5	
380.040000	46.0	
420.000000	46.0	
460.000000	46.0	

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

11 Test Equipment List

List of Test Instruments
Test Site1

	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DATE	CAL. DUE DATE
C	Signal spectrum analyzer	Agilent	N9020B	MY59050168	2024-2-19	2025-2-18
RE	EMI Test Receiver	Rohde & Schwarz	ESR3	101906	2023-8-1	2024-7-31
	EMI Test Receiver	Rohde & Schwarz	ESR3	101906	2024-8-1	2025-7-31
	Signal Analyzer	Rohde & Schwarz	FSV40	101091	2023-8-1	2024-7-31
	Signal Analyzer	Rohde & Schwarz	FSV40	101091	2024-8-1	2025-7-31
	Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9168	961	2021-9-23	2024-9-22
	Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9168	961	2024-8-30	2025-8-29
	Double-ridged waveguide horn antenna	Rohde & Schwarz	HF907	102868	2024-4-14	2027-4-13
	Pre-amplifier	Shenzhen HzEMC	HPA-081843	HYP A23026	2024-4-16	2025-4-15
	Loop antenna	Rohde & Schwarz	HFH2-Z2	100443	2024-6-26	2025-6-25
	Double Ridged Horn Antenna	ETS-Lindgren	3116C	00246076	2023-7-7	2026-7-6
	3m Semi-anechoic chamber	TDK	9X6X6	----	2024-5-8	2027-5-7
CE	EMI Test Receiver	Rohde & Schwarz	ESR3	101907	2023-8-1	2024-7-31
	EMI Test Receiver	Rohde & Schwarz	ESR3	101907	2024-8-1	2025-7-31
	LISN	Rohde & Schwarz	ENV216	101924	2023-8-1	2024-7-31
	LISN	Rohde & Schwarz	ENV216	101924	2024-8-1	2025-7-31

Measurement Software Information			
Test Item	Software	Manufacturer	Version
C	MTS 8310	MWRFTtest	2.0.0.0
RE	EMC 32	Rohde & Schwarz	V10.50.40
CE	EMC 32	Rohde & Schwarz	V9.15.03

C - Conducted RF tests

- Conducted peak output power
- 6dB bandwidth and 99% Occupied Bandwidth
- Power spectral density*
- Spurious RF conducted emissions
- Band edge



12 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

Items	Extended Uncertainty
Conducted Disturbance at Mains Terminals	150kHz to 30MHz, LISN, 3.16dB
Radiated Disturbance	9kHz to 30MHz, 3.52dB 30MHz to 1GHz, 5.03dB (Horizontal) 5.12dB (Vertical) 1GHz to 18GHz, 5.49dB 18GHz to 40GHz, 5.63dB
RF Conducted Measurement	Power related: 1.16dB Frequency related: 6.00×10^{-8}

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2023, clause 4.3.3.



13 Photographs of Test Set-ups

Refer to the < Test Setup photos >.



14 Photographs of EUT

Refer to the < External Photos > & < Internal Photos >.

-----End of Test Report-----