

# TEST REPORT

Reference No..... : WTX21X04041977W  
FCC ID ..... : 2AZTO-THG1  
Applicant ..... : Pure Watercraft  
Address ..... : 2151 N Northlake Way #210, Seattle, WA 98103  
Product Name ..... : Throttle  
Test Model. .... : THG1  
Standards ..... : FCC Part 15.247  
Date of Receipt sample .... : Apr. 30, 2021  
Date of Test..... : Dec. 30, 2021 to Feb. 15, 2022  
Date of Issue ..... : Feb. 15, 2022  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308

Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:

*Jack Huang*

*Jason Su*

*Silin Chen*

Jack Huang / Project Engineer

Jason Su / RF Manager

Silin Chen / Manager

**TABLE OF CONTENTS**

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION.....</b>                          | <b>4</b>  |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 4         |
| 1.2 TEST STANDARDS.....                                     | 5         |
| 1.3 TEST METHODOLOGY.....                                   | 5         |
| 1.4 TEST FACILITY .....                                     | 5         |
| 1.5 EUT SETUP AND TEST MODE .....                           | 6         |
| 1.6 MEASUREMENT UNCERTAINTY .....                           | 7         |
| 1.7 TEST EQUIPMENT LIST AND DETAILS .....                   | 8         |
| <b>2. SUMMARY OF TEST RESULTS .....</b>                     | <b>10</b> |
| <b>3. ANTENNA REQUIREMENT .....</b>                         | <b>11</b> |
| 3.1 STANDARD APPLICABLE.....                                | 11        |
| 3.2 EVALUATION INFORMATION .....                            | 11        |
| <b>4. POWER SPECTRAL DENSITY .....</b>                      | <b>12</b> |
| 4.1 STANDARD APPLICABLE.....                                | 12        |
| 4.2 TEST SETUP BLOCK DIAGRAM .....                          | 12        |
| 4.3 TEST PROCEDURE.....                                     | 12        |
| 4.4 SUMMARY OF TEST RESULTS/PLOTS .....                     | 12        |
| <b>5. DTS BANDWIDTH.....</b>                                | <b>13</b> |
| 5.1 STANDARD APPLICABLE.....                                | 13        |
| 5.2 TEST SETUP BLOCK DIAGRAM .....                          | 13        |
| 5.3 TEST PROCEDURE.....                                     | 13        |
| 5.4 SUMMARY OF TEST RESULTS/PLOTS .....                     | 13        |
| <b>6. RF OUTPUT POWER .....</b>                             | <b>14</b> |
| 6.1 STANDARD APPLICABLE.....                                | 14        |
| 6.2 TEST SETUP BLOCK DIAGRAM .....                          | 14        |
| 6.3 TEST PROCEDURE.....                                     | 14        |
| 6.4 SUMMARY OF TEST RESULTS/PLOTS .....                     | 14        |
| <b>7. FIELD STRENGTH OF SPURIOUS EMISSIONS .....</b>        | <b>15</b> |
| 7.1 STANDARD APPLICABLE.....                                | 15        |
| 7.2 TEST PROCEDURE.....                                     | 15        |
| 7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....           | 17        |
| 7.4 SUMMARY OF TEST RESULTS/PLOTS .....                     | 17        |
| <b>8. OUT OF BAND EMISSIONS.....</b>                        | <b>24</b> |
| 8.1 STANDARD APPLICABLE.....                                | 24        |
| 8.2 TEST PROCEDURE.....                                     | 24        |
| 8.3 SUMMARY OF TEST RESULTS/PLOTS .....                     | 25        |
| <b>9. CONDUCTED EMISSIONS .....</b>                         | <b>30</b> |
| 9.1 TEST PROCEDURE.....                                     | 30        |
| 9.2 BASIC TEST SETUP BLOCK DIAGRAM.....                     | 30        |
| 9.3 TEST RECEIVER SETUP .....                               | 30        |
| 9.4 SUMMARY OF TEST RESULTS/PLOTS .....                     | 30        |
| <b>APPENDIX SUMMARY .....</b>                               | <b>33</b> |
| <b>APPENDIX A.....</b>                                      | <b>34</b> |
| <b>APPENDIX B.....</b>                                      | <b>37</b> |
| <b>APPENDIX C.....</b>                                      | <b>40</b> |
| <b>APPENDIX D.....</b>                                      | <b>43</b> |
| <b>APPENDIX PHOTOGRAPHS.....</b>                            | <b>47</b> |

**Report version**

| Version No. | Date of issue | Description |
|-------------|---------------|-------------|
| Rev.00      | Feb. 15, 2022 | Original    |
| /           | /             | /           |

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Pure Watercraft  
Address of applicant: 2151 N Northlake Way #210, Seattle, WA 98103

Manufacturer: Pure Watercraft  
Address of manufacturer: 2151 N Northlake Way #210, Seattle, WA 98103

| General Description of EUT                                                              |                 |
|-----------------------------------------------------------------------------------------|-----------------|
| Product Name:                                                                           | Throttle        |
| Trade Name                                                                              | /               |
| Model No.:                                                                              | THG1            |
| Adding Model(s):                                                                        | /               |
| Rated Voltage:                                                                          | Battery DC 9.6V |
| Battery Capacity:                                                                       | 1100mAh         |
| Power Adapter:                                                                          | /               |
| Note: The test data is gathered from a production sample, provided by the manufacturer. |                 |

| Technical Characteristics of EUT |                                                           |
|----------------------------------|-----------------------------------------------------------|
| Bluetooth Version:               | V5.0 (BLE mode)                                           |
| Frequency Range:                 | 2402-2480MHz                                              |
| RF Output Power:                 | 1Mbps:0.364dBm (Conducted)<br>2Mbps: 0.519dBm (Conducted) |
| Data Rate:                       | 1Mbps, 2Mbps                                              |
| Modulation:                      | GFSK                                                      |
| Quantity of Channels:            | 40                                                        |
| Channel Separation:              | 2MHz                                                      |
| Type of Antenna:                 | PCB Antenna                                               |
| Antenna Gain:                    | 3.3dBi                                                    |

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247:** Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

**558074 D01 15.247 Meas Guidance v05r02:** Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

| Test Mode List |             |         |
|----------------|-------------|---------|
| Test Mode      | Description | Remark  |
| TM1            | Low         | 2402MHz |
| TM2            | Middle      | 2440MHz |
| TM3            | High        | 2480MHz |

| Test Conditions    |           |
|--------------------|-----------|
| Temperature:       | 22~25 °C  |
| Relative Humidity: | 45~55 %   |
| ATM Pressure:      | 1019 mbar |

| EUT Cable List and Details |            |                     |                        |
|----------------------------|------------|---------------------|------------------------|
| Cable Description          | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| /                          | /          | /                   | /                      |

| Special Cable List and Details |            |                     |                        |
|--------------------------------|------------|---------------------|------------------------|
| Cable Description              | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| USB Cable                      | 1.00       | Unshielded          | Without Ferrite        |
| DC Cable                       | 1.45       | Unshielded          | Without Ferrite        |
| DC Cable                       | 1.38       | Unshielded          | Without Ferrite        |
| AC Cable                       | 1.95       | Unshielded          | Without Ferrite        |

| Auxiliary Equipment List and Details |                 |            |               |
|--------------------------------------|-----------------|------------|---------------|
| Description                          | Manufacturer    | Model      | Serial Number |
| Switching Power Supply               | Mean Well       | LRS-200-12 | /             |
| Wirewound Resistor                   | TE Connectivity | TE500B1R2J | /             |
| Notebook                             | Lenovo          | TP00114A   | R9-0YPT2W     |

## 1.6 Measurement Uncertainty

| Measurement uncertainty        |            |                                |
|--------------------------------|------------|--------------------------------|
| Parameter                      | Conditions | Uncertainty                    |
| RF Output Power                | Conducted  | $\pm 0.42\text{dB}$            |
| Occupied Bandwidth             | Conducted  | $\pm 1.5\%$                    |
| Power Spectral Density         | Conducted  | $\pm 1.8\text{dB}$             |
| Conducted Spurious Emission    | Conducted  | $\pm 2.17\text{dB}$            |
| Conducted Emissions            | Conducted  | 9-150kHz $\pm 3.74\text{dB}$   |
|                                |            | 0.15-30MHz $\pm 3.34\text{dB}$ |
| Transmitter Spurious Emissions | Radiated   | 30-200MHz $\pm 4.52\text{dB}$  |
|                                |            | 0.2-1GHz $\pm 5.56\text{dB}$   |
|                                |            | 1-6GHz $\pm 3.84\text{dB}$     |
|                                |            | 6-26GHz $\pm 3.92\text{dB}$    |

## 1.7 Test Equipment List and Details

| No.                                                       | Description             | Manufacturer    | Model                 | Serial No.  | Cal Date   | Due. Date  |
|-----------------------------------------------------------|-------------------------|-----------------|-----------------------|-------------|------------|------------|
| SEMT-1075                                                 | Communication Tester    | Rohde & Schwarz | CMW500                | 148650      | 2021-03-27 | 2022-03-26 |
| SEMT-1063                                                 | GSM Tester              | Rohde & Schwarz | CMU200                | 114403      | 2021-03-27 | 2022-03-26 |
| SEMT-1072                                                 | Spectrum Analyzer       | Agilent         | E4407B                | MY41440400  | 2021-03-27 | 2022-03-26 |
| SEMT-1079                                                 | Spectrum Analyzer       | Agilent         | N9020A                | US47140102  | 2021-03-27 | 2022-03-26 |
| SEMT-1080                                                 | Signal Generator        | Agilent         | 83752A                | 3610A01453  | 2021-03-27 | 2022-03-26 |
| SEMT-1081                                                 | Vector Signal Generator | Agilent         | N5182A                | MY47070202  | 2021-03-27 | 2022-03-26 |
| SEMT-1028                                                 | Power Divider           | Weinschel       | 1506A                 | PM204       | 2021-03-27 | 2022-03-26 |
| SEMT-1082                                                 | Power Divider           | RF-Lambda       | RFLT4W5M18G           | 14110400027 | 2021-03-27 | 2022-03-26 |
| SEMT-C001                                                 | Cable                   | Zheng DI        | LL142-07-07-10M(A)    | /           | /          | /          |
| SEMT-C002                                                 | Cable                   | Zheng DI        | ZT40-2.92J-2.92J-6M   | /           | /          | /          |
| SEMT-C003                                                 | Cable                   | Zheng DI        | ZT40-2.92J-2.92J-2.5M | /           | /          | /          |
| SEMT-C004                                                 | Cable                   | Zheng DI        | 2M0RFC                | /           | /          | /          |
| SEMT-C005                                                 | Cable                   | Zheng DI        | 1M0RFC                | /           | /          | /          |
| SEMT-C006                                                 | Cable                   | Zheng DI        | 1M0RFC                | /           | /          | /          |
| <input checked="" type="checkbox"/> Chamber A: Below 1GHz |                         |                 |                       |             |            |            |
| SEMT-1031                                                 | Spectrum Analyzer       | Rohde & Schwarz | FSP30                 | 836079/035  | 2021-03-27 | 2022-03-26 |
| SEMT-1007                                                 | EMI Test Receiver       | Rohde & Schwarz | ESVB                  | 825471/005  | 2021-03-27 | 2022-03-26 |
| SEMT-1008                                                 | Amplifier               | Agilent         | 8447F                 | 3113A06717  | 2021-04-12 | 2022-04-11 |
| SEMT-1069                                                 | Loop Antenna            | Schwarz beck    | FMZB 1516             | 9773        | 2021-03-19 | 2023-03-18 |
| SEMT-1068                                                 | Broadband Antenna       | Schwarz beck    | VULB9163              | 9163-333    | 2021-03-19 | 2023-03-18 |
| <input checked="" type="checkbox"/> Chamber A: Above 1GHz |                         |                 |                       |             |            |            |
| SEMT-1031                                                 | Spectrum Analyzer       | Rohde & Schwarz | FSP30                 | 836079/035  | 2021-03-27 | 2022-03-26 |
| SEMT-1007                                                 | EMI Test Receiver       | Rohde & Schwarz | ESVB                  | 825471/005  | 2021-03-27 | 2022-03-26 |
| SEMT-1043                                                 | Amplifier               | C&D             | PAP-1G18              | 2002        | 2021-04-12 | 2022-04-11 |
| SEMT-1042                                                 | Horn Antenna            | ETS             | 3117                  | 00086197    | 2021-03-19 | 2023-03-18 |
| SEMT-1121                                                 | Horn Antenna            | Schwarzbeck     | BBHA 9170             | BBHA91705   | 2021-04-27 | 2023-04-26 |

|                                                       |                          |                        |             |             |            |            |
|-------------------------------------------------------|--------------------------|------------------------|-------------|-------------|------------|------------|
|                                                       |                          |                        |             | 82          |            |            |
| SEMT-1169                                             | Pre-amplifier            | Direction Systems Inc. | PAP-2640    | 14145-14153 | 2021-04-27 | 2022-04-26 |
| SEMT-1163                                             | Spectrum Analyzer        | Rohde & Schwarz        | FSP40       | 100612      | 2021-03-27 | 2022-03-26 |
| SEMT-1166                                             | Power Limiter            | Agilent                | N9356B      | MY45450376  | 2021-03-27 | 2022-03-26 |
| <input type="checkbox"/> Chamber B: Below 1GHz        |                          |                        |             |             |            |            |
| SEMT-1068                                             | Trilog Broadband Antenna | Schwarz beck           | VULB9163(B) | 9163-635    | 2021-04-09 | 2023-04-08 |
| SEMT-1067                                             | Amplifier                | Agilent                | 8447D       | 2944A10179  | 2021-04-12 | 2022-04-11 |
| SEMT-1066                                             | EMI Test Receiver        | Rohde & Schwarz        | ESPI        | 101391      | 2021-05-06 | 2022-05-05 |
| <input type="checkbox"/> Chamber C: Below 1GHz        |                          |                        |             |             |            |            |
| SEMT-1319                                             | EMI Test Receiver        | Rohde & Schwarz        | ESIB 26     | 100401      | 2021-12-03 | 2022-12-02 |
| SEMT-1343                                             | Trilog Broadband Antenna | Schwarz beck           | VULB 9168   | 1194        | 2021-05-28 | 2023-05-27 |
| SEMT-1333                                             | Amplifier                | HP                     | 8447F       | 2944A03869  | 2021-04-15 | 2022-04-14 |
| <input checked="" type="checkbox"/> Conducted Room 1# |                          |                        |             |             |            |            |
| SEMT-1001                                             | EMI Test Receiver        | Rohde & Schwarz        | ESPI        | 101611      | 2021-04-12 | 2022-04-11 |
| SEMT-1002                                             | Pulse Limiter            | Rohde & Schwarz        | ESH3-Z2     | 100911      | 2021-04-15 | 2022-04-14 |
| SEMT-1003                                             | AC LISN                  | Schwarz beck           | NSLK8126    | 8126-224    | 2021-04-12 | 2022-04-11 |
| <input type="checkbox"/> Conducted Room 2#            |                          |                        |             |             |            |            |
| SEMT-1334                                             | EMI Test Receiver        | Rohde & Schwarz        | ESPI        | 101259      | 2021-04-12 | 2022-04-11 |
| SEMT-1336                                             | LISN                     | Rohde & Schwarz        | ENV 216     | 100097      | 2021-04-12 | 2022-04-11 |

| Software List                           |              |        |         |
|-----------------------------------------|--------------|--------|---------|
| Description                             | Manufacturer | Model  | Version |
| EMI Test Software (Radiated Emission)*  | Farad        | EZ-EMC | RA-03A1 |
| EMI Test Software (Conducted Emission)* | Farad        | EZ-EMC | RA-03A1 |

\*Remark: indicates software version used in the compliance certification testing.

## 2. SUMMARY OF TEST RESULTS

---

| FCC Rules                 | Description of Test Item          | Result    |
|---------------------------|-----------------------------------|-----------|
| §15.203; §15.247(b)(4)(i) | Antenna Requirement               | Compliant |
| §15.205                   | Restricted Band of Operation      | Compliant |
| §15.207(a)                | Conducted Emission                | Compliant |
| §15.247(e)                | Power Spectral Density            | Compliant |
| §15.247(a)(2)             | DTS Bandwidth                     | Compliant |
| §15.247(b)(3)             | RF Output Power                   | Compliant |
| §15.209(a)                | Radiated Emission                 | Compliant |
| §15.247(d)                | Band Edge (Out of Band Emissions) | Compliant |

N/A: Not applicable.

### **3. Antenna Requirement**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Evaluation Information**

This product has a PCB antenna, fulfill the requirement of this section.

## 4. Power Spectral Density

---

### 4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 4.2 Test Setup Block Diagram



### 4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$ .
- Set the VBW  $\geq 3 \times \text{RBW}$ .
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.

### 4.4 Summary of Test Results/Plots

Please refer to Appendix A


## 5. DTS Bandwidth

---

### 5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

### 5.2 Test Setup Block Diagram

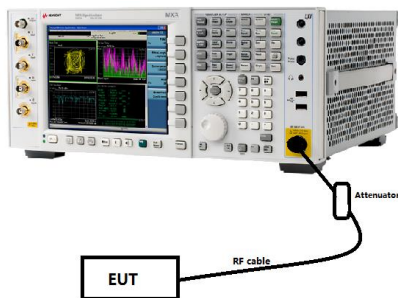

### 5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- Set RBW = 100kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

### 5.4 Summary of Test Results/Plots

**Please refer to Appendix B**


## 6. RF Output Power

---

### 6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

### 6.2 Test Setup Block Diagram

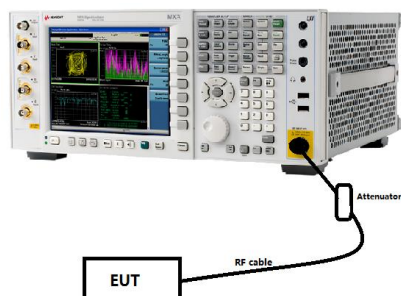

### 6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- Set the  $RBW \geq DTS$  bandwidth.
- Set  $VBW \geq 3 \times RBW$ .
- Set  $span \geq 3 \times RBW$ .
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

### 6.4 Summary of Test Results/Plots

Please refer to Appendix C

## 7. Field Strength of Spurious Emissions

### 7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


### 7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

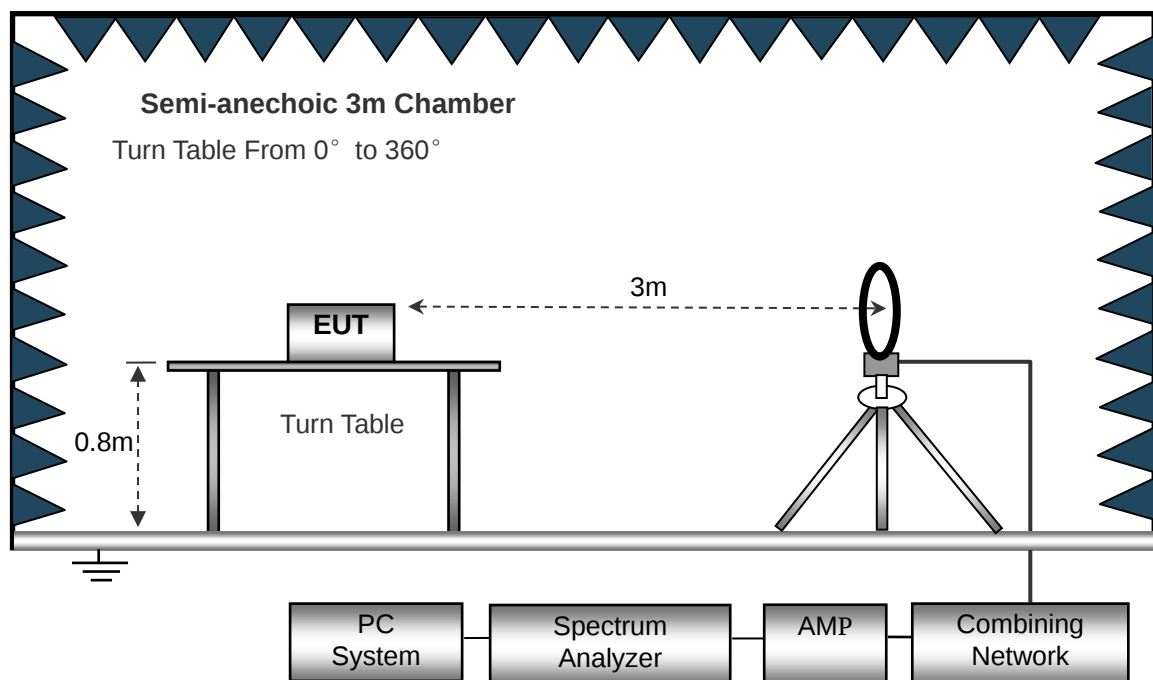

The test setup for emission measurement from 30MHz to 1GHz.

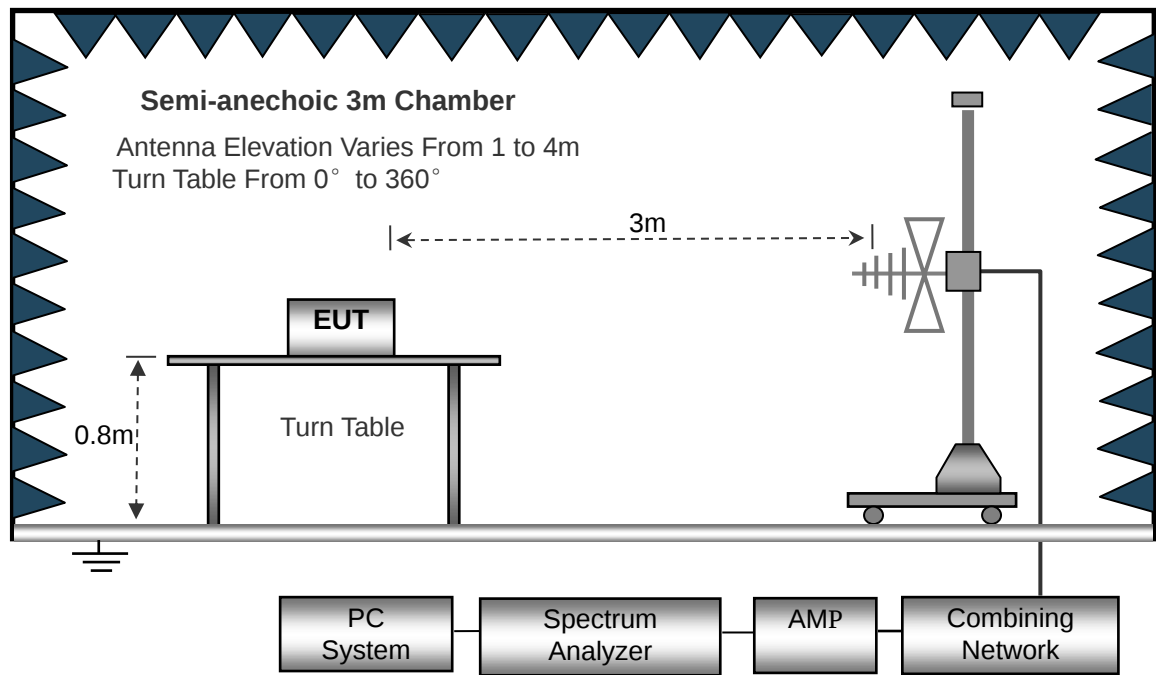

The test setup for emission measurement above 1GHz.

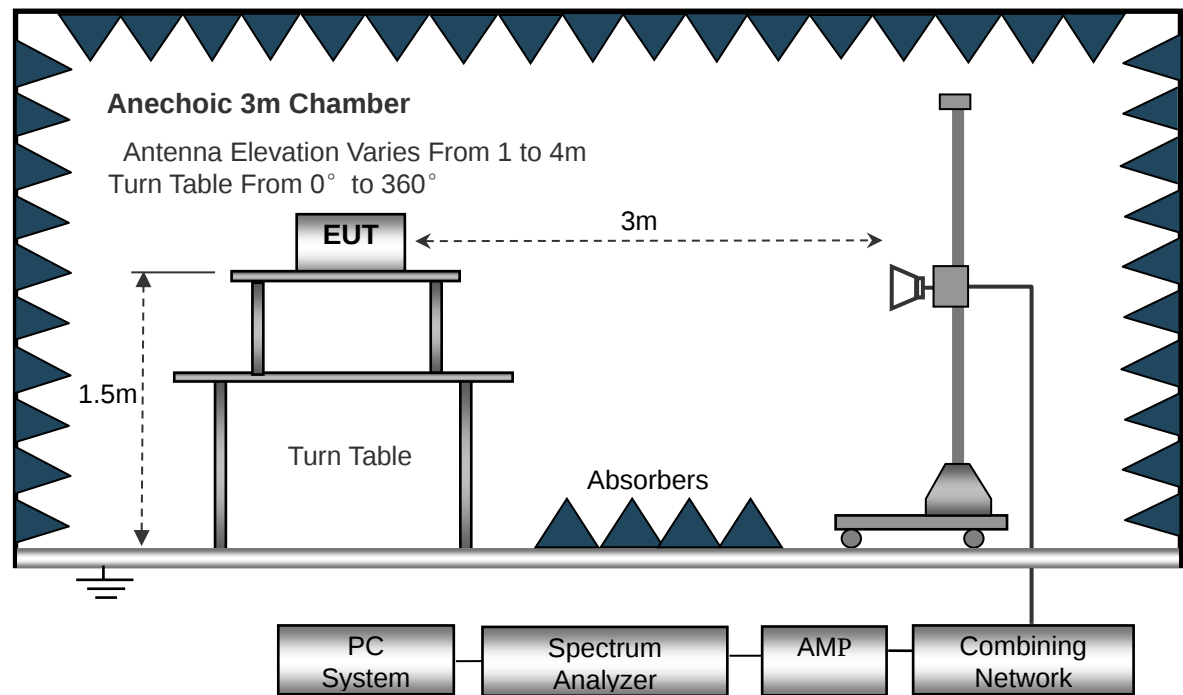

Frequency :9kHz-30MHz  
RBW=10KHz,  
VBW =30KHz  
Sweep time= Auto  
Trace = max hold  
Detector function = peak

Frequency :30MHz-1GHz  
RBW=120KHz,  
VBW=300KHz  
Sweep time= Auto  
Trace = max hold  
Detector function = peak, QP

Frequency :Above 1GHz  
RBW=1MHz,  
VBW=3MHz(Peak), 10Hz(AV)  
Sweep time= Auto  
Trace = max hold  
Detector function = peak, AV

### 7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 7.4 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


- Spurious Emissions Below 1GHz
- 1Mbps

|              |                 |           |            |
|--------------|-----------------|-----------|------------|
| Test Channel | Low(worst case) | Polarity: | Horizontal |
|--------------|-----------------|-----------|------------|

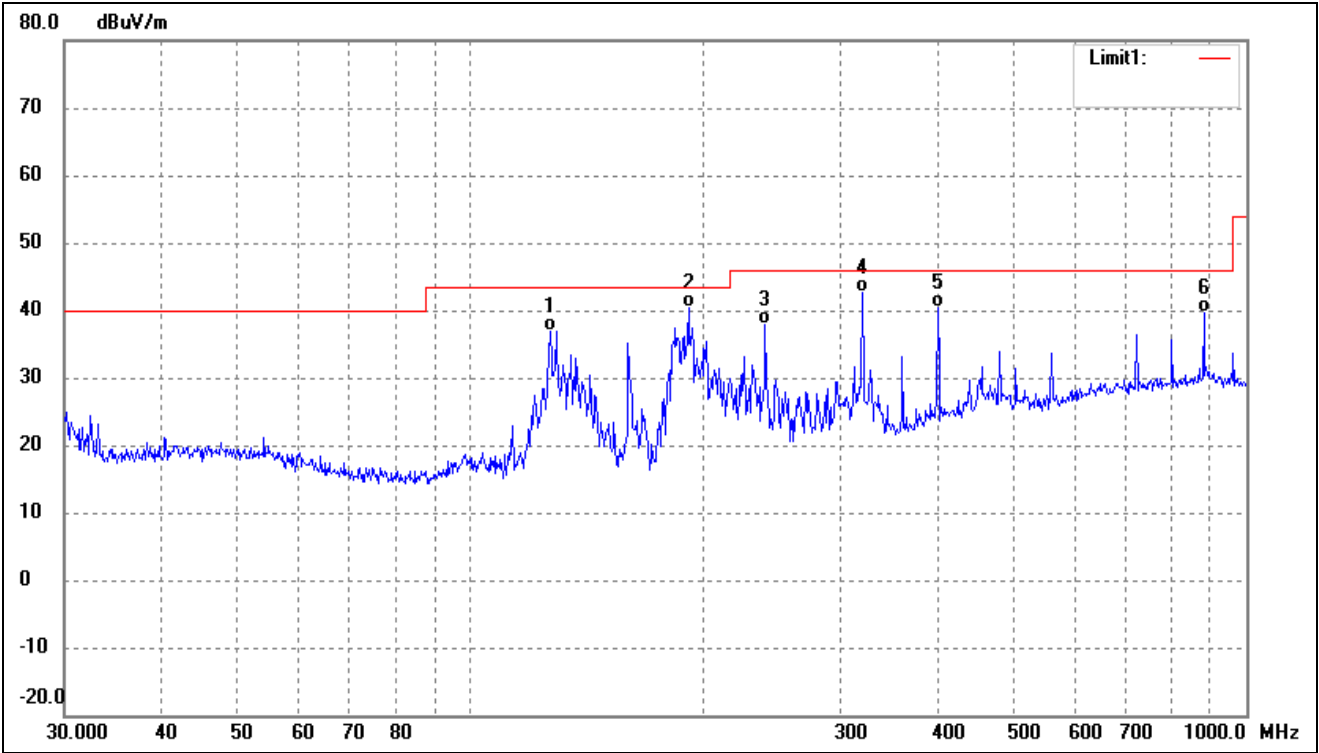

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>dB/m | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Degree<br>( ) | Height<br>(cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1   | 126.7723           | 47.69               | -10.85          | 36.84              | 43.50             | -6.66          | -             | -              | QP     |
| 2   | 191.0738           | 50.31               | -10.01          | 40.30              | 43.50             | -3.20          | -             | -              | QP     |
| 3   | 239.9874           | 46.53               | -8.59           | 37.94              | 46.00             | -8.06          | -             | -              | QP     |
| 4   | 319.9370           | 49.01               | -6.34           | 42.67              | 46.00             | -3.33          | -             | -              | QP     |
| 5   | 400.4319           | 44.38               | -3.88           | 40.50              | 46.00             | -5.50          | -             | -              | QP     |
| 6   | 881.4067           | 37.09               | 2.62            | 39.71              | 46.00             | -6.29          | -             | -              | QP     |


|              |                 |           |          |
|--------------|-----------------|-----------|----------|
| Test Channel | Low(worst case) | Polarity: | Vertical |
|--------------|-----------------|-----------|----------|

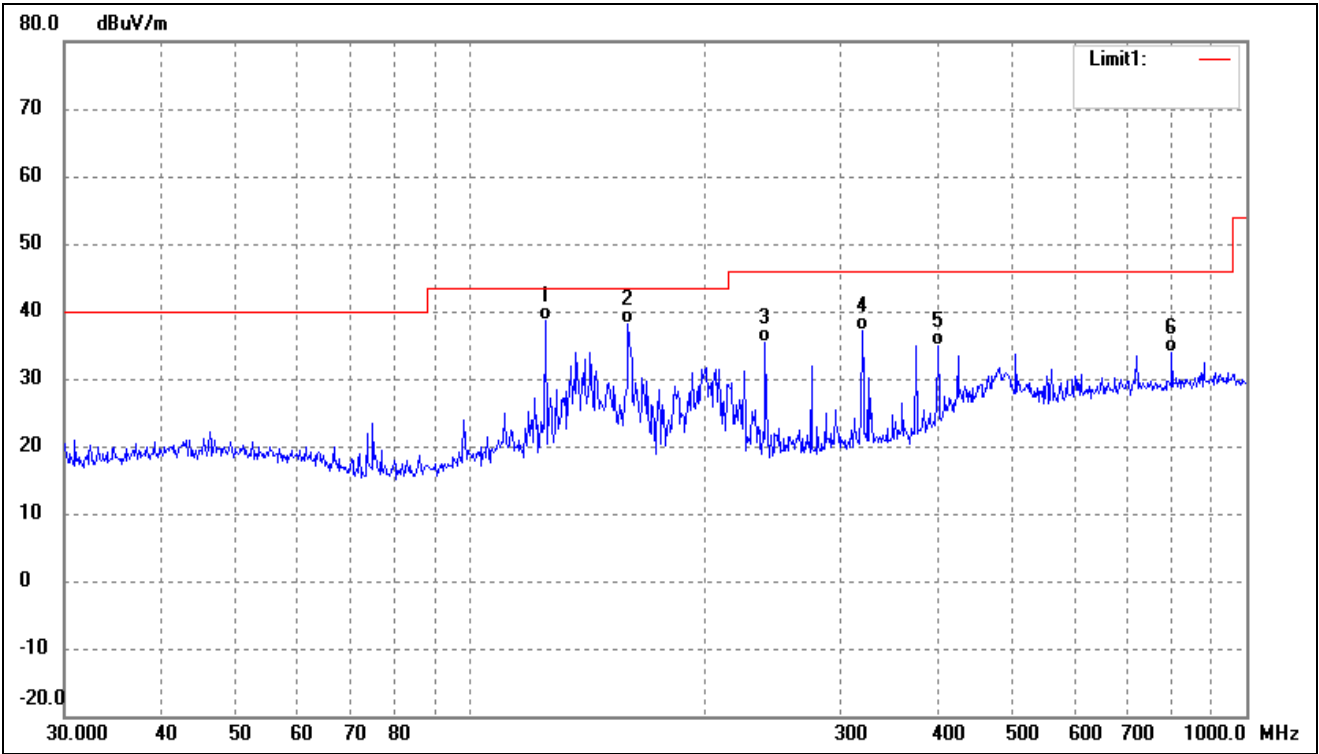

| No. | Frequency | Reading  | Correct | Result   | Limit    | Margin | Degree | Height | Remark |
|-----|-----------|----------|---------|----------|----------|--------|--------|--------|--------|
|     | (MHz)     | (dBuV/m) | dB/m    | (dBuV/m) | (dBuV/m) | (dB)   | ( )    | (cm)   |        |
| 1   | 125.0066  | 49.07    | -10.51  | 38.56    | 43.50    | -4.94  | -      | -      | QP     |
| 2   | 159.7844  | 50.37    | -12.17  | 38.20    | 43.50    | -5.30  | -      | -      | QP     |
| 3   | 239.9874  | 43.86    | -8.59   | 35.27    | 46.00    | -10.73 | -      | -      | QP     |
| 4   | 319.9370  | 43.53    | -6.34   | 37.19    | 46.00    | -8.81  | -      | -      | QP     |
| 5   | 400.4319  | 38.82    | -3.88   | 34.94    | 46.00    | -11.06 | -      | -      | QP     |
| 6   | 801.7863  | 31.72    | 2.10    | 33.82    | 46.00    | -12.18 | -      | -      | QP     |


➤ 2Mbps

|              |                 |           |            |
|--------------|-----------------|-----------|------------|
| Test Channel | Low(worst case) | Polarity: | Horizontal |
|--------------|-----------------|-----------|------------|

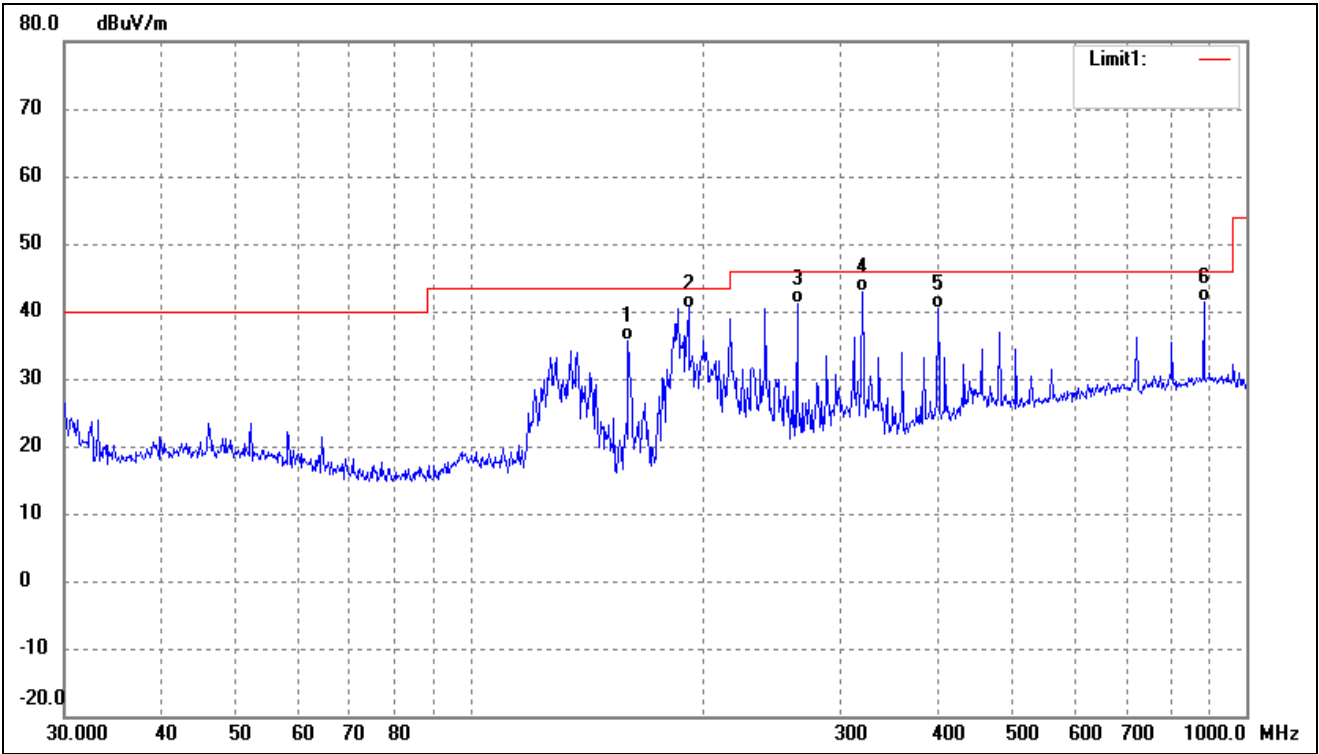

| No. | Frequency | Reading  | Correct | Result   | Limit    | Margin | Degree | Height | Remark |
|-----|-----------|----------|---------|----------|----------|--------|--------|--------|--------|
|     | (MHz)     | (dBuV/m) | dB/m    | (dBuV/m) | (dBuV/m) | (dB)   | ( )    | (cm)   |        |
| 1   | 159.7844  | 47.75    | -12.17  | 35.58    | 43.50    | -7.92  | -      | -      | QP     |
| 2   | 191.0738  | 50.50    | -10.01  | 40.49    | 43.50    | -3.01  | -      | -      | QP     |
| 3   | 263.8190  | 49.01    | -7.94   | 41.07    | 46.00    | -4.93  | -      | -      | QP     |
| 4   | 319.9370  | 49.17    | -6.34   | 42.83    | 46.00    | -3.17  | -      | -      | QP     |
| 5   | 400.4319  | 44.15    | -3.88   | 40.27    | 46.00    | -5.73  | -      | -      | QP     |
| 6   | 881.4067  | 38.64    | 2.62    | 41.26    | 46.00    | -4.74  | -      | -      | QP     |

|              |                 |           |          |
|--------------|-----------------|-----------|----------|
| Test Channel | Low(worst case) | Polarity: | Vertical |
|--------------|-----------------|-----------|----------|

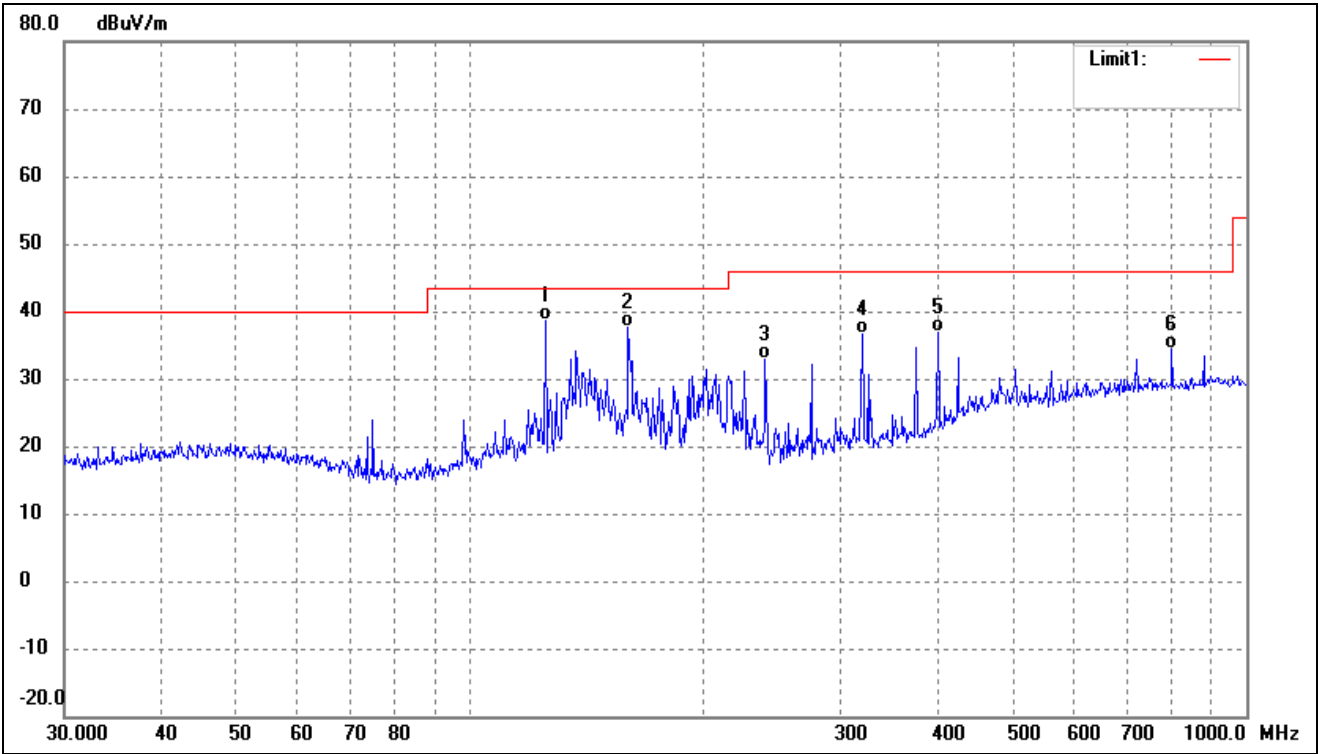

| No. | Frequency | Reading  | Correct | Result   | Limit    | Margin | Degree | Height | Remark |
|-----|-----------|----------|---------|----------|----------|--------|--------|--------|--------|
|     | (MHz)     | (dBuV/m) | dB/m    | (dBuV/m) | (dBuV/m) | (dB)   | ( )    | (cm)   |        |
| 1   | 125.0066  | 49.11    | -10.51  | 38.60    | 43.50    | -4.90  | -      | -      | QP     |
| 2   | 159.7844  | 49.70    | -12.17  | 37.53    | 43.50    | -5.97  | -      | -      | QP     |
| 3   | 239.9874  | 41.44    | -8.59   | 32.85    | 46.00    | -13.15 | -      | -      | QP     |
| 4   | 319.9370  | 42.85    | -6.34   | 36.51    | 46.00    | -9.49  | -      | -      | QP     |
| 5   | 400.4319  | 40.73    | -3.88   | 36.85    | 46.00    | -9.15  | -      | -      | QP     |
| 6   | 801.7863  | 32.31    | 2.10    | 34.41    | 46.00    | -11.59 | -      | -      | QP     |

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

## ➤ Spurious Emissions Above 1GHz

1Mbps

| Frequency              | Reading  | Correct | Result   | Limit    | Margin | Polar | Detector |
|------------------------|----------|---------|----------|----------|--------|-------|----------|
| (MHz)                  | (dBuV/m) | dB      | (dBuV/m) | (dBuV/m) | (dB)   | H/V   |          |
| Low Channel-2402MHz    |          |         |          |          |        |       |          |
| 4804.000               | 52.75    | -4.52   | 48.23    | 74.00    | -25.77 | H     | PK       |
| 7206.000               | 50.92    | -2.20   | 48.72    | 74.00    | -25.28 | H     | PK       |
| 4804.000               | 53.06    | -4.52   | 48.54    | 74.00    | -25.46 | V     | PK       |
| 7206.000               | 49.74    | -2.20   | 47.54    | 74.00    | -26.46 | V     | PK       |
| Middle Channel-2440MHz |          |         |          |          |        |       |          |
| 4880.000               | 52.81    | -4.47   | 48.34    | 74.00    | -25.66 | H     | PK       |
| 7320.000               | 48.53    | -2.17   | 46.36    | 74.00    | -27.64 | H     | PK       |
| 4880.000               | 52.36    | -4.47   | 47.89    | 74.00    | -26.11 | V     | PK       |
| 7320.000               | 48.62    | -2.17   | 46.45    | 74.00    | -27.55 | V     | PK       |
| High Channel-2480MHz   |          |         |          |          |        |       |          |
| 4960.000               | 50.35    | -4.41   | 45.94    | 74.00    | -28.06 | H     | PK       |
| 7440.000               | 49.76    | -2.14   | 47.62    | 74.00    | -26.38 | H     | PK       |
| 4960.000               | 50.27    | -4.41   | 45.86    | 74.00    | -28.14 | V     | PK       |
| 7440.000               | 49.52    | -2.14   | 47.38    | 74.00    | -26.62 | V     | PK       |

2Mbps

| Frequency              | Reading  | Correct | Result   | Limit    | Margin | Polar | Detector |
|------------------------|----------|---------|----------|----------|--------|-------|----------|
| (MHz)                  | (dBuV/m) | dB      | (dBuV/m) | (dBuV/m) | (dB)   | H/V   |          |
| Low Channel-2402MHz    |          |         |          |          |        |       |          |
| 4804.000               | 52.25    | -4.52   | 47.73    | 74.00    | -26.27 | H     | PK       |
| 7206.000               | 50.55    | -2.20   | 48.35    | 74.00    | -25.65 | H     | PK       |
| 4804.000               | 52.19    | -4.52   | 47.67    | 74.00    | -26.33 | V     | PK       |
| 7206.000               | 50.65    | -2.20   | 48.45    | 74.00    | -25.55 | V     | PK       |
| Middle Channel-2440MHz |          |         |          |          |        |       |          |
| 4880.000               | 51.44    | -4.47   | 46.97    | 74.00    | -27.03 | H     | PK       |
| 7320.000               | 48.63    | -2.17   | 46.46    | 74.00    | -27.54 | H     | PK       |
| 4880.000               | 51.11    | -4.47   | 46.64    | 74.00    | -27.36 | V     | PK       |
| 7320.000               | 49.09    | -2.17   | 46.92    | 74.00    | -27.08 | V     | PK       |
| High Channel-2480MHz   |          |         |          |          |        |       |          |
| 4960.000               | 50.48    | -4.41   | 46.07    | 74.00    | -27.93 | H     | PK       |
| 7440.000               | 49.44    | -2.14   | 47.30    | 74.00    | -26.70 | H     | PK       |
| 4960.000               | 50.18    | -4.41   | 45.77    | 74.00    | -28.23 | V     | PK       |
| 7440.000               | 49.47    | -2.14   | 47.33    | 74.00    | -26.67 | V     | PK       |

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

## 8. Out of Band Emissions

---

### 8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 8.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

#### A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

#### B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b)  $VBW \geq [3 \times RBW]$ .
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

RBW as a function of frequency

| Frequency        | RBW              |
|------------------|------------------|
| 9kHz to 150kHz   | 200Hz to 300Hz   |
| 0.15MHz to 30MHz | 9kHz to 10kHz    |
| 30MHz to 1000MHz | 100kHz to 120kHz |
| >1000MHz         | 1MHz             |


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

### 8.3 Summary of Test Results/Plots


- Radiated test
- 1Mbps

|              |     |           |                         |
|--------------|-----|-----------|-------------------------|
| Test Channel | Low | Polarity: | Horizontal (worst case) |
|--------------|-----|-----------|-------------------------|

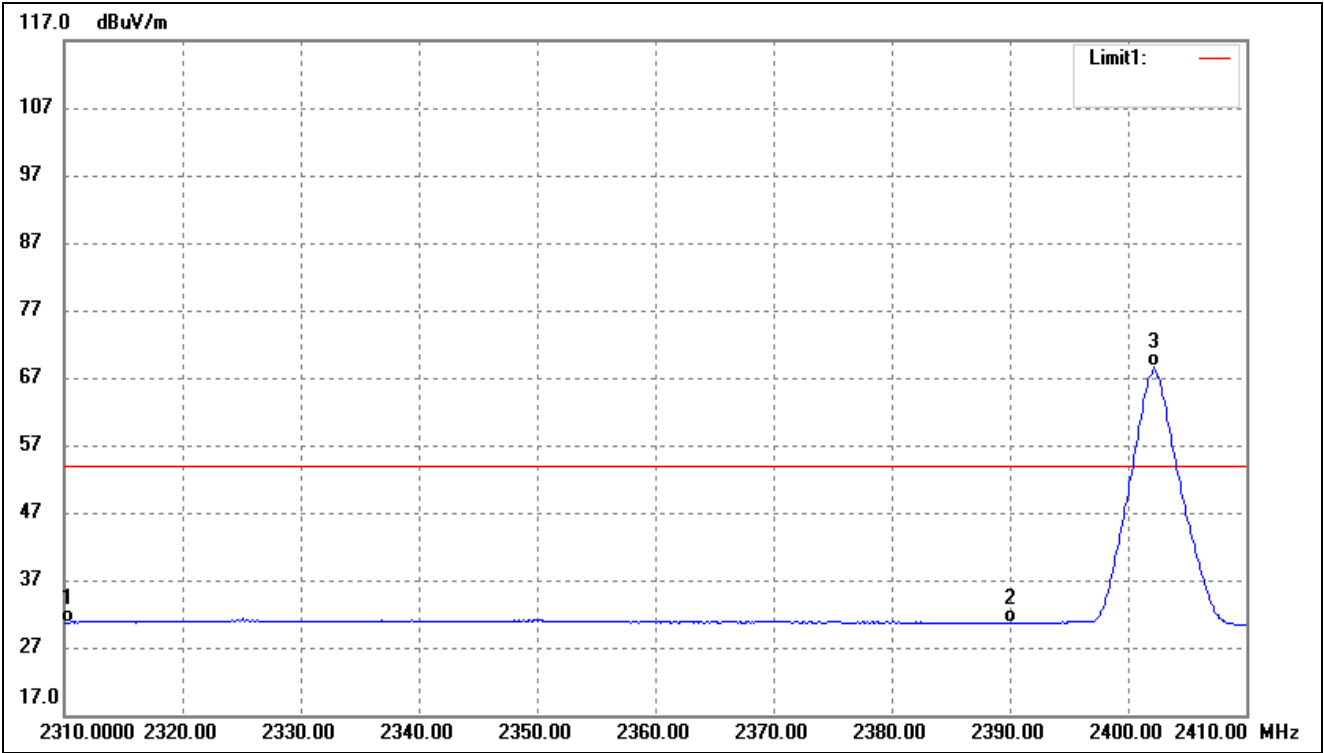

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>Factor(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark           |
|-----|--------------------|---------------------|-----------------------|--------------------|-------------------|----------------|------------------|
| 1   | 2310.000           | 40.39               | -9.66                 | 30.73              | 54.00             | -23.27         | Average Detector |
|     | 2310.000           | 52.17               | -9.66                 | 42.51              | 74.00             | -31.49         | Peak Detector    |
| 2   | 2390.000           | 40.10               | -9.50                 | 30.60              | 54.00             | -23.40         | Average Detector |
|     | 2390.000           | 51.79               | -9.50                 | 42.29              | 74.00             | -31.71         | Peak Detector    |
| 3   | 2402.200           | 78.14               | -9.47                 | 68.67              | /                 | /              | Average Detector |
|     | 2402.200           | 98.95               | -9.47                 | 89.48              | /                 | /              | Peak Detector    |


|              |      |           |                         |
|--------------|------|-----------|-------------------------|
| Test Channel | High | Polarity: | Horizontal (worst case) |
|--------------|------|-----------|-------------------------|

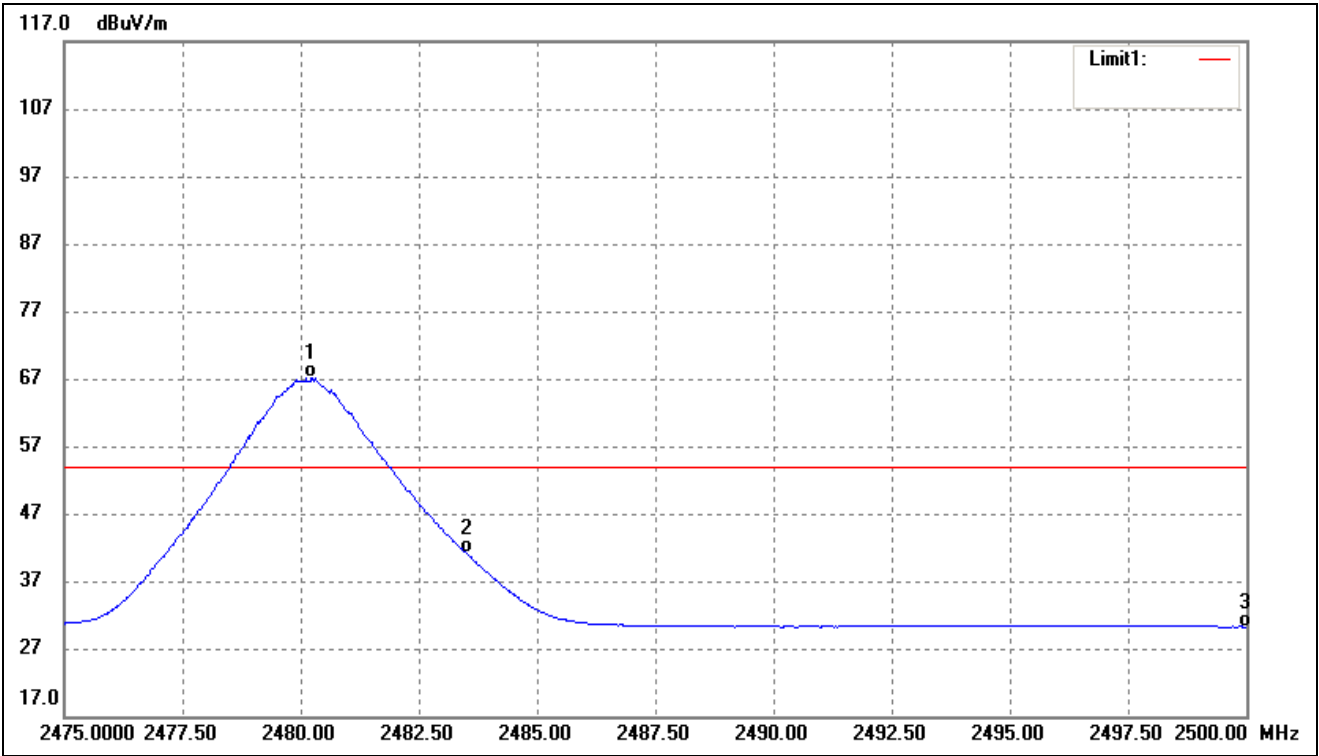

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>dB/m | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark           |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|------------------|
| 1   | 2480.225           | 76.49               | -9.32           | 67.17              | /                 | /              | Average Detector |
|     | 2480.125           | 96.99               | -9.32           | 87.67              | /                 | /              | Peak Detector    |
| 2   | 2483.500           | 50.54               | -9.31           | 41.23              | 54.00             | -12.77         | Average Detector |
|     | 2483.500           | 61.14               | -9.31           | 51.83              | 74.00             | -22.17         | Peak Detector    |
| 3   | 2500.000           | 39.50               | -9.28           | 30.22              | 54.00             | -23.78         | Average Detector |
|     | 2500.000           | 51.37               | -9.28           | 42.09              | 74.00             | -31.91         | Peak Detector    |


➤ 2Mbps

|              |     |           |                         |
|--------------|-----|-----------|-------------------------|
| Test Channel | Low | Polarity: | Horizontal (worst case) |
|--------------|-----|-----------|-------------------------|

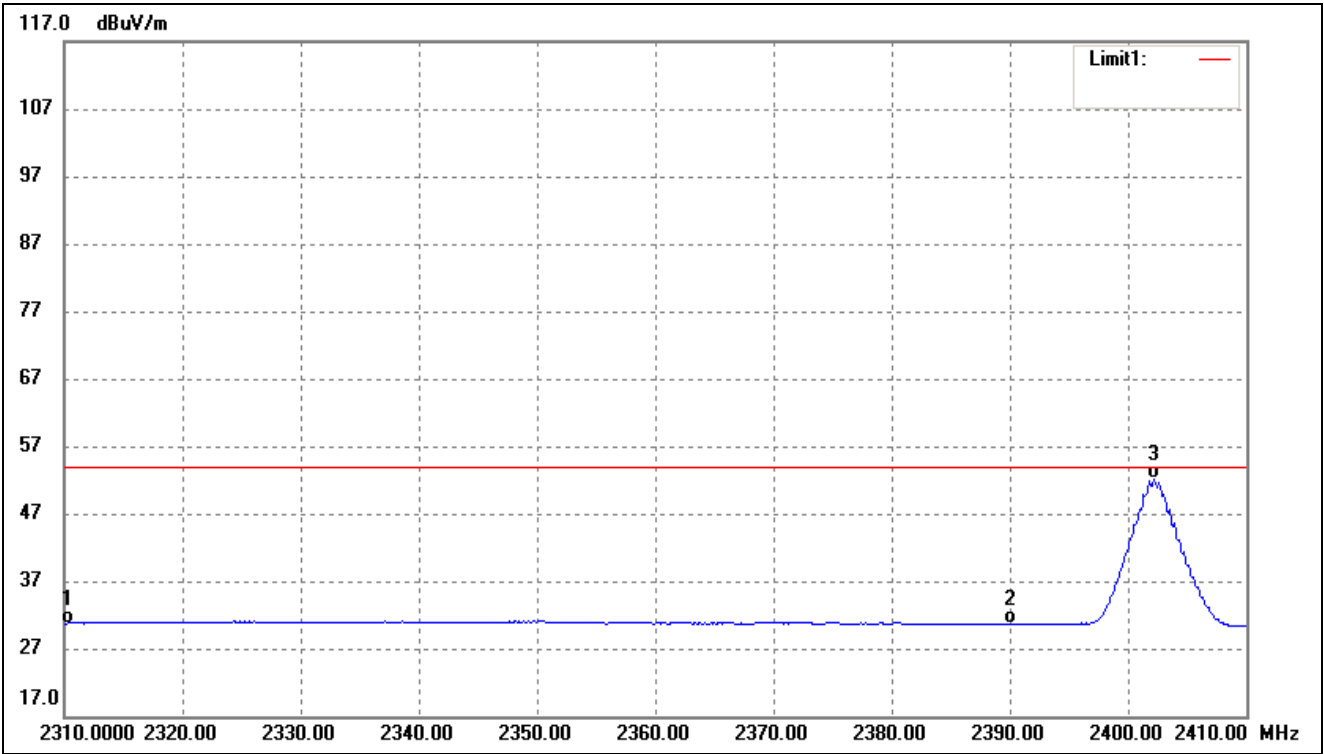

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>Factor(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark           |
|-----|--------------------|---------------------|-----------------------|--------------------|-------------------|----------------|------------------|
| 1   | 2310.000           | 40.39               | -9.66                 | 30.73              | 54.00             | -23.27         | Average Detector |
|     | 2310.000           | 52.62               | -9.66                 | 42.96              | 74.00             | -31.04         | Peak Detector    |
| 2   | 2390.000           | 40.12               | -9.50                 | 30.62              | 54.00             | -23.38         | Average Detector |
|     | 2390.000           | 51.80               | -9.50                 | 42.30              | 74.00             | -31.70         | Peak Detector    |
| 3   | 2402.200           | 61.72               | -9.47                 | 52.25              | /                 | /              | Average Detector |
|     | 2402.200           | 98.61               | -9.47                 | 89.14              | /                 | /              | Peak Detector    |

|              |      |           |                         |
|--------------|------|-----------|-------------------------|
| Test Channel | High | Polarity: | Horizontal (worst case) |
|--------------|------|-----------|-------------------------|

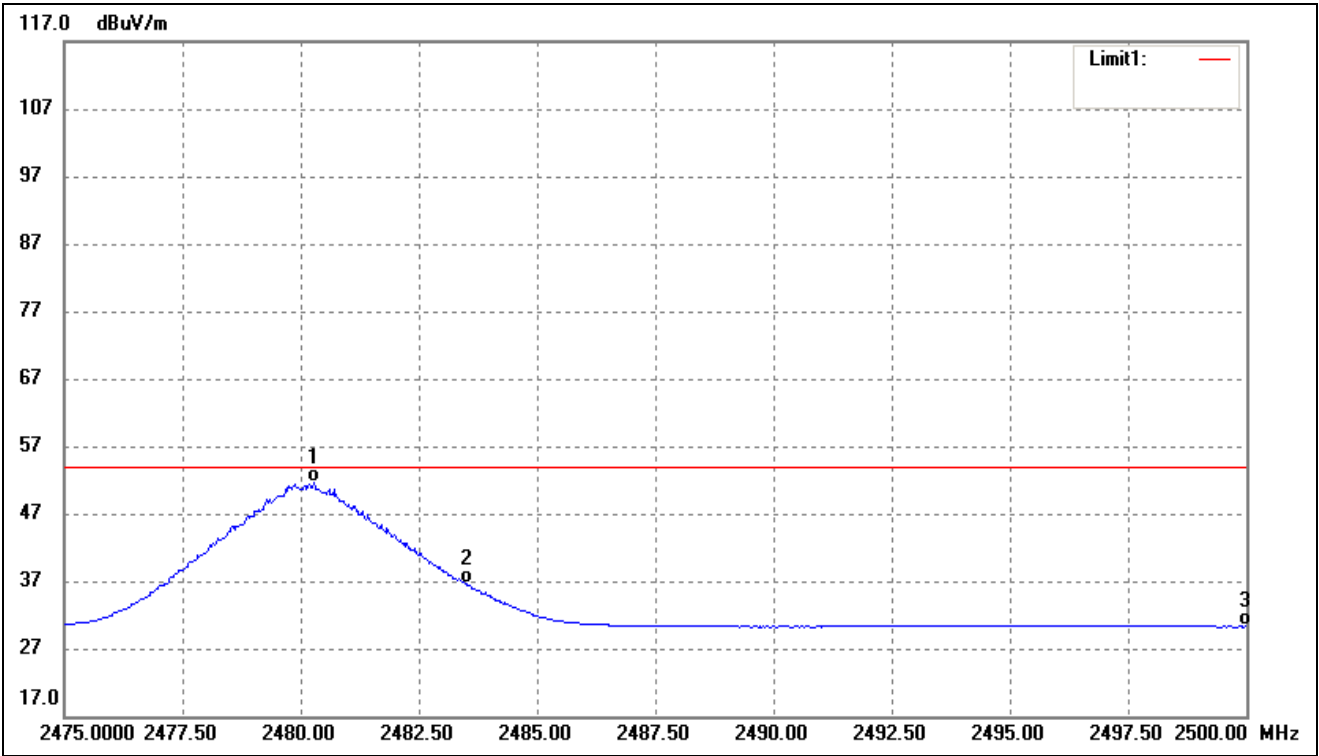

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>dB/m | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark           |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|------------------|
| 1   | 2480.275           | 60.83               | -9.32           | 51.51              | /                 | /              | Average Detector |
|     | 2480.575           | 97.12               | -9.32           | 87.80              | /                 | /              | Peak Detector    |
| 2   | 2483.500           | 45.94               | -9.31           | 36.63              | 54.00             | -17.37         | Average Detector |
|     | 2483.500           | 64.71               | -9.31           | 55.40              | 74.00             | -18.60         | Peak Detector    |
| 3   | 2500.000           | 39.55               | -9.28           | 30.27              | 54.00             | -23.73         | Average Detector |
|     | 2500.000           | 51.00               | -9.28           | 41.72              | 74.00             | -32.28         | Peak Detector    |

➤ Conducted test

Please refer to Appendix D

9. Conducted Emissions


9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram

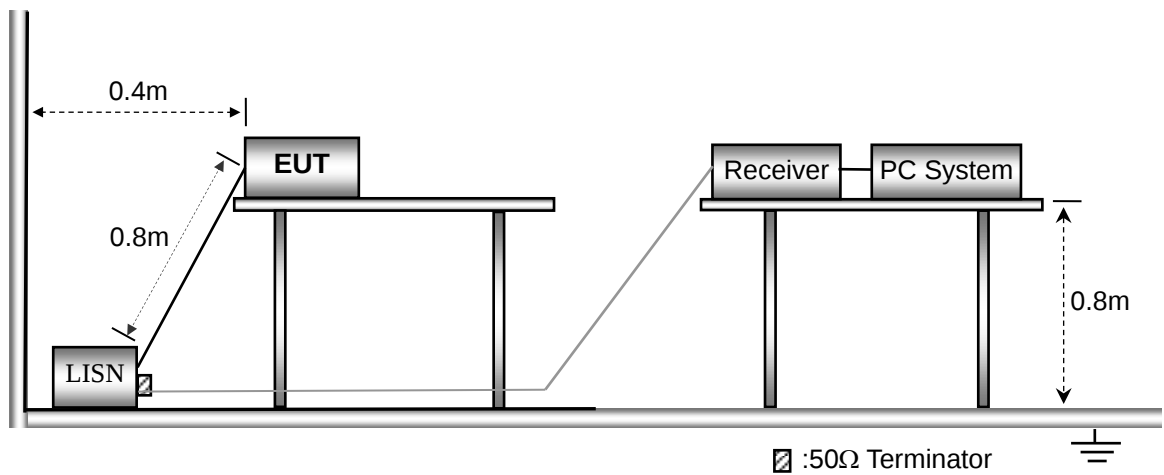


9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

|                                    |        |
|------------------------------------|--------|
| Start Frequency .....              | 150kHz |
| Stop Frequency .....               | 30MHz  |
| Sweep Speed .....                  | Auto   |
| IF Bandwidth.....                  | 10kHz  |
| Quasi-Peak Adapter Bandwidth ..... | 9kHz   |
| Quasi-Peak Adapter Mode .....      | Normal |


9.4 Summary of Test Results/Plots

|           |               |             |           |      |
|-----------|---------------|-------------|-----------|------|
| Test Mode | Communication | AC120V 60Hz | Polarity: | Line |
|-----------|---------------|-------------|-----------|------|

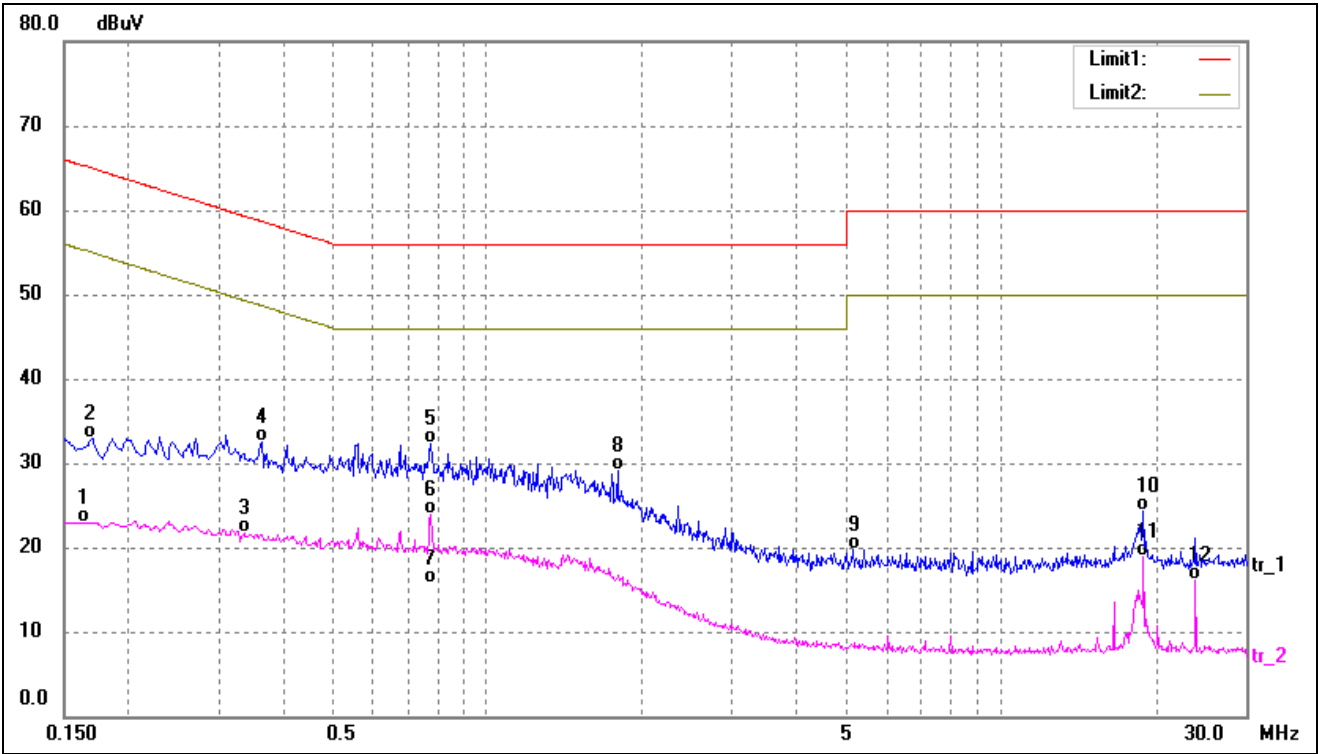

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|-----------------|------------------|-----------------|----------------|----------|
| 1   | 0.1620             | 12.63             | 10.37           | 23.00            | 55.36           | -32.36         | AVG      |
| 2   | 0.1700             | 22.61             | 10.37           | 32.98            | 64.96           | -31.98         | QP       |
| 3   | 0.3339             | 11.32             | 10.33           | 21.65            | 49.35           | -27.70         | AVG      |
| 4   | 0.3620             | 22.16             | 10.31           | 32.47            | 58.68           | -26.21         | QP       |
| 5   | 0.7780             | 21.93             | 10.43           | 32.36            | 56.00           | -23.64         | QP       |
| 6*  | 0.7780             | 13.51             | 10.43           | 23.94            | 46.00           | -22.06         | AVG      |
| 7   | 0.7780             | 5.20              | 10.43           | 15.63            | 46.00           | -30.37         | AVG      |
| 8   | 1.7980             | 18.93             | 10.22           | 29.15            | 56.00           | -26.85         | QP       |
| 9   | 5.1579             | 9.74              | 10.00           | 19.74            | 60.00           | -40.26         | QP       |
| 10  | 18.9900            | 13.98             | 10.23           | 24.21            | 60.00           | -35.79         | QP       |
| 11  | 18.9900            | 8.70              | 10.23           | 18.93            | 50.00           | -31.07         | AVG      |
| 12  | 24.0020            | 5.82              | 10.22           | 16.04            | 50.00           | -33.96         | AVG      |

|           |               |             |           |         |
|-----------|---------------|-------------|-----------|---------|
| Test Mode | Communication | AC120V 60Hz | Polarity: | Neutral |
|-----------|---------------|-------------|-----------|---------|

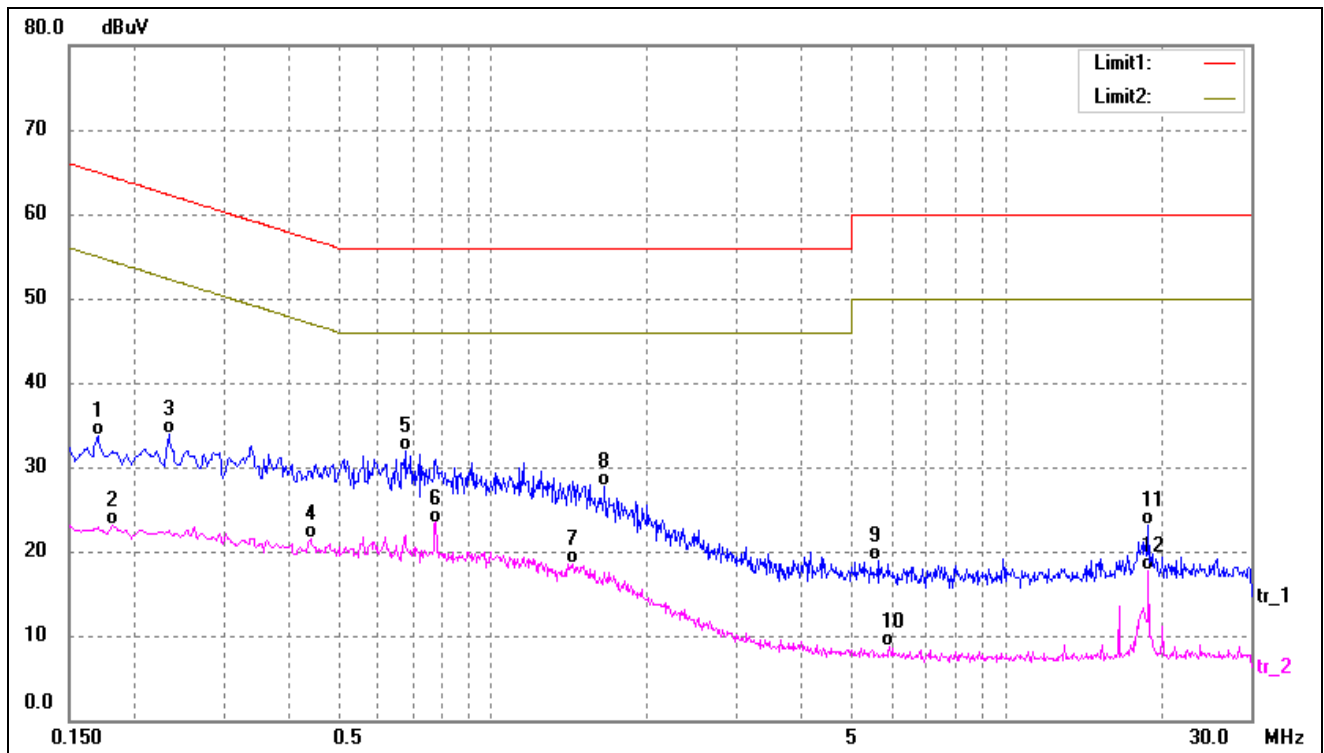

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|-----------------|------------------|-----------------|----------------|----------|
| 1   | 0.1700             | 23.31             | 10.37           | 33.68            | 64.96           | -31.28         | QP       |
| 2   | 0.1819             | 12.79             | 10.37           | 23.16            | 54.39           | -31.23         | AVG      |
| 3   | 0.2340             | 23.57             | 10.36           | 33.93            | 62.30           | -28.37         | QP       |
| 4   | 0.4420             | 11.31             | 10.28           | 21.59            | 47.02           | -25.43         | AVG      |
| 5   | 0.6780             | 21.45             | 10.37           | 31.82            | 56.00           | -24.18         | QP       |
| 6*  | 0.7780             | 12.97             | 10.43           | 23.40            | 46.00           | -22.60         | AVG      |
| 7   | 1.4340             | 8.10              | 10.38           | 18.48            | 46.00           | -27.52         | AVG      |
| 8   | 1.6580             | 17.33             | 10.28           | 27.61            | 56.00           | -28.39         | QP       |
| 9   | 5.6260             | 9.01              | 9.99            | 19.00            | 60.00           | -41.00         | QP       |
| 10  | 5.9300             | -1.19             | 9.97            | 8.78             | 50.00           | -41.22         | AVG      |
| 11  | 18.9740            | 12.95             | 10.23           | 23.18            | 60.00           | -36.82         | QP       |
| 12  | 18.9740            | 7.51              | 10.23           | 17.74            | 50.00           | -32.26         | AVG      |

APPENDIX SUMMARY

|                   |                 |               |            |
|-------------------|-----------------|---------------|------------|
| Project No.       | WTX21X04041977W | Test Engineer | cg Liang   |
| Start date        | 2022/01/12      | Finish date   | 2022/01/21 |
| Temperature       | 25℃             | Humidity      | 63%        |
| RF specifications | BT-BLE          |               |            |

| APPENDIX | Description of Test Item        | Result    |
|----------|---------------------------------|-----------|
| A        | Power Spectral Density          | Compliant |
| B        | DTS Bandwidth                   | Compliant |
| C        | RF Output Power                 | Compliant |
| D        | Conducted Out of Band Emissions | Compliant |

**APPENDIX A**

---

| Power Spectral Density |              |                                    |                   |
|------------------------|--------------|------------------------------------|-------------------|
| Test Mode              | Test Channel | Power Spectral Density<br>dBm/3kHz | Limit<br>dBm/3kHz |
| 1Mbps GFSK(BLE)        | Low          | -13.08                             | 8                 |
|                        | Middle       | -12.96                             | 8                 |
|                        | High         | -13.32                             | 8                 |
| 2Mbps GFSK(BLE)        | Low          | -13.01                             | 8                 |
|                        | Middle       | -12.95                             | 8                 |
|                        | High         | -13.40                             | 8                 |

|               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Low</p>    | <div><div><div>Agilent</div><div>R T</div><div>Ref 20 dBm #Atten 30 dB Mkr1 2.4021305 GHz -13.08 dBm</div><div>#Peak Log 10 dB/ Offst 1 dB</div><div>M1 S2 S3 FC AA</div><div>Marker 2.402130500 GHz -13.08 dBm</div><div>Center 2.402 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 171.5 ms (1001 pts) Span 1.5 MHz</div></div><div><div>Peak Search</div><div>Meas Tools ▶</div><div>Next Peak</div><div>Next Pk Right</div><div>Next Pk Left</div><div>Min Search</div><div>Pk-Pk Search</div><div>More 1 of 2</div></div></div> |
| <p>Middle</p> | <div><div><div>Agilent</div><div>R T</div><div>Ref 20 dBm #Atten 30 dB Mkr1 2.4401335 GHz -12.96 dBm</div><div>#Peak Log 10 dB/ Offst 1 dB</div><div>M1 S2 S3 FC AA</div><div>Center 2.44 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 171.5 ms (1001 pts) Span 1.5 MHz</div></div><div><div>Peak Search</div><div>Meas Tools ▶</div><div>Next Peak</div><div>Next Pk Right</div><div>Next Pk Left</div><div>Min Search</div><div>Pk-Pk Search</div><div>More 1 of 2</div></div></div>                                              |
| <p>High</p>   | <div><div><div>Agilent</div><div>R T</div><div>Ref 20 dBm #Atten 30 dB Mkr1 2.4801365 GHz -13.32 dBm</div><div>#Peak Log 10 dB/ Offst 1 dB</div><div>M1 S2 S3 FC AA</div><div>Marker 2.480136500 GHz -13.32 dBm</div><div>Center 2.48 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 171.5 ms (1001 pts) Span 1.5 MHz</div></div><div><div>Peak Search</div><div>Meas Tools ▶</div><div>Next Peak</div><div>Next Pk Right</div><div>Next Pk Left</div><div>Min Search</div><div>Pk-Pk Search</div><div>More 1 of 2</div></div></div>  |

|        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Low    | <div><div><div>Agilent</div><div>R T</div><div>Ref 20 dBm #Atten 30 dB Mkr1 2.402132 GHz -13.01 dBm</div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offset</div><div>1</div><div>dB</div><div>M1 S2</div><div>S3 FC</div><div>AA</div><div>Marker</div><div>2.402132000 GHz</div><div>-13.01 dBm</div><div>Center 2.402 GHz</div><div>#Res BW 3 kHz</div><div>#VBW 10 kHz</div><div>Sweep 343.1 ms (1001 pts)</div><div>Span 3 MHz</div></div><div><div>Peak Search</div><div>Meas Tools ▶</div><div>Next Peak</div><div>Next Pk Right</div><div>Next Pk Left</div><div>Min Search</div><div>Pk-Pk Search</div><div>More 1 of 2</div></div></div> |
| Middle | <div><div><div>Agilent</div><div>R T</div><div>Ref 20 dBm #Atten 30 dB Mkr1 2.440132 GHz -12.95 dBm</div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offset</div><div>1</div><div>dB</div><div>M1 S2</div><div>S3 FC</div><div>AA</div><div>Marker</div><div>2.440132000 GHz</div><div>-12.95 dBm</div><div>Center 2.44 GHz</div><div>#Res BW 3 kHz</div><div>#VBW 10 kHz</div><div>Sweep 343.1 ms (1001 pts)</div><div>Span 3 MHz</div></div><div><div>Peak Search</div><div>Meas Tools ▶</div><div>Next Peak</div><div>Next Pk Right</div><div>Next Pk Left</div><div>Min Search</div><div>Pk-Pk Search</div><div>More 1 of 2</div></div></div>  |
| High   | <div><div><div>Agilent</div><div>R T</div><div>Ref 20 dBm #Atten 30 dB Mkr1 2.480138 GHz -13.4 dBm</div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offset</div><div>1</div><div>dB</div><div>M1 S2</div><div>S3 FC</div><div>AA</div><div>Marker</div><div>2.480138000 GHz</div><div>-13.4 dBm</div><div>Center 2.48 GHz</div><div>#Res BW 3 kHz</div><div>#VBW 10 kHz</div><div>Sweep 343.1 ms (1001 pts)</div><div>Span 3 MHz</div></div><div><div>Peak Search</div><div>Meas Tools ▶</div><div>Next Peak</div><div>Next Pk Right</div><div>Next Pk Left</div><div>Min Search</div><div>Pk-Pk Search</div><div>More 1 of 2</div></div></div>    |

**APPENDIX B**

---

| Test Mode       | Test Channel | 6 dB Bandwidth<br>kHz | Limit<br>kHz |
|-----------------|--------------|-----------------------|--------------|
| 1Mbps GFSK(BLE) | Low          | 700.304               | $\geq 500$   |
|                 | Middle       | 691.296               | $\geq 500$   |
|                 | High         | 693.512               | $\geq 500$   |
| 2Mbps GFSK(BLE) | Low          | 1114                  | $\geq 500$   |
|                 | Middle       | 1110                  | $\geq 500$   |
|                 | High         | 1114                  | $\geq 500$   |

|        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Low    | <div><div><div>Agilent</div><div>Ch Freq 2.402 GHz</div><div>Occupied Bandwidth</div><div>x dB -6.00 dB</div><div><div>Ref 20 dBm</div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offst</div><div>1</div><div>dB</div></div><div><div>Center 2.402 GHz</div><div>#Res BW 100 kHz</div><div>#VBW 300 kHz</div><div>Sweep 10 ms (1001 pts)</div><div>Span 3 MHz</div></div><div><div>Occupied Bandwidth</div><div>1.0479 MHz</div><div>Transmit Freq Error</div><div>130.029 kHz</div><div>x dB Bandwidth</div><div>700.304 kHz</div><div>Occ BW % Pwr</div><div>99.00 %</div><div>x dB</div><div>-6.00 dB</div></div></div><div><div>Meas Setup</div><div>Avg Number</div><div>10</div><div>On</div><div>Off</div><div>Avg Mode</div><div>Exp</div><div>Repeat</div><div>Max Hold</div><div>On</div><div>Off</div><div>Occ BW % Pwr</div><div>99.00 %</div><div>OBW Spar</div><div>3.00000000 MHz</div><div>x dB</div><div>-6.00 dB</div><div>Optimize</div><div>Ref Level</div></div></div>                                                  |
| Middle | <div><div><div>Agilent</div><div>Ch Freq 2.44 GHz</div><div>Occupied Bandwidth</div><div>Center 2.440000000 GHz</div><div><div>Ref 20 dBm</div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offst</div><div>1</div><div>dB</div></div><div><div>Center 2.44 GHz</div><div>#Res BW 100 kHz</div><div>#VBW 300 kHz</div><div>Sweep 10 ms (1001 pts)</div><div>Span 3 MHz</div></div><div><div>Occupied Bandwidth</div><div>1.0305 MHz</div><div>Transmit Freq Error</div><div>132.495 kHz</div><div>x dB Bandwidth</div><div>691.296 kHz</div><div>Occ BW % Pwr</div><div>99.00 %</div><div>x dB</div><div>-6.00 dB</div></div></div><div><div>Trace/View</div><div>Trace</div><div>1</div><div>2</div><div>3</div><div>Clear Write</div><div>Max Hold</div><div>Min Hold</div><div>View</div><div>Blank</div><div>More</div><div>1 of 2</div></div></div>                                                                                                                                                                                       |
| High   | <div><div><div>Agilent</div><div>Ch Freq 2.48 GHz</div><div>Occupied Bandwidth</div><div>Center 2.480000000 GHz</div><div><div>Ref 20 dBm</div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offst</div><div>1</div><div>dB</div></div><div><div>Center 2.48 GHz</div><div>#Res BW 100 kHz</div><div>#VBW 300 kHz</div><div>Sweep 10 ms (1001 pts)</div><div>Span 3 MHz</div></div><div><div>Occupied Bandwidth</div><div>1.0396 MHz</div><div>Transmit Freq Error</div><div>133.865 kHz</div><div>x dB Bandwidth</div><div>693.512 kHz</div><div>Occ BW % Pwr</div><div>99.00 %</div><div>x dB</div><div>-6.00 dB</div></div></div><div><div>Freq/Channel</div><div>Center Freq</div><div>2.48000000 GHz</div><div>Start Freq</div><div>2.47850000 GHz</div><div>Stop Freq</div><div>2.48150000 GHz</div><div>CF Step</div><div>300.000000 kHz</div><div>Auto</div><div>Man</div><div>Freq Offset</div><div>0.00000000 Hz</div><div>Signal Track</div><div>On</div><div>Off</div><div>Scale Type</div><div>Log</div><div>Lin</div></div></div> |




Waltek Testing Group (Shenzhen) Co., Ltd.  
Http://www.waltek.com.cn

## APPENDIX C

---




| RF Output Power |              |                |              |
|-----------------|--------------|----------------|--------------|
| Test Mode       | Test Channel | Reading<br>dBm | Limit<br>dBm |
| 1Mbps GFSK(BLE) | Low          | 0.296          | 30.00        |
|                 | Middle       | 0.364          | 30.00        |
|                 | High         | 0.175          | 30.00        |
| 2Mbps GFSK(BLE) | Low          | 0.362          | 30.00        |
|                 | Middle       | 0.519          | 30.00        |
|                 | High         | 0.172          | 30.00        |


|               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Low</p>    | <div><div><div>Agilent</div><div><div>Ref 20 dBm</div><div>#Atten 30 dB</div><div>Mkr1 2.402175 GHz</div><div>0.296 dBm</div></div><div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offset</div><div>1</div><div>dB</div></div><div><div>M1 S2</div><div>S3 FC</div><div>AA</div></div><div><div>Marker</div><div>2.402175000 GHz</div><div>0.296 dBm</div></div><div><div>Center 2.402 GHz</div><div>#Res BW 1 MHz</div><div>#VBW 3 MHz</div><div>Sweep 10 ms (1001 pts)</div><div>Span 5 MHz</div></div></div><div><div>Peak Search</div><div>Meas Tools ▶</div><div>Next Peak</div><div>Next Pk Right</div><div>Next Pk Left</div><div>Min Search</div><div>Pk-Pk Search</div><div>More 1 of 2</div></div></div> |
| <p>Middle</p> | <div><div><div>Agilent</div><div><div>Ref 20 dBm</div><div>#Atten 30 dB</div><div>Mkr1 2.440155 GHz</div><div>0.364 dBm</div></div><div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offset</div><div>1</div><div>dB</div></div><div><div>M1 S2</div><div>S3 FC</div><div>AA</div></div><div><div>Marker</div><div>2.440155000 GHz</div><div>0.364 dBm</div></div><div><div>Center 2.44 GHz</div><div>#Res BW 1 MHz</div><div>#VBW 3 MHz</div><div>Sweep 10 ms (1001 pts)</div><div>Span 5 MHz</div></div></div><div><div>Peak Search</div><div>Meas Tools ▶</div><div>Next Peak</div><div>Next Pk Right</div><div>Next Pk Left</div><div>Min Search</div><div>Pk-Pk Search</div><div>More 1 of 2</div></div></div>  |
| <p>High</p>   | <div><div><div>Agilent</div><div><div>Ref 20 dBm</div><div>#Atten 30 dB</div><div>Mkr1 2.480170 GHz</div><div>0.175 dBm</div></div><div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offset</div><div>1</div><div>dB</div></div><div><div>M1 S2</div><div>S3 FC</div><div>AA</div></div><div><div>Marker</div><div>2.480170000 GHz</div><div>0.175 dBm</div></div><div><div>Center 2.48 GHz</div><div>#Res BW 1 MHz</div><div>#VBW 3 MHz</div><div>Sweep 10 ms (1001 pts)</div><div>Span 5 MHz</div></div></div><div><div>Peak Search</div><div>Meas Tools ▶</div><div>Next Peak</div><div>Next Pk Right</div><div>Next Pk Left</div><div>Min Search</div><div>Pk-Pk Search</div><div>More 1 of 2</div></div></div>  |

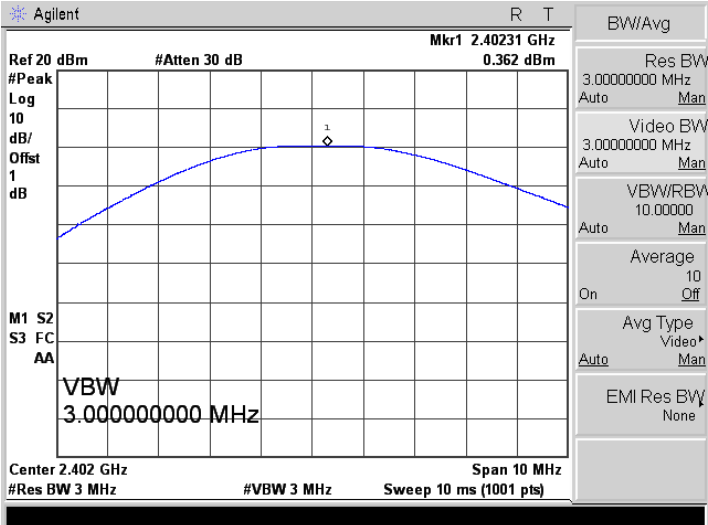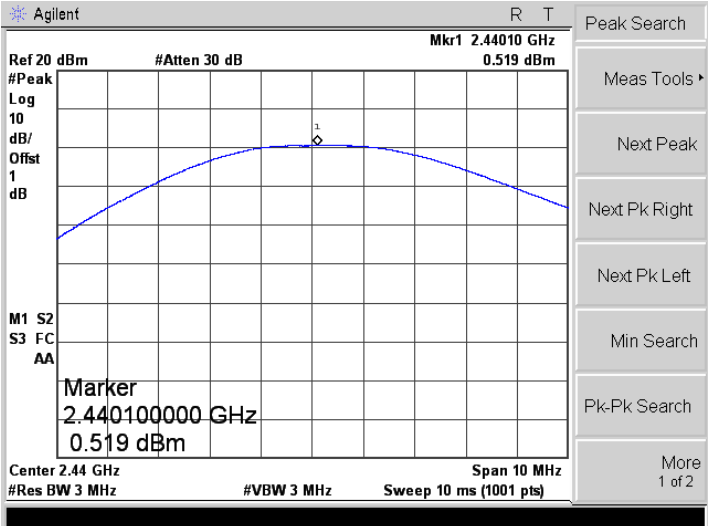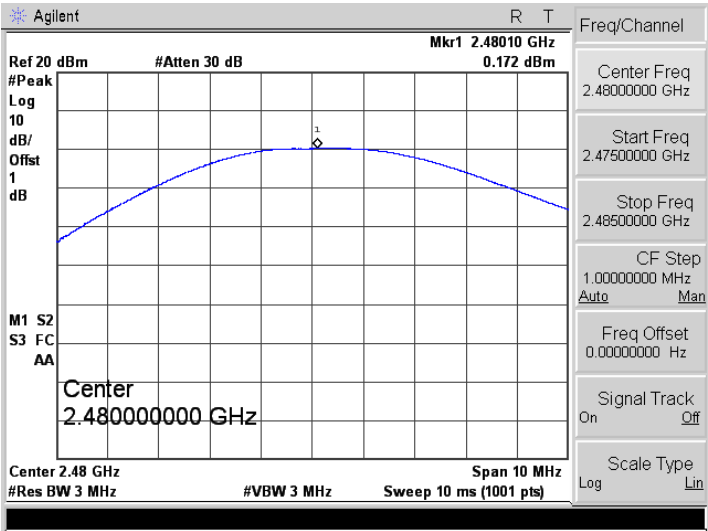
|               |                                                                                      |
|---------------|--------------------------------------------------------------------------------------|
| <p>Low</p>    |    |
| <p>Middle</p> |   |
| <p>High</p>   |  |


APPENDIX D

Conducted Out of Band Emissions
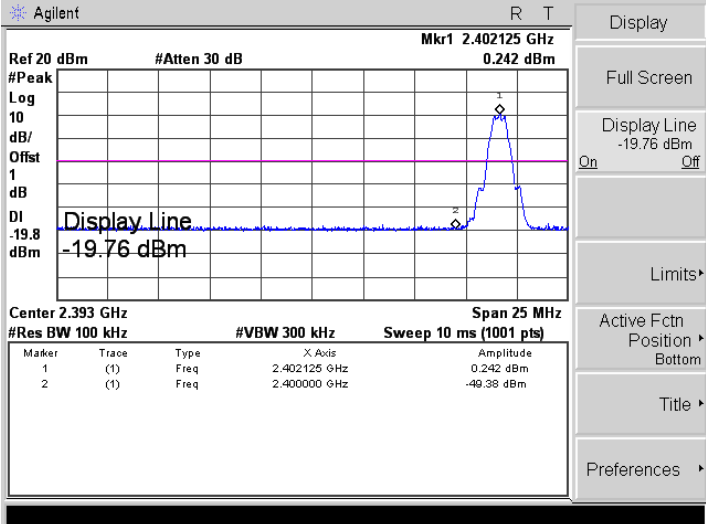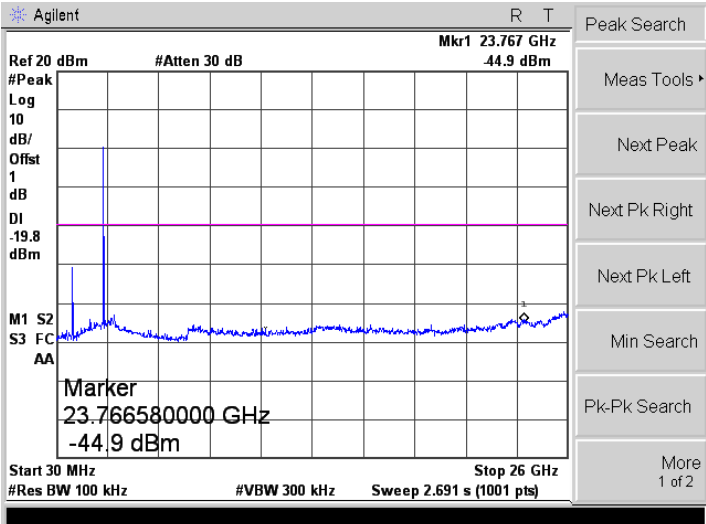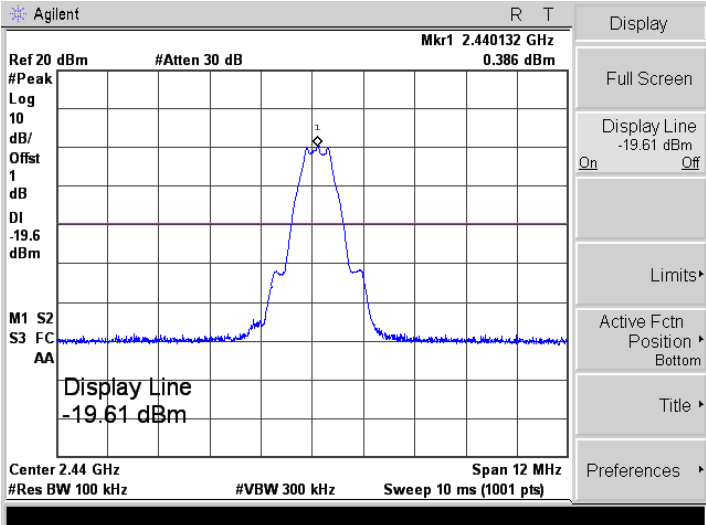
|               |                                                                                      |
|---------------|--------------------------------------------------------------------------------------|
| <p>Low</p>    |    |
|               |   |
| <p>Middle</p> |  |

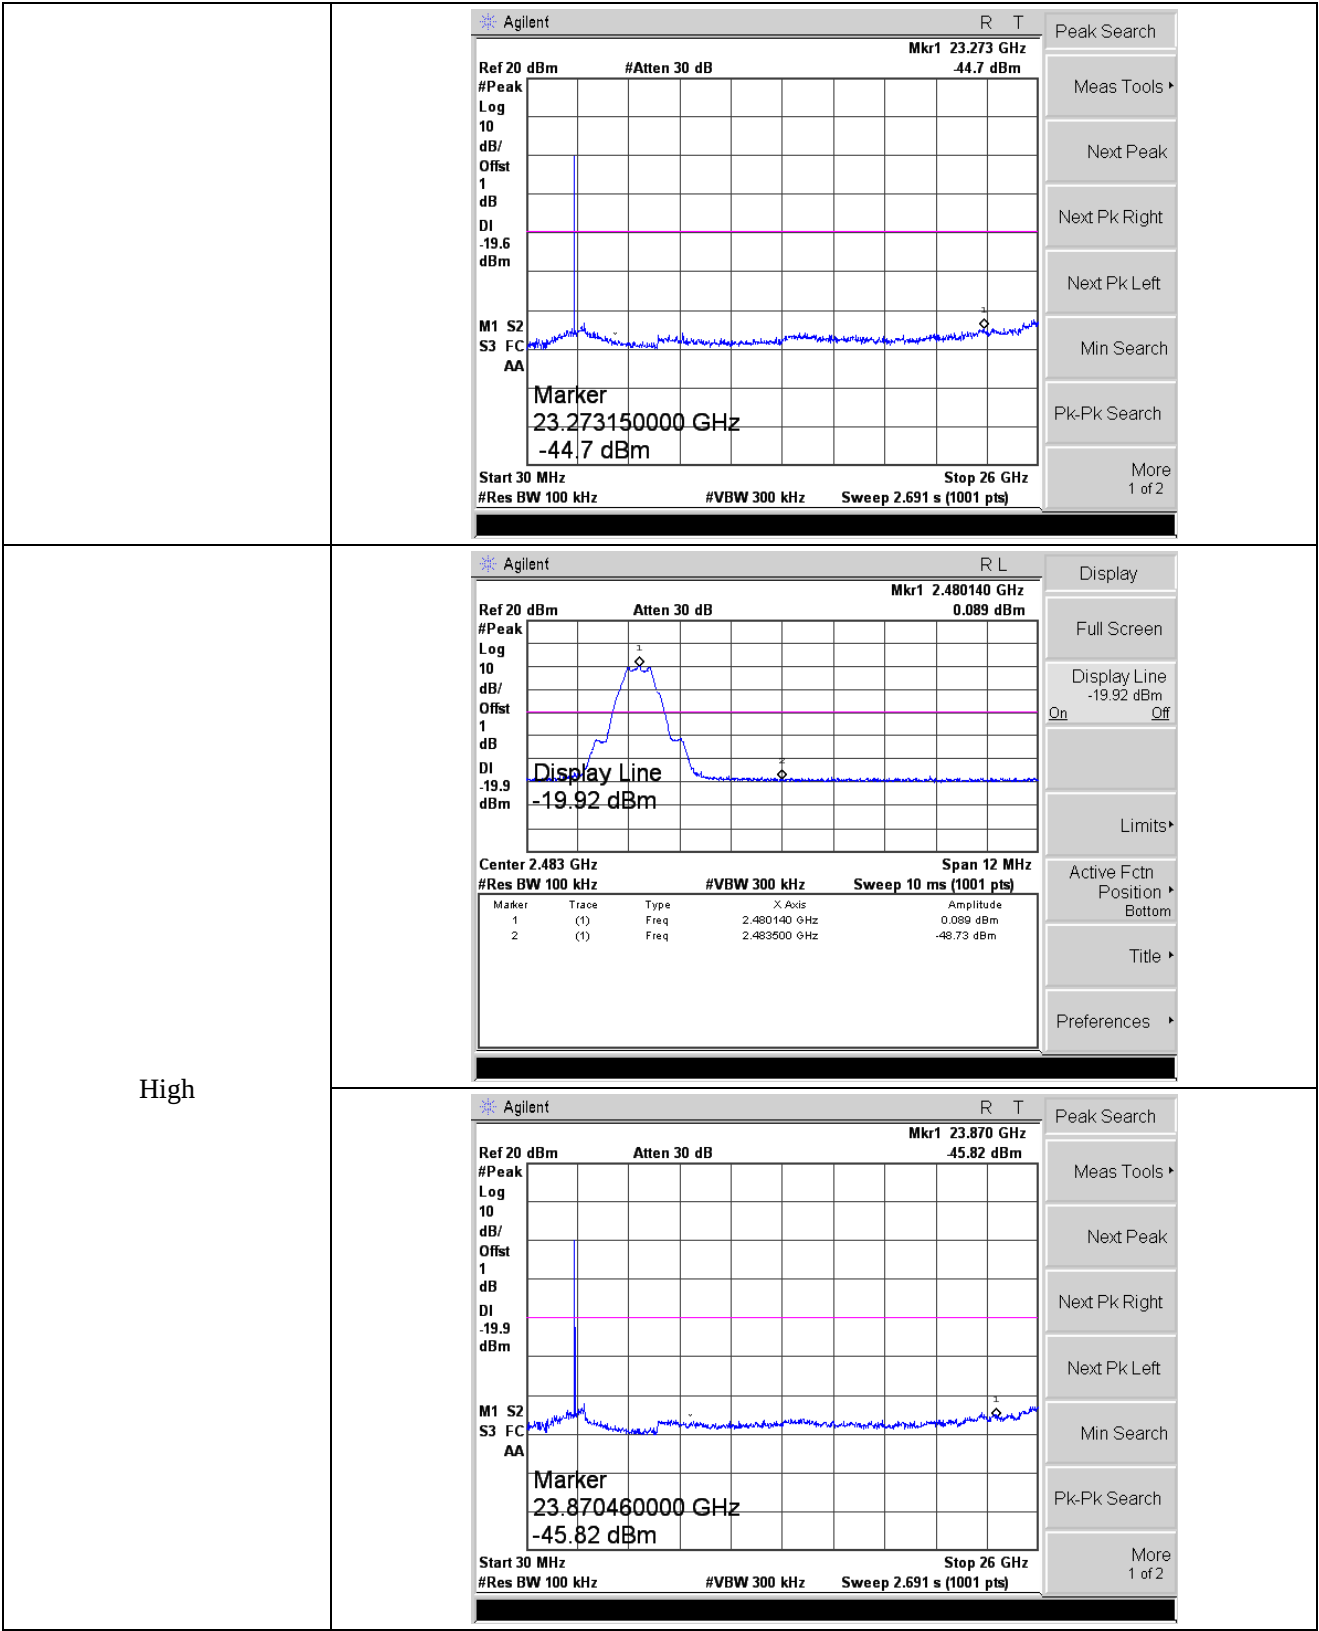

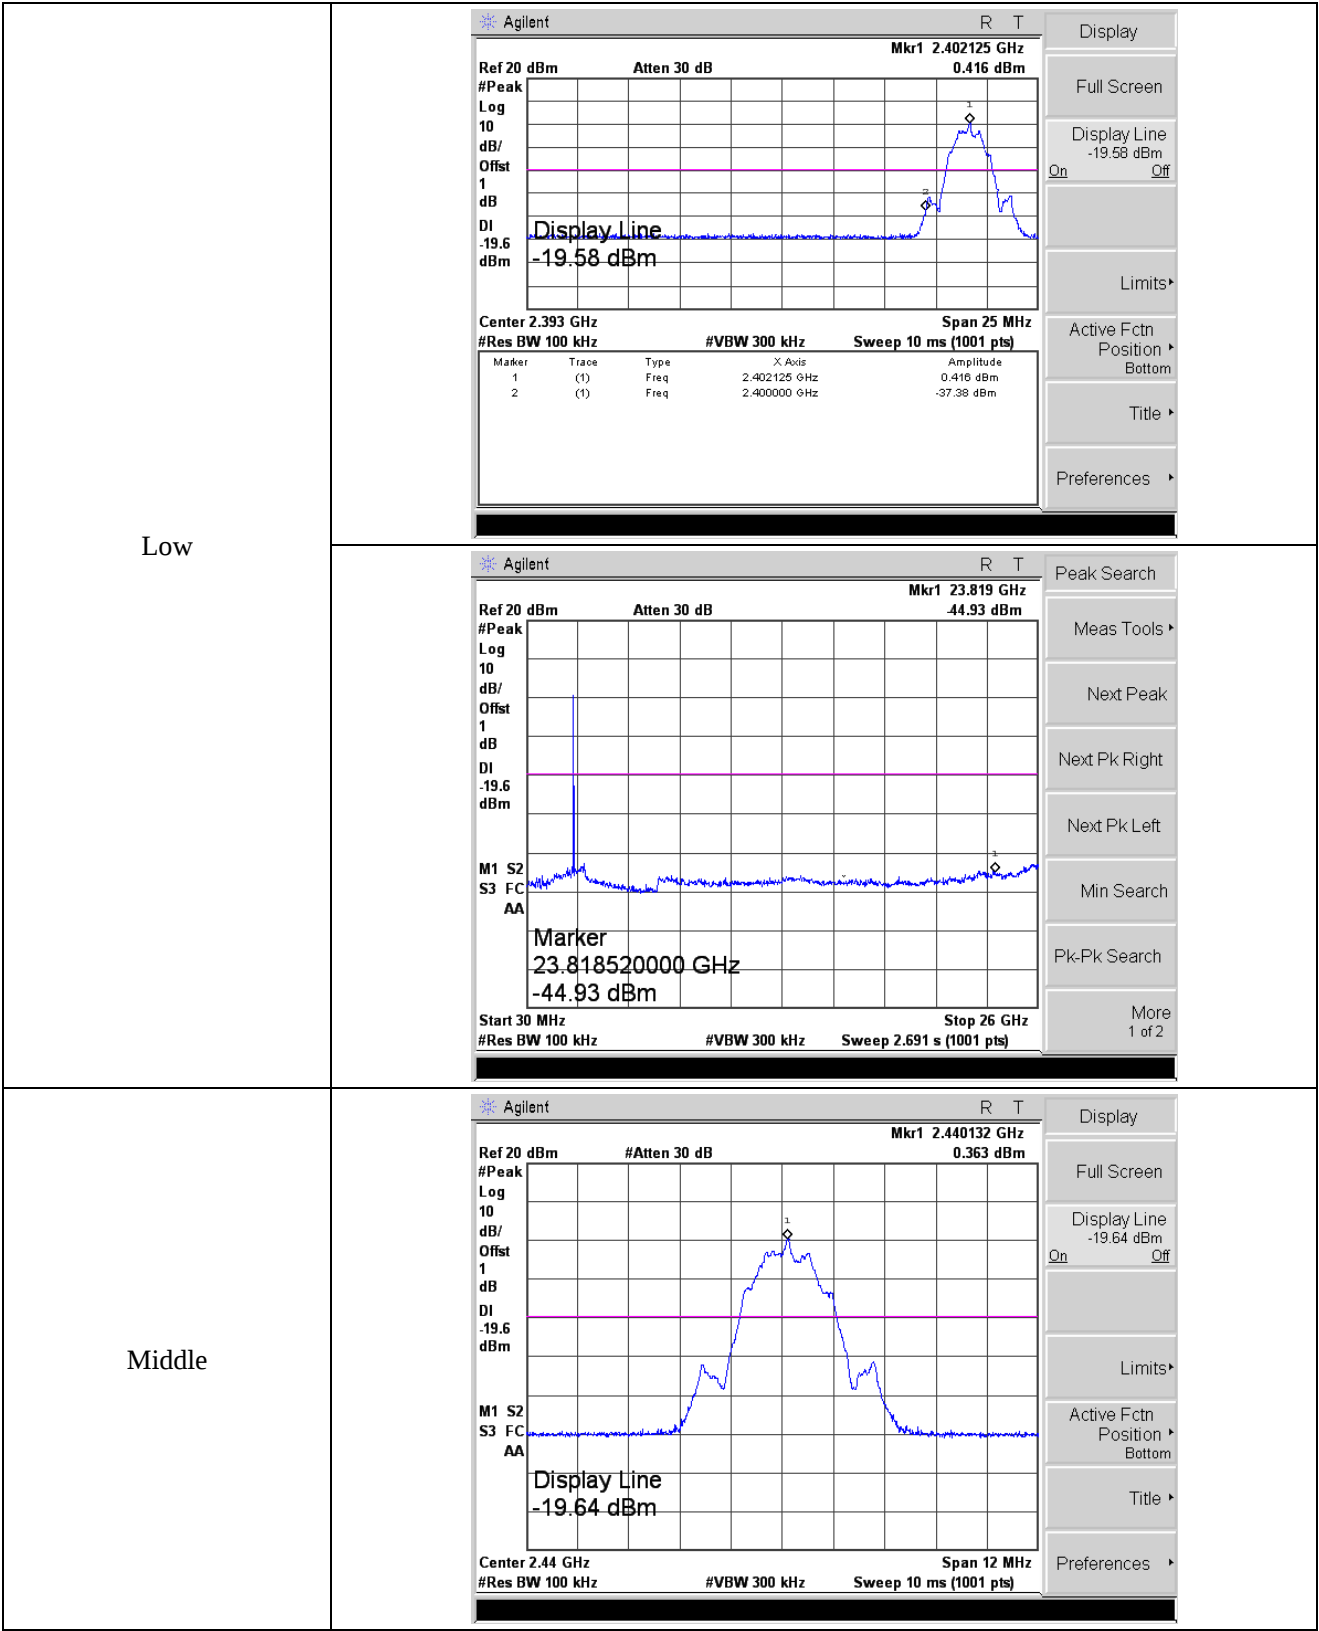

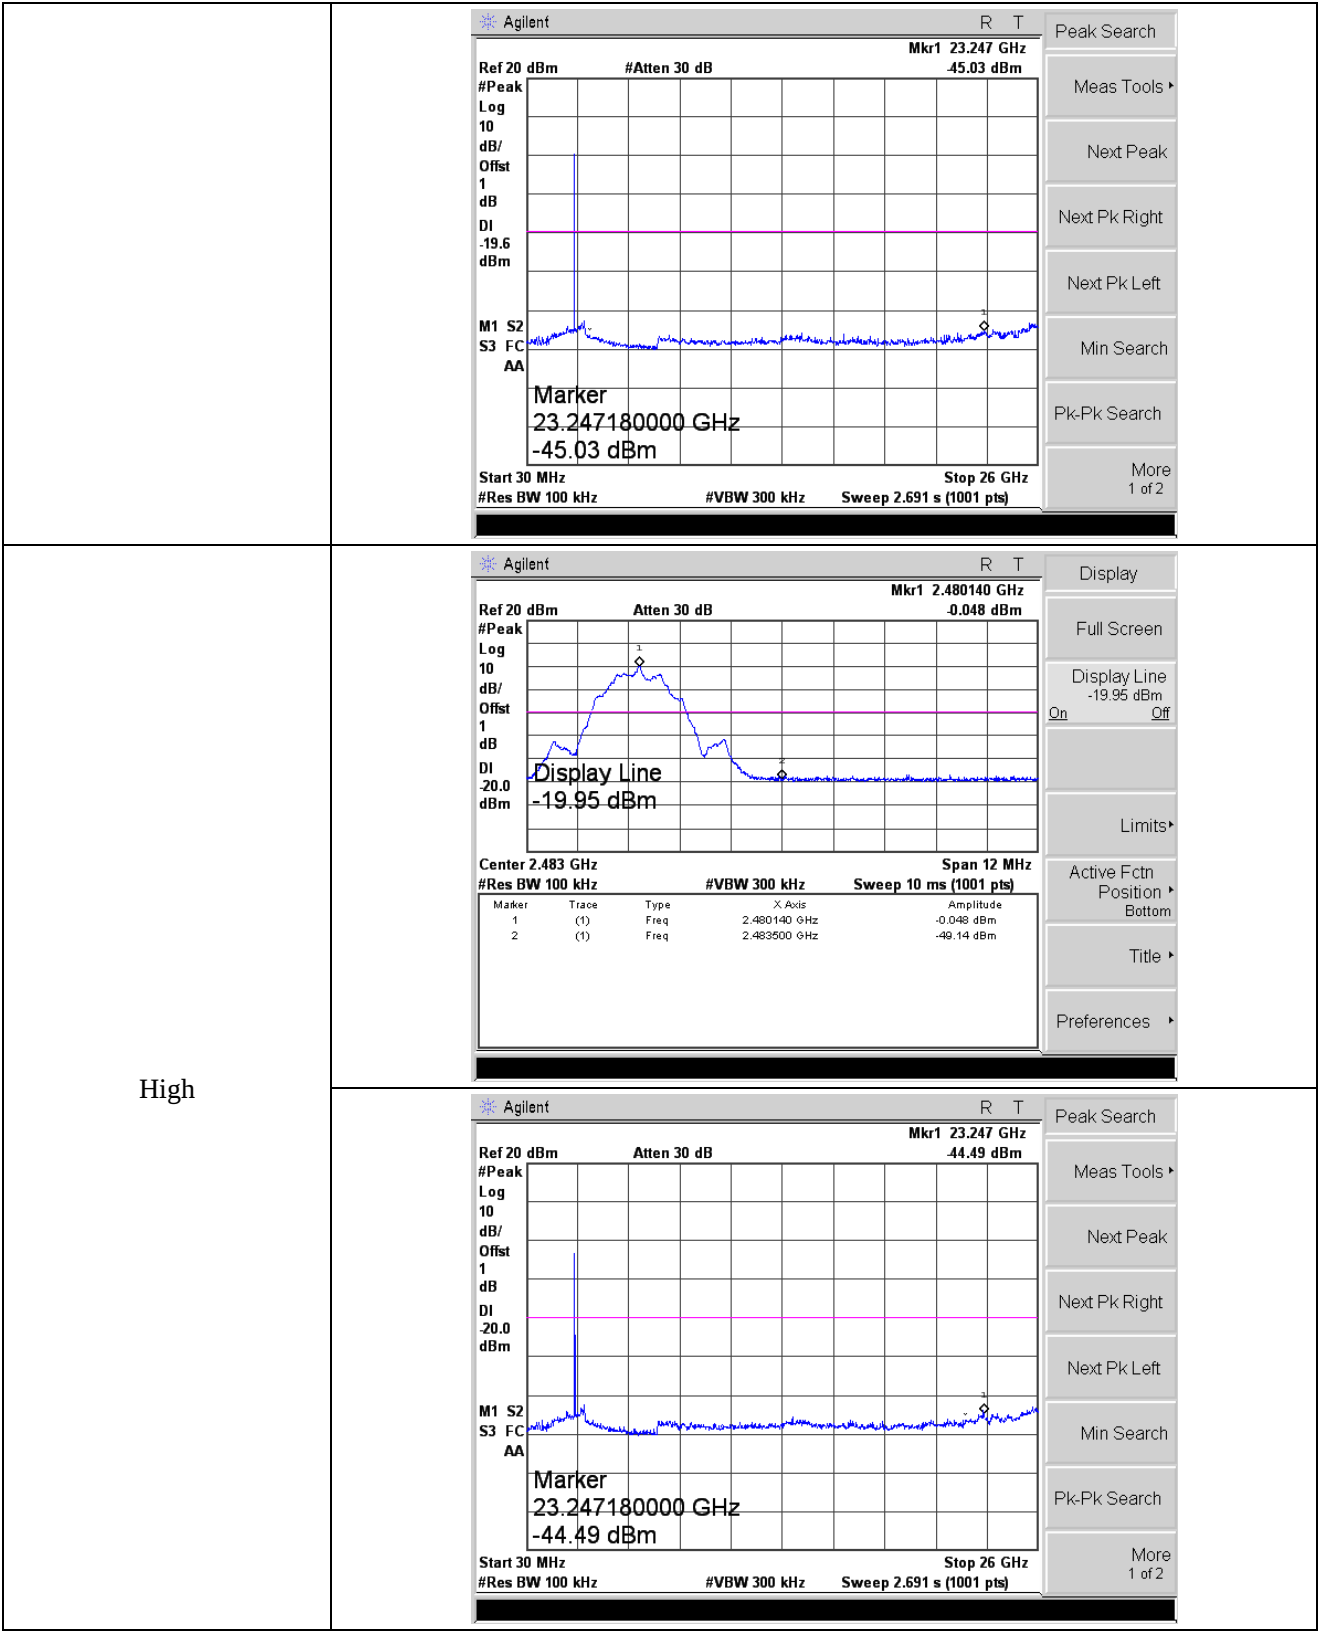

## **APPENDIX PHOTOGRAPHS**

---

**Please refer to “ANNEX”**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***