

TEST REPORT

Reference No...... : WTD21D05043149W001 V1
FCC ID : 2AZUC-MS007R
Applicant..... : Shenzhen Mosentek Technology Co., Ltd.
Address..... : Room 202, Building 3, No. 36, Third Industrial Zone, Shanmen Community, Yanluo Street, Baoan District, Shenzhen, China
Manufacturer : Shenzhen Mosentek Technology Co., Ltd.
Address..... : Room 202, Building 3, No. 36, Third Industrial Zone, Shanmen Community, Yanluo Street, Baoan District, Shenzhen, China
Product..... : 5.8G Microwave sensor
Model(s) : MS007R, MS007, MS007B, MS007E, MS007EB, MS007ER, MS010R, MSH010R, MS010ER, MS010, MS010E
Standards : FCC CFR47 Part 15 Section 15.249: 2019
Date of Receipt sample : 2021-05-10
Date of Test : 2021-05-10 to 2021-05-18
Date of Issue..... : 2021-06-07
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

Approved by:

levi xiao

levi Xiao / Project Engineer



Daniel Luo / Designated Reviewer

2 content

	Page
1 COVER PAGE.....	1
2 CONTENT.....	2
3 REVISION HISTORY	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF E.U.T.....	5
5.2 DETAILS OF E.U.T.....	5
5.3 CHANNEL LIST	5
6 EQUIPMENT USED DURING TEST	6
6.1 EQUIPMENTS LIST	6
6.2 MEASUREMENT UNCERTAINTY.....	6
6.3 TEST FACILITY	7
6.4 TEST EQUIPMENT CALIBRATION.....	7
7 RADIATION EMISSION TEST	8
7.1 EUT OPERATION.....	8
7.2 TEST SETUP	9
7.3 SPECTRUM ANALYZER SETUP.....	11
7.4 TEST PROCEDURE.....	12
7.5 TEST RESULT	13
8 RESTRICTED BAND	15
8.1 REQUIMENTS:	15
8.2 TEST RESULT	15
9 20 DB BANDWIDTH MEASUREMENT	17
9.1 TEST PROCEDURE.....	17
9.2 TEST RESULT	17
10 ANTENNA REQUIREMENT	18
11 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....	19

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD21D05043149W001	2021-05-10	2021-05-10 to 2021-05-18	2021-05-27	original	-	Replaced
WTD21D05043149W001 V1	2021-05-10	2021-05-10 to 2021-05-18	2021-06-07	Version 1	Update	Valid

4 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207	N/A
Radiated Emission	15.249(a) 15.209 15.205(a)	PASS
Outside Restricted band	15.249 15.205 15.209	PASS
20dB Bandwidth	15:215(c)	PASS
Antenna Requirement	15.203	PASS

5 General Information

5.1 General Description of E.U.T

Product:	5.8G Microwave sensor
Model(s):	MS007R, MS007, MS007B, MS007E, MS007EB, MS007ER, MS010R, MSH010R , MS010ER , MS010 , MS010E
Model Differences:	Only the model name and appearance are different, The model MSH010R is the tested sample.
Type of Modulation:	Unmodulated
Frequency Range:	5725MHz-5875MHz
Hardware Version:	V1.0.0
Software Version:	V1.0.0
Antenna Gain:	0dBi
Antenna installation:	Internal Antenna

5.2 Details of E.U.T.

Ratings:	Input: DC 12V 35mA
----------	--------------------

5.3 Channel List

Channel No.	Frequency (MHz)
1	5850

5.3.1 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Channel No.
Transmitting	5850MHz

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2020-09-17	2021-09-16
2.	LISN	R&S	ENV216	101215	2020-09-17	2021-09-16
3.	Cable	Top	TYPE16(3.5M)	-	2020-09-17	2021-09-16
3m Semi-anechoic Chamber for Radiation Emissions						
1	Test Receiver	R&S	ESCI	101296	2021.04.19	2022.04.18
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2021.04.24	2022.04.23
3	Amplifier	ANRITSU	MH648A	M43381	2021.04.19	2022.04.18
4	Cable	HUBER+SUHNER	CBL2	525178	2021.04.19	2022.04.18
5	Spectrum Analyzer	R&S	FSP30	100091	2021.04.19	2022.04.18
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2021.04.24	2022.04.23
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2020-08-26	2021-08-25
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	Agilent	N9020A	MY49100060	2020-07-30	2021-07-29
2	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2020-07-30	2021-07-29
3	Humidity Chamber	GF	GTH-225-40-1P	IAA061213	2020-07-30	2021-07-29
4	EXA Signal Analyzer	Keysight	N9010A	MY50520207526B25MP BW7X	2021.04.19	2022.04.18
“*”: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.						

6.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)

6.3 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by GUANG ZHOU GRG METROLOGY & TEST CO., LTD. address is No.163, Pingyun Rd. West of Huangpu Ave, Tianhe District, Guangzhou, Guangdong, China.

7 Radiation Emission Test

Test Requirement: FCC Part15 Paragraph 15.249&15.209&15.205

Test Method: ANSI 63.10: 2013

Measurement Distance: 3m

Test Result: PASS

15.249(a)Limit:

Fundamental frequency	Field strength of fundamental		Field strength of harmonics	
	mV/m	dBuV/m	uV/m	dBuV/m
902-928 MHz	50	94	500	54
2400-2483.5 MHz	50	94	500	54
5725-5875 MHz	50	94	500	54
24.0-24.25 GHz	250	108	2500	68

15.209 Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Note: RF Voltage(dBuV)=20 log₁₀ RF Voltage(uV)

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

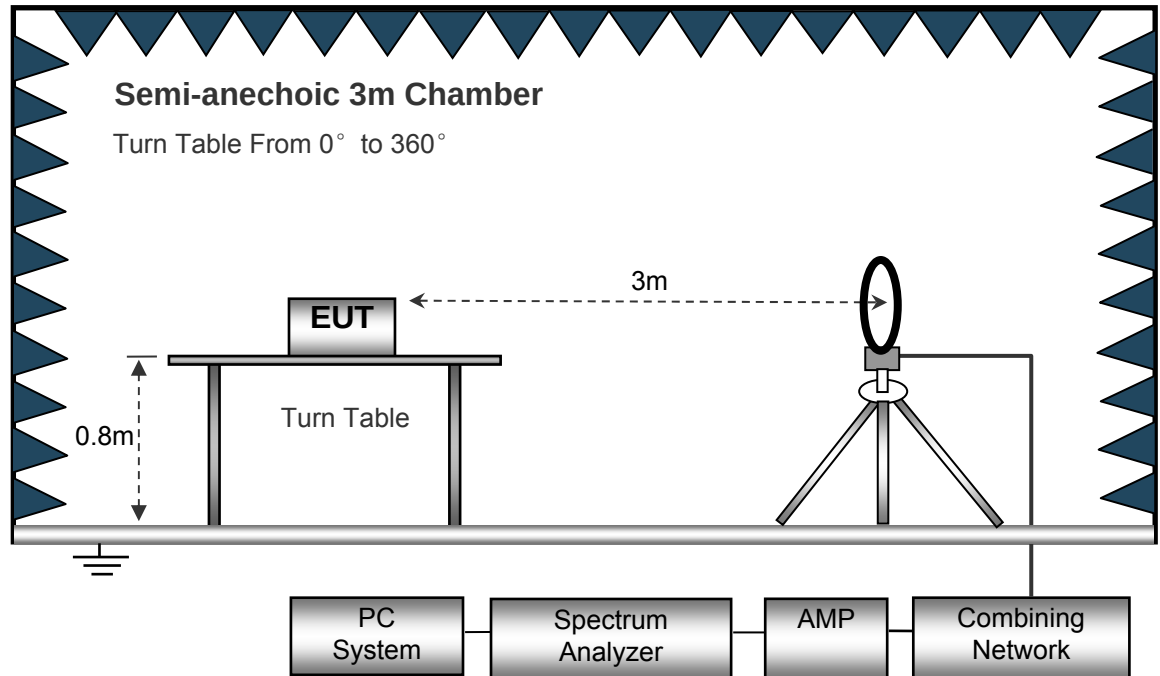

The test setup for emission measurement from 30MHz to 1GHz.

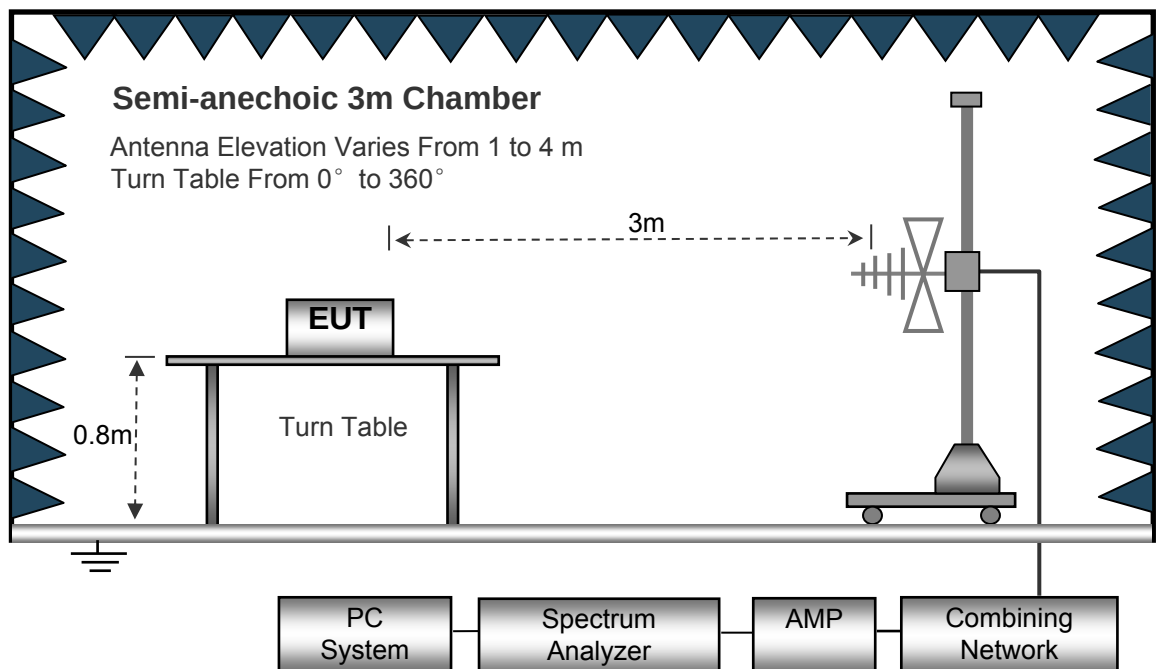

The test setup for emission measurement above 1 GHz.

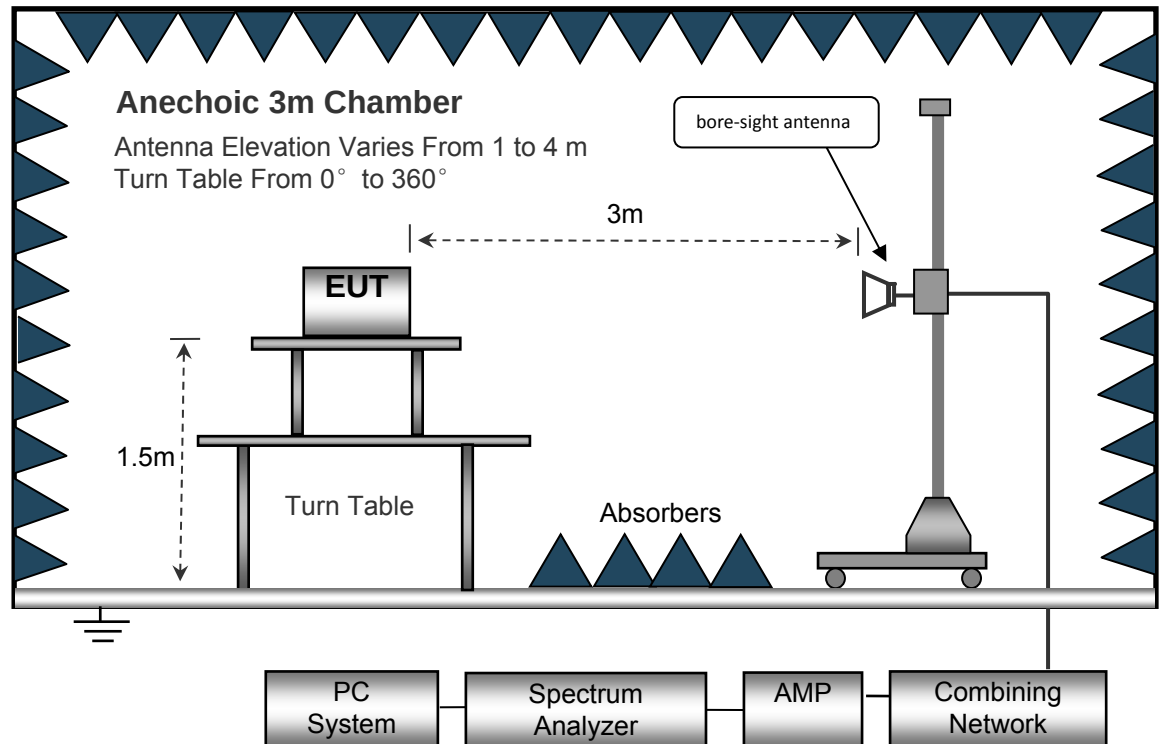

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth 10kHz
 Resolution Bandwidth 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth 10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Test Result

Test Frequency : 9KHz~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 40GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.249/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)
Low channel: 5850MHz									
5850.00	90.30	PK	249	1.8	H	-2.23	88.07	114	-25.93
5850.00	81.50	PK	247	1.9	V	-2.23	79.27	114	-34.73
11700.32	42.9	PK	255	1.9	H	-13.19	29.71	74	-44.29
11700.32	43.5	PK	220	1.5	V	-13.19	30.31	74	-43.69
17550.46	41.9	PK	353	1.6	H	-13.14	28.76	74	-45.24
17550.46	42.3	PK	20	1.4	V	-13.14	29.16	74	-44.84
23400.91	41.5	PK	188	1.6	H	-13.08	28.42	74	-45.58
23400.91	42.3	PK	125	1.7	V	-13.08	29.22	74	-44.78
24536.1	42.8	PK	186	1.6	V	0.09	42.89	74	-31.11
25102.96	42.3	PK	107	1.8	V	0.09	42.39	74	-31.61
27103.96	43.6	PK	258	1.4	V	3.01	46.61	74	-27.39
26354.96	43.9	PK	248	1.9	V	3.01	46.91	74	-27.09

AV = Peak +20Log10(duty cycle) =PK+(0) [refer to section 8 for more detail]

Frequency	PK	Turn table Angle	RX Antenna		Duty cycle Factor	AV	FCC Part 15.249/209/205	
			Height	Polar			Limit	Margin
(MHz)	(dBμV/m)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
Low channel: 5850MHz								
5850.00	88.07	249	1.8	H	0.00	88.07	94.00	-5.93
5850.00	79.27	247	1.9	V	0.00	79.27	94.00	-14.73
11700.32	29.71	255	1.9	H	0.00	29.71	54	-24.29
11700.32	30.31	220	1.5	V	0.00	30.31	54	-23.69
17550.46	28.76	353	1.6	H	0.00	28.76	54	-25.24
17550.46	29.16	20	1.4	V	0.00	29.16	54	-24.84
23400.91	28.42	188	1.6	H	0.00	28.42	54	-25.58
23400.91	29.22	125	1.7	V	0.00	29.22	54	-24.78
24536.1	42.89	186	1.6	V	0.00	42.89	54	-11.11
25102.96	42.39	107	1.8	V	0.00	42.39	54	-11.61
27103.96	46.61	258	1.4	V	0.00	46.61	54	-7.39
27354.96	46.91	248	1.9	V	0.00	46.91	54	-7.09

8 Restricted band

Test Requirement: FCC Part15 Paragraph 15.205

Test Method: ANSI C63.10: 2013

Test Result: N/A

8.1 Requirements:


emissions that fall in the restricted bands(15.205).Above 1000MHz, compliance with the emissions limits in section 15.209 shall be demonstrated based on the average value of the measured emissions,The provisions in section 15.35apply to these measurements.

8.2 Test Result

Mode: Continuously Transmitting


Antenna Polarization: Vertical

:

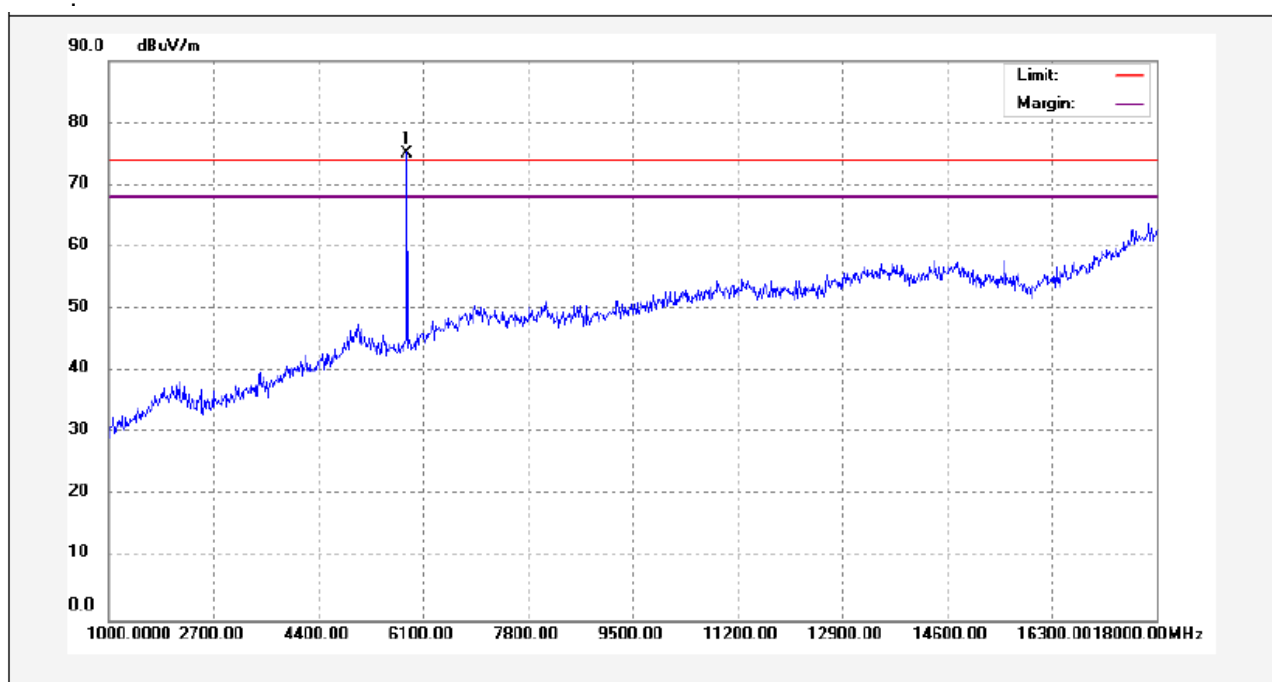

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	5850.000	77.36	-2.32	75.04	74.00	1.04	peak	

Antenna Polarization: Horizontal

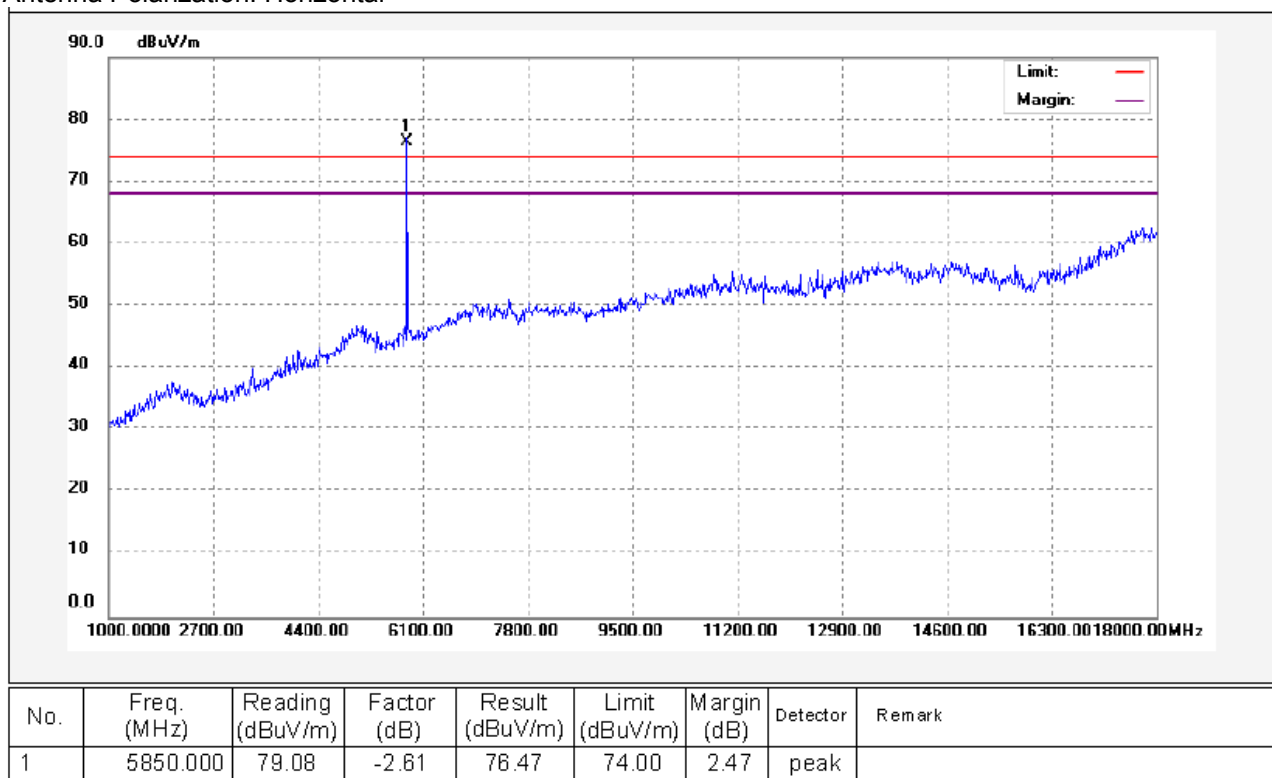

9 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.215(c)

Test Method: ANSI C63.10:2013

Test Mode: Transmitting


9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1%-5% OBW, VBW = 3RBW

9.2 Test Result

Frequency (MHz)	Bandwidth Emission (KHz)
5850	1.727

Low channel Test plots

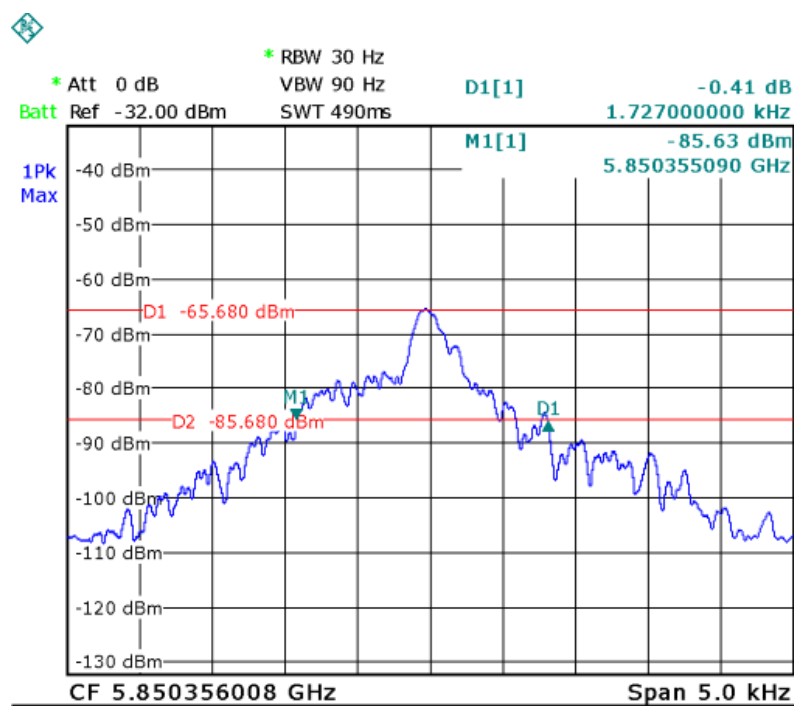

10 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a Internal Antenna , fulfil the requirement of this section.

11 Photographs - Constructional Details

Note: Please refer to appendix: Appendix- MSH010R -Photos.

=====End of Report=====