

TEST REPORT**Report Number: 21020815HKG-003**

actiMirror Corporation Ltd.

Application for Original Grant of 47 CFR Part 15 Certification

This report contains the data of 5GHz WLAN (WiFi) portion only.

FCC ID: 2AZUDDESK21T03**IC: 27292-DESK21T03****Prepared and Checked by:****Approved by:**

Signed On File

Chan Hin Man, Oscar
Assistant EngineerLee Shui Tim, Tim
Senior Supervisor
Date: May 27, 2021

TEST REPORT

GENERAL INFORMATION

Applicant Name:	actiMirror Corporation Ltd.
Applicant Address:	Unit 6-8, Hilder Centre, 2 Sung Ping Street, Hung Hom, Kowloon, Hong Kong.
FCC Specification Standard:	FCC Part 15, October 1, 2019 Edition
FCC ID:	2AZUDDESK21T03
FCC Model(s):	Desk21T-03
IC Specification Standard:	RSS-247 Issue 2, February 2017 RSS-Gen Issue 5, April 2018
IC:	27292-DESK21T03
PMN:	Desk21T-03
HVIN:	Desk21T-03
Type of EUT:	Unlicensed National Information Infrastructure Transmitter
Description of EUT:	Smart Mirror with Display
Serial Number:	N/A
Sample Receipt Date:	February 18, 2021
Date of Test:	February 18, 2021 to May 24, 2021
Report Date:	June 11, 2021
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%
Conclusion:	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 / RSS-247 Issue 2 Certification.

TEST REPORT**TABLE OF CONTENTS**

1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE	4
1.1 Summary of Test Results.....	4
1.2 Statement of Compliance.....	4
2.0 GENERAL DESCRIPTION	5
2.1 Product Description.....	5
2.2 Test Methodology	6
2.3 Test Facility	7
2.4 Related Submittal(s) Grants.....	7
3.0 SYSTEM TEST CONFIGURATION	8
3.1 Justification	8
3.2 EUT Exercising Software	9
3.3 Details of EUT and Description of Accessories	10
3.4 Measurement Uncertainty	10
4.0 TEST RESULTS	11
4.1 Maximum Conducted Output Power at Antenna Terminals.....	11
4.2 Minimum 6dB RF Bandwidth.....	16
4.3 26dB Bandwidth & Occupied Bandwidth.....	18
4.4 Maximum Power Spectral Density.....	20
4.5 Field Strength Calculation.....	24
4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions	25
4.6.1 Radiated Emission Configuration Photograph.....	25
4.6.2 Radiated Emission Data	25
4.6.3 Radiated Emission Test Setup	45
4.7 AC Power Line Conducted Emission.....	46
4.7.1 AC Power Line Conducted Emission Configuration Photograph	46
4.7.2 AC Power Line Conducted Emission Data.....	46
4.7.3 Conducted Emission Test Setup	49
5.0 EQUIPMENT LIST	50

TEST REPORT

1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

1.1 Summary of Test Results

TEST ITEMS	FCC PART 15 SECTION	RSS-247/ RSS-GEN# SECTION	RESULTS	DETAILS SEE SECTION
Antenna Requirement	15.407(a)	6.2.1.1/ 6.2.2.1/ 6.2.3.1/ 6.2.4.1	Pass	2.1
Max. Conducted Output Power (Peak)	15.407(a)	6.2.1.1/ 6.2.2.1/ 6.2.3.1/ 6.2.4.1	Pass	4.1
Transmit Power Control (TPC)	15.407(h)	6.2.1.1/ 6.2.2.1/ 6.2.3.1/ 6.2.4.1	N/A	See Remark
Min. 6dB RF Bandwidth	15.407(e)	6.2.4.1	Pass	4.2
Max. Power Density (average)	15.407(a)	6.2.4.1	Pass	4.3
Out of Band Antenna Conducted Emission	15.407(b)	6.2.1.2/ 6.2.2.2/ 6.2.3.2/ 6.2.4.2	Pass	4.4
Radiated Emission in Restricted Bands and Spurious Emissions	15.407(b), 15.209 & 15.109	6.2.1.2/ 6.2.2.2/ 6.2.3.2/ 6.2.4.2	Pass	4.6
AC Power Line Conducted Emission	15.207 & 15.107	7.2.4 [#]	Pass	4.7
Dynamic Frequency Selection(DFS)	15.407	6.3.1	N/A	4.10

Remark: not applicable if the EUT is <500mW (27dBm)

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

1.2 Statement of Compliance

The equipment under test is found to be complying with the following standard:

FCC Part 15, October 1, 2019 Edition

RSS-247 Issue 2, February 2017

RSS-Gen Issue 5 Amendment 1, March 2019

TEST REPORT

2.0 GENERAL DESCRIPTION

2.1 Product Description

This device is a Mirror with Wi-fi and Bluetooth function.

For 2.4 GHz ISM Band:

- For 802.11b mode, it operates at frequency range of 2.412 GHz to 2.462 GHz with 11 Channels. It transmits via DQPSK, DBPSK and CCK. Maximum bit rate can be up to 11Mbps.
- For 802.11g mode, it operates at frequency range of 2.412 GHz to 2.462 GHz with 11 Channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to 54Mbps.
- For 802.11n mode (With 20MHz Bandwidth), it operates at frequency range of 2.412 GHz to 2.462 GHz with 11 Channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 65Mbps.

For 5.15GHz to 5.24GHz Band:

The module operates at Frequency range of 5.18GHz to 5.24GHz with 4 channels.

- For 802.11a mode, it operates at frequency range of 5.18GHz to 5.24GHz with 4 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to 54Mbps.
- For 802.11n mode (20 MHz Bandwidth), it operates at frequency range of 5.18GHz to 5.24GHz with 4 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 65Mbps.
- For 802.11n mode (40 MHz Bandwidth), it operates at frequency range of 5.19GHz to 5.23GHz with 2 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 135Mbps.
- For 802.11ac mode (20 MHz Bandwidth), it operates at frequency range of 5.18GHz to 5.24GHz with 4 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS8 78Mbps.
- For 802.11ac mode (40 MHz Bandwidth), it operates at frequency range of 5.18GHz to 5.24GHz with 2 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS9 162Mbps.
- For 802.11ac mode (80 MHz Bandwidth), it operates at 5.21GHz with 1 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS9 390 Mbps.

TEST REPORT

For 5.725GHz to 5.85GHz Band:

The module operates at Frequency range of 5.745GHz to 5.825GHz with 4 channels.

- For 802.11a mode, it operates at frequency range of 5.745GHz to 5.825GHz with 4 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to 54Mbps.
- For 802.11n mode (20 MHz Bandwidth), it operates at frequency range of 5.745GHz to 5.825GHz with 4 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 65Mbps.
- For 802.11n mode (40 MHz Bandwidth), it operates at frequency range of 5.755GHz to 5.795GHz with 2 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 135Mbps.
- For 802.11ac mode (20 MHz Bandwidth), it operates at frequency range of 5.745GHz to 5.825GHz with 4 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS8 78Mbps.
- For 802.11ac mode (40 MHz Bandwidth), it operates at frequency range of 5.755GHz to 5.795GHz with 2 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS9 162 Mbps.
- For 802.11ac mode (80 MHz Bandwidth), it operates at 5775MHz with 1 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS9 390 Mbps.

Antenna Information:

- PCB Antenna
- WLAN 802.11 a/b/g/n/ac
- For operating frequency of 2.4GHz , antenna has maximum gain of 2.29dBi
- For operating frequency of 5GHz , antenna has maximum gain of 2.29 dBi

2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No.789033 D02 v02r01 (14-December-2017) All other measurements were made in accordance with the procedures in 47 CFR Part 2.

TEST REPORT

2.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been fully placed on file with the FCC and Industry Canada No.: 2042H.

2.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver (WiFi portion only).

TEST REPORT

3.0 SYSTEM TEST CONFIGURATION

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by a 120VAC (AC/DC adaptor).

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109.

TEST REPORT

3.1 Justification – Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

Different data rates have been tested. Worst case is reported only.

All relevant operation modes have been tested, and the worst case data is included in this report.

All data rates were tested under normal mode of WiFi. Only the worst-case data is shown in the report for OFDM.

For simultaneous transmission, both WiFi and Bluetooth portions are also switched on when taking radiated emission for determining worst-case spurious emission

3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

TEST REPORT

3.3 Details of EUT and Description of Accessories

An adaptor (provided with the unit) was used to power the device. Its description is listed below.

(1) An AC adaptor (Model: FJ-SW20171204000)
Input: 100-240VAC 1.5A 50/60Hz
Output: 12VDC 4A
(Provided by Applicant)

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test at a level of confidence of 95% has been considered. The values of the Measurement uncertainty:

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.8 dB
2	Conducted emission 150KHz-30MHz	±3.4 dB
3	Radiated emission 9KHz-30MHz	±4.9 dB
4	Radiated emission 30MHz-1GHz	±4.7 dB
5	Radiated emission 1GHz-18GHz	±5.1 dB
6	Radiated emission 18GHz-26GHz	±5.2 dB
7	Radiated emission 26GHz-40GHz	±5.2 dB

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.


TEST REPORT

4.0 TEST RESULTS

4.1 Maximum Conducted (Avg) Output Power at Antenna Terminals

RF Conduct Measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

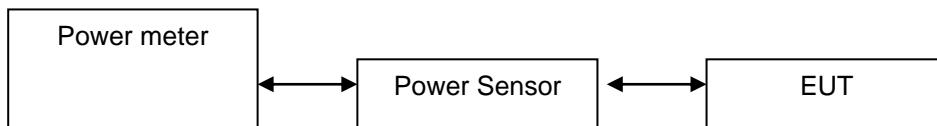

The antenna port of the EUT was connected to the input of a spectrum analyzer.

- The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals. The measurement procedure E.3.A (789033 D02 General UNII Test Procedures New Rules v02r01) was used.
- The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

IEEE 802.11ac (20MHz) (MCS0) Antenna Gain = 2.29dBi

Frequency (MHz)	Conducted output power in dBm	Conducted output power in mWatt
5180	10.29	10.68
5200	10.41	10.99
5240	10.19	10.45
5745	9.82	9.60
5785	8.14	6.51
5825	4.44	2.78

IEEE 802.11ac (40MHz) (MCS0) Antenna Gain = 2.29dBi

Frequency (MHz)	Conducted output power in dBm	Conducted output power in mWatt
5190	10.37	10.89
5230	10.19	10.44
5755	8.65	7.33
5795	7.68	5.86

IEEE 802.11ac (80MHz) (MCS0) Antenna Gain = 2.29dBi

Frequency (MHz)	Conducted output power in dBm	Conducted output power in mWatt
5210	7.64	5.81
5775	8.17	6.56

TEST REPORT

IEEE 802.11a (20MHz) (OFDM, 6 Mbps) Antenna Gain = 2.29dBi

Frequency (MHz)	Conducted output power in dBm	Conducted output power in mWatt
5180	10.64	11.59
5200	10.66	11.63
5240	10.52	11.26
5745	10.24	10.57
5785	8.42	6.94
5825	7.70	5.89

IEEE 802.11n (20MHz) (OFDM, MCS0) Antenna Gain = 2.29dBi

Frequency (MHz)	Conducted output power in dBm	Conducted output power in mWatt
5180	10.17	10.41
5200	10.23	10.57
5240	10.07	10.17
5745	9.88	9.73
5785	8.19	6.59
5825	6.70	4.68

IEEE 802.11n (40MHz) (OFDM, MCS0) Antenna Gain = 2.29dBi

Frequency (MHz)	Conducted output power in dBm	Conducted output power in mWatt
5190	10.19	10.46
5230	10.05	10.12
5755	8.86	7.69
5795	4.46	2.79

TEST REPORT

For maximum e.i.r.p.

IEEE 802.11ac (20MHz) (MCS0) Antenna Gain = 2.29dBi

Frequency (MHz)	Conducted output power in dBm	EIRP in dBm	EIRP in mWatt
5180	10.29	12.58	18.11
5220	10.41	12.70	18.62
5240	10.19	12.48	17.70
5745	9.82	12.11	16.26
5785	8.14	10.43	11.04
5825	4.44	6.73	4.71

IEEE 802.11ac (40MHz) (MCS0) Antenna Gain = 2.29dBi

Frequency (MHz)	Conducted output power in dBm	EIRP in dBm	EIRP in mWatt
5190	10.37	12.66	18.45
5230	10.19	12.48	17.70
5755	8.65	10.94	12.42
5795	7.68	9.97	9.93

IEEE 802.11ac (80MHz) (MCS0) Antenna Gain = 2.29dBi

Frequency (MHz)	Conducted output power in dBm	EIRP in dBm	EIRP in mWatt
5210	7.64	9.93	9.84
5775	8.17	10.46	11.12

IEEE 802.11a (20MHz) (OFDM, 6 Mbps) Antenna Gain = 2.29dBi

Frequency (MHz)	Conducted output power in dBm	EIRP in dBm	EIRP in mWatt
5180	10.64	12.93	19.63
5220	10.66	12.95	19.72
5240	10.52	12.81	19.10
5745	10.24	12.53	17.91
5785	8.42	10.71	11.78
5825	7.70	9.99	9.98

TEST REPORT

IEEE 802.11n (20MHz) (OFDM, MCS0) Antenna Gain = 2.29dBi

Frequency (MHz)	Conducted output power in dBm	EIRP in dBm	EIRP in mWatt
5180	10.17	12.46	17.62
5220	10.23	12.52	17.86
5240	10.07	12.36	17.22
5745	9.88	12.17	16.48
5785	8.19	10.48	11.17
5825	6.70	8.99	7.93

IEEE 802.11n (40MHz) (OFDM, MCS0) Antenna Gain = 2.29dBi

Frequency (MHz)	Conducted output power in dBm	EIRP in dBm	EIRP in mWatt
5190	10.19	12.48	17.70
5230	10.05	12.34	17.14
5755	8.86	11.15	13.03
5795	4.46	6.75	4.73

 Cable loss : 1.02 dB External Attenuation : 10 dB

 Cable loss, external attenuation: included in OFFSET function
 added to SA raw reading

 IEEE 802.11ac (20MHz) (OFDM, MCS0)
 max. conducted output level = 10.41 dBm

 IEEE 802.11ac (40MHz) (OFDM, MCS0)
 max. conducted output level = 10.37 dBm

 IEEE 802.11ac (80MHz) (OFDM, MCS0)
 max. conducted output level = 8.17 dBm

 IEEE 802.11a (20MHz) (OFDM, 6 Mbps)
 max. conducted output level = 10.66 dBm

 IEEE 802.11n (20MHz) (OFDM, MCS0)
 max. conducted output level = 10.23 dBm

 IEEE 802.11n (40MHz) (OFDM, MCS0)
 max. conducted output level = 10.19 dBm

TEST REPORT

Remark:

1. Maximum e.i.r.p = Maximum conducted output power + Duty Cycle Factor + Antenna Gain
2. Maximum conducted output power = Conducted output power + Duty Cycle Factor
3. Duty cycle= On Time/ Period;
Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;
Average factor = $20 \log_{10} \text{Duty Cycle}$.
4. Limits for FCC:

5150-5250MHz:

250mW (24dBm) for antennas with gains of 6dBi or less. (Client device)

5250-5350MHz:

250mW (24dBm)

5470-5725MHz:

250mW (24dBm)

5725-5850MHz:

1W (30dBm) for antennas with gains of 6dBi or less.

Limits for RSS:

5150-5250MHz:

200mW (23dBm) for antennas with gains of 6dBi or less.

5250-5350MHz:

250mW (24dBm)

5470-5725MHz:

250mW (24dBm)

5725-5850MHz:

1W (30dBm) for antennas with gains of 6dBi or less.

TEST REPORT

4.2 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11ac (20MHz) (MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5190	17.7	17.8
5200	17.5	17.8
5240	17.7	17.8
5745	17.7	18.2
5785	17.7	18.2
5825	17.7	18.2

IEEE 802.11ac (40MHz) (MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5190	36.5	36.6
5230	35.9	36.3
5755	36.2	36.6
5795	36.1	36.3

IEEE 802.11ac (80MHz) (MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5210	75.3	75.5
5775	75.3	76.5

IEEE 802.11a (20MHz) (OFDM, 6Mbps)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5180	16.5	16.6
5200	16.5	16.6
5240	16.5	16.8
5745	16.5	17.2
5785	16.5	17.2
5825	16.5	17.2

TEST REPORT

IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5180	22.0	17.8
5200	21.8	17.8
5240	22.0	17.8
5745	23.6	18.2
5785	27.2	18.2
5825	26.8	18.2

IEEE 802.11n (40MHz) (OFDM, MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5190	40.15	36.6
5230	40.15	36.3
5755	53.633	36.6
5795	56.629	36.6

Limits:

For 5725-5850MHz:

6 db bandwidth shall be at least 500kHz

The plots of 6db RF bandwidth and occupied bandwidth are saved with filename : 21020815HKG-003_test data.pdf

TEST REPORT**4.3 26 dB Bandwidth & Occupied Bandwidth**

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 26dB lower than PEAK level. The 26dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11ac (20MHz) (MCS0)

Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
5180	22.0	17.8
5200	22.0	17.8
5240	22.0	17.8
5745	26.4	18.2
5785	27.6	18.2
5825	28.6	18.2

IEEE 802.11ac (40MHz) (MCS0)

Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
5190	40.449	36.6
5230	40.15	36.3
5755	54.232	36.6
5795	40.1	36.3

IEEE 802.11ac (80MHz) (MCS0)

Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
5210	83.0	75.5
5775	129.0	76.5

IEEE 802.11a (20MHz) (OFDM, 6Mbps)

Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
5180	21.6	16.6
5200	21.6	16.6
5240	21.6	16.8
5745	28.6	17.2
5785	29.0	17.2
5825	29.0	17.2

TEST REPORT**IEEE 802.11n (20MHz) (OFDM, MCS0)**

Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
5180	22.0	17.8
5200	21.8	17.8
5240	22.0	17.8
5745	23.6	18.2
5785	27.2	18.2
5825	26.8	18.2

IEEE 802.11n (40MHz) (OFDM, MCS0)

Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
5190	40.2	36.6
5230	40.2	36.3
5755	53.6	36.6
5795	56.6	36.6

TEST REPORT

4.4 Maximum Power Spectral Density

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

Spectrum analyser according to the following Settings:

For U-NII-1, U-NII-2A, U-NII-2C band:

Using method SA-2

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 1 MHz, Set VBW \geq 3 RBW, Detector = RMS
- c) Sweep time = auto, trigger set to “free run”.
- d) Trace average at least 100 traces in power averaging mode.
- e) Record the max value and add 10 log (1/duty cycle)

For U-NII-3 band:

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 500 kHz, Set VBW \geq 3 RBW, Detector = RMS
- c) Use the peak marker function to determine the maximum power level in any 500 kHz band segment within the fundamental EBW.
- d) Sweep time = auto, trigger set to “free run”.
- e) Trace average at least 100 traces in power averaging mode.
- f) Record the max value and add 10 log (1/duty cycle)

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

IEEE 802.11ac (20MHz) (MCS0)

Frequency (MHz)	Conducted PSD in 1MHz (dBm)
5180	-0.087
5200	0.237
5240	-0.132

IEEE 802.11ac (500MHz) (MCS0)

Frequency (MHz)	Conducted PSD in 500kHz (dBm)
5745	-3.785
5785	-5.430
5825	-6.005

TEST REPORT

IEEE 802.11ac (40MHz) (MCS0)

Frequency (MHz)	Conducted PSD in 1MHz (dBm)
5190	-3.402
5230	-3.401
Frequency (MHz)	Conducted PSD in 500kHz (dBm)
5755	-7.773
5795	-8.824

IEEE 802.11ac (80MHz) (MCS0)

Frequency (MHz)	Conducted PSD in 1MHz (dBm)
5210	-8.303
Frequency (MHz)	Conducted PSD in 500kHz (dBm)
5775	-10.774

IEEE 802.11a (20MHz) (OFDM, 6 Mbps)

Frequency (MHz)	Conducted PSD in 1MHz (dBm)
5180	0.145
5200	0.090
5240	-0.021
Frequency (MHz)	Conducted PSD in 500kHz (dBm)
5745	-2.704
5785	-4.368
5825	-5.007

IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	Conducted PSD in 1MHz (dBm)
5180	-0.580
5200	-0.401
5240	-0.740
Frequency (MHz)	Conducted PSD in 500kHz (dBm)
5745	-3.739
5785	-5.424
5825	-6.038

TEST REPORT

IEEE 802.11n (40MHz) (OFDM, MCS0)

Frequency (MHz)	Conducted PSD in 1MHz (dBm)
5190	-3.369
5230	-3.552
Frequency (MHz)	Conducted PSD in 500kHz (dBm)
5755	-6.925
5795	-8.407

For maximum e.i.r.p.

IEEE 802.11ac (20MHz) (MCS0)

Frequency (MHz)	EIRP PSD in 1MHz (dBm)
5180	2.20
5200	2.53
5240	2.16
5745	-1.50
5786	-3.14
5825	-3.72

IEEE 802.11ac (40MHz) (MCS0)

Frequency (MHz)	EIRP PSD in 1MHz (dBm)
5190	-1.11
5230	-1.11
5755	-5.48
5795	-6.53

IEEE 802.11ac (80MHz) (MCS0)

Frequency (MHz)	EIRP PSD in 1MHz (dBm)
5210	-6.01
5775	-8.48

IEEE 802.11a (20MHz) (OFDM, 6 Mbps)

Frequency (MHz)	EIRP PSD in 1MHz (dBm)
5180	2.44
5220	2.38
5240	2.27
5745	-0.41
5786	-2.08
5825	-2.72

TEST REPORT

IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	EIRP PSD in 1MHz (dBm)
5180	1.71
5220	1.89
5240	1.55
5745	-1.45
5786	-3.13
5825	-3.75

IEEE 802.11n (40MHz) (OFDM, MCS0)

Frequency (MHz)	EIRP PSD in 1MHz (dBm)
5190	-1.08
5230	-1.26
5755	-4.64
5795	-6.12

Remark:

1. Cable Loss: 1.02 dB
2. e.i.r.p. spectral density = Power spectral density + Duty Cycle Factor + Antenna Gain
3. Power spectral density = Conducted power spectral density + Duty Cycle Factor
4. Duty cycle= On Time/ Period;
Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;
Average factor = $20 \log_{10} \text{Duty Cycle}$.
5. Limit:

For U-NII-1:

FCC:
11dBm/MHz for mobile/portable device.
RSS:
10dBm/MHz E.I.R.P

For U-NII-2:

FCC:
11dBm/MHz
RSS:
11dBm/MHz

For U-NII-3:

FCC:
30dBm/500kHz.
RSS:
30dBm/500kHz.

The test data are saved with filename: 21020815HKG-003_test data.pdf

TEST REPORT

4.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0 $\text{dB}\mu\text{V}$ is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 $\text{dB}\mu\text{V}/\text{m}$. This value in $\text{dB}\mu\text{V}/\text{m}$ is converted to its corresponding level in $\mu\text{V}/\text{m}$.

RA = 62.0 $\text{dB}\mu\text{V}$

AF = 7.4 dB

CF = 1.6 dB

AG = 29.0 dB

PD = 0.0 dB

AV = -10 dB

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm} [(32.0 \text{ dB}\mu\text{V}/\text{m})/20] = 39.8 \mu\text{V}/\text{m}$$

TEST REPORT

4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

4.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission
at

10400, 11490 MHz

The worst case radiated emission configuration photographs are saved with filename: Radiated Photo.pdf

4.6.2 Radiated Emission Data

The data in below tables list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 0.2 dB margin

TEST REPORT

IEEE 802.11A (20MHz) (OFDM,6MBs)

Radiated Emission Data

5180MHz

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	5150.000	26.5	33	35.7	31.5	54.0	-24.8
H	10360.000	32.7	33	40.5	42.5	54.0	-13.9
V	15540.000	28.0	33	37.7	33.5	54.0	-21.3
H	20720.000	26.5	33	37.7	37.5	54.0	-30.1
H	25900.000	32.7	33	39.3	34.6	54.0	-19.4
H	31080.000	28.0	33	42.1	40.0	54.0	-14.0

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	5150.000	52.7	33	35.7	51.2	74.0	-18.7
H	10360.000	65.8	33	40.5	71.1	74.0	-0.7
V	15540.000	60.6	33	37.7	49.2	74.0	-8.7
H	20720.000	47.1	33	37.7	45.5	74.0	-28.5
H	25900.000	39.3	33	39.3	41.5	74.0	-32.5
H	31080.000	32.8	33	42.1	50.2	74.0	-23.8

5240MHz

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	10480.000	28.7	33	40.5	36.2	54.0	-17.8
V	15720.000	26.8	33	37.7	31.5	54.0	-22.5
H	20960.000	32.3	33	37.7	37.0	54.0	-17.0
V	26200.000	34.9	33	39.2	41.1	54.0	-12.9
H	31440.000	34.4	33	42.1	43.5	54.0	-10.5
H	36680.000	40.2	33	41.7	48.9	54.0	-5.1

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	10480.000	50.6	33	40.5	65.5	74.0	-8.5
V	15720.000	46.8	33	37.7	51.5	74.0	-22.5
H	20960.000	63.4	33	37.7	51.3	74.0	-22.7
V	26200.000	49.7	33	39.2	43.5	74.0	-30.5
H	31440.000	44.3	33	42.1	46.1	74.0	-27.9
H	36680.000	43.7	33	41.7	49.5	74.0	-24.5

TEST REPORT

5200MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	10400.000	28.0	33	40.5	35.5	54.0	-18.5
H	15600.000	28.4	33	37.7	33.1	54.0	-20.9
V	20800.000	27.8	33	37.7	32.5	54.0	-21.5
H	26000.000	30.3	33	39.2	36.5	54.0	-17.5
V	31200.000	31.9	33	42.1	41.0	54.0	-13.0
H	36400.000	38.5	33	41.7	47.2	54.0	-6.8

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	10400.000	64.0	33	40.5	71.5	74.0	-2.5
H	15600.000	45.5	33	37.7	50.2	74.0	-23.8
V	20800.000	42.8	33	37.7	47.5	74.0	-26.5
H	26000.000	36.7	33	39.2	42.9	74.0	-31.1
V	31200.000	34.2	33	42.1	43.3	74.0	-30.7
H	36400.000	41.6	33	41.7	50.3	74.0	-23.7

5745MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	5725.000	30.6	33	36.6	34.2	54.0	-19.8
H	11490.000	27.8	33	40.8	35.6	54.0	-18.4
V	17235.000	33.9	33	37.6	38.5	54.0	-15.5
V	22980.000	31.2	33	38.3	36.5	54.0	-17.5
H	28725.000	33.0	33	40.1	40.1	54.0	-13.9
H	34470.000	37.9	33	41.1	46.0	54.0	-8.0

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	5725.000	46.6	33	36.6	50.2	74.0	-23.8
H	11490.000	63.0	33	40.8	70.8	74.0	-3.2
V	17235.000	49.3	33	37.6	53.9	74.0	-20.1
V	22980.000	37.9	33	38.3	43.2	74.0	-30.8
H	28725.000	37.5	33	40.1	44.6	74.0	-29.4
H	34470.000	44.5	33	41.1	52.6	74.0	-21.4

TEST REPORT

5785MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	5725.000	27.8	33	36.6	31.4	54.0	-22.6
H	11570.000	30.5	33	40.5	38.0	54.0	-16.0
V	17355.000	38.3	33	37.6	42.9	54.0	-11.1
V	23140.000	38.5	33	38.6	44.1	54.0	-9.9
H	28925.000	40.4	33	40.1	47.5	54.0	-6.5
H	34710.000	43.5	33	41.3	51.8	54.0	-2.2

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	5725.000	48.4	33	36.6	52.0	74.0	-22.0
H	11570.000	63.0	33	40.5	70.5	74.0	-3.5
H	17355.000	41.7	33	37.6	46.3	74.0	-27.7
V	23140.000	39.7	33	38.6	45.3	74.0	-28.7
H	28925.000	40.0	33	40.1	47.1	74.0	-26.9
H	34710.000	44.0	33	41.3	52.3	74.0	-21.7

TEST REPORT

5825MHz123

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	5850.000	27.9	33	36.6	31.5	54.0	-22.5
H	11650.000	29.5	33	40.5	37.0	54.0	-17.0
V	17475.000	31.5	33	37.6	36.1	54.0	-17.9
V	23300.000	30.2	33	38.6	35.8	54.0	-18.2
H	29125.000	41.6	33	40.0	48.6	54.0	-5.4
H	34950.000	42.3	33	41.3	50.6	54.0	-3.4

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	5850.000	47.3	33	36.6	50.9	74.0	-23.1
H	11650.000	60.3	33	40.5	67.8	74.0	-6.2
H	17475.000	46.8	33	37.6	51.4	74.0	-22.6
V	23300.000	39.1	33	38.6	44.7	74.0	-29.3
H	29125.000	34.5	33	40.0	41.5	74.0	-32.5
H	34950.000	43.3	33	41.3	51.6	74.0	-22.4

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

IEEE 802.11N (HT20MHz) (MCS0)

Radiated Emission Data

5180MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	5150.000	34.8	33	35.7	37.5	54.0	-16.5
H	10360.000	32.3	33	40.5	39.8	54.0	-14.2
H	15540.000	37.9	33	37.7	42.6	54.0	-11.4
H	20720.000	35.9	33	37.7	40.6	54.0	-13.4
H	25900.000	33.9	33	39.3	40.2	54.0	-13.8
V	31080.000	37.6	33	42.1	46.7	54.0	-7.3

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	5150.000	47.5	33	35.7	50.2	74.0	-23.8
H	10360.000	54.6	33	40.5	62.1	74.0	-11.9
H	15540.000	43.8	33	37.7	48.5	74.0	-25.5
H	20720.000	40.1	33	37.7	44.8	74.0	-29.2
H	25900.000	33.8	33	39.3	40.1	74.0	-33.9
V	31080.000	37.0	33	42.1	46.1	74.0	-27.9

5240MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	10480.000	27.9	33	40.5	35.4	54.0	-18.6
V	15720.000	25.2	33	37.7	29.9	54.0	-24.1
H	20960.000	23.8	33	37.7	28.5	54.0	-25.5
H	26200.000	26.8	33	39.2	33.0	54.0	-21.0
V	31440.000	30.5	33	42.1	39.6	54.0	-14.4
H	36680.000	35.6	33	41.7	44.3	54.0	-9.7

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	10480.000	59.3	33	40.5	66.8	74.0	-7.2
V	15720.000	42.8	33	37.7	47.5	74.0	-26.5
H	20960.000	57.3	33	37.7	62.0	74.0	-12.0
H	26200.000	38.5	33	39.2	44.7	74.0	-29.3
V	31440.000	37.0	33	42.1	46.1	74.0	-27.9
H	36680.000	39.5	33	41.7	48.2	74.0	-25.8

TEST REPORT

5200MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	10400.000	32.8	33	40.5	40.3	54.0	-13.7
H	15600.000	31.7	33	37.7	36.4	54.0	-17.6
V	20800.000	31.3	33	37.7	36.0	54.0	-18.0
H	26000.000	33.1	33	39.2	39.3	54.0	-14.7
H	31200.000	30.3	33	42.1	39.4	54.0	-14.6
H	36400.000	38.8	33	41.7	47.5	54.0	-6.5

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	10400.000	66.3	33	40.5	73.8	74.0	-0.2
H	15600.000	47.3	33	37.7	52.0	74.0	-22.0
V	20800.000	47.0	33	37.7	51.7	74.0	-22.3
H	26000.000	38.0	33	39.2	44.2	74.0	-29.8
H	31200.000	35.2	33	42.1	44.3	74.0	-29.7
H	36400.000	41.7	33	41.7	50.4	74.0	-23.6

5745MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	5725.000	32.3	33	36.6	35.9	54.0	-18.1
H	11490.000	32.5	33	40.8	40.3	54.0	-13.7
H	17235.000	32.7	33	37.6	37.3	54.0	-16.7
H	22980.000	32.6	33	38.3	37.9	54.0	-16.1
H	28725.000	36.6	33	40.1	43.7	54.0	-10.3
H	34470.000	37.1	33	41.1	45.2	54.0	-8.8

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	5725.000	49.3	33	36.6	52.9	74.0	-21.1
H	11490.000	66.0	33	40.8	73.8	74.0	-0.2
H	17235.000	36.7	33	37.6	41.3	74.0	-32.7
H	22980.000	39.6	33	38.3	44.9	74.0	-29.1
H	28725.000	40.6	33	40.1	47.7	74.0	-26.3
H	34470.000	42.3	33	41.1	50.4	74.0	-23.6

TEST REPORT

5785MHz

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	5725.000	31.9	33	36.6	35.5	54.0	-18.5
H	11570.000	32.0	33	40.5	39.5	54.0	-14.5
V	17355.000	32.7	33	37.6	37.3	54.0	-16.7
V	23140.000	35.0	33	38.6	40.6	54.0	-13.4
H	28925.000	36.2	33	40.1	43.3	54.0	-10.7
H	34710.000	39.1	33	41.3	47.4	54.0	-6.6

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	5725.000	48.6	33	36.6	52.2	74.0	-21.8
H	11570.000	65.8	33	40.5	73.3	74.0	-0.7
V	17355.000	44.0	33	37.6	48.6	74.0	-25.4
V	23140.000	36.5	33	38.6	42.1	74.0	-31.9
H	28925.000	38.4	33	40.1	45.5	74.0	-28.5
H	34710.000	41.0	33	41.3	49.3	74.0	-24.7

TEST REPORT

5825MHz

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	5850.000	27.2	33	36.6	30.8	54.0	-23.2
H	11650.000	32.4	33	40.5	39.9	54.0	-14.1
V	17475.000	32.7	33	37.6	37.3	54.0	-16.7
H	23300.000	32.0	33	38.6	37.6	54.0	-16.4
H	29125.000	35.1	33	40.0	42.1	54.0	-11.9
H	34950.000	37.1	33	41.3	45.4	54.0	-8.6

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	5850.000	58.1	33	36.6	61.7	74.0	-12.3
H	11650.000	65.7	33	40.5	73.2	74.0	-0.8
V	17475.000	46.3	33	37.6	50.9	74.0	-23.1
H	23300.000	38.6	33	38.6	44.2	74.0	-29.8
H	29125.000	43.8	33	40.0	50.8	74.0	-23.2
H	34950.000	45.3	33	41.3	53.6	74.0	-20.4

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

IEEE 802.11n (40MHz) (MCS0)

Radiated Emission Data

5190MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	5150.000	29.9	33	35.7	32.6	54.0	-21.4
H	10380.000	31.1	33	40.5	38.6	54.0	-15.4
H	15570.000	32.0	33	37.7	36.7	54.0	-17.3
V	20760.000	33.5	33	37.7	38.2	54.0	-15.8
H	25950.000	35.2	33	39.3	41.5	54.0	-12.5
H	31140.000	36.8	33	42.1	45.9	54.0	-8.1

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	5150.000	49.3	33	35.7	52.0	74.0	-22.0
H	10380.000	64.0	33	40.5	71.5	74.0	-2.5
H	15570.000	44.8	33	37.7	49.5	74.0	-24.5
V	20760.000	39.0	33	37.7	43.7	74.0	-30.3
H	25950.000	37.3	33	39.3	43.6	74.0	-30.4
H	31140.000	38.5	33	42.1	47.6	74.0	-26.4

5230MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	10460.000	29.7	33	40.5	37.2	54.0	-16.8
H	15690.000	28.9	33	37.7	33.6	54.0	-20.4
H	20920.000	32.8	33	37.7	37.5	54.0	-16.5
V	26150.000	34.7	33	39.2	40.9	68.0	-27.1
H	31380.000	32.1	33	42.1	41.2	54.0	-12.8
H	36610.000	37.3	33	41.7	46.0	54.0	-8.0

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	10460.000	62.9	33	40.5	70.4	74.0	-3.6
H	15690.000	44.6	33	37.7	49.3	74.0	-24.7
H	20920.000	37.8	33	37.7	42.5	74.0	-31.5
V	26150.000	43.4	33	39.2	49.6	68.0	-18.4
H	31380.000	36.0	33	42.1	45.1	74.0	-28.9
H	36610.000	39.8	33	41.7	48.5	74.0	-25.5

TEST REPORT

5755MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	5725.000	31.0	33	36.6	34.6	54.0	-19.4
H	11510.000	27.3	33	40.5	34.8	54.0	-19.2
V	17265.000	31.1	33	37.6	35.7	54.0	-18.3
V	23020.000	34.5	33	38.6	40.1	54.0	-13.9
V	28775.000	36.6	33	40.1	43.7	54.0	-10.3
H	34530.000	40.8	33	41.3	49.1	54.0	-4.9

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	5725.000	46.2	33	36.6	49.8	74.0	-24.2
H	11510.000	57.8	33	40.5	65.3	74.0	-8.7
V	17265.000	36.1	33	37.6	40.7	74.0	-33.3
V	23020.000	37.0	33	38.6	42.6	74.0	-31.4
V	28775.000	37.5	33	40.1	44.6	74.0	-29.4
H	34530.000	40.8	33	41.3	49.1	74.0	-24.9

TEST REPORT

5795MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	5850.000	27.9	33	36.6	31.5	54.0	-22.5
H	11590.000	30.3	33	40.5	37.8	54.0	-16.2
H	17385.000	32.2	33	37.6	36.8	54.0	-17.2
V	23180.000	34.0	33	38.6	39.6	54.0	-14.4
H	28975.000	33.1	33	40.1	40.2	54.0	-13.8
H	34770.000	42.0	33	41.3	50.3	54.0	-3.7

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	5850.000	51.9	33	36.6	55.5	74.0	-18.5
H	11590.000	65.4	33	40.5	72.9	74.0	-1.1
H	17385.000	46.0	33	37.6	50.6	74.0	-23.4
V	23180.000	37.5	33	38.6	43.1	74.0	-30.9
H	28975.000	37.6	33	40.1	44.7	74.0	-29.3
H	34770.000	42.0	33	41.3	50.3	74.0	-23.7

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

Ac mode 20MHz

 Frequency: 5210MHz
 IEEE 802.11ac (80MHz) (MCS0)

Radiated Emission Data

5180MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	5150.000	29.8	33	35.7	32.5	54.0	-21.5
H	10360.000	28.9	33	40.5	36.4	54.0	-17.6
H	15540.000	30.7	33	37.7	35.4	54.0	-18.6
H	20720.000	33.5	33	37.7	38.2	54.0	-15.8
V	25900.000	33.9	33	39.3	40.2	54.0	-13.8
H	31080.000	36.1	33	42.1	45.2	54.0	-8.8

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	5150.000	48.7	33	35.7	51.4	74.0	-22.6
H	10360.000	59.5	33	40.5	67.0	74.0	-7.0
H	15540.000	47.3	33	37.7	52.0	74.0	-22.0
H	20720.000	39.5	33	37.7	44.2	74.0	-29.8
V	25900.000	37.6	33	39.3	43.9	74.0	-30.1
H	31080.000	40.9	33	42.1	50.0	74.0	-24.0

5240MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Avergae (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	10480.000	25.1	33	40.5	32.6	54.0	-21.4
H	15720.000	33.8	33	37.7	38.5	54.0	-15.5
H	20960.000	32.2	33	37.7	36.9	54.0	-17.1
H	26200.000	32.2	33	39.2	38.4	54.0	-15.6
V	31440.000	32.5	33	42.1	41.6	54.0	-12.4
H	36680.000	37.4	33	41.7	46.1	54.0	-7.9

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	10480.000	43.8	33	40.5	51.3	74.0	-22.7
H	15720.000	67.3	33	37.7	72.0	74.0	-2.0
H	20960.000	43.9	33	37.7	48.6	74.0	-25.4
H	26200.000	36.8	33	39.2	43.0	68.0	-25.0
V	31440.000	33.6	33	42.1	42.7	74.0	-31.3
H	36680.000	40.9	33	41.7	49.6	74.0	-24.4

TEST REPORT

5200MHz

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	10400.000	30.7	33	40.5	38.2	54.0	-15.8
H	15600.000	29.9	33	37.7	34.6	54.0	-19.4
V	20800.000	32.9	33	37.7	37.6	54.0	-16.4
H	26000.000	31.8	33	39.2	38.0	54.0	-16.0
H	31200.000	22.5	33	42.1	31.6	54.0	-22.4
H	36400.000	40.5	33	41.7	49.2	54.0	-4.8

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	10400.000	64.9	33	40.5	72.4	74.0	-1.6
H	15600.000	52.6	33	37.7	57.3	74.0	-16.7
V	20800.000	43.5	33	37.7	48.2	74.0	-25.8
H	26000.000	36.6	33	39.2	42.8	74.0	-31.2
H	31200.000	34.6	33	42.1	43.7	74.0	-30.3
H	36400.000	40.0	33	41.7	48.7	74.0	-25.3

5745MHz

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	5725.000	30.1	33	36.6	33.7	54.0	-20.3
H	11490.000	29.8	33	40.8	37.6	54.0	-16.4
H	17235.000	31.1	33	37.6	35.7	54.0	-18.3
H	22980.000	32.1	33	38.3	37.4	54.0	-16.6
H	28725.000	33.9	33	40.1	41.0	54.0	-13.0
H	34470.000	38.7	33	41.1	46.8	54.0	-7.2

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	5725.000	46.7	33	36.6	50.3	74.0	-23.7
H	11490.000	64.2	33	40.8	72.0	74.0	-2.0
H	17235.000	48.0	33	37.6	52.6	74.0	-21.4
H	22980.000	39.4	33	38.3	44.7	74.0	-29.3
H	28725.000	38.1	33	40.1	45.2	74.0	-28.8
H	34470.000	43.1	33	41.1	51.2	74.0	-22.8

TEST REPORT

5785MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	5725.000	29.7	33	36.6	33.3	54.0	-20.7
H	11570.000	31.2	33	40.5	38.7	54.0	-15.3
H	17355.000	30.8	33	37.6	35.4	54.0	-18.6
V	23140.000	31.5	33	38.6	37.1	54.0	-16.9
H	28925.000	34.9	33	40.1	42.0	54.0	-12.0
H	34710.000	36.1	33	41.3	44.4	54.0	-9.6

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	5725.000	47.7	33	36.6	51.3	74.0	-22.7
H	11570.000	63.7	33	40.5	71.2	74.0	-2.8
H	17355.000	41.8	33	37.6	46.4	74.0	-27.6
V	23140.000	39.2	33	38.6	44.8	74.0	-29.2
H	28925.000	40.9	33	40.1	48.0	74.0	-26.0
H	34710.000	44.0	33	41.3	52.3	74.0	-21.7

5825MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	5850.000	31.0	33	36.6	34.6	54.0	-19.4
H	11650.000	29.5	33	40.5	37.0	54.0	-17.0
H	17475.000	30.0	33	37.6	34.6	54.0	-19.4
H	23300.000	34.0	33	38.6	39.6	54.0	-14.4
V	29125.000	35.0	33	40.0	42.0	54.0	-12.0
H	34950.000	35.4	33	41.3	43.7	54.0	-10.3

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	5850.000	47.6	33	36.6	51.2	74.0	-22.8
H	11650.000	61.5	33	40.5	69.0	74.0	-5.0
H	17475.000	49.0	33	37.6	53.6	74.0	-20.4
H	23300.000	38.1	33	38.6	43.7	74.0	-30.3
V	29125.000	39.2	33	40.0	46.2	74.0	-27.8
H	34950.000	41.8	33	41.3	50.1	74.0	-23.9

TEST REPORT

Ac mode 40MHz

 Frequency: 5210MHz
 IEEE 802.11ac (80MHz) (MCS0)

Radiated Emission Data

5190MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	5150.000	27.8	33	35.7	30.5	54.0	-23.5
H	10380.000	31.0	33	40.5	38.5	54.0	-15.5
V	15570.000	29.4	33	37.7	34.1	54.0	-19.9
H	20760.000	30.9	33	37.7	35.6	54.0	-18.4
H	25950.000	34.7	33	39.3	41.0	54.0	-13.0
H	31140.000	37.2	33	42.1	46.3	54.0	-7.7

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	5150.000	60.5	33	35.7	63.2	74.0	-10.8
H	10380.000	64.2	33	40.5	71.7	74.0	-2.3
V	15570.000	48.5	33	37.7	53.2	74.0	-20.8
H	20760.000	40.0	33	37.7	44.7	74.0	-29.3
H	25950.000	40.0	33	39.3	46.3	74.0	-27.7
H	31140.000	41.9	33	42.1	51.0	74.0	-23.0

5230MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	10460.000	27.1	33	40.5	34.6	54.0	-19.4
H	15690.000	30.5	33	37.7	35.2	54.0	-18.8
H	20920.000	30.0	33	37.7	34.7	54.0	-19.3
V	26150.000	30.6	33	39.2	36.8	54.0	-17.2
H	31380.000	30.4	33	42.1	39.5	54.0	-14.5
H	36610.000	35.9	33	41.7	44.6	54.0	-9.4

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	10460.000	62.7	33	40.5	70.2	74.0	-3.8
H	15690.000	45.6	33	37.7	50.3	74.0	-23.7
H	20920.000	42.8	33	37.7	47.5	74.0	-26.5
V	26150.000	42.4	33	39.2	48.6	74.0	-25.4
H	31380.000	34.5	33	42.1	43.6	74.0	-30.4
H	36610.000	38.5	33	41.7	47.2	74.0	-26.8

TEST REPORT

5755MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	5725.000	32.8	33	36.6	36.4	54.0	-17.6
H	11510.000	30.9	33	40.5	38.4	54.0	-15.6
V	17265.000	32.8	33	37.6	37.4	54.0	-16.6
V	23020.000	30.5	33	38.6	36.1	54.0	-17.9
V	28775.000	33.5	33	40.1	40.6	54.0	-13.4
H	34530.000	39.2	33	41.3	47.5	54.0	-6.5

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	5725.000	47.7	33	36.6	51.3	74.0	-22.7
H	11510.000	63.7	33	40.5	71.2	74.0	-2.8
V	17265.000	46.0	33	37.6	50.6	74.0	-23.4
V	23020.000	37.5	33	38.6	43.1	74.0	-30.9
V	28775.000	38.1	33	40.1	45.2	74.0	-28.8
H	34530.000	42.4	33	41.3	50.7	74.0	-23.3

5795MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	5850.000	30.9	33	36.6	34.5	54.0	-19.5
H	11590.000	30.1	33	40.5	37.6	54.0	-16.4
V	17385.000	31.8	33	37.6	36.4	54.0	-17.6
H	23180.000	33.6	33	38.6	39.2	54.0	-14.8
H	28975.000	34.4	33	40.1	41.5	54.0	-12.5
V	34770.000	38.9	33	41.3	47.2	54.0	-6.8

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	5850.000	49.8	33	36.6	53.4	74.0	-20.6
H	11590.000	63.7	33	40.5	71.2	74.0	-2.8
V	17385.000	42.1	33	37.6	46.7	74.0	-27.3
H	23180.000	49.7	33	38.6	55.3	74.0	-18.7
H	28975.000	36.0	33	40.1	43.1	74.0	-30.9
V	34770.000	41.4	33	41.3	49.7	74.0	-24.3

TEST REPORT

Ac mode 80MHz

 Frequency: 5210MHz
 IEEE 802.11ac (80MHz) (MCS0)

Radiated Emission Data

5210MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	5150.000	29.9	33	35.7	32.6	54.0	-21.4
H	10360.000	28.9	33	40.5	36.4	54.0	-17.6
H	15540.000	29.4	33	37.7	34.1	54.0	-19.9
H	20720.000	32.0	33	37.7	36.7	54.0	-17.3
V	25900.000	31.9	33	39.3	38.2	54.0	-15.8
H	31080.000	31.4	33	42.1	40.5	54.0	-13.5

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	5150.000	49.3	33	35.7	52.0	74.0	-22.0
H	10360.000	61.9	33	40.5	69.4	74.0	-4.6
H	15540.000	45.5	33	37.7	50.2	74.0	-23.8
H	20720.000	38.9	33	37.7	43.6	74.0	-30.4
V	25900.000	34.5	33	39.3	40.8	74.0	-33.2
H	31080.000	35.1	33	42.1	44.2	74.0	-29.8

TEST REPORT

5775MHz

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	5725.000	28.7	33	36.6	32.3	54.0	-21.7
V	5850.000	31.1	33	36.6	34.7	54.0	-19.3
V	11550.000	26.7	33	40.5	34.2	54.0	-19.8
V	17325.000	34.0	33	37.6	38.6	54.0	-15.4
H	23100.000	37.1	33	38.6	42.7	54.0	-11.3
H	28875.000	41.0	33	40.1	48.1	54.0	-5.9

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	5725.000	61.1	33	36.6	64.7	74.0	-9.3
V	5850.000	66.8	33	36.6	70.4	74.0	-3.6
V	11550.000	33.1	33	40.5	40.6	74.0	-33.4
V	17325.000	48.0	33	37.6	52.6	74.0	-21.4
H	23100.000	43.3	33	38.6	48.9	74.0	-25.1
H	28875.000	43.0	33	40.1	50.1	74.0	-23.9

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

TEST REPORT

Mode: WiFi + Bluetooth

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	45.232	31.8	16	10.0	25.8	40.0	-14.2
V	55.348	30.4	16	11.0	25.4	40.0	-14.6
V	75.702	41.2	16	6.0	31.2	40.0	-8.8
V	600.006	21.8	16	29.0	34.8	46.0	-11.2
H	800.125	21.5	16	31.0	36.5	46.0	-9.5
V	999.998	27.0	16	33.0	44.0	54.0	-10.0


NOTES: 1. Quasi-Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters.
3. Value in the margin column shows emission below limit.
4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.


TEST REPORT

4.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

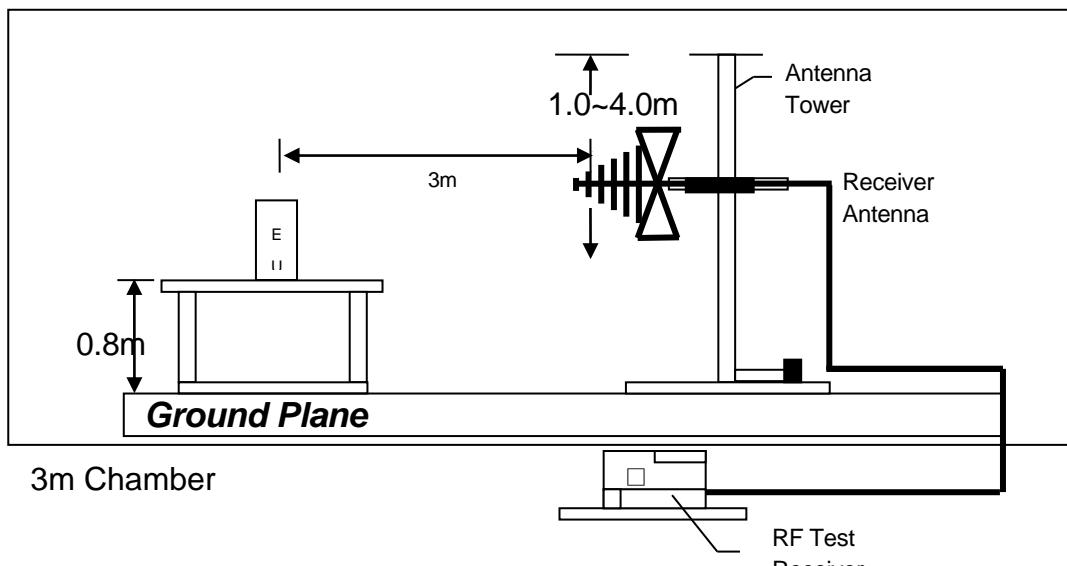

Test setup of radiated emissions up to 1GHz

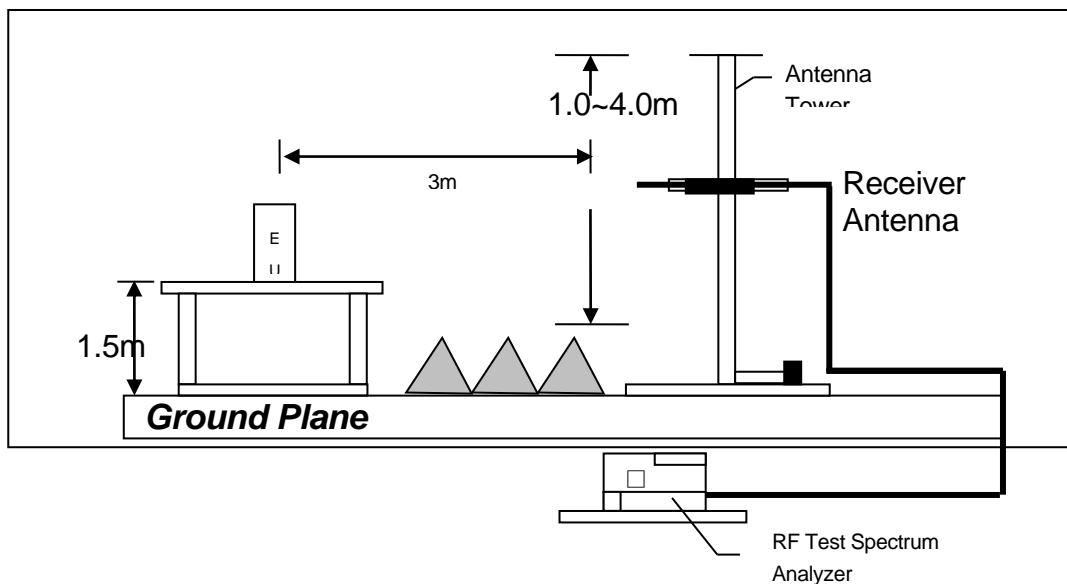

Test setup of radiated emissions above 1GHz

TEST REPORT

4.7 AC Power Line Conducted Emission

- Not applicable – EUT is only powered by battery for operation.
- EUT connects to AC power line. Emission Data is listed in following pages.
- Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

4.7.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration
at
0.155 MHz

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: Conduct Photo.pdf


4.7.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 28.7 dB margin compare with Quasi-peak limit


TEST REPORT

Worst Case: WiFi + Bluetooth

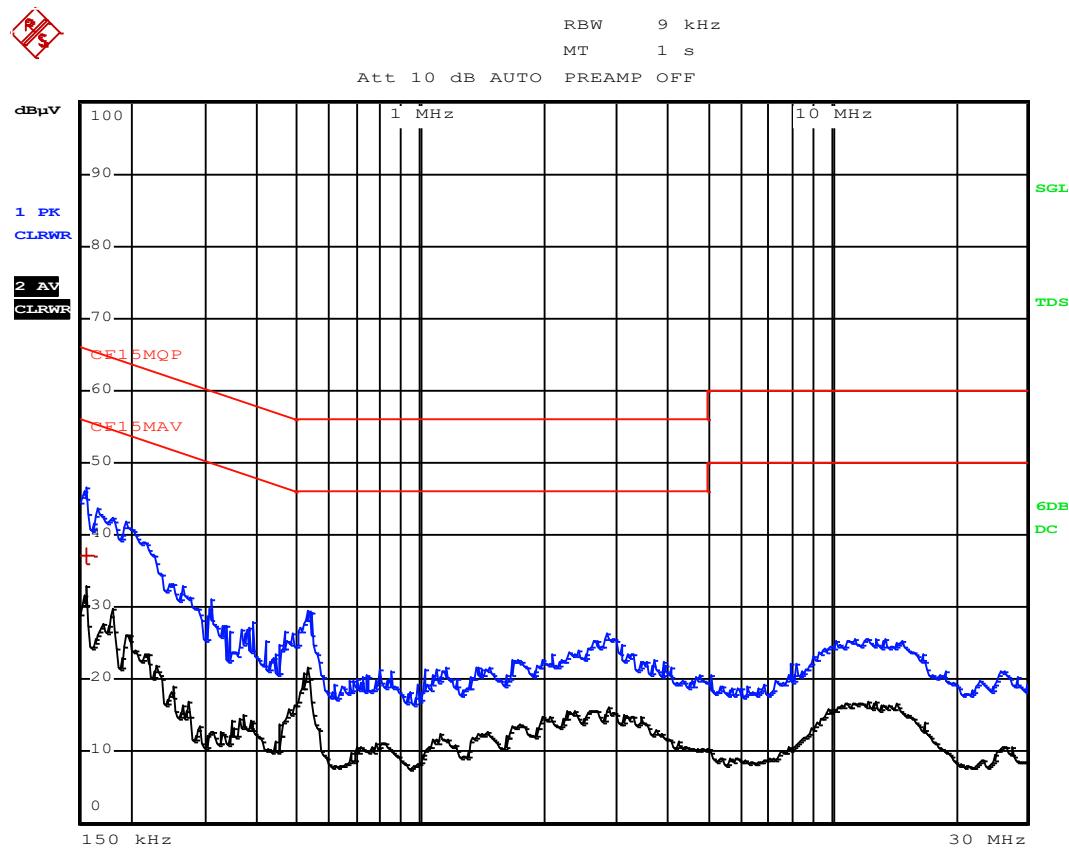

TEST REPORT**Worst Case: WiFi + Bluetooth**

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dB μ V	DELTA	LIMIT dB
1 Quasi Peak	154.5 kHz	37.00 L1		-28.74

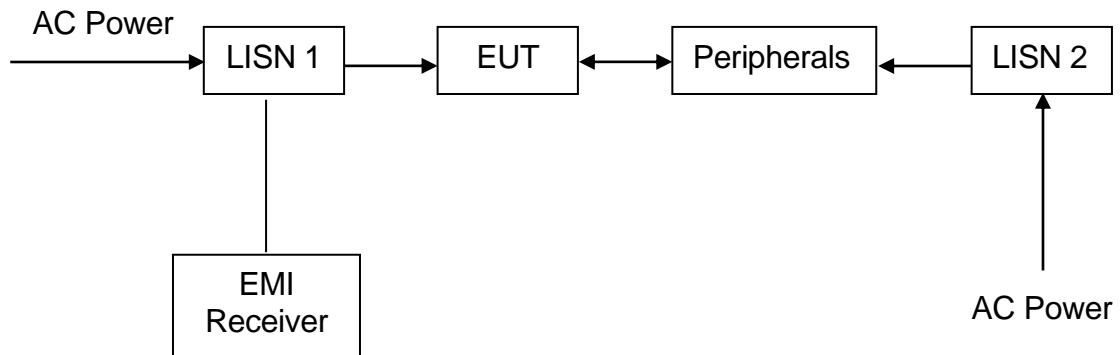TEST REPORT**4.7.3 Conducted Emission Test Setup**

TEST REPORT

5.0 EQUIPMENT LIST

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer	Biconical Antenna (20MHz to 200MHz)
Registration No.	EW-3156	EW-2466	EW-2512
Manufacturer	ROHDE SCHWARZ	ROHDE SCHWARZ	EMCO
Model No.	ESR26	FSP30	3104C
Calibration Date	January 25, 2021	September 05, 2020	June 03, 2020
Calibration Due Date	January 25, 2022	September 05, 2021	December 03, 2021

Equipment	Log Periodic Antenna	Double Ridged Guide Antenna	Active Loop H-field (9kHz to 30MHz)
Registration No.	EW-0447	EW-0194	EW-2313
Manufacturer	EMCO	EMCO	ELECTROMETRI
Model No.	3146	3115	EM-6876
Calibration Date	September 25, 2019	June 03, 2021	December 17, 2019
Calibration Due Date	June 25, 2021	June 03, 2022	June 17, 2021

Equipment	RF Cable 14m (1GHz to 26.5GHz)	14m Double Shield RF Cable (20MHz to 6GHz)	12 metre RF Cable 40GHz
Registration No.	EW-2781	EW-2074	EW-2774
Manufacturer	GREATBILLION	RADIALL	GREATBILLION
Model No.	SMA m / SHF5MPU /SMA m ra14m,26G	N(m)-RG142-BNC(m) L= 14M	SMA m-m ra 12m 40G outdoor
Calibration Date	November 24, 2020	August 29, 2020	September 12, 2020
Calibration Due Date	November 24, 2021	August 29, 2021	September 12, 2021

2) Conducted Emissions Test

Equipment	RF Cable 240cm (RG142) (9kHz to 30MHz)	Artificial Mains Network	EMI Test Receiver
Registration No.	EW-2454	EW-2501	EW-2500
Manufacturer	RADIALL	ROHDE SCHWARZ	ROHDE SCHWARZ
Model No.	bnc m st / 142 /bnc m ra 240cm	ENV-216	ESCI
Calibration Date	November 10, 2020	September 11, 2020	March 29, 2021
Calibration Due Date	November 10, 2021	September 11, 2021	March 29, 2022

TEST REPORT

3) Conductive Measurement Test

Equipment	5m RF Cable (40GHz)	RF Power Meter with Power Sensor (N1921A)	Spectrum Analyzer
Registration No.	EW-2701	EW-2270	EW-2466
Manufacturer	RADIALL	N/A	ROHDE SCHWARZ
Model No.	sma m-m 5m 40G	AGILENTTECH	FSP30
Calibration Date	November 24, 2020	September 03, 2020	September 05, 2020
Calibration Due Date	November 24, 2021	September 03, 2021	September 05, 2021

4) Bandwidth/Bandedge Measurement Test

Equipment	5m RF Cable (40GHz)	Spectrum Analyzer
Registration No.	EW-2701	EW-2466
Manufacturer	RADIALL	ROHDE SCHWARZ
Model No.	sma m-m 5m 40G	FSP30
Calibration Date	November 24, 2020	September 05, 2020
Calibration Due Date	November 24, 2021	September 05, 2021