



FCC TEST REPORT

Prepared for :

Quanzhou Phaong Electronics Co. , Ltd.

**No. 25-27,14th road, Chenghui international hardware electromechanical
city, Xiamei town, Nan'an, Fujian Province, China**

FCC ID: 2AZVD-ER20

Product: Emergency Radio

Trade Name: N/A

Model Name: ER20, ER20 Pro

Date of Test: Apr. 30, 2021~ May. 07, 2021

Date of Report: May. 07, 2021

Report Number: HK2104271380-E

Prepared By :

Shenzhen HUAK Testing Technology Co., Ltd.

1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,

Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

TEL: +86-755-2302 9901 FAX: +86-755-2302 9901

E-mail: service@cer-mark.com <http://www.cer-mark.com>



TEST REPORT VERIFICATION

Applicant : Quanzhou Phaong Electronics Co. , Ltd.
Address : No. 25-27,14th road, Chenghui international hardware electromechanical city, Xiamei town, Nan'an, Fujian Province, China
Manufacturer : Quanzhou Phaong Electronics Co. , Ltd.
Address : No. 25-27,14th road, Chenghui international hardware electromechanical city, Xiamei town, Nan'an, Fujian Province, China
EUT Description : Emergency Radio
(A) Model No. : ER20
(B) Serial No. : ER20 Pro
(C) Power Supply : DC 3.7V from Battery or DC 5V USB

Standards FCC Part 15 Subpart B
ANSI C63.4:2014

This device described above has been tested by HUAKE, and the test results show that the equipment under test (EUT) is in compliance with Part 15 of FCC Rules. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of HUAKE, this document may be altered or revised by HUAKE, personal only, and shall be noted in the revision of the document.

Date of Test.....

Date (s) of performance of tests Apr. 30, 2021~ May. 07, 2021

Date of Issue May. 07, 2021

Test Result Pass

Testing Engineer :

(Gary Qian)

Technical Manager :

Authorized Signatory :

(Jason Zhou)



1 . TEST SUMMARY	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 DESCRIPTION OF TEST SETUP	9
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	9
2.5 MEASUREMENT INSTRUMENTS LIST	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION	11
3.1.2 TEST PROCEDURE	12
3.1.3 TEST SETUP	12
3.1.4 EUT OPERATING CONDITIONS	12
3.1.5 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	15
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	15
3.2.2 TEST PROCEDURE	15
3.2.3 TEST SETUP	16
3.2.4 EUT OPERATING CONDITIONS	16
3.2.5 TEST RESULTS	17
3.2.6 TEST RESULTS(Above 1GHz)	19
4 . TEST SETUP PHOTO	20
5. PHOTOS OF THE EUT	22

**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	2021/5/07	Jason Zhou



1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
FCC Part 15 Subpart B ANSI C63.4:2014	Conducted Emission	§15.107	PASS	
	Radiated Emission	§15.109	PASS	

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report
- (2) For client's request and manual description, the test will not be executed.



1.1 TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address : 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong,
China

Designation Number : CN1229

Test Firm Registration Number:616276

IC Registration No.: 21210

The 3m alternate test site of Shenzhen HUAKE Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 21210 on May 24, 2016.

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

Measurement Uncertainty

Conducted Emission Expanded Uncertainty	= 2.71dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.90dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 3.90dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.28dB, k=2



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Emergency Radio	
Model Name	ER20	
Serial No	ER20 Pro	
Model Difference	All model's the function, software and electric circuit are the same, only with a product color, appearance and model named different. Test sample model: ER20	
Product Description	The EUT is a Emergency Radio	
	Operating frequency:	N/A
	Connecting I/O port:	N/A
Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.		
Power Source	DC Voltage	
Power Rating	DC 3.7V from Battery or DC 5V from USB	



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Running


For Conducted Test	
Final Test Mode	Description
Mode 1	Running

For Radiated Test	
Final Test Mode	Description
Mode 1	Running



2.3 DESCRIPTION OF TEST SETUP

Operation of EUT during testing:

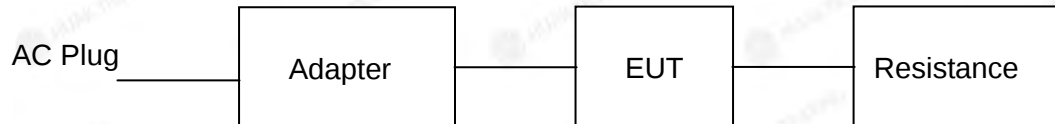

Adapter information

Model: HW-059200CHQ

Input: 100-240V, 50/60Hz, 0.5A

Output: 5VDC, 2A

Resistance information

Model: R99

Input: 50W 5Ω

2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Emergency Radio	N/A	ER20	N/A	EUT

**2.5 MEASUREMENT INSTRUMENTS LIST**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Jun. 18, 2020	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Jun. 18, 2020	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Jun. 18, 2020	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Jun. 18, 2020	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 18, 2020	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Jun. 18, 2020	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Jun. 18, 2020	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Jun. 18, 2020	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Jun. 18, 2020	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Jun. 18, 2020	1 Year
11.	Pre-amplifier	EMCI	EMC05184 5SE	HKE-015	Jun. 18, 2020	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Jun. 18, 2020	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	Jun. 18, 2020	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Jun. 18, 2020	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 18, 2020	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Jun. 18, 2020	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Jun. 18, 2020	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 17, 2020	3 Year
19.	Horn Antenna	Schwarzbeck	BBHA 9170	HKE-017	Jun. 18, 2020	1 Year



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

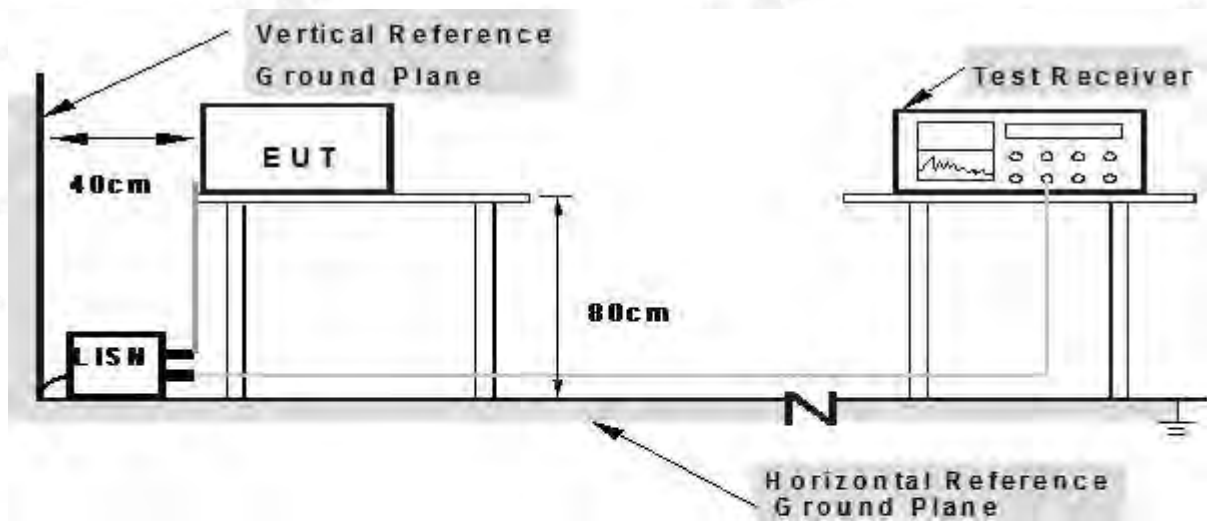

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

Remark: We tested AC 120V/60Hz and AC 240V/60Hz, the worst case was recorded.



3.1.5 TEST RESULTS

EUT :	Emergency Radio	Model Name. :	ER20
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2021-04-30
Test Mode :	Running	Phase :	L
Test Voltage :	AC120V/60Hz		

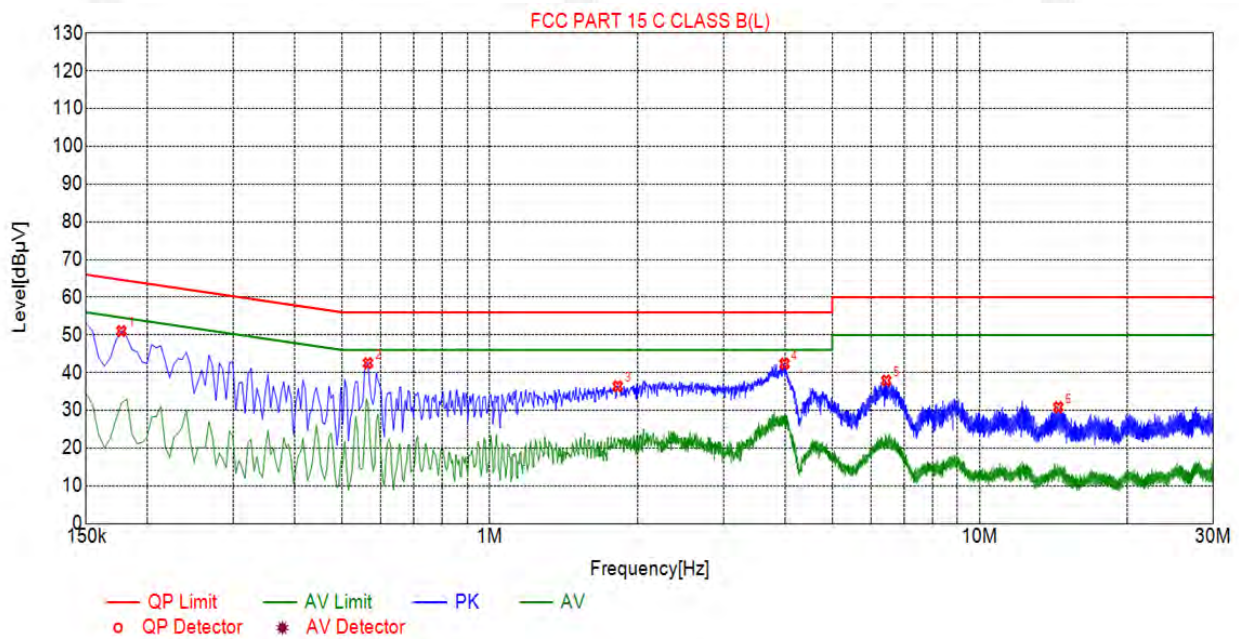

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1770	51.04	20.05	64.63	13.59	30.99	PK	L
2	0.5640	42.54	20.06	56.00	13.46	22.48	PK	L
3	1.8240	36.41	20.14	56.00	19.59	16.27	PK	L
4	3.9975	42.37	20.25	56.00	13.63	22.12	PK	L
5	6.4455	37.93	20.22	60.00	22.07	17.71	PK	L
6	14.4690	30.84	19.95	60.00	29.16	10.89	PK	L

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

HUAKE Testing Lab TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



EUT :	Emergency Radio	Model Name. :	ER20
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2021-04-30
Test Mode :	Running	Phase :	N
Test Voltage :	AC120V/60Hz		

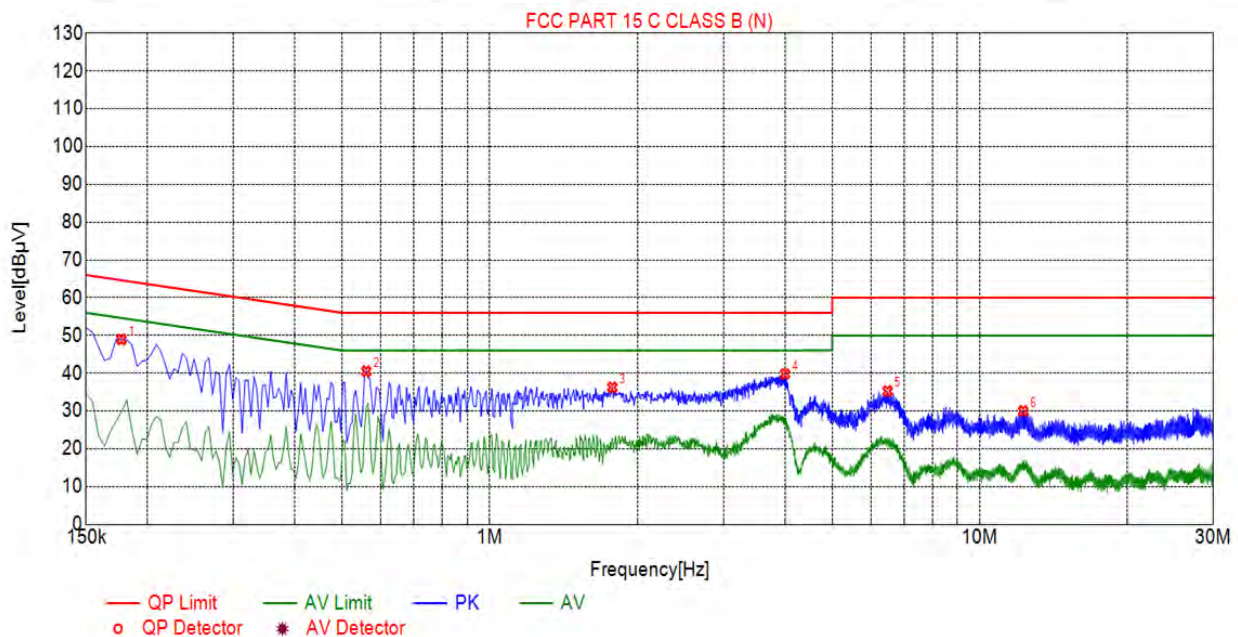

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1770	48.94	20.05	64.63	15.69	28.89	PK	N
2	0.5595	40.51	20.06	56.00	15.49	20.45	PK	N
3	1.7790	36.26	20.14	56.00	19.74	16.12	PK	N
4	4.0065	39.82	20.25	56.00	16.18	19.57	PK	N
5	6.4860	35.28	20.21	60.00	24.72	15.07	PK	N
6	12.2685	30.00	19.98	60.00	30.00	10.02	PK	N

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

HUAKE Testing Lab TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 3m)
	dBuV/m	dBuV/m
30 ~ 88	39.0	40.0
88 ~ 216	43.5	43.5
216 ~ 960	46.5	46.0
Above 960	49.5	54.0

Notes:


- (1) The limit for radiated test was performed according to as following:
FCC PART 15B /ICES-003.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

3.2.2 TEST PROCEDURE


- a. The measuring distance of at 3 m.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter Shielded room test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP(AV) Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

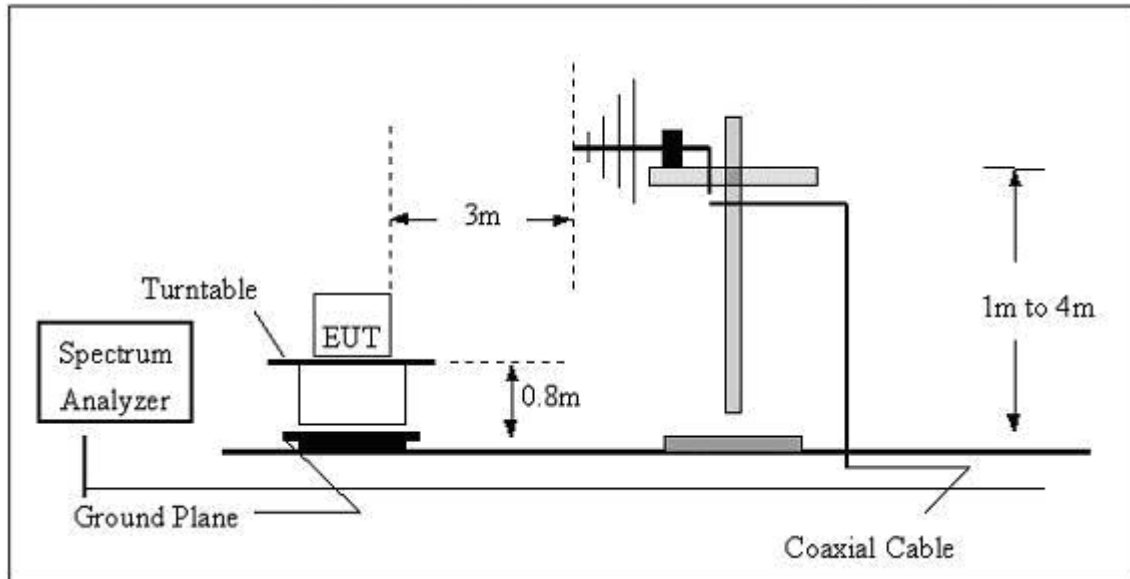

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

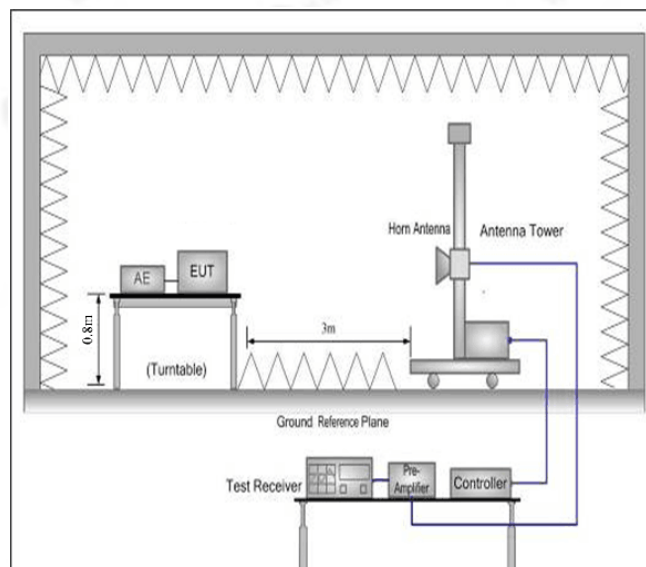


3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.5 TEST RESULTS

EUT :	Emergency Radio	Model Name :	ER20
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2021-04-30
Test Mode :	Running	Polarization :	Horizontal
Test Power :	AC120V/60Hz		

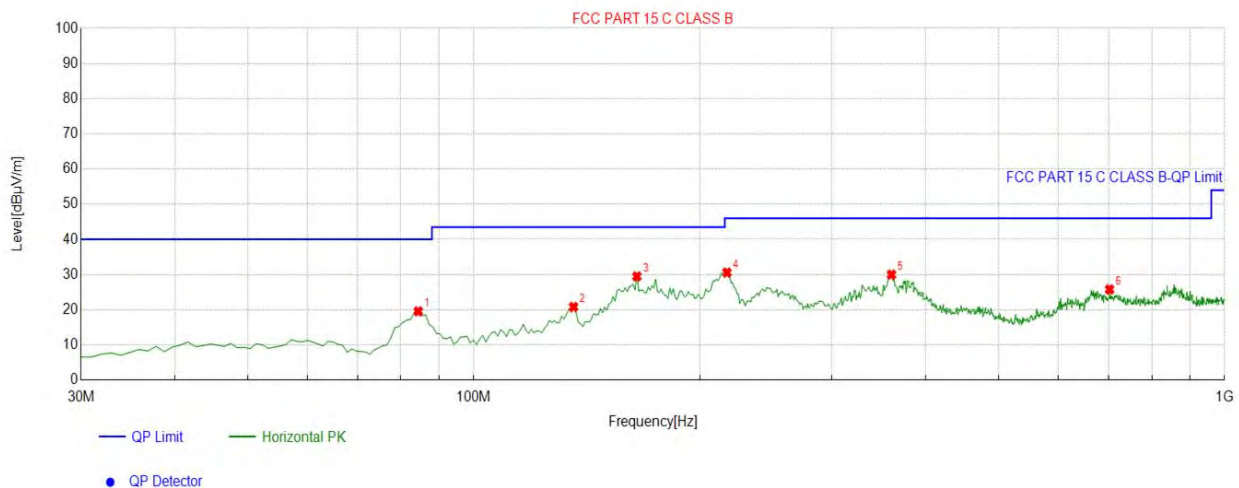


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	84.3744	-18.42	37.96	19.54	40.00	20.46	100	353	Horizontal
2	135.8358	-18.93	39.72	20.79	43.50	22.71	100	345	Horizontal
3	164.9650	-17.76	47.23	29.47	43.50	14.03	100	330	Horizontal
4	217.3974	-14.62	45.19	30.57	46.00	15.43	100	314	Horizontal
5	360.1301	-11.34	41.32	29.98	46.00	16.02	100	322	Horizontal
6	702.8829	-5.01	30.79	25.78	46.00	20.22	100	358	Horizontal

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



EUT :	Emergency Radio	Model Name :	ER20
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2021-04-30
Test Mode :	Running	Polarization :	Vertical
Test Power :	AC120V/60Hz		

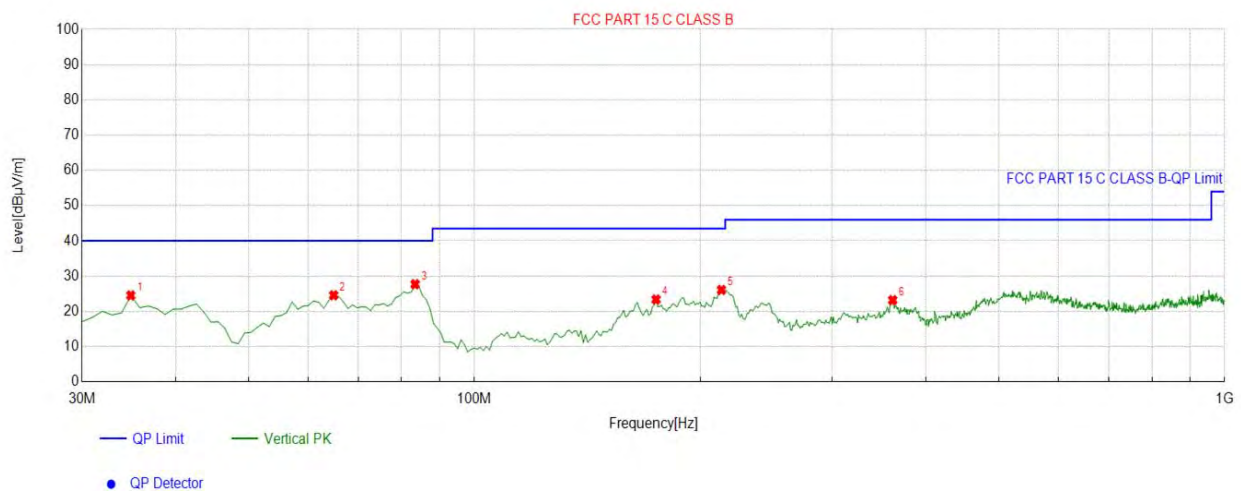

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.8549	-16.15	40.66	24.51	40.00	15.49	100	157	Vertical
2	64.9550	-16.40	40.95	24.55	40.00	15.45	100	328	Vertical
3	83.4034	-18.65	46.34	27.69	40.00	12.31	100	46	Vertical
4	174.6747	-17.09	40.45	23.36	43.50	20.14	100	213	Vertical
5	213.5135	-14.72	40.80	26.08	43.50	17.42	100	217	Vertical
6	361.1011	-11.31	34.48	23.17	46.00	22.83	100	233	Vertical

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

**3.2.6 TEST RESULTS(Above 1GHz)**

EUT :	Emergency Radio	Model Name :	ER20
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2021-04-30
Test Mode :	Mode 1		
Test Power :	AC120V/60Hz		

Polarization : Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1220.56	57.26	-11.37	45.89	74	-28.11	peak
1871.14	57.15	-15.38	41.77	74	-32.23	peak
2568.63	56.64	-8.62	48.02	74	-25.98	peak
3829.45	57.57	-6.17	51.4	74	-22.6	peak
4757.85	55.86	-4.52	51.34	74	-22.66	peak
4952.28	56.43	-5.64	50.79	74	-23.21	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						


Polarization : Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1159.33	57.55	-12.37	45.18	74	-28.82	peak
1204.14	56.47	-10.25	46.22	74	-27.78	peak
2755.05	57.23	-8.49	48.74	74	-25.26	peak
3246.74	58.54	-5.24	53.3	74	-20.7	peak
4916.56	55.86	-5.66	50.2	74	-23.8	peak
5945.27	57.18	-6.93	50.25	74	-23.75	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						




4. TEST SETUP PHOTO

Conducted Emission

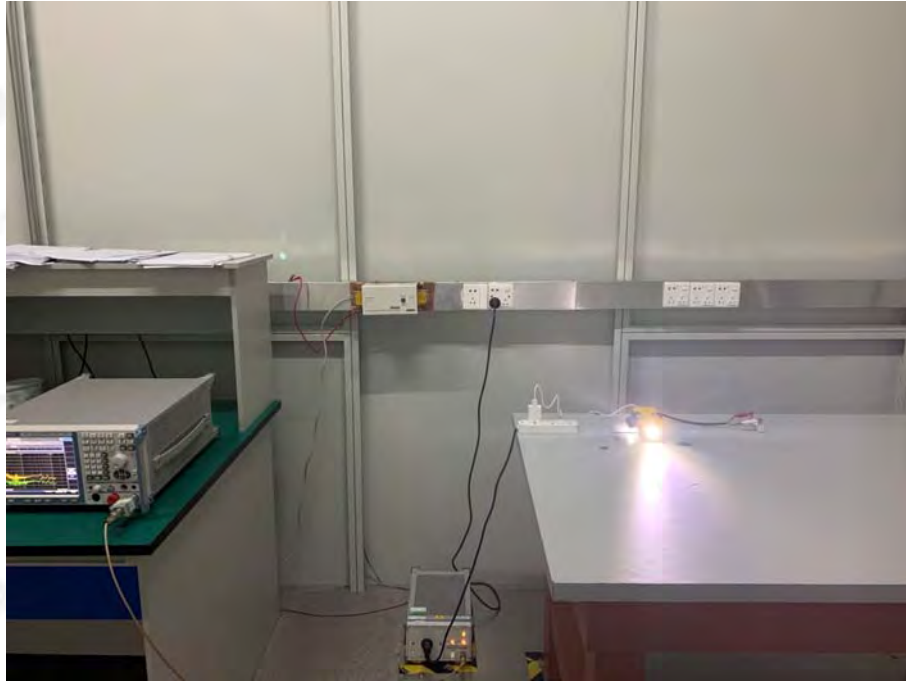


Radiated Emissions

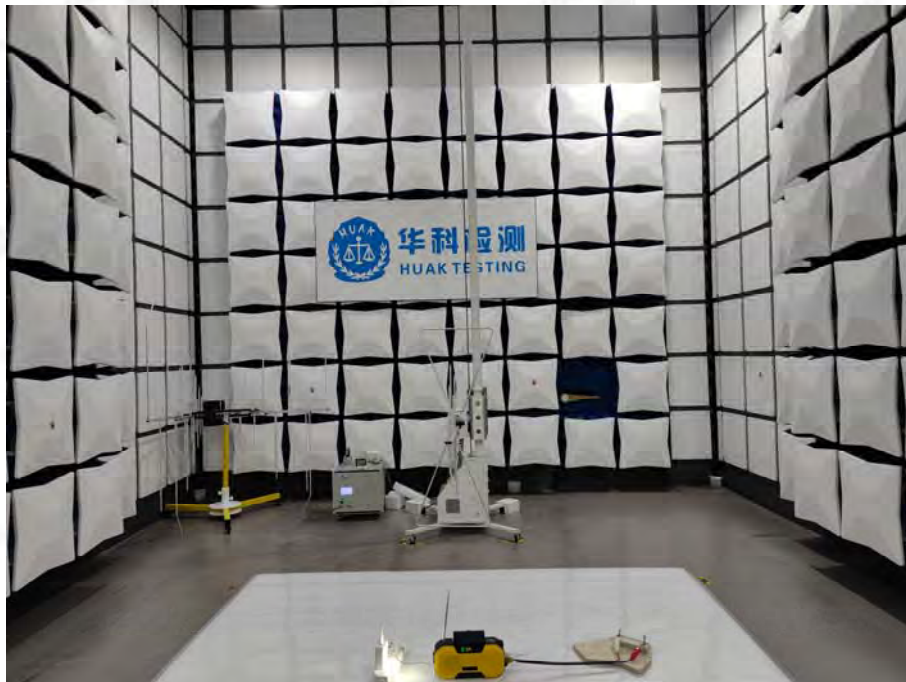

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

HUAKE Testing Lab TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

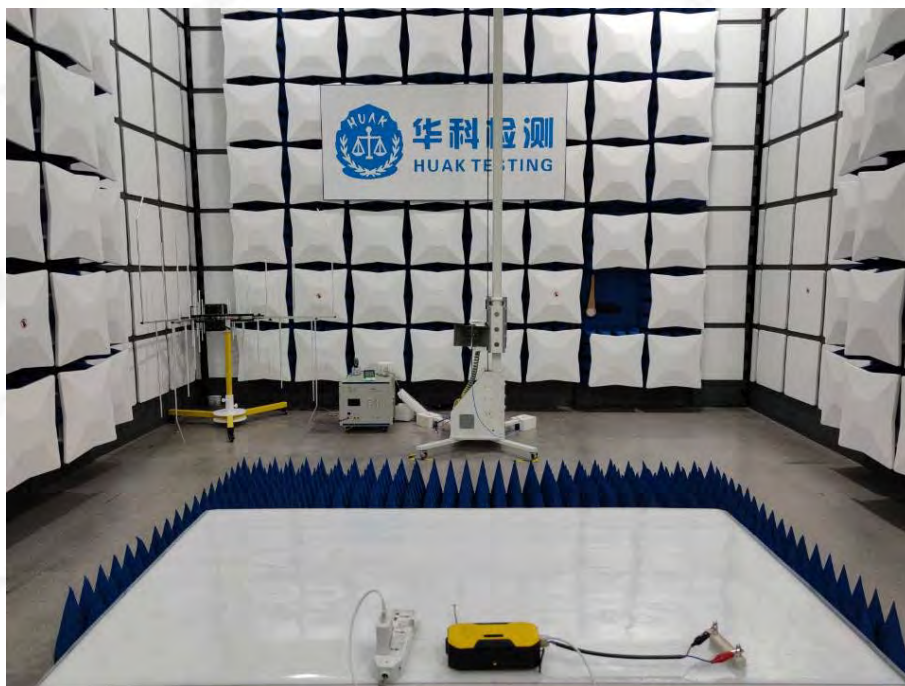

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

HUAKE Testing Lab TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



5. PHOTOS OF THE EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos

-----End of test report-----