



# FCC Part 15C Test Report

## FCC ID: 2AZVJ-H9

Applicant: Shenzhen WinWin Technology Co.,Ltd

Address: 327 Wisdom Innovation Center, Xixiang, BaoAn, Shenzhen China

Manufacturer: Shenzhen WinWin Technology Co.,Ltd

Address: 327 Wisdom Innovation Center, Xixiang, BaoAn, Shenzhen China

EUT: Voice Amplifier

Trade Mark: WinBridge

Model Number: H9

Date of Receipt: May. 28, 2025

Test Date: May. 28, 2025 - Jun. 10, 2025

Date of Report: Jun. 10, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 C 15.247  
ANSI C63.10:2013

Test Result: Pass

Report Number: DLE-250528041R

Prepared (Test Engineer): Alisa Song

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



*This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.*



| Table of Contents                                           | Page      |
|-------------------------------------------------------------|-----------|
| <b>1 . SUMMARY OF TEST RESULTS</b>                          | <b>4</b>  |
| 1.1 MEASUREMENT UNCERTAINTY                                 | 4         |
| <b>2 . GENERAL INFORMATION</b>                              | <b>5</b>  |
| 2.1 GENERAL DESCRIPTION OF EUT                              | 5         |
| 2.2 DESCRIPTION OF TEST MODES                               | 6         |
| 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 6         |
| 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)            | 7         |
| 2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING            | 7         |
| 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS                      | 8         |
| <b>3 . EMC EMISSION TEST</b>                                | <b>9</b>  |
| 3.1 CONDUCTED EMISSION MEASUREMENT                          | 9         |
| 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS                  | 9         |
| 3.1.2 TEST PROCEDURE                                        | 9         |
| 3.1.3 DEVIATION FROM TEST STANDARD                          | 9         |
| 3.1.4 TEST SETUP                                            | 10        |
| 3.1.5 EUT OPERATING CONDITIONS                              | 10        |
| 3.1.6 TEST RESULTS                                          | 11        |
| 3.2 RADIATED EMISSION MEASUREMENT                           | 13        |
| 3.2.1 RADIATED EMISSION LIMITS                              | 13        |
| 3.2.2 TEST PROCEDURE                                        | 14        |
| 3.2.3 DEVIATION FROM TEST STANDARD                          | 14        |
| 3.2.4 TEST SETUP                                            | 14        |
| 3.2.5 EUT OPERATING CONDITIONS                              | 15        |
| 3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)                  | 16        |
| 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)                   | 17        |
| 3.2.8 TEST RESULTS (1GHZ~25GHZ)                             | 19        |
| 3.3 RADIATED BAND EMISSION MEASUREMENT                      | 22        |
| 3.3.1 TEST REQUIREMENT:                                     | 22        |
| 3.3.2 TEST PROCEDURE                                        | 22        |
| 3.3.3 DEVIATION FROM TEST STANDARD                          | 22        |
| 3.3.4 TEST SETUP                                            | 23        |
| 3.3.5 EUT OPERATING CONDITIONS                              | 23        |
| <b>4 . PEAK OUTPUT POWER</b>                                | <b>35</b> |
| 4.1 APPLIED PROCEDURES / LIMIT                              | 35        |
| 4.1.1 TEST PROCEDURE                                        | 35        |
| 4.1.2 DEVIATION FROM STANDARD                               | 35        |
| 4.1.3 TEST SETUP                                            | 35        |
| 4.1.4 EUT OPERATION CONDITIONS                              | 35        |



| Table of Contents                          | Page |
|--------------------------------------------|------|
| 4.1.5 TEST RESULTS                         | 36   |
| 5 . NUMBER OF HOPPING CHANNEL              | 39   |
| 5.1 APPLIED PROCEDURES / LIMIT             | 39   |
| 5.1.1 TEST PROCEDURE                       | 39   |
| 5.1.2 DEVIATION FROM STANDARD              | 39   |
| 5.1.3 TEST SETUP                           | 39   |
| 5.1.4 EUT OPERATION CONDITIONS             | 39   |
| 5.1.5 TEST RESULTS                         | 39   |
| 6 . BANDWIDTH TEST                         | 41   |
| 6.1 APPLIED PROCEDURES / LIMIT             | 41   |
| 6.1.1 TEST PROCEDURE                       | 41   |
| 6.1.2 DEVIATION FROM STANDARD              | 41   |
| 6.1.3 TEST SETUP                           | 41   |
| 6.1.4 EUT OPERATION CONDITIONS             | 41   |
| 6.1.5 TEST RESULTS                         | 42   |
| 7 . HOPPING CHANNEL SEPARATION MEASUREMENT | 45   |
| 7.1 APPLIED PROCEDURES / LIMIT             | 45   |
| 7.1.1 TEST PROCEDURE                       | 45   |
| 7.1.2 DEVIATION FROM STANDARD              | 45   |
| 7.1.3 TEST SETUP                           | 45   |
| 7.1.4 EUT OPERATION CONDITIONS             | 45   |
| 7.1.5 TEST RESULTS                         | 45   |
| 8 . DWELL TIME OF OCCUPANCY                | 47   |
| 8.1 APPLIED PROCEDURES / LIMIT             | 47   |
| 8.1.1 TEST PROCEDURE                       | 47   |
| 8.1.2 DEVIATION FROM STANDARD              | 47   |
| 8.1.3 TEST SETUP                           | 47   |
| 8.1.4 EUT OPERATION CONDITIONS             | 47   |
| 8.1.5 TEST RESULTS                         | 48   |
| 9 . ANTENNA REQUIREMENT                    | 51   |
| 9.1 STANDARD REQUIREMENT                   | 51   |
| 9.2 EUT ANTENNA                            | 51   |
| 10 . TEST SEUUP PHOTO                      | 51   |
| 11 . EUT PHOTO                             | 51   |



## 1.. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 (15.247) , Subpart C |                             |          |        |
|---------------------------------|-----------------------------|----------|--------|
| Standard Section                | Test Item                   | Judgment | Remark |
| 15.207                          | Conducted Emission          | PASS     |        |
| 15.247(c)                       | Radiated Spurious Emission  | PASS     |        |
| 15.205                          | Band Edge Emission          | PASS     |        |
| 15.247(b)(1)                    | Peak Output Power           | PASS     |        |
| 15.247(a)(iii)                  | Number of Hopping Frequency | PASS     |        |
| 15.247(a)(iii)                  | Dwell Time                  | PASS     |        |
| 15.247(a)(1)                    | Bandwidth                   | PASS     |        |
| 15.247(a)(1)                    | Hopping Channel Separation  | PASS     |        |
| 15.203                          | Antenna Requirement         | PASS     |        |

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

### 1.1. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$  · providing a level of confidence of approximately 95 % ·

| No. | Item                         | Uncertainty               |
|-----|------------------------------|---------------------------|
| 1   | Conducted Emission Test      | $\pm 2.56\text{dB}$       |
| 2   | RF power,conducted           | $\pm 0.42\text{dB}$       |
| 3   | Spurious emissions,conducted | $\pm 2.76\text{dB}$       |
| 4   | All emissions,radiated(<1G)  | $\pm 3.65\text{dB}$       |
| 5   | All emissions,radiated(>1G)  | $\pm 4.89\text{dB}$       |
| 6   | Temperature                  | $\pm 0.5^{\circ}\text{C}$ |
| 7   | Humidity                     | $\pm 2\%$                 |
| 8   | 20dB Bandwidth               | $\pm 0.2\text{MHz}$       |



## 2.. GENERAL INFORMATION

### 2.1. GENERAL DESCRIPTION OF EUT

|                        |                                            |
|------------------------|--------------------------------------------|
| Product Name:          | Voice Amplifier                            |
| Trademark              | WinBridge                                  |
| Model No.:             | H9                                         |
| Model Difference       | N/A                                        |
| BT Version:            | 5.0                                        |
| Operation Frequency:   | 2402~2480MHz                               |
| Channel numbers:       | 79 Channels                                |
| Channel separation:    | 1MHz                                       |
| Modulation technology: | GFSK, $\pi/4$ DQPSK, 8DPSK                 |
| Antenna Type:          | Internal Antenna                           |
| Antenna gain:          | 3.38dBi                                    |
| Power supply:          | DC 5V from charger<br>DC 3.7V from battery |

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.

2.

| Channel List |                 |         |                 |         |                 |
|--------------|-----------------|---------|-----------------|---------|-----------------|
| Channel      | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 00           | 2402            | 27      | 2429            | 54      | 2456            |
| 01           | 2403            | 28      | 2430            | 55      | 2457            |
| 02           | 2404            | 29      | 2431            | 56      | 2458            |
| ~            | ~               | ~       | ~               | ~       | ~               |
| 08           | 2410            | 35      | 2437            | 62      | 2464            |
| 09           | 2411            | 36      | 2438            | 63      | 2465            |
| 10           | 2412            | 37      | 2439            | 64      | 2466            |
| 11           | 2413            | 38      | 2441            | 65      | 2467            |
| 12           | 2414            | 39      | 2441            | 66      | 2468            |
| 13           | 2415            | 40      | 2442            | 67      | 2469            |
| ~            | ~               | ~       | ~               | ~       | ~               |
| 14           | 2416            | 41      | 2443            | 68      | 2470            |
| 22           | 2424            | 49      | 2451            | 76      | 2478            |
| 23           | 2425            | 50      | 2452            | 77      | 2479            |
| 24           | 2426            | 51      | 2453            | 78      | 2480            |
| 25           | 2427            | 52      | 2454            |         |                 |
| 26           | 2428            | 53      | 2455            |         |                 |



## 2.2. DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


| Pretest Mode | Modulation | Channel |
|--------------|------------|---------|
| Mode 1       | GFSK       | CH00    |
| Mode 2       |            | CH39    |
| Mode 3       |            | CH78    |
| Mode 4       | PI/4 DQPSK | CH00    |
| Mode 5       |            | CH39    |
| Mode 6       |            | CH78    |
| Mode 7       | 8DPSK      | CH00    |
| Mode 8       |            | CH39    |
| Mode 9       |            | CH78    |

Note: (1) The measurements are performed at the highest, middle, lowest available channels.


(2) For the two items of conducted disturbance at the power supply end and space radiation below 1GHz, all modes have undergone pre-tests. The report only shows the worst test results of mode 3.

## 2.3. BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

### Radiated Spurious Emission Test



### Power Line Conducted Emission Test





## 2.4. DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment       | Model/Type No. | Series No. | Note                                                                                                                      |
|------|-----------------|----------------|------------|---------------------------------------------------------------------------------------------------------------------------|
| E-1  | Voice Amplifier | H9             | N/A        | EUT                                                                                                                       |
| E-2  | Adapter         | HW-0501000E    | N/A        | Adapter (Provide by test lab):<br>Manufacturer: HAIWEI<br>Model: HW-0501000E<br>I/P: AC 100-240V 50/60Hz<br>O/P: DC 5V 1A |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
|      |               |              |        |      |

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5. TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

| Test software Version     | Test program: FCC_assist_1.0.2.2 |          |          |
|---------------------------|----------------------------------|----------|----------|
| Frequency                 | 2402 MHz                         | 2441 MHz | 2480 MHz |
| Power Setting of Softwave | 10                               | 10       | 10       |



## 2.6. EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation test, Band-edge test and 6db bandwidth test equipment

| Item | Equipment                        | Manufacturer    | Type No.  | Serial No. | Last calibration | Calibrated until |
|------|----------------------------------|-----------------|-----------|------------|------------------|------------------|
| 1    | Spectrum Analyzer (9kHz-26.5GHz) | Agilent         | E4408B    | MY50140780 | Nov. 01, 2024    | Oct. 31, 2025    |
| 2    | Test Receiver (9kHz-7GHz)        | R&S             | ESRP7     | 101393     | Nov. 01, 2024    | Oct. 31, 2025    |
| 3    | Bilog Antenna (30MHz-1GHz)       | R&S             | VULB9162  | 00306      | Nov. 02, 2024    | Nov. 01, 2025    |
| 4    | Horn Antenna (1GHz-18GHz)        | Schwarzbeck     | BBHA9120D | 02139      | Nov. 02, 2024    | Nov. 01, 2025    |
| 5    | Horn Antenna (18GHz-40GHz)       | A.H. Systems    | SAS-574   | 588        | Nov. 01, 2024    | Oct. 31, 2025    |
| 6    | Amplifier (9KHz-6GHz)            | Schwarzbeck     | BBV9743B  | 00153      | Nov. 01, 2024    | Oct. 31, 2025    |
| 7    | Amplifier (1GHz-18GHz)           | EMEC            | EM01G8GA  | 00270      | Nov. 01, 2024    | Oct. 31, 2025    |
| 8    | Amplifier (18GHz-40GHz)          | Quanjuda        | DLE-161   | 97         | Nov. 01, 2024    | Oct. 31, 2025    |
| 9    | Loop Antenna (9KHz-30MHz)        | Schwarzbeck     | FMZB1519B | 00014      | Nov. 01, 2024    | Oct. 31, 2025    |
| 10   | RF cables1 (9kHz-1GHz)           | ChengYu         | 966       | 004        | Nov. 01, 2024    | Oct. 31, 2025    |
| 11   | RF cables2 (1GHz-40GHz)          | ChengYu         | 966       | 003        | Nov. 01, 2024    | Oct. 31, 2025    |
| 12   | Antenna connector                | Florida RF Labs | N/A       | RF 01#     | Nov. 01, 2024    | Oct. 31, 2025    |
| 13   | Power probe                      | KEYSIGHT        | U2021XA   | MY55210018 | Nov. 01, 2024    | Oct. 31, 2025    |
| 14   | Signal Analyzer 9kHz-26.5GHz     | Agilent         | N9020A    | MY55370280 | Nov. 01, 2024    | Oct. 31, 2025    |
| 15   | Test Receiver 20kHz-40GHz        | R&S             | ESU 40    | 100376     | Nov. 01, 2024    | Oct. 31, 2025    |
| 16   | D.C. Power Supply                | LongWei         | PS-305D   | 010964729  | Nov. 01, 2024    | Oct. 31, 2025    |

### Conduction Test equipment

| Item | Equipment         | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|------|-------------------|--------------|----------|------------|------------------|------------------|
| 1    | 843 Shielded Room | YIHENG       | 843 Room | 843        | Nov. 05, 2023    | Nov. 04, 2026    |
| 2    | EMI Receiver      | R&S          | ESR      | 101421     | Nov. 01, 2024    | Oct. 31, 2025    |
| 3    | LISN              | R&S          | ENV216   | 102417     | Nov. 01, 2024    | Oct. 31, 2025    |
| 4    | 843 Cable 1#      | ChengYu      | CE Cable | 001        | Nov. 01, 2024    | Oct. 31, 2025    |

### Other

| Item | Name                         | Manufacturer | Model   | Software version |
|------|------------------------------|--------------|---------|------------------|
| 1    | EMC Conduction Test System   | FALA         | EZ_EMCC | EMC-CON 3A1.1    |
| 2    | EMC radiation test system    | FALA         | EZ_EMCC | FA-03A2          |
| 3    | RF test system               | MAIWEI       | MTS8310 | 2.0.0.0          |
| 4    | RF communication test system | MAIWEI       | MTS8200 | 2.0.0.0          |



### 3.. EMC EMISSION TEST

#### 3.1. CONDUCTED EMISSION MEASUREMENT

##### 3.1.1. POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

| FREQUENCY (MHz) | Limit (dBuV) |           | Standard |
|-----------------|--------------|-----------|----------|
|                 | Quasi-peak   | Average   |          |
| 0.15 -0.5       | 66 - 56 *    | 56 - 46 * | FCC      |
| 0.50 -5.0       | 56.00        | 46.00     | FCC      |
| 5.0 -30.0       | 60.00        | 50.00     | FCC      |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


##### 3.1.2. TEST PROCEDURE

- a. The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

##### 3.1.3. DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4. TEST SETUP

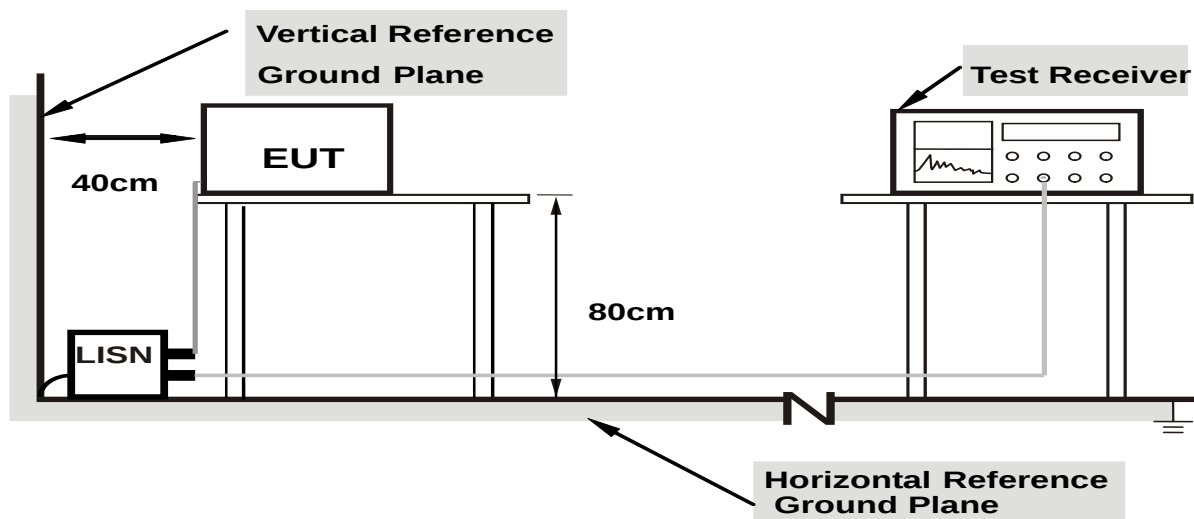

**Note: 1.**Support units were connected to second LISN.


**2.**Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.5. EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

**3.1.6. TEST RESULTS**

|                |              |                    |        |
|----------------|--------------|--------------------|--------|
| Temperature:   | 25 °C        | Relative Humidity: | 54%    |
| Pressure:      | 1010hPa      | Phase :            | L      |
| Test Voltage : | AC 120V/60Hz | Test Mode:         | Mode 3 |

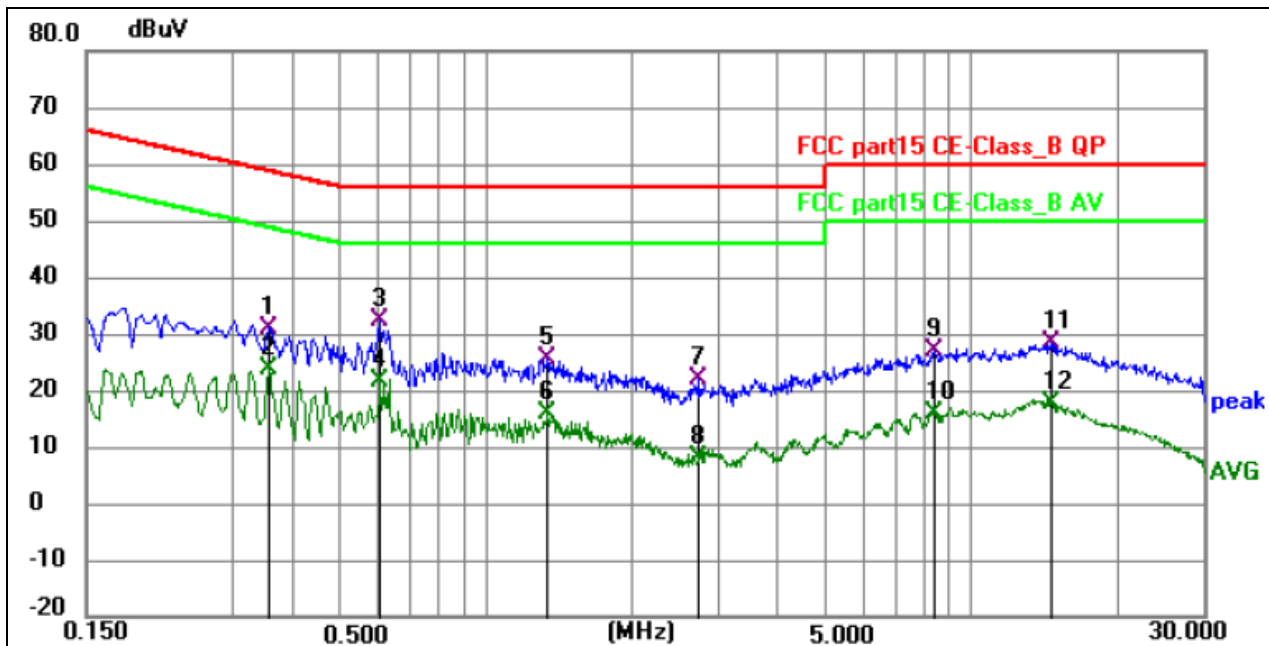


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1   | 0.3570          | 20.57          | 10.25       | 30.82        | 58.80        | -27.98      | QP       | P   |        |
| 2   | 0.3570          | 13.46          | 10.25       | 23.71        | 48.80        | -25.09      | AVG      | P   |        |
| 3 * | 0.6045          | 22.17          | 10.14       | 32.31        | 56.00        | -23.69      | QP       | P   |        |
| 4   | 0.6045          | 11.30          | 10.14       | 21.44        | 46.00        | -24.56      | AVG      | P   |        |
| 5   | 1.3380          | 15.45          | 10.05       | 25.50        | 56.00        | -30.50      | QP       | P   |        |
| 6   | 1.3380          | 5.93           | 10.05       | 15.98        | 46.00        | -30.02      | AVG      | P   |        |
| 7   | 2.7330          | 11.81          | 10.11       | 21.92        | 56.00        | -34.08      | QP       | P   |        |
| 8   | 2.7330          | -1.97          | 10.11       | 8.14         | 46.00        | -37.86      | AVG      | P   |        |
| 9   | 8.3895          | 15.86          | 11.00       | 26.86        | 60.00        | -33.14      | QP       | P   |        |
| 10  | 8.3895          | 5.00           | 11.00       | 16.00        | 50.00        | -34.00      | AVG      | P   |        |
| 11  | 14.5860         | 16.80          | 11.64       | 28.44        | 60.00        | -31.56      | QP       | P   |        |
| 12  | 14.5860         | 6.16           | 11.64       | 17.80        | 50.00        | -32.20      | AVG      | P   |        |



|                |              |                    |        |
|----------------|--------------|--------------------|--------|
| Temperature:   | 25 °C        | Relative Humidity: | 54%    |
| Pressure:      | 1010hPa      | Phase :            | N      |
| Test Voltage : | AC 120V/60Hz | Test Mode:         | Mode 3 |

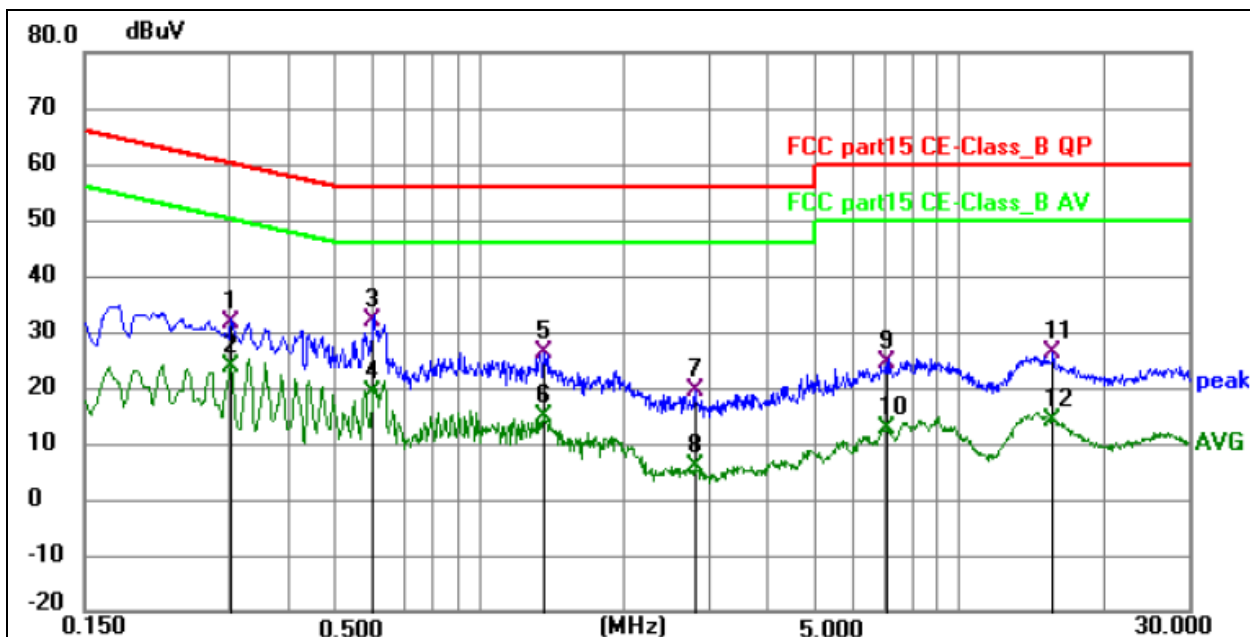

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1   | 0.3030          | 21.36          | 10.19       | 31.55        | 60.16        | -28.61      | QP       | P   |        |
| 2   | 0.3030          | 13.65          | 10.19       | 23.84        | 50.16        | -26.32      | AVG      | P   |        |
| 3 * | 0.6000          | 21.96          | 10.17       | 32.13        | 56.00        | -23.87      | QP       | P   |        |
| 4   | 0.6000          | 9.09           | 10.17       | 19.26        | 46.00        | -26.74      | AVG      | P   |        |
| 5   | 1.3650          | 16.08          | 10.09       | 26.17        | 56.00        | -29.83      | QP       | P   |        |
| 6   | 1.3650          | 4.78           | 10.09       | 14.87        | 46.00        | -31.13      | AVG      | P   |        |
| 7   | 2.8140          | 9.22           | 10.08       | 19.30        | 56.00        | -36.70      | QP       | P   |        |
| 8   | 2.8140          | -4.30          | 10.08       | 5.78         | 46.00        | -40.22      | AVG      | P   |        |
| 9   | 7.0440          | 13.72          | 10.73       | 24.45        | 60.00        | -35.55      | QP       | P   |        |
| 10  | 7.0440          | 1.85           | 10.73       | 12.58        | 50.00        | -37.42      | AVG      | P   |        |
| 11  | 15.6525         | 14.65          | 11.63       | 26.28        | 60.00        | -33.72      | QP       | P   |        |
| 12  | 15.6525         | 2.51           | 11.63       | 14.14        | 50.00        | -35.86      | AVG      | P   |        |



### 3.2. RADIATED EMISSION MEASUREMENT

#### 3.2.1. RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                          | 300                              |
| 0.490~1.705          | 24000/F(KHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 1000 MHz                                         |
| Stop Frequency                        | 25GHz                                            |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |



### 3.2.2. TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber ( Above 18GHz the distance is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


The horizontal and vertical polarities of the antenna were tested, and a pre-test was conducted on the EUT placement as three orthogonal axes X,Y,Z. The worst display of the test results was the Y-axis. The worst case emissions were reported.

### 3.2.3. DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4. TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

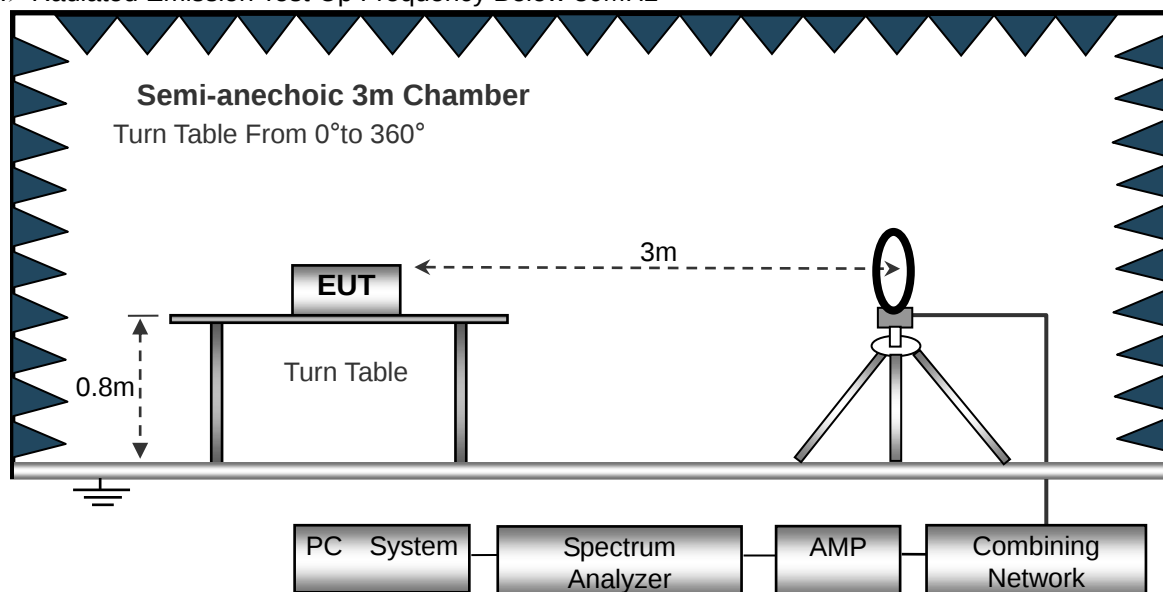

### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

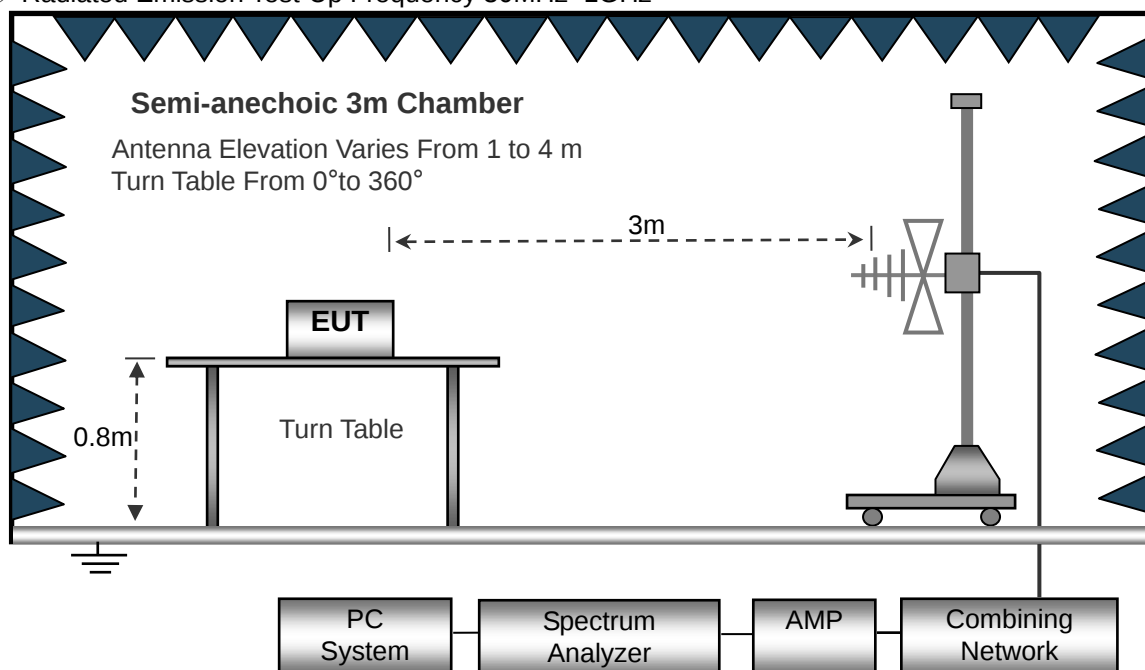

### (C) Radiated Emission Test-Up Frequency Above 1GHz

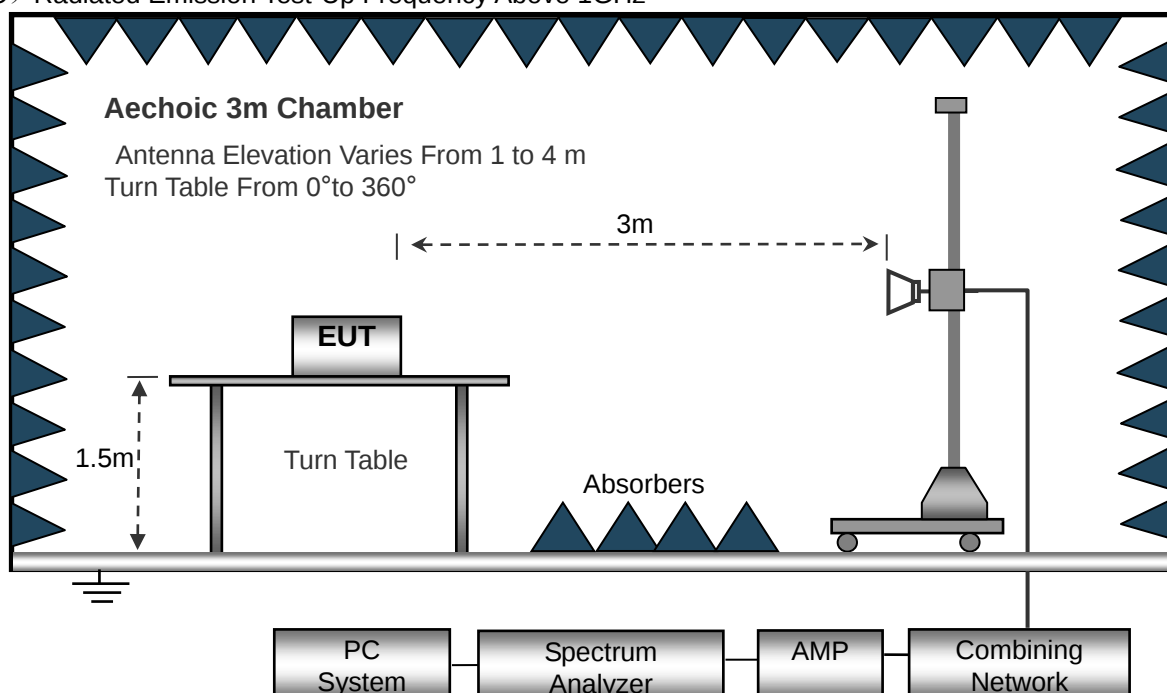

### 3.2.5. EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6. TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

|              |          |                    |              |
|--------------|----------|--------------------|--------------|
| Temperature: | 20℃      | Relative Humidity: | 48%          |
| Pressure:    | 1010 hPa | Test Voltage :     | AC 120V/60Hz |
| Test Mode :  | Mode 3   | Polarization :     | --           |

| Freq. | Reading  | Limit    | Margin | State |
|-------|----------|----------|--------|-------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB)   | P/F   |
| --    | --       | --       | --     | PASS  |
| --    | --       | --       | --     | PASS  |

**NOTE:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

**3.2.7. TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

|                |              |                    |            |
|----------------|--------------|--------------------|------------|
| Temperature:   | 26℃          | Relative Humidity: | 54%        |
| Pressure:      | 1010 hPa     | Polarization :     | Horizontal |
| Test Voltage : | AC 120V/60Hz |                    |            |
| Test Mode :    | Mode 3       |                    |            |

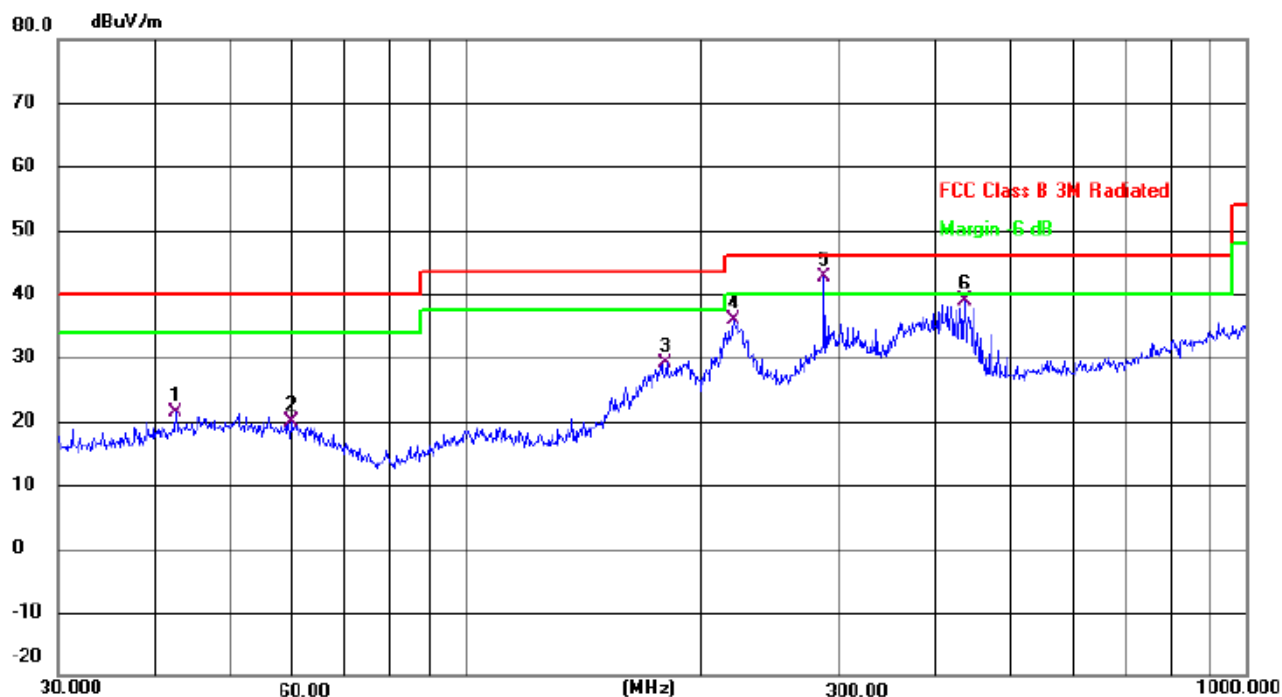

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Margin |          |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dB/m  | dB     | Detector |
| 1   |     | 42.4508  | 28.94         | -7.56          | 21.38       | 40.00 | -18.62 | QP       |
| 2   |     | 59.8588  | 27.65         | -7.71          | 19.94       | 40.00 | -20.06 | QP       |
| 3   |     | 180.6484 | 39.55         | -10.34         | 29.21       | 43.50 | -14.29 | QP       |
| 4   |     | 219.8446 | 44.07         | -8.27          | 35.80       | 46.00 | -10.20 | QP       |
| 5   | *   | 287.9904 | 48.82         | -6.25          | 42.57       | 46.00 | -3.43  | QP       |
| 6   |     | 435.5898 | 41.80         | -2.97          | 38.83       | 46.00 | -7.17  | QP       |


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



|                |              |                    |          |
|----------------|--------------|--------------------|----------|
| Temperature:   | 26℃          | Relative Humidity: | 54%      |
| Pressure:      | 1010 hPa     | Polarization :     | Vertical |
| Test Voltage : | AC 120V/60Hz |                    |          |
| Test Mode :    | Mode 3       |                    |          |

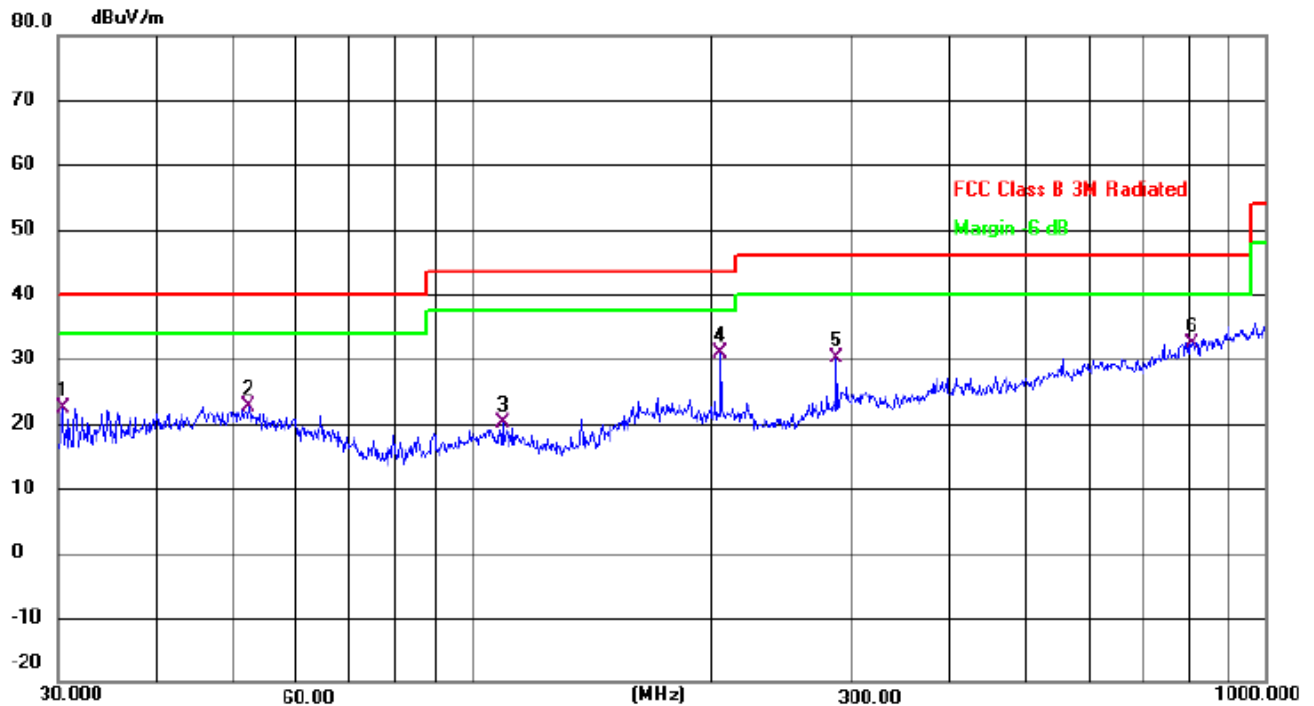

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit | Margin |          |
|-----|-----|----------|---------------|----------------|--------------|-------|--------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dB/m  | dB     | Detector |
| 1   |     | 30.4237  | 32.10         | -9.83          | 22.27        | 40.00 | -17.73 | QP       |
| 2   |     | 52.2077  | 29.90         | -7.17          | 22.73        | 40.00 | -17.27 | QP       |
| 3   |     | 109.0284 | 29.17         | -9.05          | 20.12        | 43.50 | -23.38 | QP       |
| 4   | *   | 205.6750 | 39.77         | -8.89          | 30.88        | 43.50 | -12.62 | QP       |
| 5   |     | 287.9904 | 36.30         | -6.25          | 30.05        | 46.00 | -15.95 | QP       |
| 6   |     | 807.4288 | 28.68         | 3.81           | 32.49        | 46.00 | -13.51 | QP       |

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;

**3.2.8. TEST RESULTS (1GHZ~25GHZ)**

GFSK

| Polar<br>(H/V)                                                                                                                           | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                                                                                                                                          | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| operation frequency:2402                                                                                                                 |           |                  |                   |               |                   |                   |          |        |                  |
| V                                                                                                                                        | 4804.00   | 67.36            | 50.65             | 6.88          | 31.29             | 54.88             | 74       | -19.12 | PK               |
| V                                                                                                                                        | 4804.00   | 55.85            | 50.65             | 6.88          | 31.29             | 43.37             | 54       | -10.63 | AV               |
| V                                                                                                                                        | 7206.00   | 66.52            | 49.98             | 7.16          | 36.63             | 60.33             | 74       | -13.67 | PK               |
| V                                                                                                                                        | 7206.00   | 46.24            | 49.98             | 7.16          | 36.63             | 40.05             | 54       | -13.95 | AV               |
| V                                                                                                                                        | 16132.00  | 48.21            | 51.53             | 11.34         | 41.52             | 49.54             | 74       | -24.46 | PK               |
| H                                                                                                                                        | 4804.00   | 66.13            | 50.65             | 6.88          | 31.29             | 53.65             | 74       | -20.35 | PK               |
| H                                                                                                                                        | 4804.00   | 55.85            | 50.65             | 6.88          | 31.29             | 43.37             | 54       | -10.63 | AV               |
| H                                                                                                                                        | 7206.00   | 69.63            | 49.98             | 7.16          | 36.63             | 63.44             | 74       | -10.56 | PK               |
| H                                                                                                                                        | 7206.00   | 45.68            | 49.98             | 7.16          | 36.63             | 39.49             | 54       | -14.51 | AV               |
| H                                                                                                                                        | 16132.00  | 48.21            | 51.53             | 11.34         | 41.52             | 49.54             | 74       | -24.46 | PK               |
| operation frequency:2441                                                                                                                 |           |                  |                   |               |                   |                   |          |        |                  |
| V                                                                                                                                        | 4882.00   | 67.86            | 50.67             | 6.89          | 31.38             | 55.46             | 74       | -18.54 | PK               |
| V                                                                                                                                        | 4882.00   | 55.54            | 50.67             | 6.89          | 31.38             | 43.14             | 54       | -10.86 | AV               |
| V                                                                                                                                        | 7323.00   | 69.88            | 50.02             | 7.24          | 36.63             | 63.73             | 74       | -10.27 | PK               |
| V                                                                                                                                        | 7323.00   | 46.63            | 50.02             | 7.24          | 36.63             | 40.48             | 54       | -13.52 | AV               |
| V                                                                                                                                        | 16132.00  | 48.62            | 51.53             | 11.34         | 41.52             | 49.95             | 74       | -24.05 | PK               |
| H                                                                                                                                        | 4882.00   | 66.25            | 50.67             | 6.89          | 31.38             | 53.85             | 74       | -20.15 | PK               |
| H                                                                                                                                        | 4882.00   | 55.63            | 50.67             | 6.89          | 31.38             | 43.23             | 54       | -10.77 | AV               |
| H                                                                                                                                        | 7323.00   | 69.52            | 50.02             | 7.24          | 36.63             | 63.37             | 74       | -10.63 | PK               |
| H                                                                                                                                        | 7323.00   | 47.68            | 50.02             | 7.24          | 36.63             | 41.53             | 54       | -12.47 | AV               |
| H                                                                                                                                        | 16132.00  | 48.84            | 51.53             | 11.34         | 41.52             | 50.17             | 74       | -23.83 | PK               |
| operation frequency:2480                                                                                                                 |           |                  |                   |               |                   |                   |          |        |                  |
| V                                                                                                                                        | 4960.00   | 67.63            | 50.67             | 6.89          | 31.38             | 55.23             | 74       | -18.77 | PK               |
| V                                                                                                                                        | 4960.00   | 55.52            | 50.67             | 6.89          | 31.38             | 43.12             | 54       | -10.88 | AV               |
| V                                                                                                                                        | 7440.00   | 69.22            | 50.02             | 7.24          | 36.63             | 63.07             | 74       | -10.93 | PK               |
| V                                                                                                                                        | 7440.00   | 46.68            | 50.02             | 7.24          | 36.63             | 40.53             | 54       | -13.47 | AV               |
| V                                                                                                                                        | 16132.00  | 48.69            | 51.53             | 11.34         | 41.52             | 50.02             | 74       | -23.98 | PK               |
| H                                                                                                                                        | 4960.00   | 66.24            | 50.67             | 6.89          | 31.38             | 53.84             | 74       | -20.16 | PK               |
| H                                                                                                                                        | 4960.00   | 55.36            | 50.67             | 6.89          | 31.38             | 42.96             | 54       | -11.04 | AV               |
| H                                                                                                                                        | 7440.00   | 69.85            | 50.02             | 7.24          | 36.63             | 63.7              | 74       | -10.3  | PK               |
| H                                                                                                                                        | 7440.00   | 47.82            | 50.02             | 7.24          | 36.63             | 41.67             | 54       | -12.33 | AV               |
| H                                                                                                                                        | 16132.00  | 48.66            | 51.53             | 11.34         | 41.52             | 49.99             | 74       | -24.01 | PK               |
| Remark:                                                                                                                                  |           |                  |                   |               |                   |                   |          |        |                  |
| 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,<br>Margin= Emission Level - Limit                       |           |                  |                   |               |                   |                   |          |        |                  |
| 2. If peak below the average limit, the average emission was no test.                                                                    |           |                  |                   |               |                   |                   |          |        |                  |
| 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value<br>has no need to be reported. |           |                  |                   |               |                   |                   |          |        |                  |

 $\pi/4$  DQPSK

| Polar<br>(H/V)                                                                                                                                                                                                                                                                                                                                            | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|--------------------|----------------|------------------|
| operation frequency:2402                                                                                                                                                                                                                                                                                                                                  |                    |                            |                           |                       |                             |                               |                    |                |                  |
| V                                                                                                                                                                                                                                                                                                                                                         | 4804.00            | 67.58                      | 50.65                     | 6.88                  | 31.29                       | 55.1                          | 74                 | -18.9          | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 4804.00            | 55.35                      | 50.65                     | 6.88                  | 31.29                       | 42.87                         | 54                 | -11.13         | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7206.00            | 66.36                      | 49.98                     | 7.16                  | 36.63                       | 60.17                         | 74                 | -13.83         | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7206.00            | 46.85                      | 49.98                     | 7.16                  | 36.63                       | 40.66                         | 54                 | -13.34         | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 16132.00           | 49.62                      | 51.53                     | 11.34                 | 41.52                       | 50.95                         | 74                 | -23.05         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4804.00            | 69.57                      | 50.65                     | 6.88                  | 31.29                       | 57.09                         | 74                 | -16.91         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4804.00            | 52.63                      | 50.65                     | 6.88                  | 31.29                       | 40.15                         | 54                 | -13.85         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7206.00            | 66.65                      | 49.98                     | 7.16                  | 36.63                       | 60.46                         | 74                 | -13.54         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7206.00            | 47.21                      | 49.98                     | 7.16                  | 36.63                       | 41.02                         | 54                 | -12.98         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 16132.00           | 47.96                      | 51.53                     | 11.34                 | 41.52                       | 49.29                         | 74                 | -24.71         | PK               |
| operation frequency:2441                                                                                                                                                                                                                                                                                                                                  |                    |                            |                           |                       |                             |                               |                    |                |                  |
| V                                                                                                                                                                                                                                                                                                                                                         | 4882.00            | 67.55                      | 50.67                     | 6.89                  | 31.38                       | 55.15                         | 74                 | -18.85         | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 4882.00            | 55.36                      | 50.67                     | 6.89                  | 31.38                       | 42.96                         | 54                 | -11.04         | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7323.00            | 66.68                      | 50.02                     | 7.24                  | 36.63                       | 60.53                         | 74                 | -13.47         | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7323.00            | 46.26                      | 50.02                     | 7.24                  | 36.63                       | 40.11                         | 54                 | -13.89         | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 16132.00           | 48.52                      | 51.53                     | 11.34                 | 41.52                       | 49.85                         | 74                 | -24.15         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4882.00            | 66.21                      | 50.67                     | 6.89                  | 31.38                       | 53.81                         | 74                 | -20.19         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4882.00            | 55.63                      | 50.67                     | 6.89                  | 31.38                       | 43.23                         | 54                 | -10.77         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7323.00            | 65.52                      | 50.02                     | 7.24                  | 36.63                       | 59.37                         | 74                 | -14.63         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7323.00            | 47.36                      | 50.02                     | 7.24                  | 36.63                       | 41.21                         | 54                 | -12.79         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 16132.00           | 48.85                      | 51.53                     | 11.34                 | 41.52                       | 50.18                         | 74                 | -23.82         | PK               |
| operation frequency:2480                                                                                                                                                                                                                                                                                                                                  |                    |                            |                           |                       |                             |                               |                    |                |                  |
| V                                                                                                                                                                                                                                                                                                                                                         | 4960.00            | 67.56                      | 50.79                     | 6.83                  | 31.36                       | 54.96                         | 74                 | -19.04         | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 4960.00            | 55.92                      | 50.79                     | 6.83                  | 31.36                       | 43.32                         | 54                 | -10.68         | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7440.00            | 66.88                      | 50.11                     | 7.25                  | 36.58                       | 60.6                          | 74                 | -13.4          | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7440.00            | 47.36                      | 50.11                     | 7.25                  | 36.58                       | 41.08                         | 54                 | -12.92         | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 16132.00           | 46.22                      | 51.53                     | 11.34                 | 41.52                       | 47.55                         | 74                 | -26.45         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4960.00            | 66.28                      | 50.79                     | 6.83                  | 31.36                       | 53.68                         | 74                 | -20.32         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4960.00            | 54.81                      | 50.79                     | 6.83                  | 31.36                       | 42.21                         | 54                 | -11.79         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7440.00            | 65.97                      | 50.11                     | 7.25                  | 36.58                       | 59.69                         | 74                 | -14.31         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7440.00            | 45.63                      | 50.11                     | 7.25                  | 36.58                       | 39.35                         | 54                 | -14.65         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 16132.00           | 47.58                      | 51.53                     | 11.34                 | 41.52                       | 48.91                         | 74                 | -25.09         | PK               |
| <b>Remark:</b><br>1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,<br>Margin= Emission Level - Limit<br>2. If peak below the average limit, the average emission was no test.<br>3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value<br>has no need to be reported. |                    |                            |                           |                       |                             |                               |                    |                |                  |



8DPSK

| Polar<br>(H/V)                                                                                                                                                                                                                                                                                                                                            | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|--------------------|----------------|------------------|
| operation frequency:2402                                                                                                                                                                                                                                                                                                                                  |                    |                            |                           |                       |                             |                               |                    |                |                  |
| V                                                                                                                                                                                                                                                                                                                                                         | 4804.00            | 66.21                      | 50.65                     | 6.88                  | 31.29                       | 53.73                         | 74                 | -20.27         | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 4804.00            | 55.36                      | 50.65                     | 6.88                  | 31.29                       | 42.88                         | 54                 | -11.12         | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7206.00            | 66.25                      | 49.98                     | 7.16                  | 36.63                       | 60.06                         | 74                 | -13.94         | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7206.00            | 46.73                      | 49.98                     | 7.16                  | 36.63                       | 40.54                         | 54                 | -13.46         | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 16132.00           | 46.74                      | 51.53                     | 11.34                 | 41.52                       | 48.07                         | 74                 | -25.93         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4804.00            | 66.63                      | 50.65                     | 6.88                  | 31.29                       | 54.15                         | 74                 | -19.85         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4804.00            | 55.21                      | 50.65                     | 6.88                  | 31.29                       | 42.73                         | 54                 | -11.27         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7206.00            | 64.58                      | 49.98                     | 7.16                  | 36.63                       | 58.39                         | 74                 | -15.61         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7206.00            | 47.66                      | 49.98                     | 7.16                  | 36.63                       | 41.47                         | 54                 | -12.53         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 16132.00           | 47.85                      | 51.53                     | 11.34                 | 41.52                       | 49.18                         | 74                 | -24.82         | PK               |
| operation frequency:2441                                                                                                                                                                                                                                                                                                                                  |                    |                            |                           |                       |                             |                               |                    |                |                  |
| V                                                                                                                                                                                                                                                                                                                                                         | 4882.00            | 66.21                      | 50.67                     | 6.89                  | 31.38                       | 53.81                         | 74                 | -20.19         | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 4882.00            | 54.63                      | 50.67                     | 6.89                  | 31.38                       | 42.23                         | 54                 | -11.77         | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7323.00            | 65.85                      | 50.02                     | 7.24                  | 36.63                       | 59.7                          | 74                 | -14.3          | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7323.00            | 47.66                      | 50.02                     | 7.24                  | 36.63                       | 41.51                         | 54                 | -12.49         | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 16132.00           | 47.21                      | 51.53                     | 11.34                 | 41.52                       | 48.54                         | 74                 | -25.46         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4882.00            | 65.85                      | 50.67                     | 6.89                  | 31.38                       | 53.45                         | 74                 | -20.55         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4882.00            | 53.36                      | 50.67                     | 6.89                  | 31.38                       | 40.96                         | 54                 | -13.04         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7323.00            | 65.52                      | 50.02                     | 7.24                  | 36.63                       | 59.37                         | 74                 | -14.63         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7323.00            | 46.64                      | 50.02                     | 7.24                  | 36.63                       | 40.49                         | 54                 | -13.51         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 16132.00           | 46.81                      | 51.53                     | 11.34                 | 41.52                       | 48.14                         | 74                 | -25.86         | PK               |
| operation frequency:2480                                                                                                                                                                                                                                                                                                                                  |                    |                            |                           |                       |                             |                               |                    |                |                  |
| V                                                                                                                                                                                                                                                                                                                                                         | 4960.00            | 67.36                      | 50.79                     | 6.83                  | 31.36                       | 54.76                         | 74                 | -19.24         | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 4960.00            | 54.85                      | 50.79                     | 6.83                  | 31.36                       | 42.25                         | 54                 | -11.75         | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7440.00            | 64.66                      | 50.11                     | 7.25                  | 36.58                       | 58.38                         | 74                 | -15.62         | PK               |
| V                                                                                                                                                                                                                                                                                                                                                         | 7440.00            | 46.64                      | 50.11                     | 7.25                  | 36.58                       | 40.36                         | 54                 | -13.64         | AV               |
| V                                                                                                                                                                                                                                                                                                                                                         | 16132.00           | 48.88                      | 51.53                     | 11.34                 | 41.52                       | 50.21                         | 74                 | -23.79         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4960.00            | 67.33                      | 50.79                     | 6.83                  | 31.36                       | 54.73                         | 74                 | -19.27         | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 4960.00            | 54.25                      | 50.79                     | 6.83                  | 31.36                       | 41.65                         | 54                 | -12.35         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7440.00            | 65.28                      | 50.11                     | 7.25                  | 36.58                       | 59                            | 74                 | -15            | PK               |
| H                                                                                                                                                                                                                                                                                                                                                         | 7440.00            | 47.13                      | 50.11                     | 7.25                  | 36.58                       | 40.85                         | 54                 | -13.15         | AV               |
| H                                                                                                                                                                                                                                                                                                                                                         | 16132.00           | 47.83                      | 51.53                     | 11.34                 | 41.52                       | 49.16                         | 74                 | -24.84         | PK               |
| <b>Remark:</b><br>1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,<br>Margin= Emission Level - Limit<br>2. If peak below the average limit, the average emission was no test.<br>3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value<br>has no need to be reported. |                    |                            |                           |                       |                             |                               |                    |                |                  |



### 3.3 RADIATED BAND EMISSION MEASUREMENT

#### 3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 2300MHz                                          |
| Stop Frequency                        | 2520                                             |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

#### 3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


The horizontal and vertical polarities of the antenna were tested, and a pre-test was conducted on the EUT placement as three orthogonal axes X,Y,Z. The worst display of the test results was the Y-axis. The worst case emissions were reported.

#### 3.3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

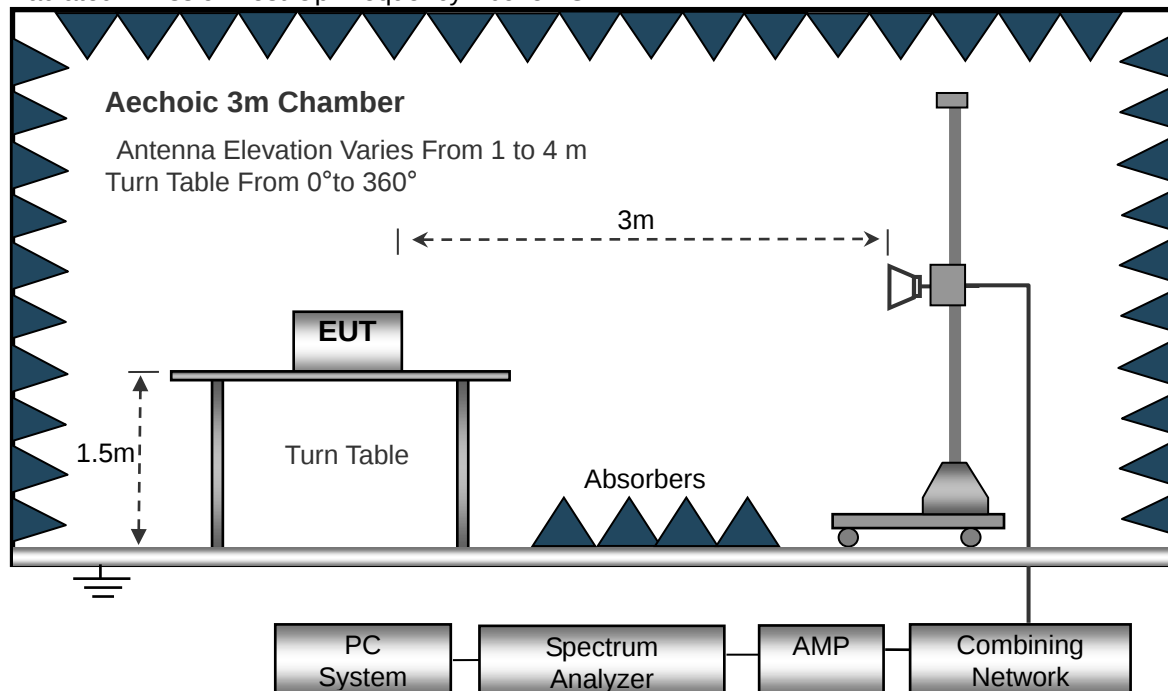

### 3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



### 3.3.6 TEST RESULT

GFSK

| Polar<br>(H/V)           | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------------|--------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|--------------------|----------------|------------------|
| operation frequency:2402 |                    |                            |                           |                       |                             |                               |                    |                |                  |
| V                        | 2390.00            | 77.52                      | 52.11                     | 2.68                  | 27.32                       | 55.41                         | 74                 | -18.59         | PK               |
| V                        | 2390.00            | 65.89                      | 52.11                     | 2.68                  | 27.32                       | 43.78                         | 54                 | -10.22         | AV               |
| V                        | 2400.00            | 76.52                      | 52.13                     | 2.52                  | 27.46                       | 54.37                         | 74                 | -19.63         | PK               |
| V                        | 2400.00            | 64.86                      | 52.13                     | 2.52                  | 27.46                       | 42.71                         | 54                 | -11.29         | AV               |
| H                        | 2390.00            | 76.55                      | 52.11                     | 2.68                  | 27.32                       | 54.44                         | 74                 | -19.56         | PK               |
| H                        | 2390.00            | 65.52                      | 52.11                     | 2.68                  | 27.32                       | 43.41                         | 54                 | -10.59         | AV               |
| H                        | 2400.00            | 76.41                      | 52.13                     | 2.52                  | 27.46                       | 54.26                         | 74                 | -19.74         | PK               |
| H                        | 2400.00            | 65.96                      | 52.13                     | 2.52                  | 27.46                       | 43.81                         | 54                 | -10.19         | AV               |

| Polar<br>(H/V)           | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------------|--------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|--------------------|----------------|------------------|
| operation frequency:2480 |                    |                            |                           |                       |                             |                               |                    |                |                  |
| V                        | 2483.50            | 77.21                      | 52.23                     | 2.86                  | 27.44                       | 55.28                         | 74                 | -18.72         | PK               |
| V                        | 2483.50            | 65.99                      | 52.23                     | 2.86                  | 27.44                       | 44.06                         | 54                 | -9.94          | AV               |
| V                        | 2500.00            | 76.52                      | 52.26                     | 2.88                  | 27.49                       | 54.63                         | 74                 | -19.37         | PK               |
| V                        | 2500.00            | 65.33                      | 52.26                     | 2.88                  | 27.49                       | 43.44                         | 54                 | -10.56         | AV               |
| H                        | 2483.50            | 76.38                      | 52.23                     | 2.86                  | 27.44                       | 54.45                         | 74                 | -19.55         | PK               |
| H                        | 2483.50            | 66.46                      | 52.23                     | 2.86                  | 27.44                       | 44.53                         | 54                 | -9.47          | AV               |
| H                        | 2500.00            | 78.52                      | 52.26                     | 2.88                  | 27.49                       | 56.63                         | 74                 | -17.37         | PK               |
| H                        | 2500.00            | 67.36                      | 52.26                     | 2.88                  | 27.49                       | 45.47                         | 54                 | -8.53          | AV               |

**Remark:**

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

 $\pi/4$  DQPSK

| Polar<br>(H/V)           | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|--------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                          | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| operation frequency:2402 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 2390.00   | 76.21            | 52.11             | 2.68          | 27.32             | 54.1              | 74       | -19.9  | PK               |
| V                        | 2390.00   | 65.63            | 52.11             | 2.68          | 27.32             | 43.52             | 54       | -10.48 | AV               |
| V                        | 2400.00   | 76.58            | 52.13             | 2.52          | 27.46             | 54.43             | 74       | -19.57 | PK               |
| V                        | 2400.00   | 64.33            | 52.13             | 2.52          | 27.46             | 42.18             | 54       | -11.82 | AV               |
| H                        | 2390.00   | 76.55            | 52.11             | 2.68          | 27.32             | 54.44             | 74       | -19.56 | PK               |
| H                        | 2390.00   | 65.25            | 52.11             | 2.68          | 27.32             | 43.14             | 54       | -10.86 | AV               |
| H                        | 2400.00   | 76.63            | 52.13             | 2.52          | 27.46             | 54.48             | 74       | -19.52 | PK               |
| H                        | 2400.00   | 65.88            | 52.13             | 2.52          | 27.46             | 43.73             | 54       | -10.27 | AV               |

| Polar<br>(H/V)           | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|--------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                          | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| operation frequency:2480 |           |                  |                   |               |                   |                   |          |        |                  |
| V                        | 2483.50   | 76.51            | 52.23             | 2.86          | 27.44             | 54.58             | 74       | -19.42 | PK               |
| V                        | 2483.50   | 65.56            | 52.23             | 2.86          | 27.44             | 43.63             | 54       | -10.37 | AV               |
| V                        | 2500.00   | 76.25            | 52.26             | 2.88          | 27.49             | 54.36             | 74       | -19.64 | PK               |
| V                        | 2500.00   | 65.91            | 52.26             | 2.88          | 27.49             | 44.02             | 54       | -9.98  | AV               |
| H                        | 2483.50   | 76.85            | 52.23             | 2.86          | 27.44             | 54.92             | 74       | -19.08 | PK               |
| H                        | 2483.50   | 65.56            | 52.23             | 2.86          | 27.44             | 43.63             | 54       | -10.37 | AV               |
| H                        | 2500.00   | 76.52            | 52.26             | 2.88          | 27.49             | 54.63             | 74       | -19.37 | PK               |
| H                        | 2500.00   | 65.88            | 52.26             | 2.88          | 27.49             | 43.99             | 54       | -10.01 | AV               |

**Remark:**

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



8DPSK

| Polar<br>(H/V)           | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------------|--------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|--------------------|----------------|------------------|
| operation frequency:2402 |                    |                            |                           |                       |                             |                               |                    |                |                  |
| V                        | 2390.00            | 76.36                      | 52.11                     | 2.68                  | 27.32                       | 54.25                         | 74                 | -19.75         | PK               |
| V                        | 2390.00            | 65.52                      | 52.11                     | 2.68                  | 27.32                       | 43.41                         | 54                 | -10.59         | AV               |
| V                        | 2400.00            | 77.96                      | 52.13                     | 2.52                  | 27.46                       | 55.81                         | 74                 | -18.19         | PK               |
| V                        | 2400.00            | 65.86                      | 52.13                     | 2.52                  | 27.46                       | 43.71                         | 54                 | -10.29         | AV               |
| H                        | 2390.00            | 77.85                      | 52.11                     | 2.68                  | 27.32                       | 55.74                         | 74                 | -18.26         | PK               |
| H                        | 2390.00            | 65.21                      | 52.11                     | 2.68                  | 27.32                       | 43.1                          | 54                 | -10.9          | AV               |
| H                        | 2400.00            | 76.23                      | 52.13                     | 2.52                  | 27.46                       | 54.08                         | 74                 | -19.92         | PK               |
| H                        | 2400.00            | 65.58                      | 52.13                     | 2.52                  | 27.46                       | 43.43                         | 54                 | -10.57         | AV               |

| Polar<br>(H/V)           | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------------|--------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|--------------------|----------------|------------------|
| operation frequency:2480 |                    |                            |                           |                       |                             |                               |                    |                |                  |
| V                        | 2483.50            | 77.21                      | 52.23                     | 2.86                  | 27.44                       | 55.28                         | 74                 | -18.72         | PK               |
| V                        | 2483.50            | 65.33                      | 52.23                     | 2.86                  | 27.44                       | 43.4                          | 54                 | -10.6          | AV               |
| V                        | 2500.00            | 76.85                      | 52.26                     | 2.88                  | 27.49                       | 54.96                         | 74                 | -19.04         | PK               |
| V                        | 2500.00            | 65.33                      | 52.26                     | 2.88                  | 27.49                       | 43.44                         | 54                 | -10.56         | AV               |
| H                        | 2483.50            | 77.55                      | 52.23                     | 2.86                  | 27.44                       | 55.62                         | 74                 | -18.38         | PK               |
| H                        | 2483.50            | 65.64                      | 52.23                     | 2.86                  | 27.44                       | 43.71                         | 54                 | -10.29         | AV               |
| H                        | 2500.00            | 76.28                      | 52.26                     | 2.88                  | 27.49                       | 54.39                         | 74                 | -19.61         | PK               |
| H                        | 2500.00            | 66.25                      | 52.26                     | 2.88                  | 27.49                       | 44.36                         | 54                 | -9.64          | AV               |

**Remark:**

1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



### 3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

|                   |                                          |
|-------------------|------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (d)          |
| Test Method:      | KDB558074 D0115.247 Meas Guidance v05r02 |

#### 3.4.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

#### 3.4.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

Set the RBW = 100KHz.

Set the VBW = 300KHz.

Sweep time = auto couple.

Detector function = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

#### 3.4.3 DEVIATION FROM STANDARD

No deviation.

#### 3.4.4 TEST SETUP







#### 3.4.5 EUT OPERATION CONDITIONS





The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 3.4.6 TEST RESULTS







For Conducted  
Unhopping  
GFSK

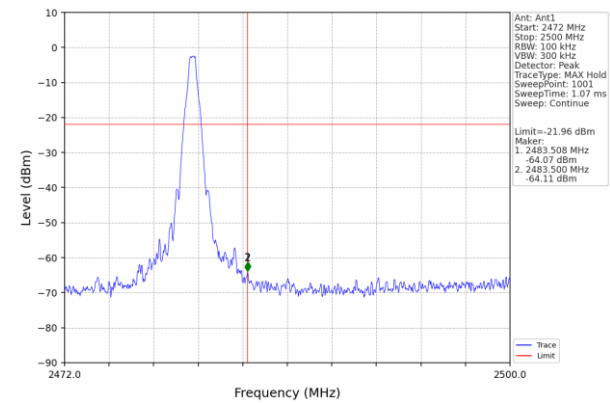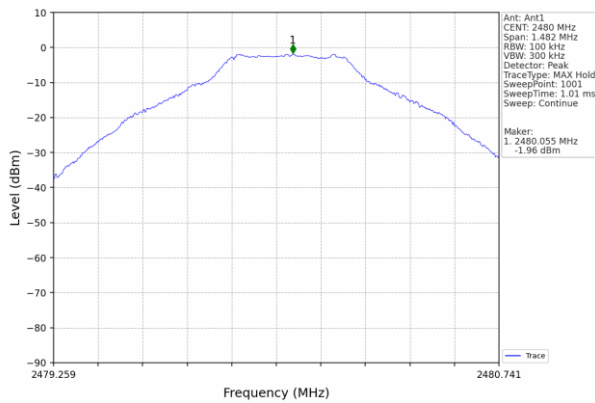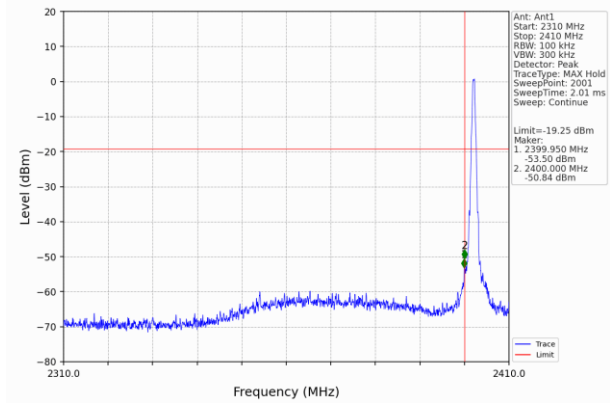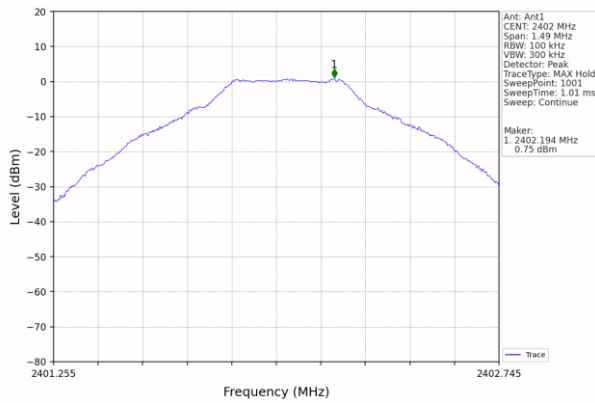

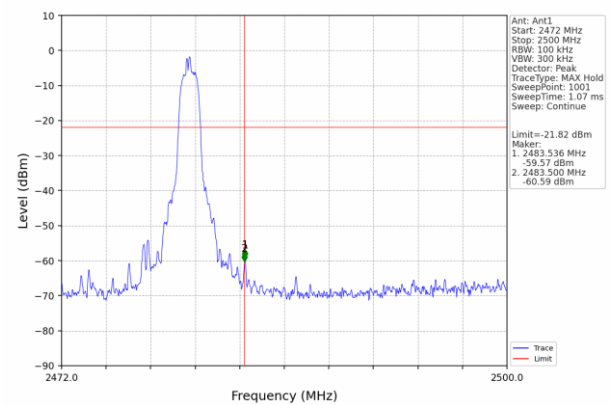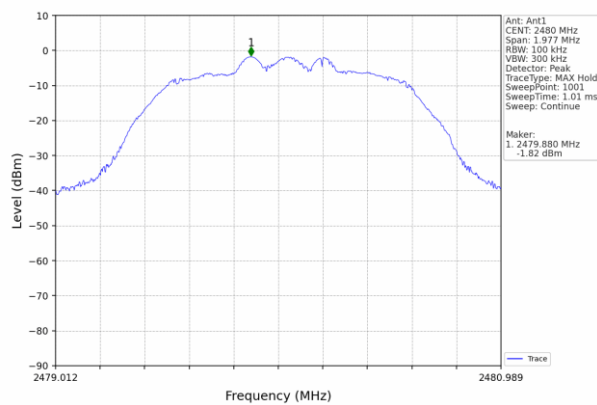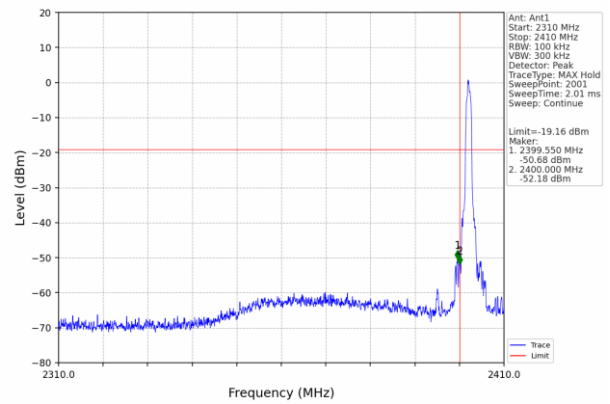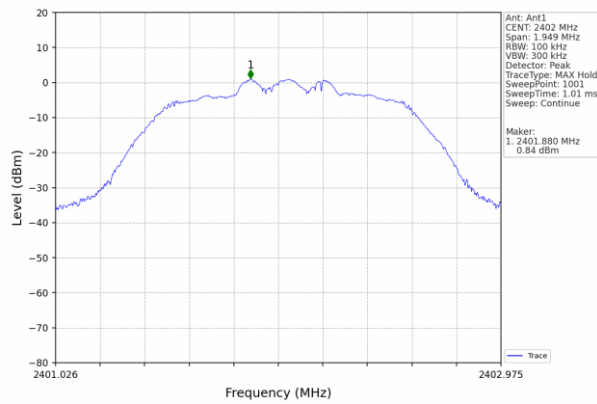 $\pi/4$  DQPSK











## 8DPSK

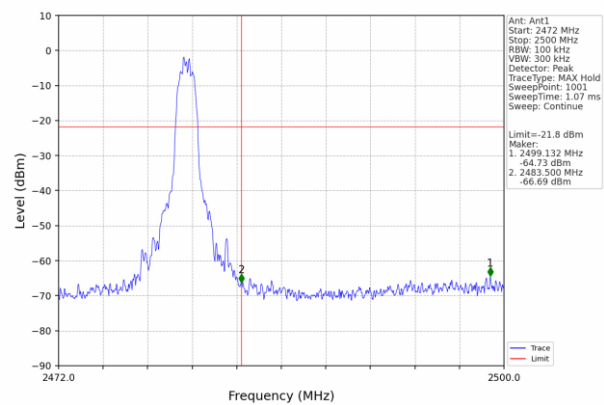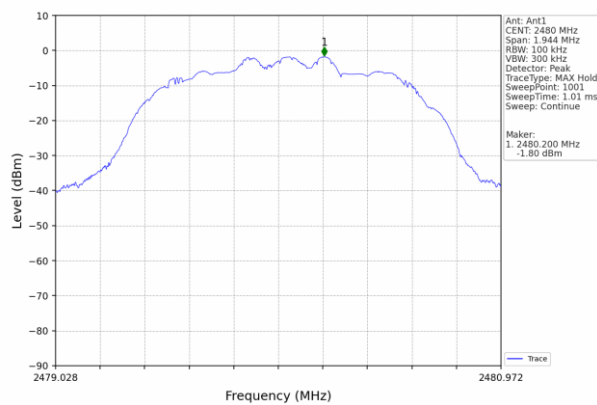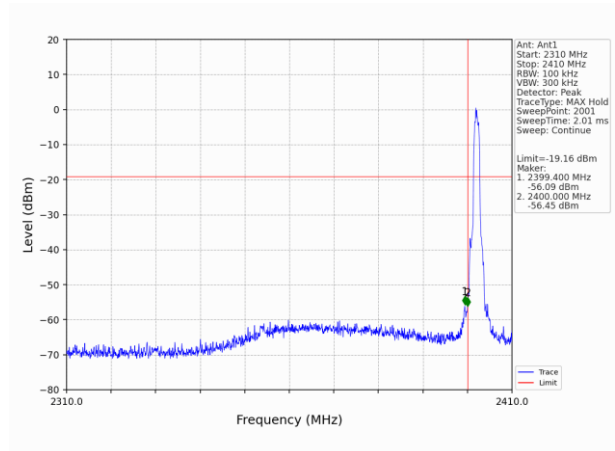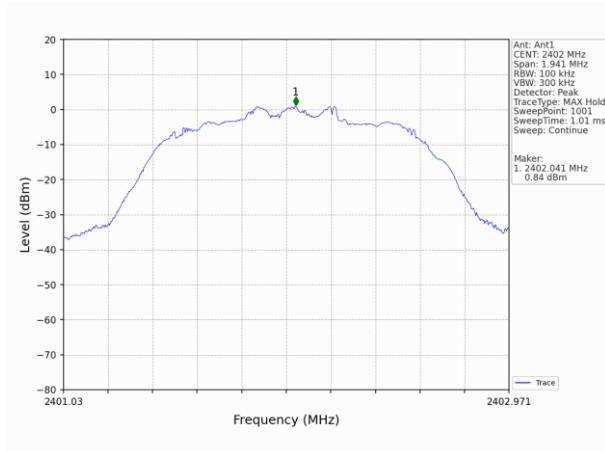







Hopping Mode  
GFSK

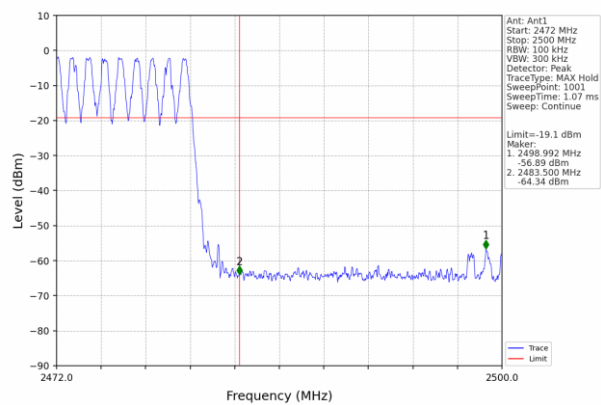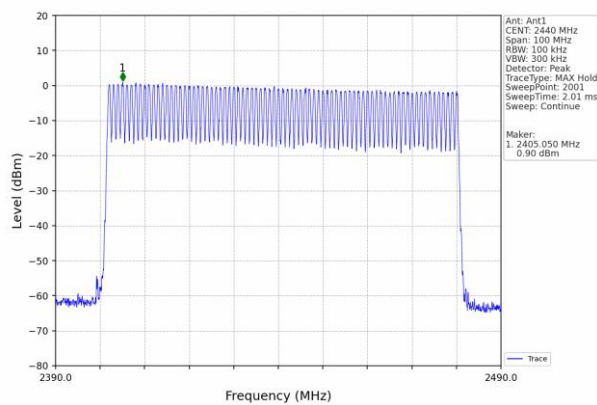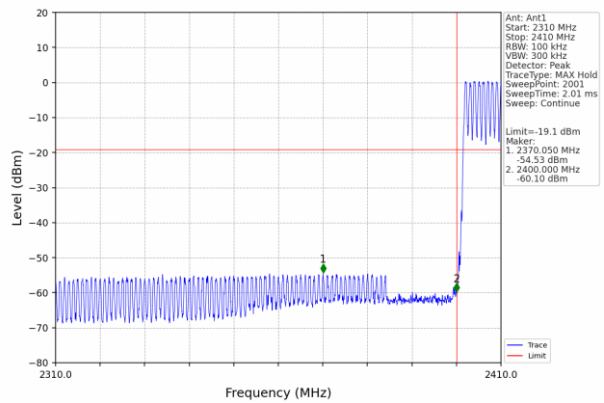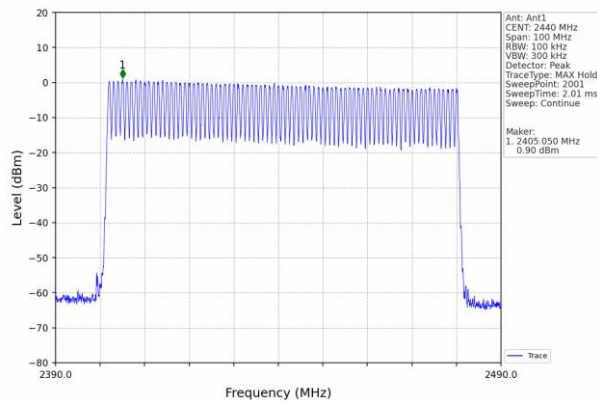

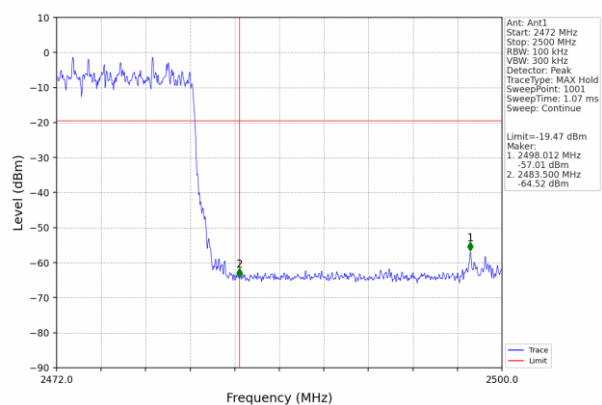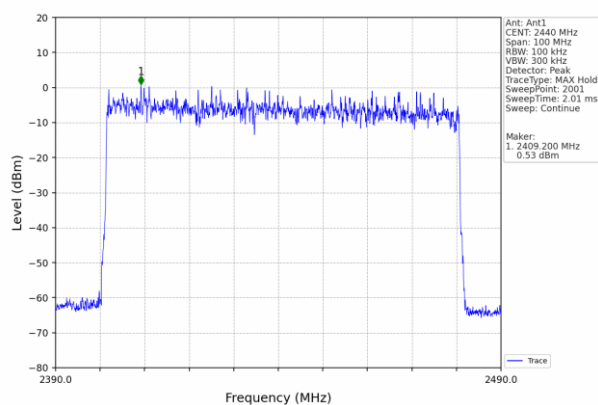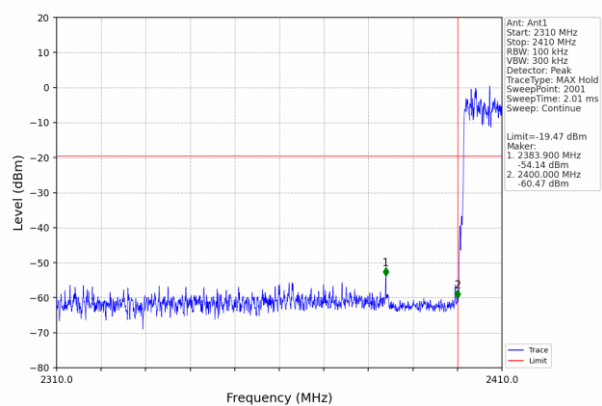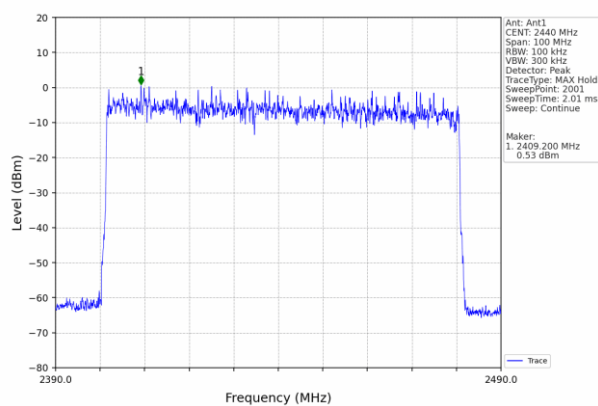 $\pi/4$  DQPSK



## 8DPSK

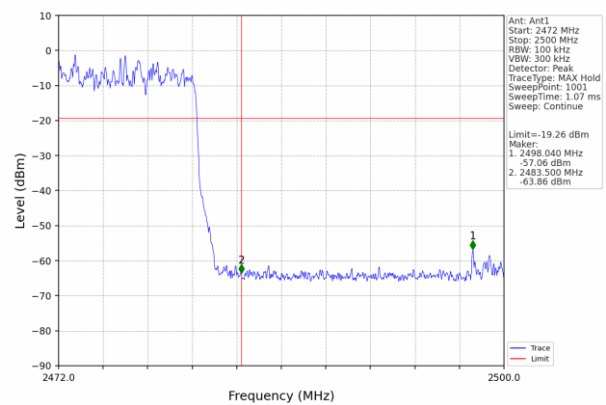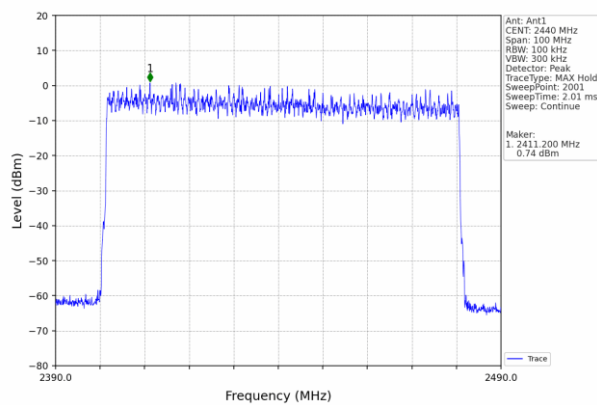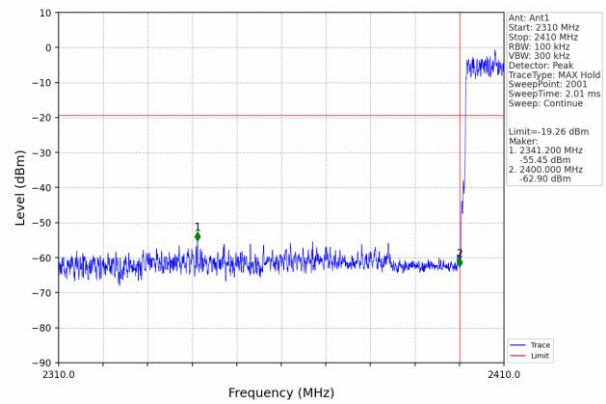
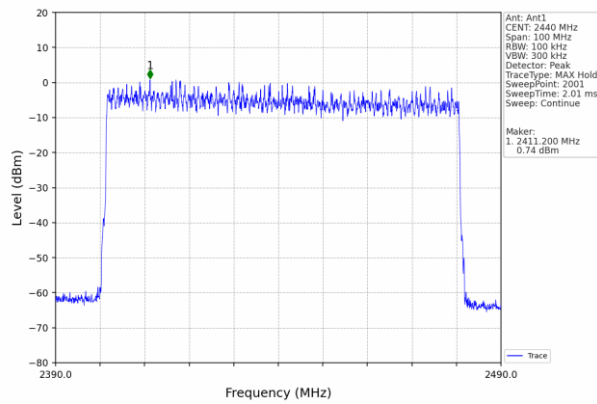






For Conducted

During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.



| Test channel: | Lowest channel |
|---------------|----------------|
|---------------|----------------|

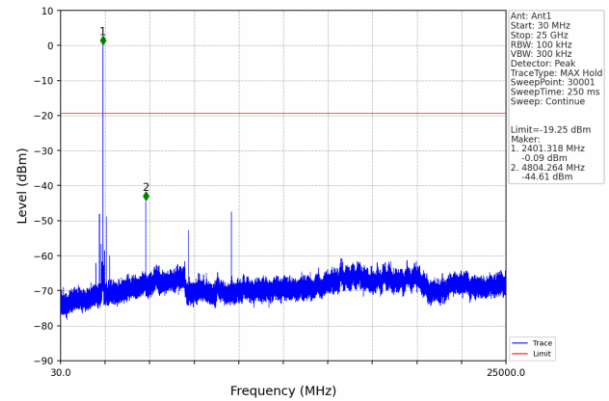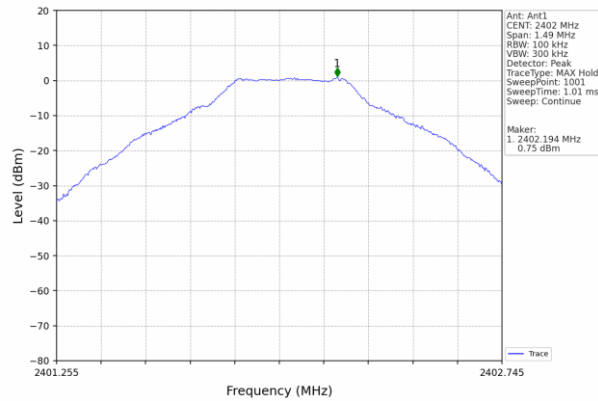

| Test channel: | Middle channel |
|---------------|----------------|
|---------------|----------------|

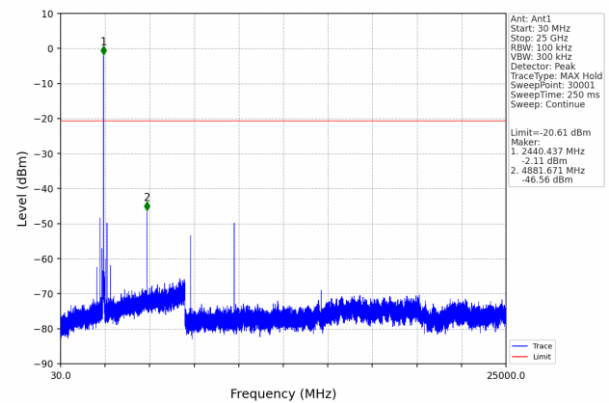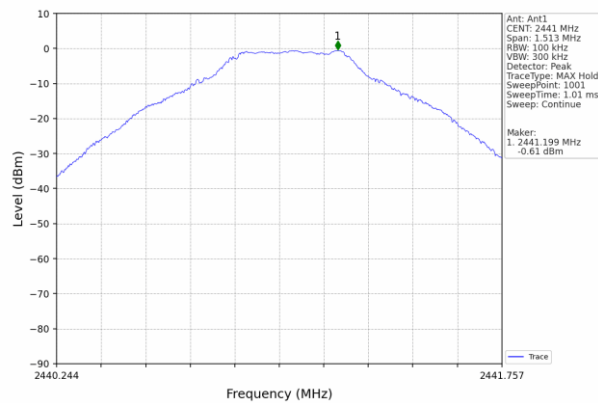

| Test channel: | Highest channel |
|---------------|-----------------|
|---------------|-----------------|

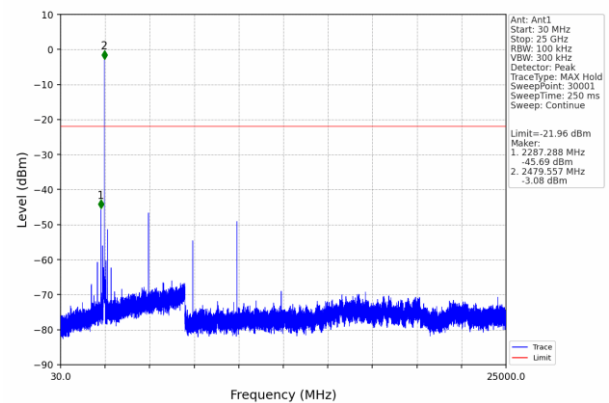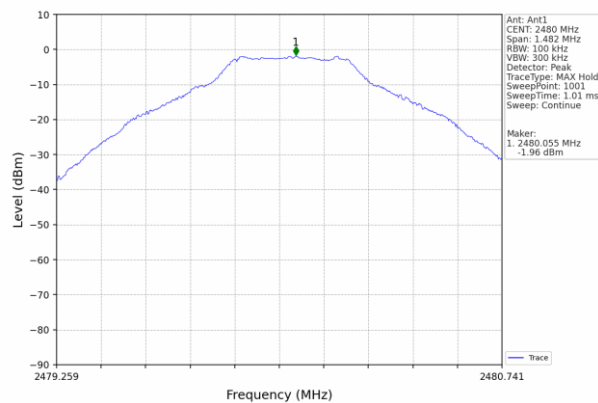



#### 4.. PEAK OUTPUT POWER

##### 4.1. APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |                   |                  |                       |        |
|---------------------------------|-------------------|------------------|-----------------------|--------|
| Section                         | Test Item         | Limit            | Frequency Range (MHz) | Result |
| 15.247<br>(b)(i)                | Peak Output Power | 30Bm or 20.96dBm | 2400-2483.5           | PASS   |


##### 4.1.1. TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW=%10BW  
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
VBW  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold

##### 4.1.2. DEVIATION FROM STANDARD

No deviation.

##### 4.1.3. TEST SETUP

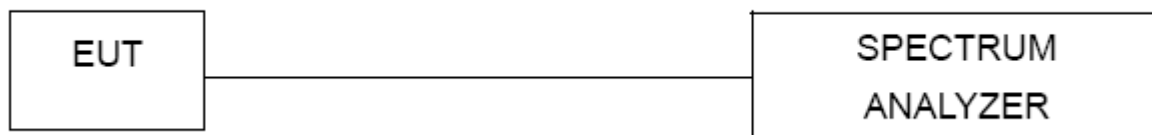


##### 4.1.4. EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**4.1.5. TEST RESULTS**


|              |          |                    |                                     |
|--------------|----------|--------------------|-------------------------------------|
| Temperature: | 25 °C    | Relative Humidity: | 60%                                 |
| Pressure:    | 1012 hPa | Test Mode :        | CH00/ CH39 /CH78 (1M/2M/3Mbps Mode) |

| Mode          | Test Channel | Peak Output Power (dBm) | LIMIT (dBm) |
|---------------|--------------|-------------------------|-------------|
| GFSK          | CH00         | 0.99                    | 30.00       |
|               | CH39         | -0.31                   | 30.00       |
|               | CH78         | -1.73                   | 30.00       |
| $\pi/4$ DQPSK | CH00         | 1.96                    | 20.96       |
|               | CH39         | 0.62                    | 20.96       |
|               | CH78         | -0.72                   | 20.96       |
| 8DPSK         | CH00         | 2.34                    | 20.96       |
|               | CH39         | 1.12                    | 20.96       |
|               | CH78         | -0.34                   | 20.96       |

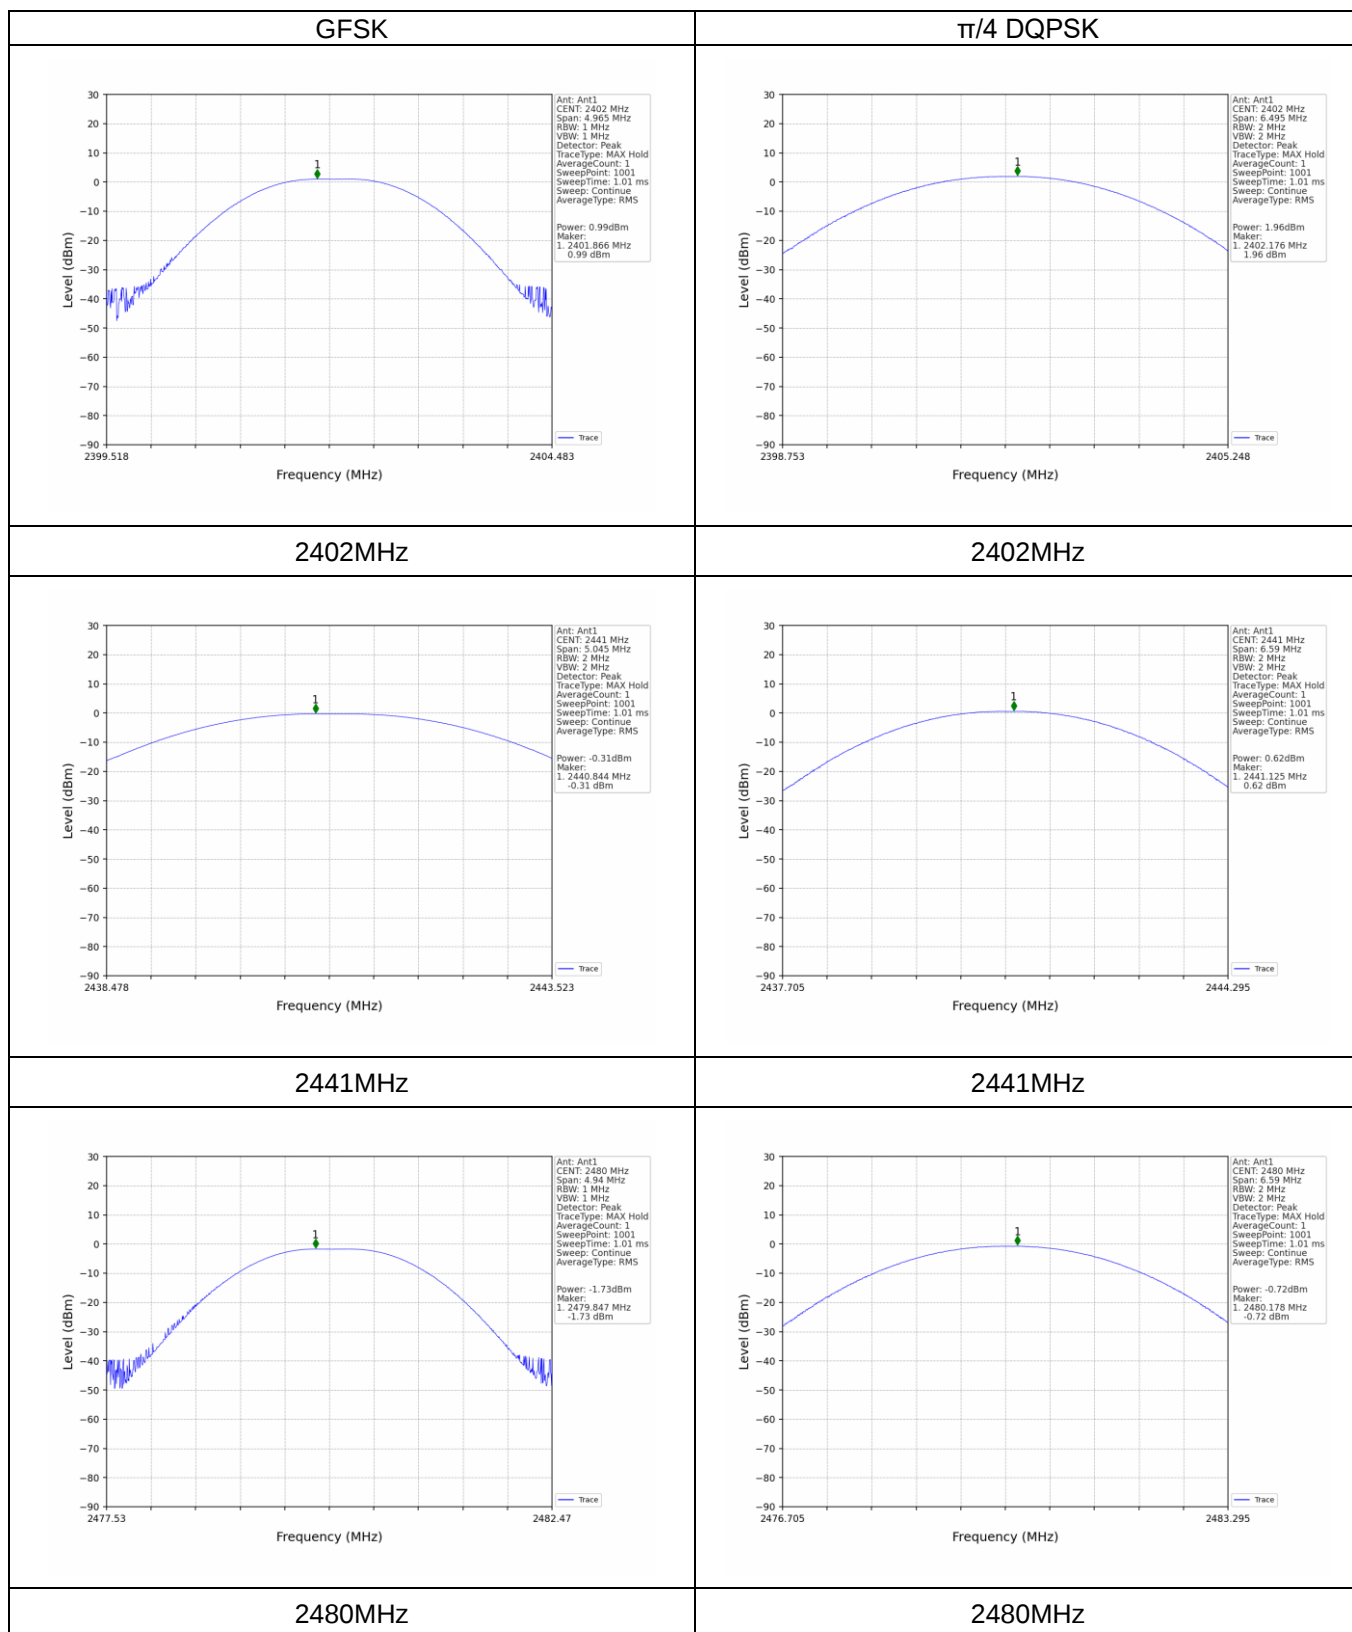





## 8DPSK

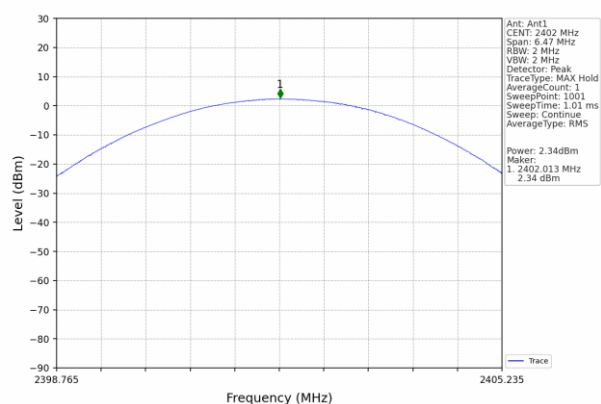

## 2402MHz

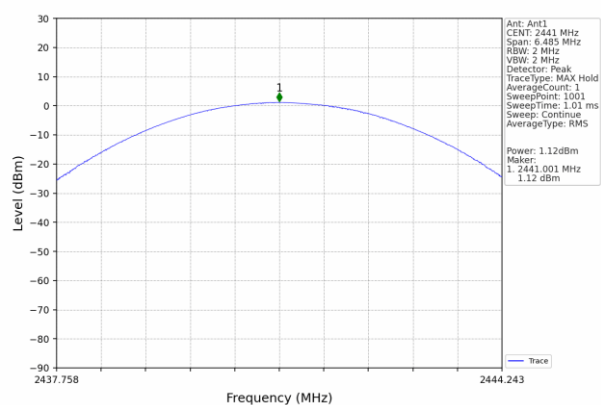

## 2441MHz

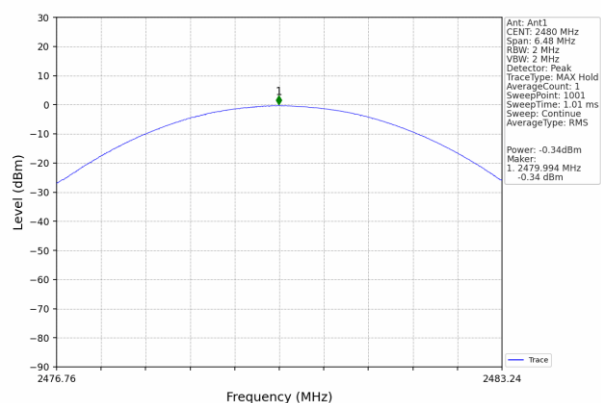

## 2480MHz



## 5.. NUMBER OF HOPPING CHANNEL

### 5.1. APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |                           |       |                       |        |
|---------------------------------|---------------------------|-------|-----------------------|--------|
| Section                         | Test Item                 | Limit | Frequency Range (MHz) | Result |
| 15.247 (a)(1)(iii)              | Number of Hopping Channel | ≥15   | 2400-2483.5           | PASS   |

| Spectrum Parameters | Setting                           |
|---------------------|-----------------------------------|
| Attenuation         | Auto                              |
| Span Frequency      | = the frequency band of operation |
| RB                  | RBW= 100KHz                       |
| VB                  | VBW ≥ RBW                         |
| Detector            | Peak                              |
| Trace               | Max Hold                          |
| Sweep Time          | Auto                              |

#### 5.1.1. TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

#### 5.1.2. DEVIATION FROM STANDARD

No deviation.

#### 5.1.3. TEST SETUP



#### 5.1.4. EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 5.1.5. TEST RESULTS


|                           |              |    |
|---------------------------|--------------|----|
| Test Mode :               | Hopping Mode |    |
| Number of Hopping Channel | GFSK         | 79 |
|                           | π/4 DQPSK    | 79 |
|                           | 8DPSK        | 79 |



## GFSK

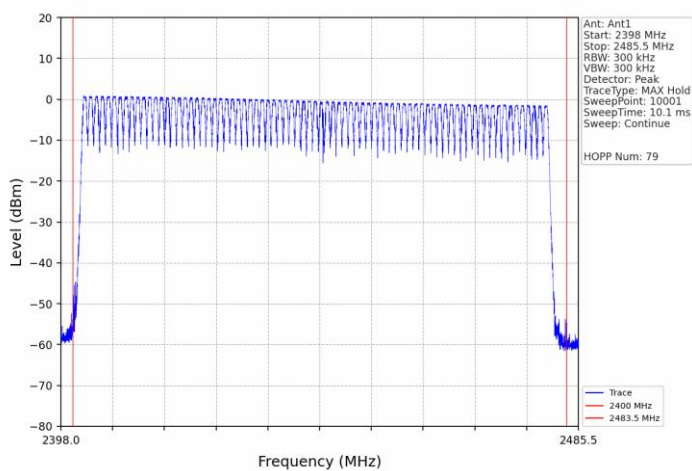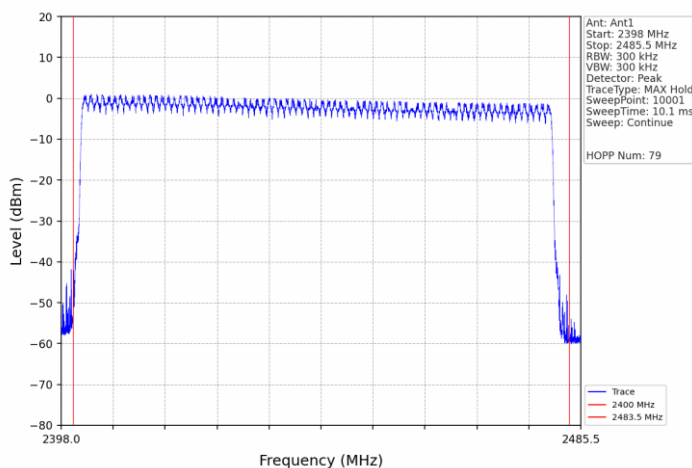 $\pi/4$  DQPSK

## 8DPSK

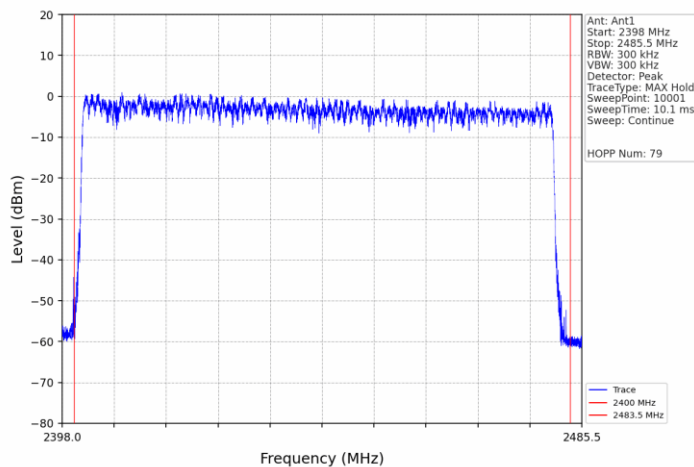



## 6.. BANDWIDTH TEST

### 6.1. APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |           |
|---------------------------------|-----------|
| Section                         | Test Item |
| 15.247(a)(2)                    | Bandwidth |


#### 6.1.1. TEST PROCEDURE

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW)  $\geq$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

#### 6.1.2. DEVIATION FROM STANDARD

No deviation.

#### 6.1.3. TEST SETUP

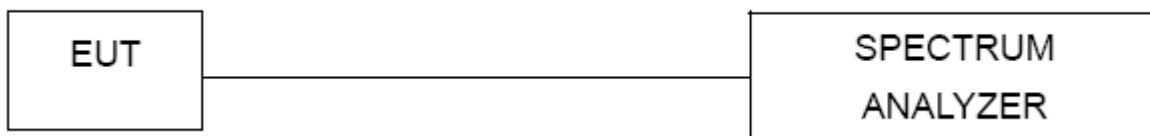


#### 6.1.4. EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.


**6.1.5. TEST RESULTS**

|               | Frequency<br>(MHz) | 20dB Bandwidth<br>(MHz) | Result |
|---------------|--------------------|-------------------------|--------|
| GFSK          | 2402               | 0.993                   | Pass   |
|               | 2441               | 1.009                   | Pass   |
|               | 2480               | 0.988                   | Pass   |
| $\pi/4$ DQPSK | 2402               | 1.299                   | Pass   |
|               | 2441               | 1.318                   | Pass   |
|               | 2480               | 1.318                   | Pass   |
| 8DPSK         | 2402               | 1.294                   | Pass   |
|               | 2441               | 1.297                   | Pass   |
|               | 2480               | 1.296                   | Pass   |

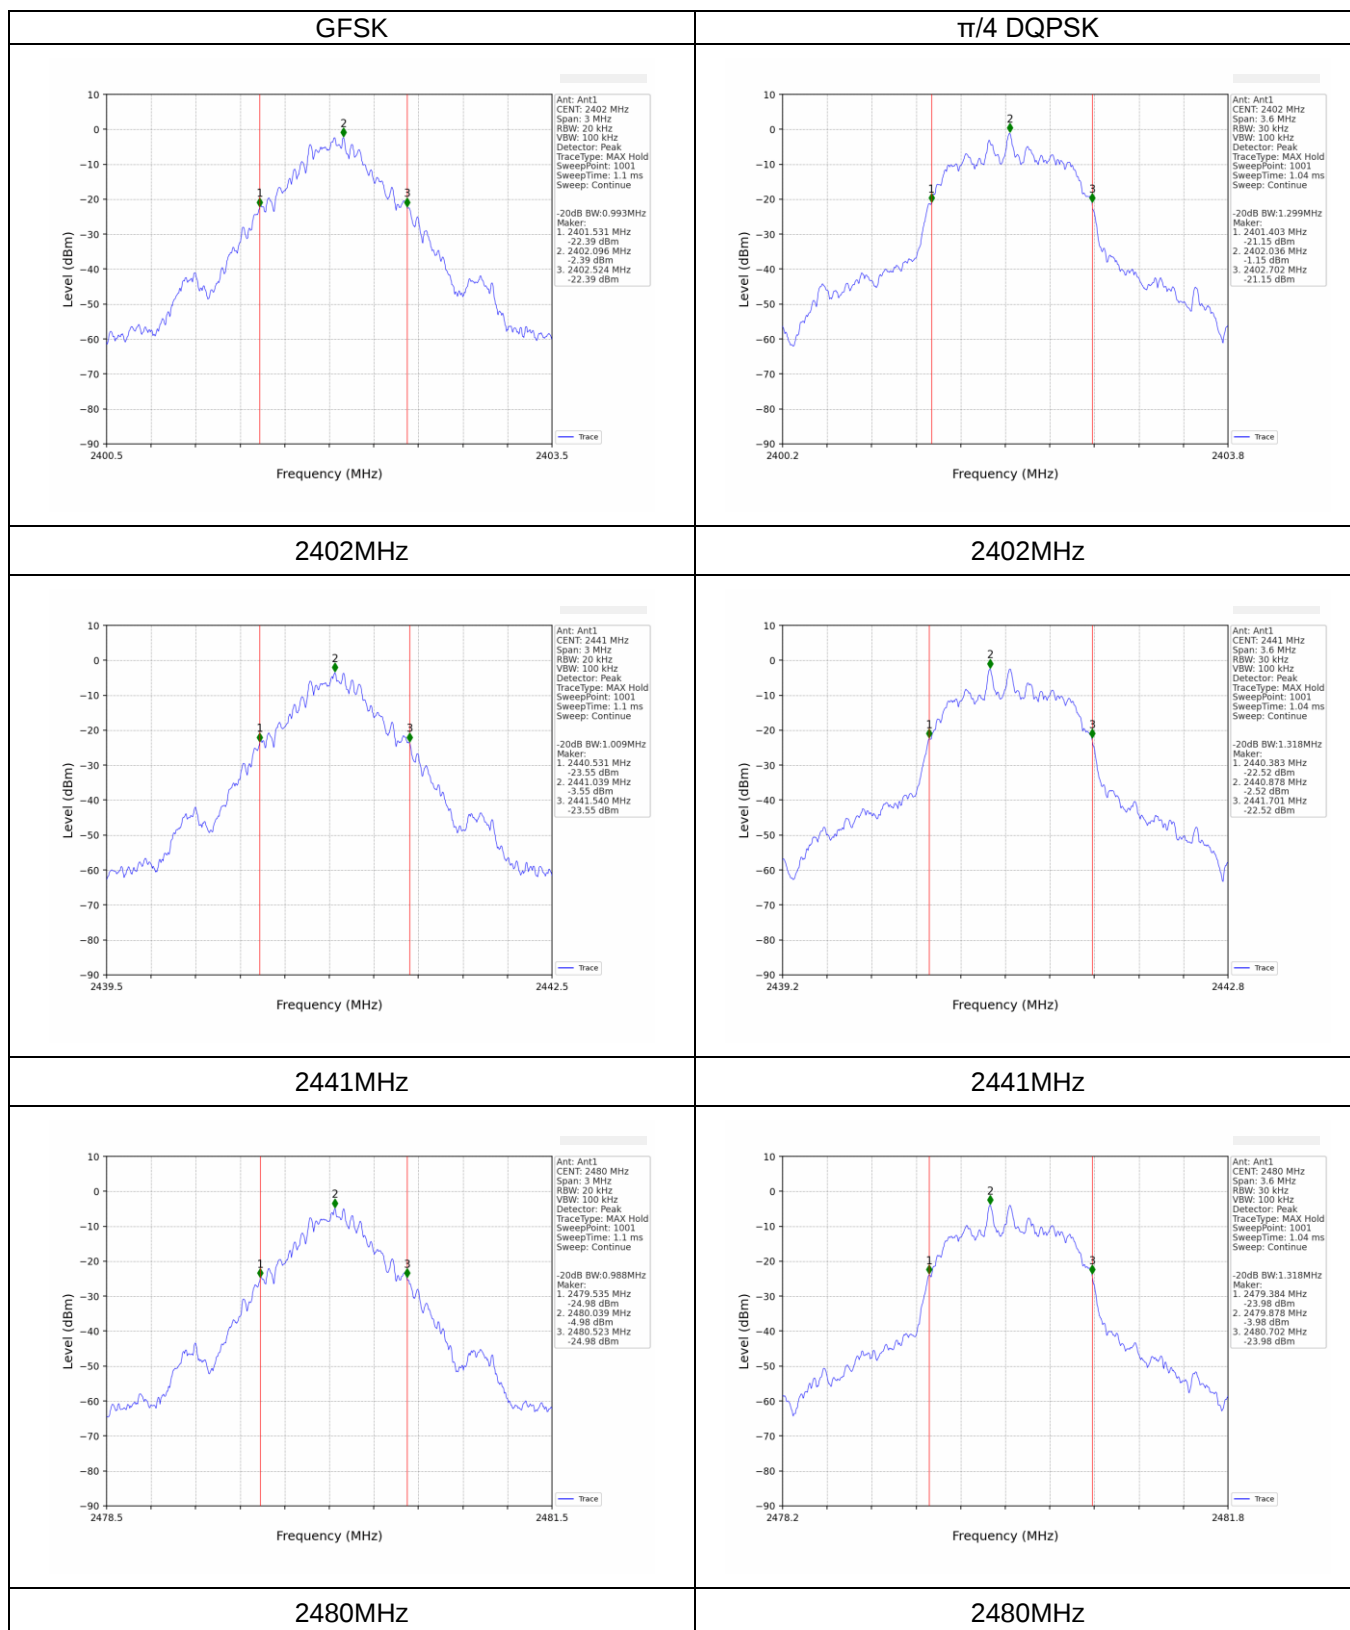





## 8DPSK

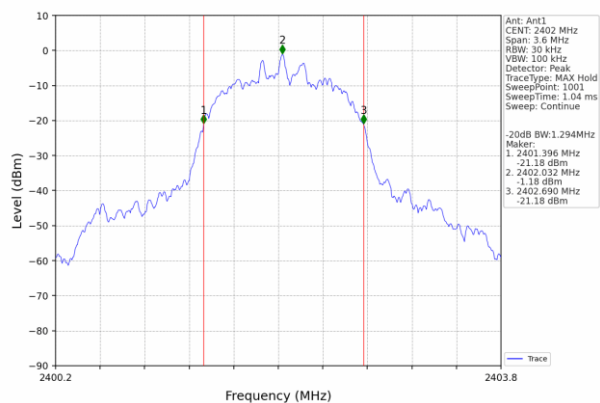

## 2402MHz

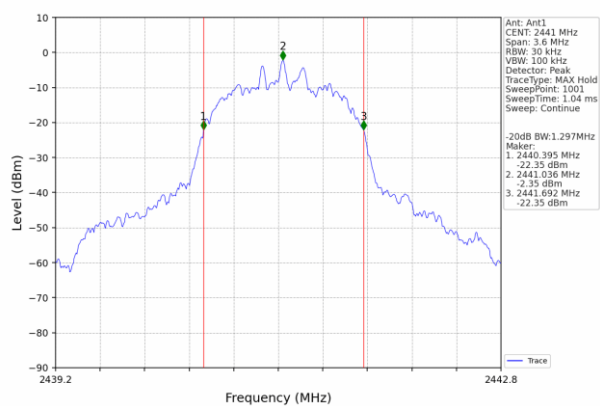

## 2441MHz

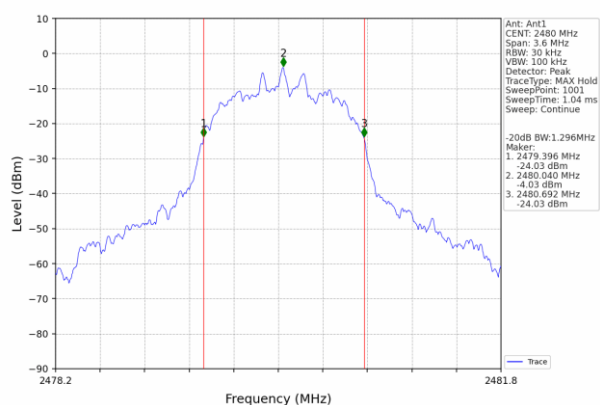

## 2480MHz



## 7.. HOPPING CHANNEL SEPARATION MEASUREMENT

### 7.1. APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

| Spectrum Parameter | Setting                                       |
|--------------------|-----------------------------------------------|
| Attenuation        | Auto                                          |
| Span Frequency     | > Measurement Bandwidth or Channel Separation |
| RB                 | 300 kHz (Channel Separation)                  |
| VB                 | 1000 kHz (Channel Separation)                 |
| Detector           | Peak                                          |
| Trace              | Max Hold                                      |
| Sweep Time         | Auto                                          |


#### 7.1.1. TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were utilised for channel separation measurement.

#### 7.1.2. DEVIATION FROM STANDARD

No deviation.

#### 7.1.3. TEST SETUP

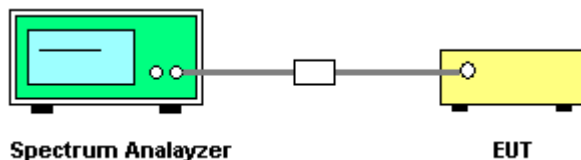

#### 7.1.4. EUT OPERATION CONDITIONS



The EUT was programmed to be in continuously transmitting mode.

#### 7.1.5. TEST RESULTS


| Test Mode     | Ch. Separation (MHz) | Max 20dB bandwidth(MHz) | Limit (MHz)  | Result |
|---------------|----------------------|-------------------------|--------------|--------|
| GFSK          | 1.026                | 1.009                   | $\geq 0.673$ | Pass   |
| $\pi/4$ DQPSK | 1.010                | 1.318                   | $\geq 0.879$ | Pass   |
| 8DPSK         | 1.001                | 1.297                   | $\geq 0.865$ | Pass   |



## GFSK

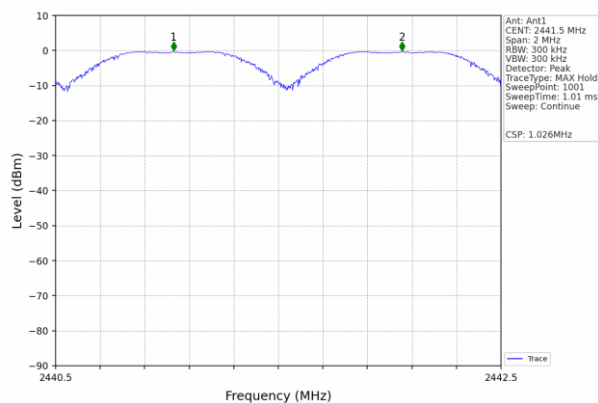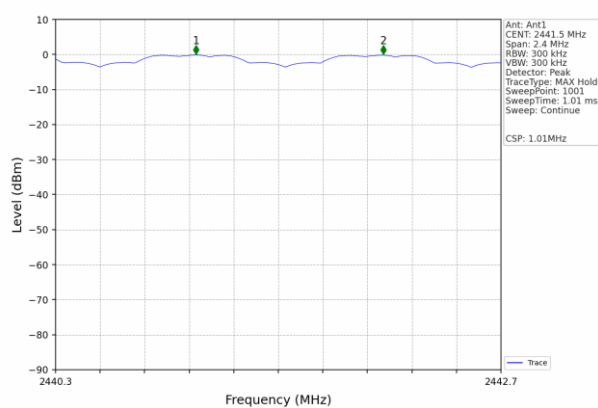 $\pi/4$ DPSK

## 8DPSK

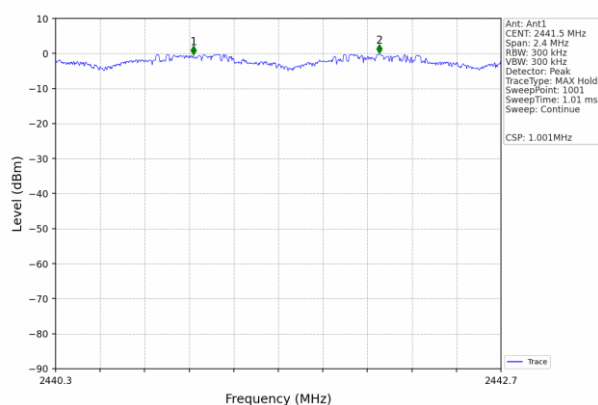



## 8.. DWELL TIME OF OCCUPANCY

### 8.1. APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |                              |        |                          |        |
|---------------------------------|------------------------------|--------|--------------------------|--------|
| Section                         | Test Item                    | Limit  | Frequency Range<br>(MHz) | Result |
| 15.247<br>(a)(1)(iii)           | Average Time<br>of Occupancy | 0.4sec | 2400-2483.5              | PASS   |

#### 8.1.1. TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for DH5, DH3 and DH1 packet transmitting.
- Measure the maximum time duration of one single pulse.
- A Period Time = (channel number)\*0.4  
DH1 Time Slot: Reading \* (1600/2)\*31.6/(channel number)  
DH3 Time Slot: Reading \* (1600/4)\*31.6/(channel number)  
DH5 Time Slot: Reading \* (1600/6)\*31.6/(channel number)

#### 8.1.2. DEVIATION FROM STANDARD

No deviation.

#### 8.1.3. TEST SETUP



#### 8.1.4. EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**8.1.5. TEST RESULTS**


|             |                      |
|-------------|----------------------|
| Test Mode : | CH39-DH5, 2DH5, 3DH5 |
|-------------|----------------------|


| Mode      | Packet | Pulse time (ms) | Dwell time(ms) | Limit(s) | Result |
|-----------|--------|-----------------|----------------|----------|--------|
| GFSK      | DH1    | 0.392           | 124.264        | 0.4      | Pass   |
|           | DH3    | 1.642           | 254.510        | 0.4      | Pass   |
|           | DH5    | 2.896           | 318.560        | 0.4      | Pass   |
| Pi/4DQPSK | 2-DH1  | 0.394           | 126.080        | 0.4      | Pass   |
|           | 2-DH3  | 1.648           | 266.976        | 0.4      | Pass   |
|           | 2-DH5  | 2.902           | 304.710        | 0.4      | Pass   |
| 8DPSK     | 3DH1   | 0.400           | 127.600        | 0.4      | Pass   |
|           | 3DH3   | 1.652           | 251.104        | 0.4      | Pass   |
|           | 3DH5   | 2.902           | 307.612        | 0.4      | Pass   |

Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second for DH1, 2-DH1


Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second for DH3, 2-DH3

Dwell time=Pulse time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second for DH5, 2-DH5

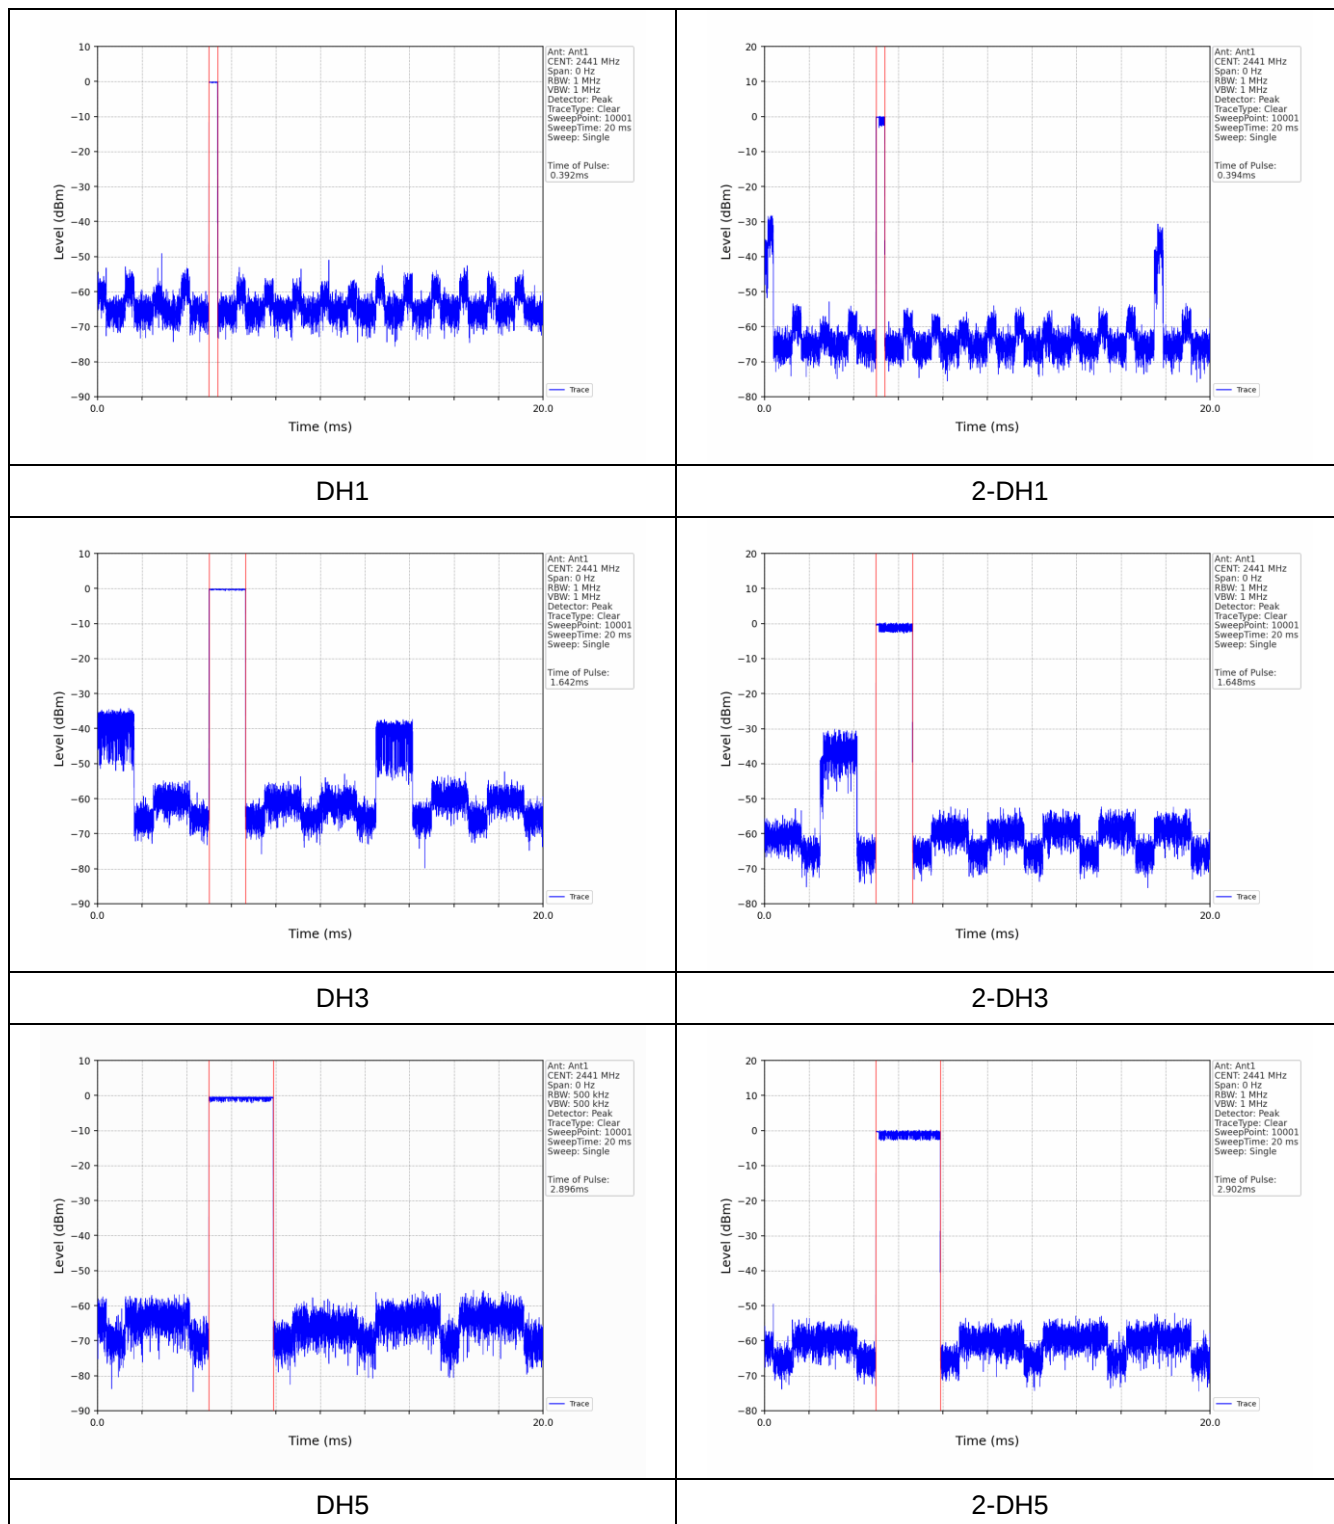


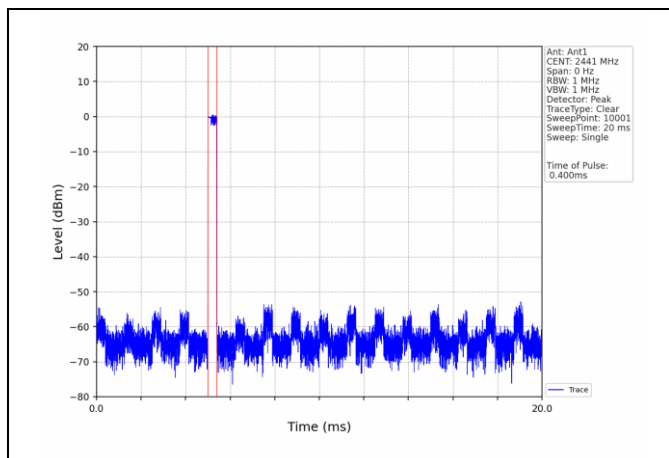

3-DH1

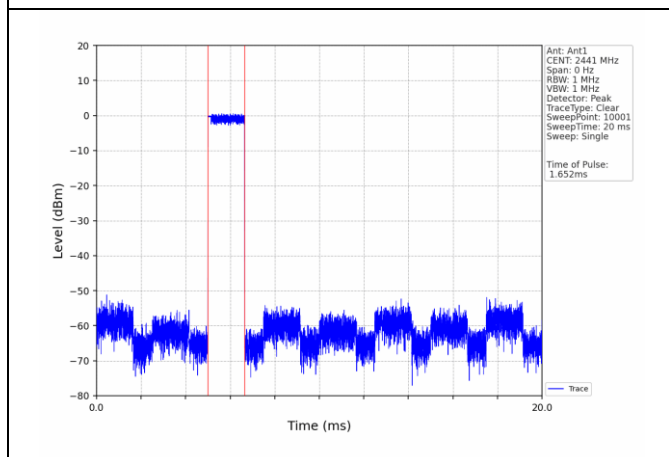

3-DH3

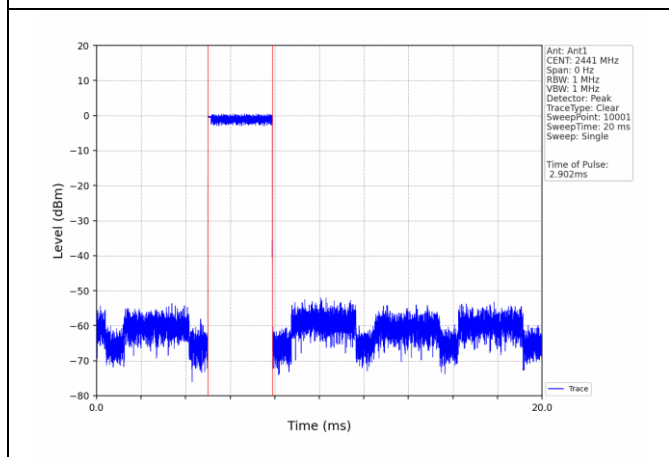

3-DH5



## **9.. ANTENNA REQUIREMENT**

### **9.1. STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **9.2. EUT ANTENNA**

The EUT antenna is internal antenna,. It comply with the standard requirement.

## **10.. TEST SEUUP PHOTO**

Reference to the appendix I for details.

## **11.. EUT PHOTO**

Reference to the appendix II for details.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***