

# TR20 series user manual



Shenzhen NNPO Technology co., ltd

April.2021

## Legal statement

### • Copyright Shenzhen NNPO Technology Co., Ltd all rights reserved.

Any part of this manual, including text, pictures and graphics, belongs to Shenzhen NNPO Technology Co., Ltd. or its affiliated company (hereinafter referred to as "NNPO").

Without written permission, no unit or individual may extract, copy, translate or modify all or part of this manual in any way. Unless otherwise agreed, NNPO does not provide any express or implied statement or guarantee for this manual.

### • About this product

This product can only enjoy after-sales service and maintenance in the country or region where it is purchased.

### • About this manual

This manual is only used as a guide for related products, which may be different from the actual products. Please refer to the actual products. NNPO may update this manual due to product version upgrade or other needs. If you need the latest manual, please log in to NNPO official website for reference.

NNPO recommends that you use this manual under the guidance of professionals.

### • Trademark declaration

Other trademarks involved in this manual are owned by their respective owners.

### • Statement of responsibility

To the maximum extent permitted by law, this manual and the products described (including its hardware, software, firmware, etc.) are provided "as is", and there may be defects or errors. NNPO does not provide any express or implied warranty, including but not limited to the warranties of merchantability, quality satisfaction and suitability for specific purposes; There is no compensation for any special, incidental, incidental or indirect damages caused by the use of this manual or NNPO products, including but not limited to the loss of business profits, system failure, loss of data or documents.

You are aware of the openness of the Internet, and there may be risks such as network attack, hacker attack and virus infection when you connect your products to the Internet. NNPO will not be responsible for the abnormal operation of products and information leakage caused by

this, but NNPO will provide you with technical support related to products in time.

When using this product, please strictly abide by the applicable laws and regulations and avoid infringing the rights of third parties, including but not limited to the right of publicity, intellectual property rights, data rights or other privacy rights. You may not use this product for weapons of mass destruction, chemical and biological weapons, nuclear explosions or any unsafe use of nuclear energy or for human rights violations.



When laser is turned on, please do not irradiate the eyes and skin. The laser emitted by the equipment may cause damage to eyes and skin.

Description of icons used in the manual:

 — Warning, the words involved in danger or harm.

 — Tips, additional instructions, or helpful techniques.

 — Comments, a description of the meaning of words.

## Precautions for safe use



### DANGER

- In the process of equipment installation and use, all electrical safety regulations of the using countries and regions must be strictly observed. Use a matched power supply that meets the requirements of SELV (safety extra low voltage).
- Please use the power adapter provided by the regular manufacturer. Please refer to the product parameter table for specific requirements of the power adapter.
- During wiring, disassembly and other operations, the power supply of the equipment should be disconnected, and live operation is not allowed.
- Do not place the battery near the heat source or fire source to avoid direct sunlight.
- Batteries of correct specifications should be used, as improper use may cause explosion hazard. After the battery is installed or removed, it is required to close the battery compartment safely.
- Do not swallow batteries to avoid chemical burns.
- Do not place the battery within the reach of children.
- If the equipment is laser equipment, do not direct the laser at human eyes to avoid possible harm to human eyes.

- After the laser is turned on, it is strictly forbidden to aim the laser at objects with strong reflection, such as glass and reflector, to avoid laser reflection damaging the thermal imaging detector.

### CAUTION

- Do not put the thermal imager directly at high-temperature targets, such as the sun, laser, welding machine, etc., otherwise the thermal imaging detector will be damaged.
- The time interval between two power-on and power-off should be greater than 20 seconds.
- The thermal imager combines precise optical instruments and electronic equipment sensitive to static electricity, so please avoid objects falling on the equipment or vibrating the equipment vigorously, and keep the equipment away from places where magnetic field interference exists.
- Avoid installing the equipment where the surface vibrates or is easily impacted (ignoring this item may damage the equipment).

## Precautions for safe use

- Exceeding the use environment specified in this manual may cause damage to the thermal imager. Please do not use the product in extremely hot, cold, dusty, corrosive, high salinity or high humidity environment. Please refer to the product parameter table for specific temperature and humidity requirements.
- When the thermal imager is not in use and during transportation, please take out the battery and place the thermal imager in a protective packaging box.
- When the battery is too low during use, please replace the battery in time to avoid damage to the battery caused by over discharge.
- When the equipment is not in use, please cover the lens protection cover to protect the image sensor.
- When it is necessary to clean the non-optical surface of the thermal imager, do not scrub with chemical solvents, thinners, etc., but wipe the shell with clean, soft and dry flannelette.
- The infrared lens of thermal imager is coated with an anti-reflection film, which only needs to be cleaned when it is obviously dirty. Frequent scrubbing of the lens may lead to wear of the lens coating. Please avoid touching the lens surface.

Acidic substances on the skin left by fingerprints will damage the coating and lens surface. Only use special lens cloth to clean the lens.

- If you connect your products to the Internet at your own risk, including but not limited to network attacks, hacker attacks, virus infections, etc., our company will not be responsible for the abnormal operation and information leakage of the products, but we will provide you with technical support related to the products in time.
- Equipment access to the Internet may suffer network security problems, please enhance the protection of personal information and data security. When you find that the equipment may encounter network security risks, please contact us in time.
- Please do not disassemble the thermal imager by yourself. Please contact the factory in case of failure, otherwise no warranty will be given.
- Please keep all the original packaging materials of the equipment properly, so that in case of problems, the equipment can be packaged with packaging materials and sent to the service center for processing. Our company will not bear any responsibility for accidental damage in transit caused by non-original packaging materials.

04

## Catalogue

Legal statement .....	01
Preface .....	02
Precautions for safe use .....	03
1 Product overview .....	09
2 Product features .....	09
3 Main technical parameters .....	11
4 Packing configuration .....	13
5 Use operation .....	14
5.1 Components of thermal imager .....	14
5.2 Preparation before use .....	16
5.2.1 check .....	16
5.2.2 Battery installation .....	16
5.3 Key function description .....	16
5.3.1 The thermal imager buttons are shown below .....	16

05

5.4 Power On/Off .....	18
5.5 Key shortcut operation instructions .....	19
5.6 Commissioning of thermal imager .....	20
5.6.1 Eyepiece vision adjustment .....	20
5.6.2 Focusing of infrared lens .....	20
5.7 Main image interface of thermal imager .....	21
5.8 Operating instructions of thermal imager shortcut menu .....	22
5.8.1 Enter the shortcut menu .....	22
5.8.2 Calibration .....	22
5.8.3 picture in picture .....	23
5.8.4 laser ranging .....	23
5.8.5 Hot spot tracking .....	24
5.8.6 compass .....	24
5.8.7 WIFI .....	25

5.8.8 Low Power .....	25
5.9 Operating instructions of main menu of thermal imager .....	25
5.9.1 Palette .....	26
5.9.2 bright .....	26
5.9.3 contrast .....	27
5.9.4 Sharp .....	27
5.9.5 setting .....	28
5.9.5.1 calibration .....	28
5.9.5.2 picture in picture .....	28
5.9.5.3 Hot spot tracking .....	28
5.9.5.4 screen Brightness .....	28
5.9.5.5 Automatic sleep .....	29
5.9.5.6 automatic OFF .....	29
5.9.5.7 Reset .....	29

5.9.6 Advanced settings .....	30
5.9.6.1 Reticle Type .....	30
5.9.6.2 Reticle color .....	30
5.9.6.3 Model .....	30
5.9.6.4 Zeroing .....	31
5.9.6.5 language .....	31
6 Analysis and elimination of common faults .....	32
7 maintaining .....	34
after service .....	36

## •1 Product overview

TR20 series is an excellent infrared thermal imaging scope. Compact design, small size, light weight and portable. Using the most advanced infrared thermal imaging night vision system with excellent image quality. It can meet the requirements of high shock vibration and can adapt to various harsh environments. There are a variety of aiming cursors can be selected, with the functions of taking pictures, video recording, WIFI transmission, etc., to meet various applications in law enforcement inspection, outdoor hunting and other occasions.

## •2 Product features

- Light, small and powerful.
- The most advanced 12μm pixel, which provides clearer image and farther observation;
- The world's exclusive warm color display design, which protects the eyes even in case of long-term use.

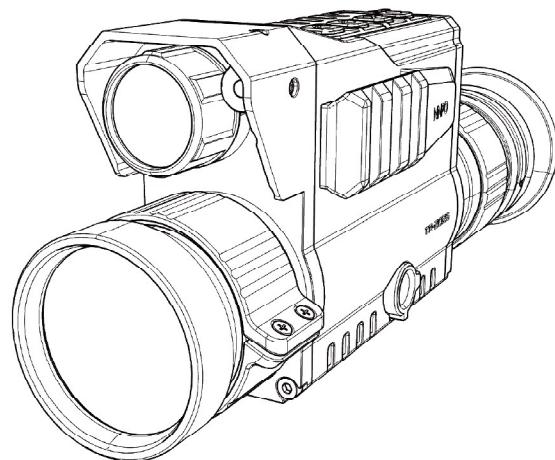


Figure 1 Thermal imager

- The only lighting auxiliary function in the world;
- APP remote control and real-time Internet streaming media;

### •3 Main technical parameters

Resolution,Pixel	Uncooled 384*288
Pixel Size, micron	12μm
Refresh Rate	50Hz;
Display Resolution	1280*960 (LCOS)
Digital zoom	2×, 4×
Objective Lens	19mm/25mm/35mm
Field of View (HxV)	13.8°×10.4°/10.5°×7.9°/ 7.5°×5.7°
Eyerelief	40mm
Dioptre adjustment, dpt	±5
Calibration	Shutter Calibration, scene Calibration, automatic Calibration
Reticle	8 types and 5 colors;
palette	white hot,black hot,red hot,green hot,blue hot,amber,iron red,hot iron



picture in picture	yes		
flashlight	yes		
Laser indicator	yes		
WIFI	Connect with mobile APP		
digital compass	yes		
accelerometer	yes		
Hot spot tracking	yes		
Take pictures and videos	yes		
video output	Composite video output		
battery	1x 18650		
Working hours	Single battery > 4 hours		
External power supply	TYPE-C		
Shell material	Aviation aluminum alloy		
measure/ weight	19mm focal length	186mm*51mm*74mm	540g
	25mm focal length	189mm*51mm*74mm	560g
	35mm focal length	195mm*51mm*74mm	560g
the protection grades	IP67		
Working temperature	-30°C~60°C		



#### • 4 Packing configuration

The thermal imager configuration is shown below.

item No	item description	quantity
①	Thermal imager	1 piece
②	Model 18650 rechargeable battery	2 pieces (optional)
③	charger	1 piece
④	User manual	1 piece
⑤	Wipe cloth	1 piece
⑥	tool kit	1 set

