

TEST REPORT

Part 15 Subpart C 15.247

Equipment under test Bluetooth Speaker

Model name ARMY ROOM

FCC ID 2AZWB-ARMYSROOM

Applicant KEIKEY CO.,LTD.

Manufacturer KEIKEY CO.,LTD.

Date of test(s) 2021.05.17 ~ 2021.05.24

Date of issue 2021.05.28

Issued to

KEIKEY CO.,LTD.

317, Dosan-daero, Gangnam-gu, Seoul, Republic of Korea

Tel: +82-02-3448-0777 / Fax: +82-02-3448-0888

Issued by

KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,

Gyeonggi-do, 14057, Korea

473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea

Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
	
Do-Won Ahn Test engineer	Young-Jin Lee Technical manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr



Revision history

Revision	Date of issue	Test report No.	Description
-	2021.05.28	KES-RF1-21T0090	Initial

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

TABLE OF CONTENTS

1. General information.....	4
1.1. EUT description	4
1.2. Test configuration.....	5
1.3. Device modifications	5
1.4. Frequency/channel operations.....	5
1.5. Accessory information.....	5
1.6. Software and Firmware description.....	5
1.7. Measurement results explanation example	5
1.8. Measurement Uncertainty.....	6
2. Summary of tests	7
3. Test results.....	8
3.1. 20 dB bandwidth	8
3.2. Output power.....	11
3.3. Carrier frequency separation.....	13
3.4. Number of hopping frequency	15
3.5. Time of occupancy	16
3.6. Radiated restricted band and emissions	20
3.7. Conducted band edge and out of band emissions	40
Appendix A. Measurement equipment.....	44
Appendix B. Test setup photo.....	45

1. General information

Applicant: KEIKEY CO.,LTD.
Applicant address: 317, Dosan-daero, Gangnam-gu, Seoul, Republic of Korea
Test site: KES Co., Ltd.
Test site address: □3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,
Gyeonggi-do, 14057, Korea
■473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea
Test Facility: FCC Accreditation Designation No.: KR0100, Registration No.: 444148
FCC rule part(s): 15.247
FCC ID: 2AZWB-ARMYSROOM
Test device serial No.: Production Pre-production Engineering

1.1. EUT description

Equipment under test: Bluetooth Speaker
Frequency range: 2 402 MHz ~ 2 480 MHz (BDR/EDR/LE_1 Mbps)
Model: ARMY ROOM
Number of channels: 2 402 MHz ~ 2 480 MHz (BDR/EDR) : 79ch
Modulation technique: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna specification: PCB Antenna // Peak gain: -0.68 dBi
Power source: DC 4.5 V (Battery)
H/W version: bluetooth5.1
S/W version: HJX2021059V02

15.247(a)(1) that the rx input bandwidths shift frequencies in synchronization with the transmitted signals.

15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

Pseudorandom frequency hopping sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1 600 hops/s.

Equal hopping frequency use

The channels of this system will be used equally over the long-term distribution of the hopsets.

System receiver input bandwidth

Each channel bandwidth is 1 MHz.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

1.2. Test configuration

The **KEIKEY CO.,LTD. Bluetooth Speaker FCC ID: 2AZWB-ARMYSROOM** was tested according to the specification of EUT, the EUT must comply with following standards and KDB documents.

FCC Part 15.247

KDB 558074 D01 v05 r02

ANSI C63.10-2013

1.3. Device modifications

N/A

1.4. Frequency/channel operations

Ch.	Frequency (MHz)	Rate(Mbps)
01	2402	1/3
:	:	:
41	2442	1/3
:	:	:
79	2480	1/3

1.5. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source

1.6. Software and Firmware description

The software and firmware installed In the EUT is version HJX2021059V02

1.7. Measurement results explanation example

For all conducted test items

The TDF contains cable loss values and Attenuator factor, and the spectrum analyzer readout level is exactly the EUT RF output level.

$$\begin{aligned} \text{TDF(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 1.56 + 10 = 11.56 \end{aligned}$$

For Radiation test:

Field strength level (dB μ V/m) = Measured level (dB μ V) + Antenna factor (dB) + Cable loss (dB) - Amplifier gain (dB)

1.8. Measurement Uncertainty

Test Item	Uncertainty	
Uncertainty for Conduction emission test	2.46 dB	
Uncertainty for Radiation emission test (include Fundamental emission)	Below 1 GHz	4.40 dB
	Above 1GHz	5.94 dB
Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		

2. Summary of tests

Reference	Test description	Test results
15.247(a)(1)	20 dB bandwidth	Pass
15.247(b)(1)	Output power	Pass
15.247(a)(1)	Channel separation	Pass
15.247(a)(1)(iii)	Number of channels	Pass
15.247(a)(1)(iii)	Time of occupancy	Pass
15.205, 15.209	Radiated restricted band and emission	Pass
15.247(d)	Conducted band edge and out of band emissions	Pass
15.207(a)	AC conducted emissions	N/A

NOTE: The EUT uses a lithium battery with DC 4.5 V, and therefore the test suites related to AC Mains port were not applicable.


3. Test results

3.1. 20 dB bandwidth

Test procedure

ANSI C63.10-2013 clause 6.9.2 and 6.9.3

Test setup



Test setting


1. Span = The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 2.0 times and 5.0 times the OBW.
2. RBW = The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW.
3. VBW = Shall be approximately three times the RBW.
4. Sweep = auto
5. Detector function = peak
6. Trace mode = max hold

Limit

Not applicable


Test results

Frequency(MHz)	Channel no.	Data rate(Mbps)	Measured bandwidth(MHz)
2 402	01	1	0.902
2 442	41		0.902
2 480	79		0.947
2 402	01	2	1.286
2 442	41		1.286
2 480	79		1.283
2 402	01	3	1.286
2 442	41		1.286
2 480	79		1.286

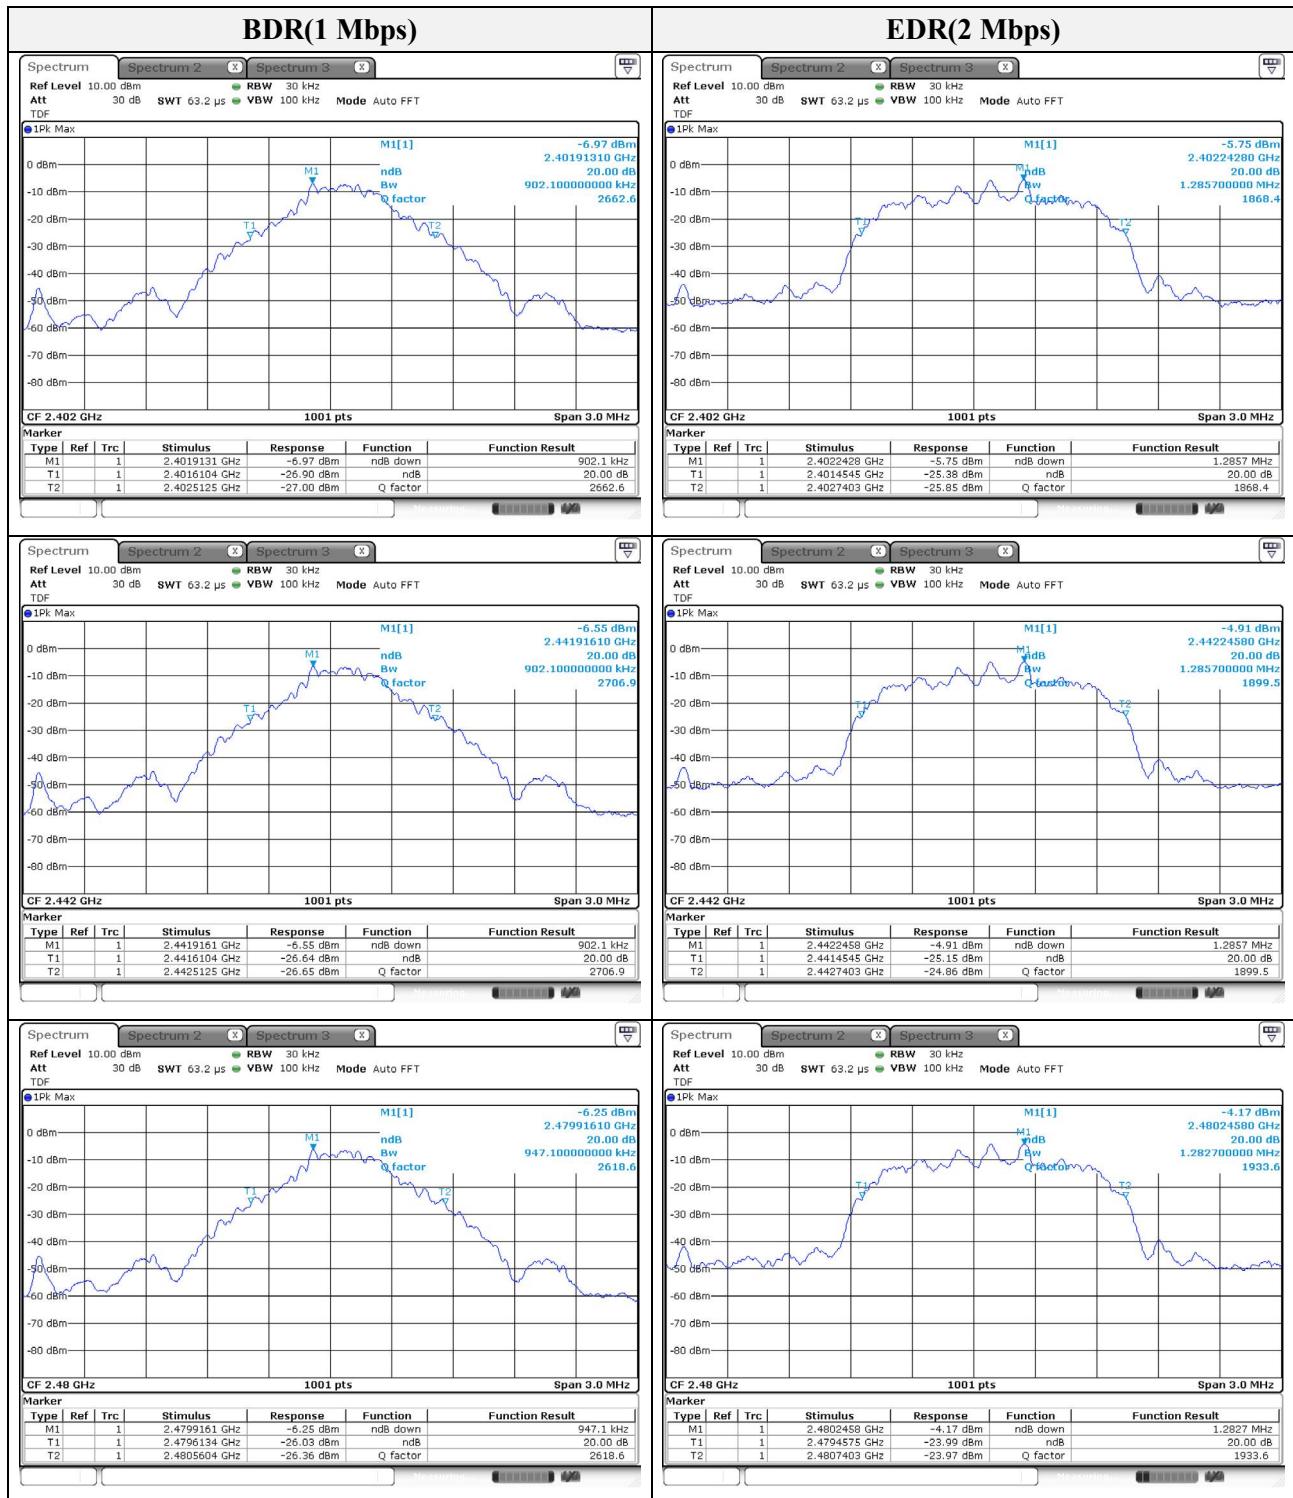

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

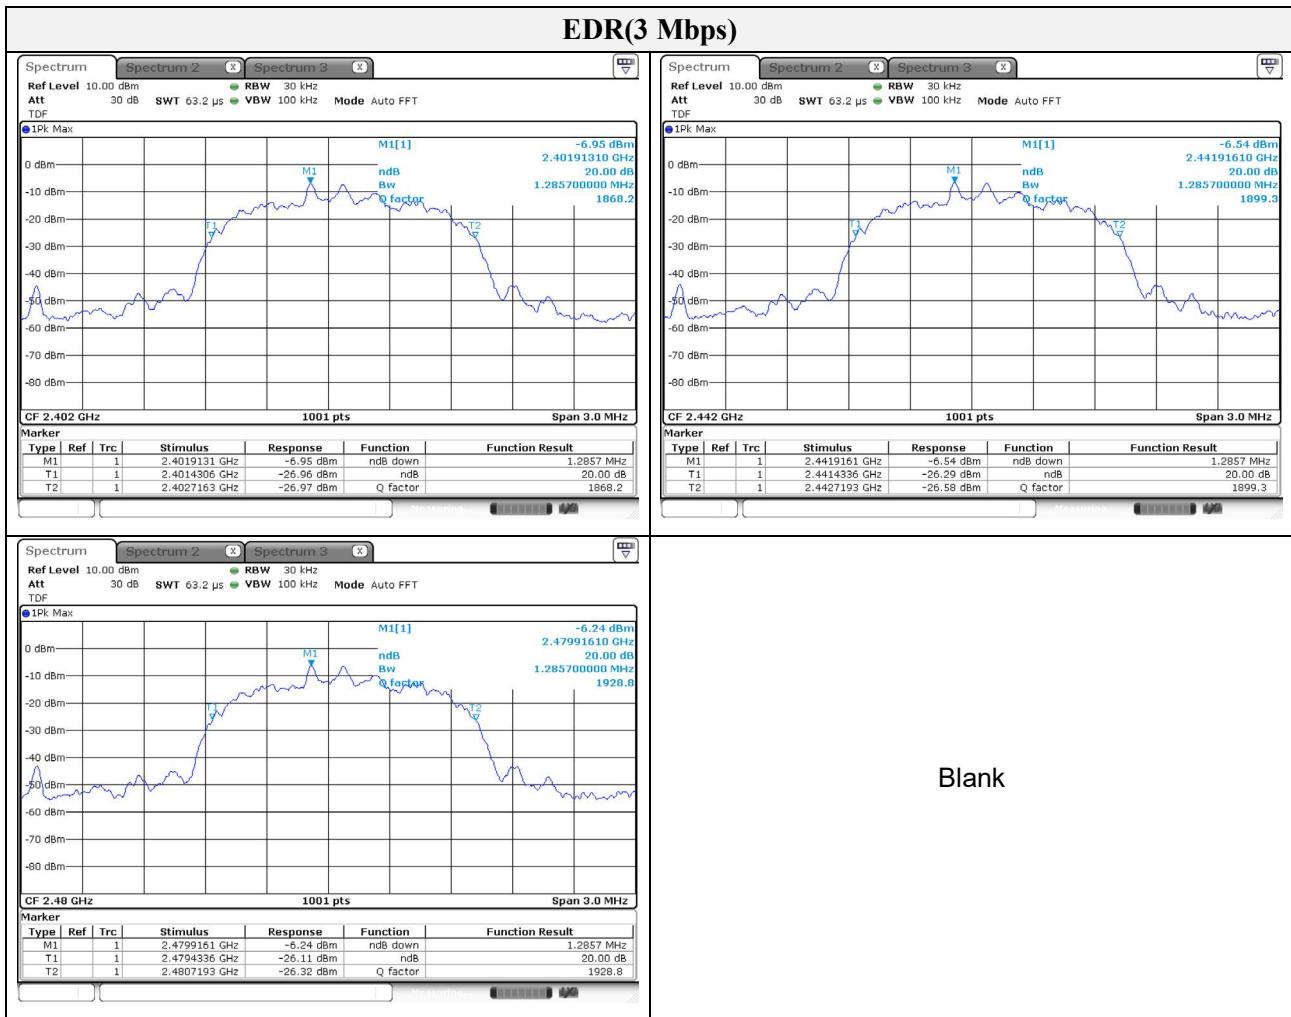


Blank

3.2. Output power

Test procedure

ANSI C63.10-2013 - Section 7.8.5

Test setup

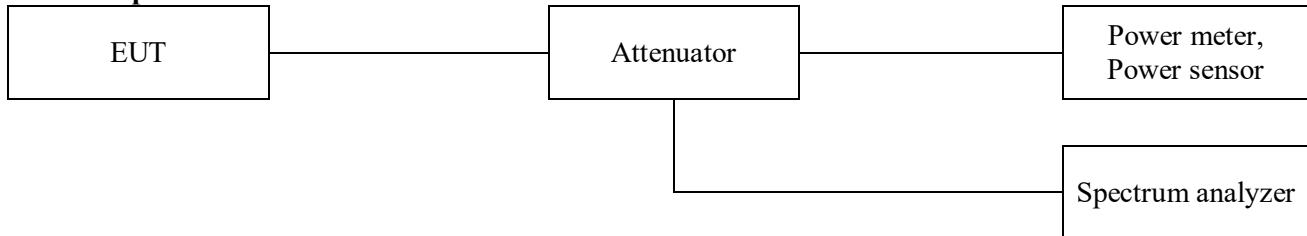

Test setting

1. Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
2. RBW > the 20 dB bandwidth of the emission being measured
3. VBW \geq RBW
4. Sweep = Auto
5. Detector function = Peak
6. Trace = Max hold

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables. A plot of the test results and setup description shall be included in the test report.

-A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

Limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(1), For frequency hopping systems operating in the 2 400 ~ 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 ~ 5 805 MHz band: 1 Watt.



Test results

Frequency(MHz)	Channel no.	Data rate (Mbps)	Peak Power (dBm) ^{Note1}	Average Power (dBm) ^{Note1}	Power Limit (dBm)
2 402	01	1	-2.36	-3.49	20.97
2 442	41		-1.51	-2.63	20.97
2 480	79		-0.91	-1.87	20.97
2 402	01	2	-1.02	-4.42	20.97
2 442	41		-1.74	-2.66	20.97
2 480	79		-0.91	-1.82	20.97
2 402	01	3	-1.66	-5.32	20.97
2 442	41		-0.91	-4.92	20.97
2 480	79		-0.16	-4.00	20.97

Note.


1. The peak power and average power were tested using power meter, power sensor.

3.3. Carrier frequency separation

Test procedure

ANSI C63.10-2013 - Section 7.8.2

Test setup



Test Setting

1. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
2. Span = wide enough to capture the peaks of two adjacent channels
3. RBW = Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
4. Video (or Average) Bandwidth (VBW) \geq RBW
5. Sweep = auto
6. Detector function = peak
7. Trace = max hold


Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

Limit

According to 15.247(a)(1), frequency hopping system operating in 2 400 ~ 2 483.5 MHz. Band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test results

Frequency(MHz)	Channel no.	Data rate(Mbps)	Channel Separation (MHz)
2 442	41	1	0.998
2 442	41	3	1.001

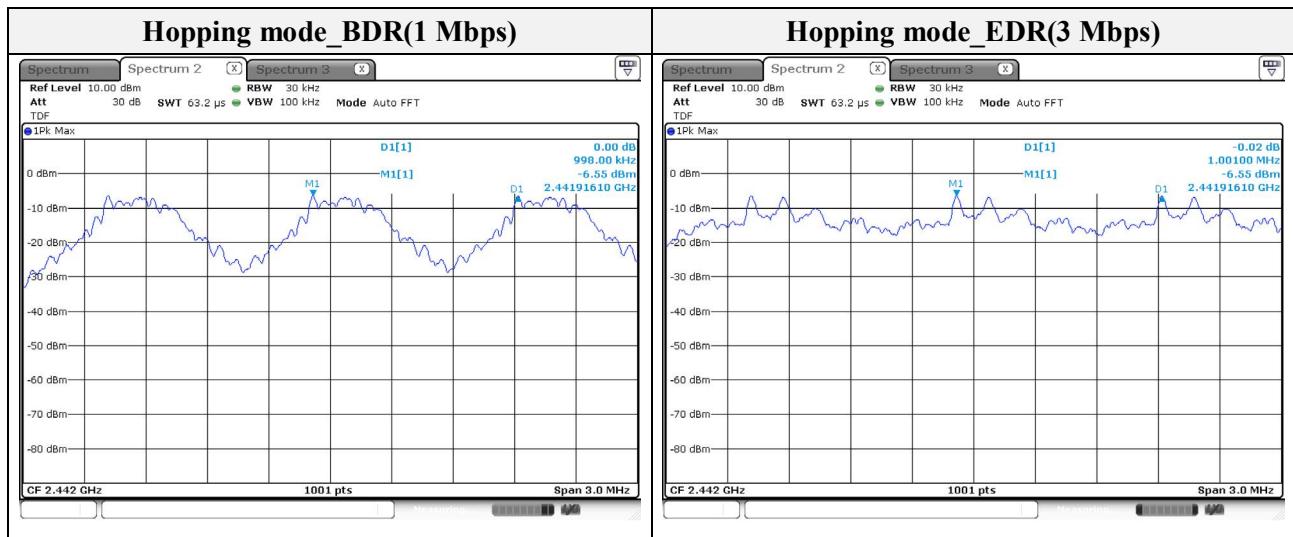

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


The authenticity of the test report, contact shchoi@kes.co.kr

3.4. Number of hopping frequency

Test procedure

ANSI C63.10-2013 - Section 7.8.3

Test setup



Test setting


1. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
2. Frequency range: 2 400 MHz to 2 483.5 MHz
3. Span = the frequency band of operation
4. RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
5. VBW \geq RBW
6. Sweep = auto
7. Detector function = peak
8. Trace = max hold

Allow the trace to stabilize. It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

Limit

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 MHz bands shall use at least 15 hopping frequencies.

Test results

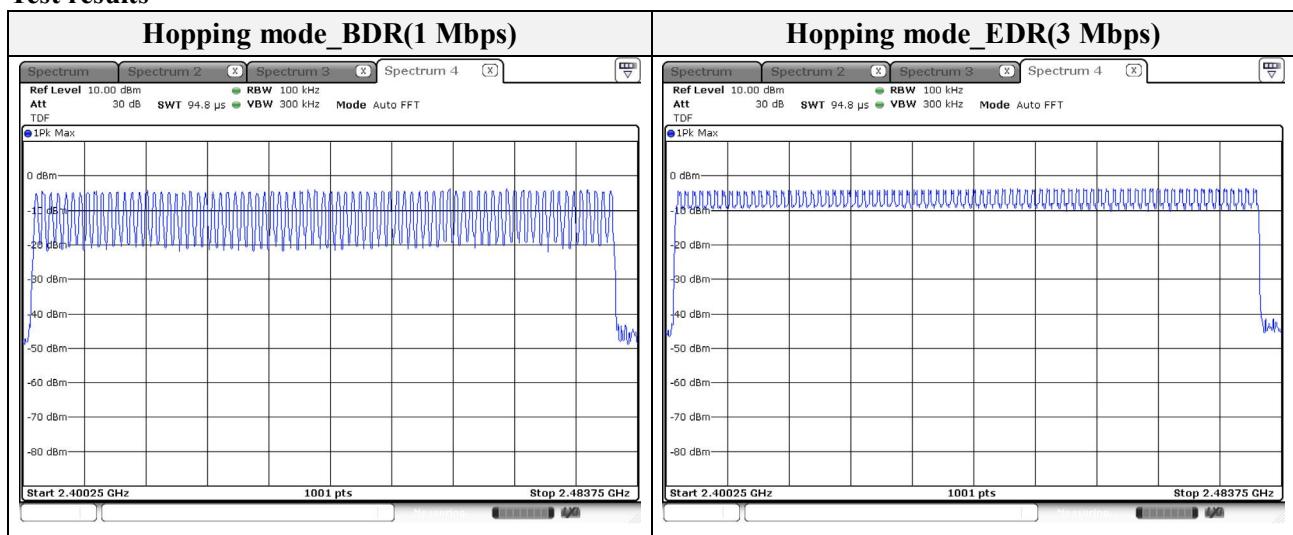

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


The authenticity of the test report, contact shchoi@kes.co.kr

3.5. Time of occupancy

Test procedure

ANSI C63.10-2013 - Section 7.8.4

Test setup



Test setting

1. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
2. Span = zero span, centered on a hopping channel
4. RBW = shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
5. VBW = 1 MHz (\geq RBW)
6. Sweep = as necessary to capture the entire dwell time per hopping channel
7. Detector function = peak
8. Trace = max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Limit

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a period of 0.4 seconds multiplied by the number of hopping channels employed.

A period time = $0.4(s) \times 79 = 31.6(s)$

Time of occupancy on the TX channel in 31.6 sec
 = time domain slot length \times (hop rate \div number of hop per channel) \times 31.6

*Adaptive Frequency Hopping

A period time = $0.4(s) \times 20 = 8(s)$

Time of occupancy on the TX channel in 8 sec
 = time domain slot length \times (hop rate \div number of hop per channel) \times 8

Test results

Packet type		Frequency (MHz)	Dwell time (ms)	A period time (s)	Time of occupancy on the Tx channel	Limit for time of occupancy on the Tx channel
DH1	Non-AFH	2 442	0.374	31.6	119.68	400
DH3	Non-AFH	2 442	1.632	31.6	216.12	400
DH5	Non-AFH	2 442	2.877	31.6	306.88	400
2-DH1	Non-AFH	2 442	0.384	31.6	122.88	400
2-DH3	Non-AFH	2 442	1.630	31.6	260.80	400
2-DH5	Non-AFH	2 442	2.881	31.6	307.31	400
3-DH1	Non-AFH	2 442	0.385	31.6	123.20	400
3-DH3	Non-AFH	2 442	1.639	31.6	262.24	400
3-DH5	Non-AFH	2 442	2.885	31.6	307.73	400

Note:

1. Non-AFH

DH1: Dwell time (ms) \times [(1 600 \div 2) \div 79] \times 31.6(s) = 119.68

DH3: Dwell time (ms) \times [(1 600 \div 4) \div 79] \times 31.6(s) = 216.12

DH5: Dwell time (ms) \times [(1 600 \div 6) \div 79] \times 31.6(s) = 306.88

2-DH1: Dwell time (ms) \times [(1 600 \div 2) \div 79] \times 31.6(s) = 122.88


2-DH3: Dwell time (ms) \times [(1 600 \div 4) \div 79] \times 31.6(s) = 260.80

2-DH5: Dwell time (ms) \times [(1 600 \div 6) \div 79] \times 31.6(s) = 307.31

3-DH1: Dwell time (ms) \times [(1 600 \div 2) \div 79] \times 31.6(s) = 123.20




3-DH3: Dwell time (ms) \times [(1 600 \div 4) \div 79] \times 31.6(s) = 262.24

3-DH5: Dwell time (ms) \times [(1 600 \div 6) \div 79] \times 31.6(s) = 307.73

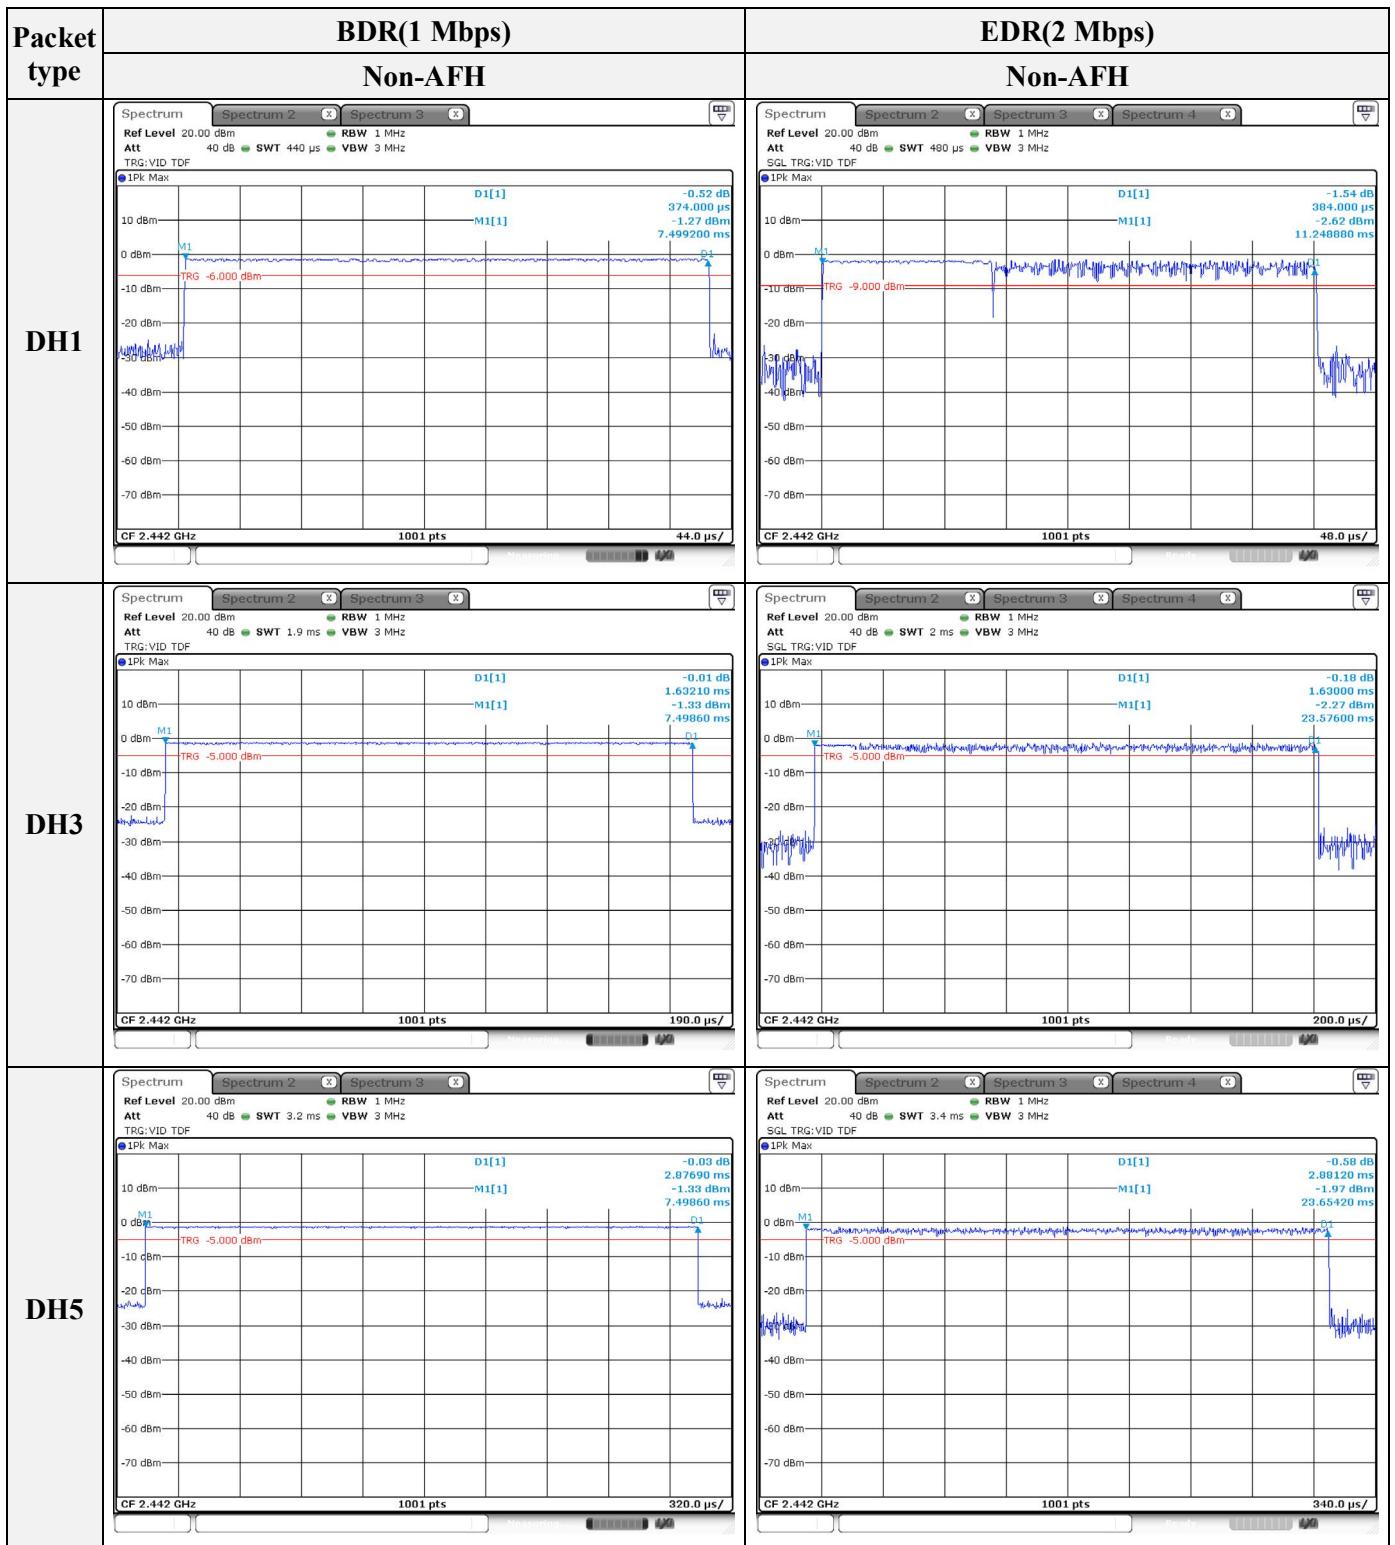

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

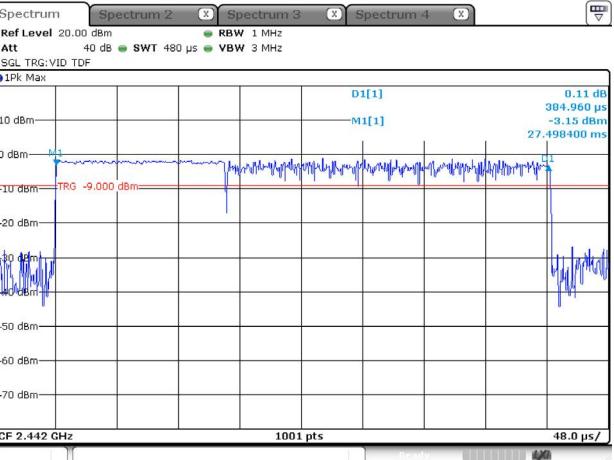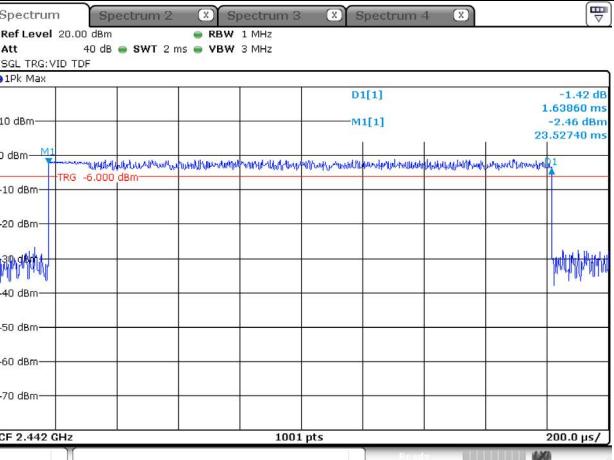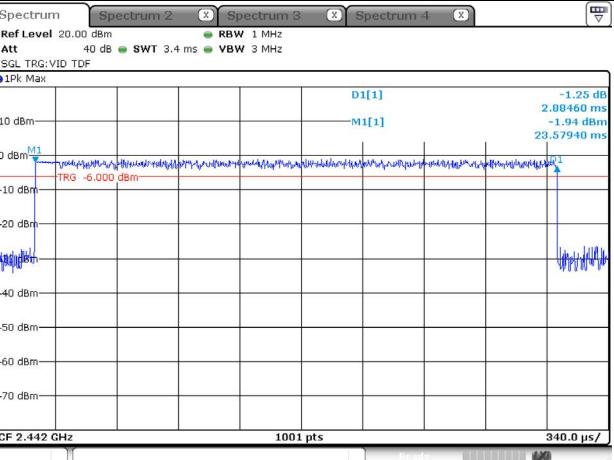Packet type	EDR(3 Mbps)		-
	Non-AFH		
DH1			Blank
DH3			Blank
DH5			Blank


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr


3.6. Radiated restricted band and emissions

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

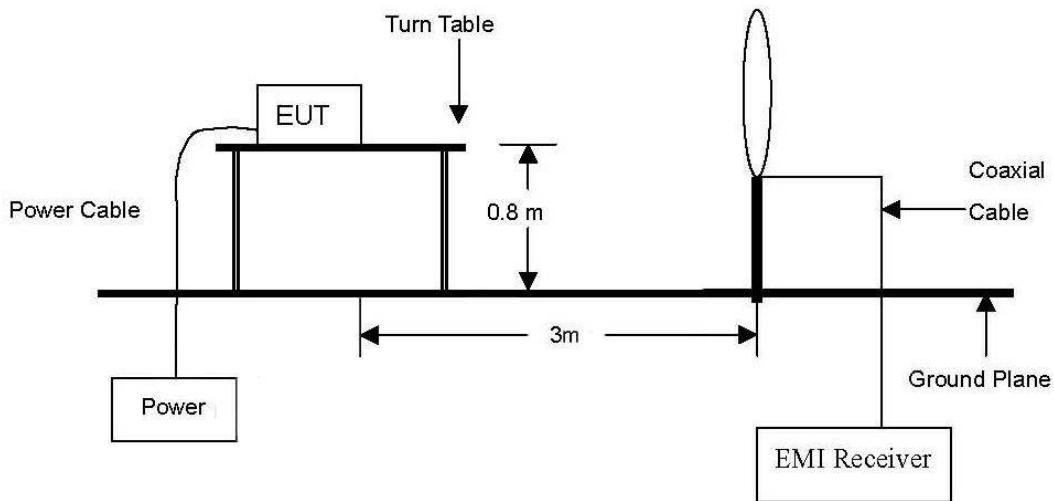

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

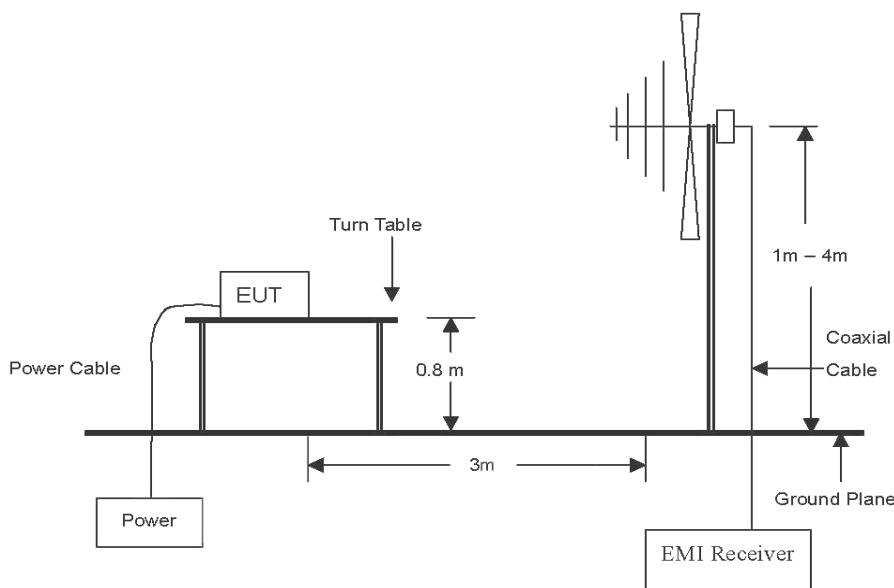

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

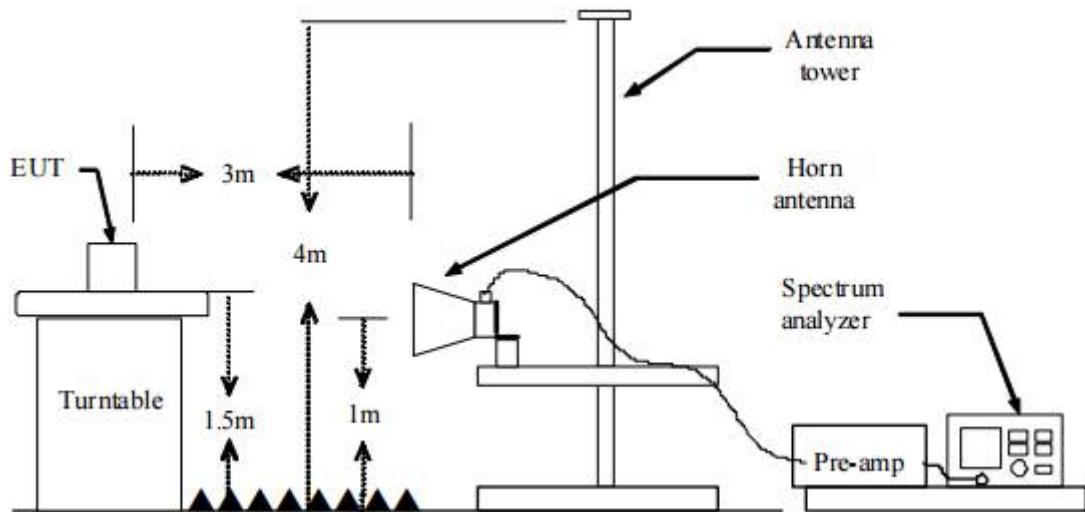

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

Test procedure

1. The EUT is placed on a turntable, which is 0.8 m (below 1 GHz) and 1.5 m (above 1 GHz) ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum analyzer settings for $f < 1$ GHz:
Span = wide enough to fully capture the emission being measured
RBW = 100 kHz
VBW \geq RBW
Sweep = auto
Detector function = quasi peak
Trace = max hold

8. Spectrum analyzer settings for $f \geq 1$ GHz: Peak

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

9. Spectrum analyzer settings for $f \geq 1$ GHz: Average

Average value of pulsed emissions.

Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall be determined from the peak field strength after correcting for the worst-case duty cycle as described in 7.5 in ANSI 63.10-2013 & Procedure 9(b) in the KDB 558074 v05r02.

10. Duty Cycle Correction Factor (20 channel hopping in AFH mode)

a. Time to cycle through all channels = $\Delta t = \tau[\text{ms}] \times 20 \text{ channels} = 58.00 \text{ ms}$, where τ = pulse width

b. $100 \text{ ms} / \Delta t[\text{ms}] = H \rightarrow$ Round up to next highest integer, $H = 2$, where H = number of hops

c. Worst Case Dwell Time = $\tau[\text{ms}] \times H = 5.80 \text{ ms}$

d. Duty Cycle Correction = $20 \log (\text{Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = -24.73 \text{ dB}$

11. Both 2Mbps & 3Mbps data rate were investigated. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

Note:

1. The spectrum is measured from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1 GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20 dB of the respective limits were not reported.
2. The loop antenna was investigated with three polarizations, and horizontal and vertical polarizations were reported as the worst case.
3. According to 15.35 (c), as a “duty cycle correction factor”, pulse averaging with $20 \log(\text{duty cycle})$ has to be used.
Duty cycle correction factor = $20\log(\text{dwell time}/100 \text{ ms})$
4. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
5. Average test would be performed if the peak result were greater than the average limit.
6. Field strength(dB μ V/m) = Level(dB μ V) + Correction factors(dB/m) + Cable loss(dB) + or F_d (dB)
7. Correction factors(dB/m) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB)
8. Margin(dB) = Limit(dB μ V/m) - Field strength(dB μ V/m)
9. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.
10. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
11. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open field test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
12. $f < 30 \text{ MHz}$, extrapolation factor of 40 dB/decade of distance. $F_d = 40\log(D_m / D_s)$
 $f \geq 30 \text{ MHz}$, extrapolation factor of 20 dB/decade of distance. $F_d = 20\log(D_m / D_s)$

Where:

F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters

Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (μ V/m)
0.009 ~ 0.490	300	2 400 / F(kHz)
0.490 ~ 1.705	30	24 000 / F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Duty cycle


Regarding to KDB 558074 D01_v05 r02, 6. Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on- and off-times of the transmitted signal.
- The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on- and off-times of the transmitted signal.

T _{on} time (ms)	Period (ms)	Duty cycle (Linear)	Duty cycle (%)	Duty cycle correction factor (dB)
2.862	3.723	0.767	76.74	1.15
2.868	3.729	0.769	76.91	1.14
2.861	3.730	0.767	76.70	1.15

Duty cycle (Linear) = T_{on} time/Period

DCF(Duty cycle correction factor (dB)) = 10log(1/duty cycle)

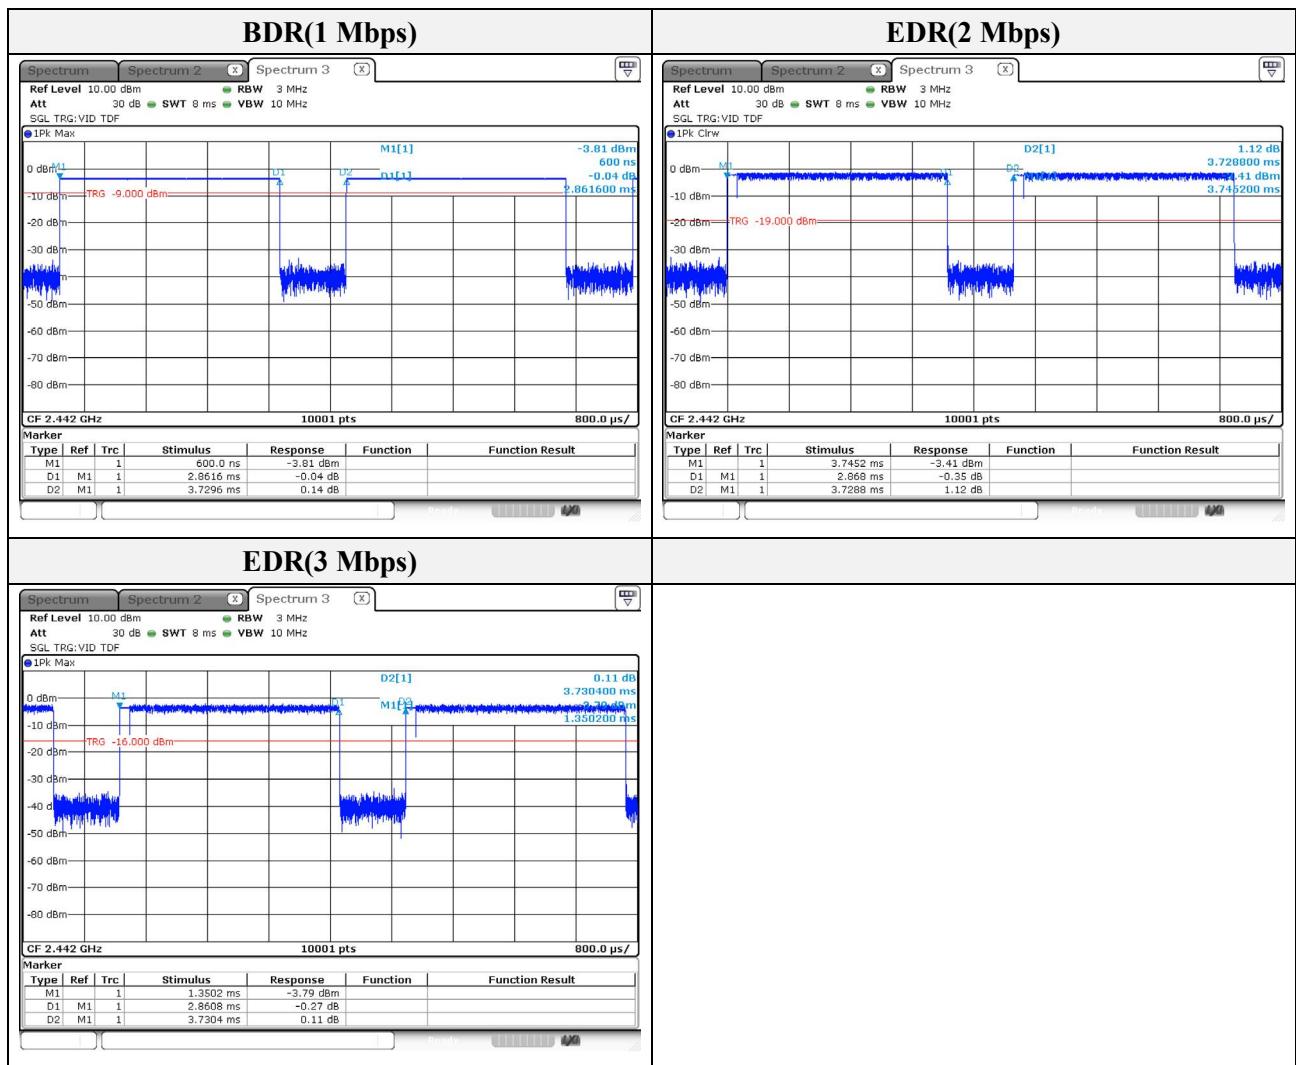


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

Test results (Below 30 MHz)

Mode:	EDR
Transfer rate:	1 Mbps
Distance of measurement:	3 meter
Channel:	79(Worst case)

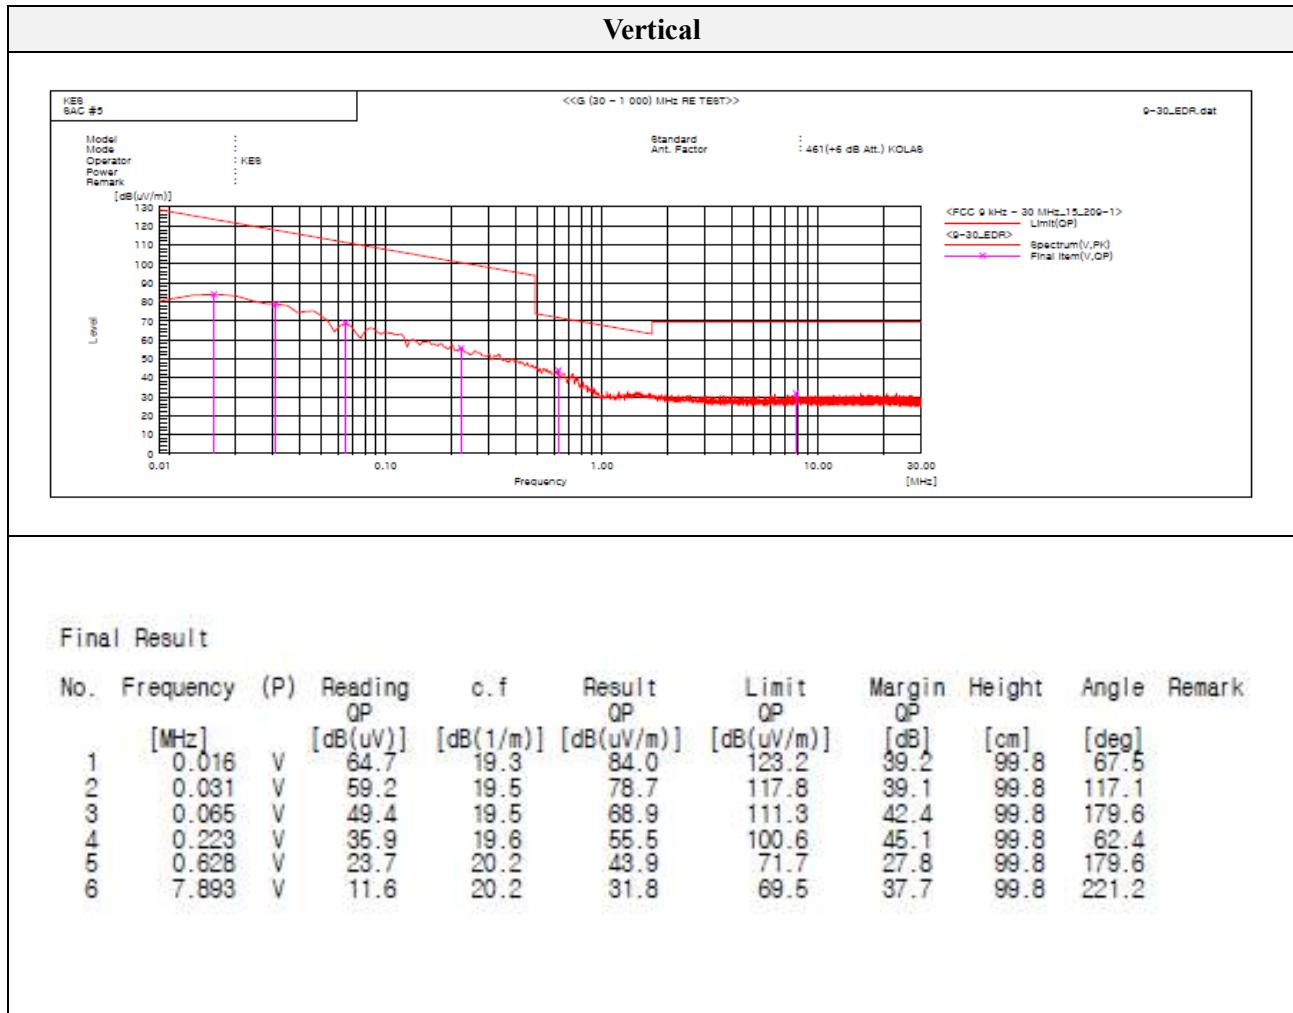


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

Test results (Below 1 000 MHz) – Worst case

Mode:	EDR
Transfer rate:	3 Mbps
Distance of measurement:	3 meter
Channel:	79(Worst case)

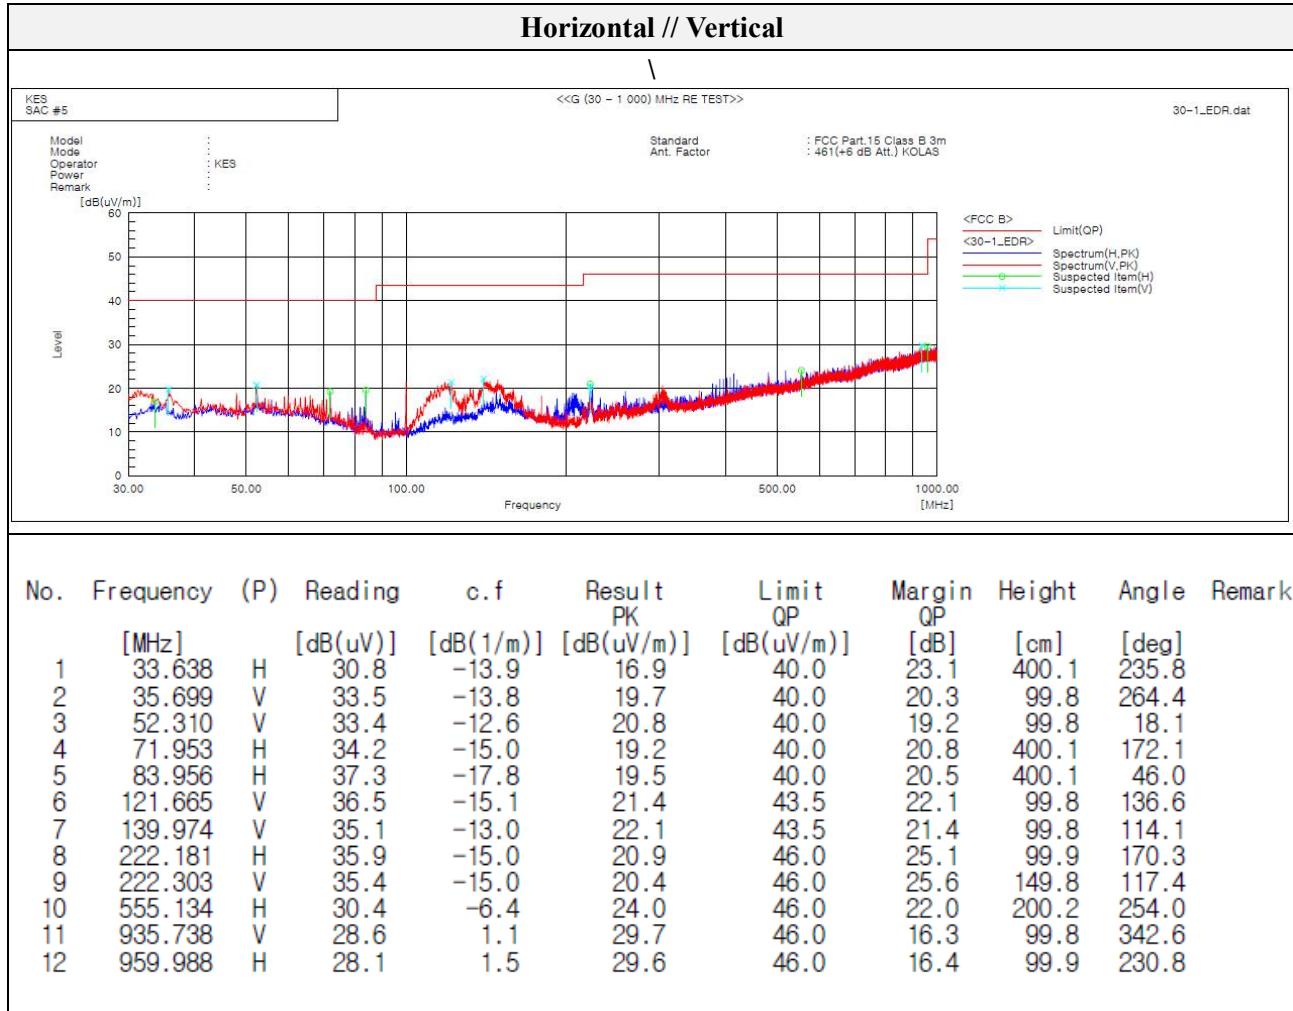

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

Test results (Above 1 000 MHz)


Mode:	BDR
Transfer rate:	1 Mbps
Distance of measurement:	3 meter
Channel:	01

- Spurious

Frequency (MHz)	Level (dB μ N)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
1 580.04	45.41	Peak	H	-5.64	-	39.77	74.00	34.23
1 638.00	46.47	Peak	V	-4.99	-	41.48	74.00	32.52
2 592.40	44.47	Peak	V	0.42	-	44.89	74.00	29.11
3 243.00	43.08	Peak	H	1.36	-	44.44	74.00	29.56
3 307.50	42.88	Peak	V	1.31	-	44.19	74.00	29.81

- Band edge

Frequency (MHz)	Level (dB μ N)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2 389.87	48.66	Peak	H	0.02	-	48.68	74.00	25.32
2 389.87	46.31	Peak	V	0.02	-	46.33	74.00	27.67

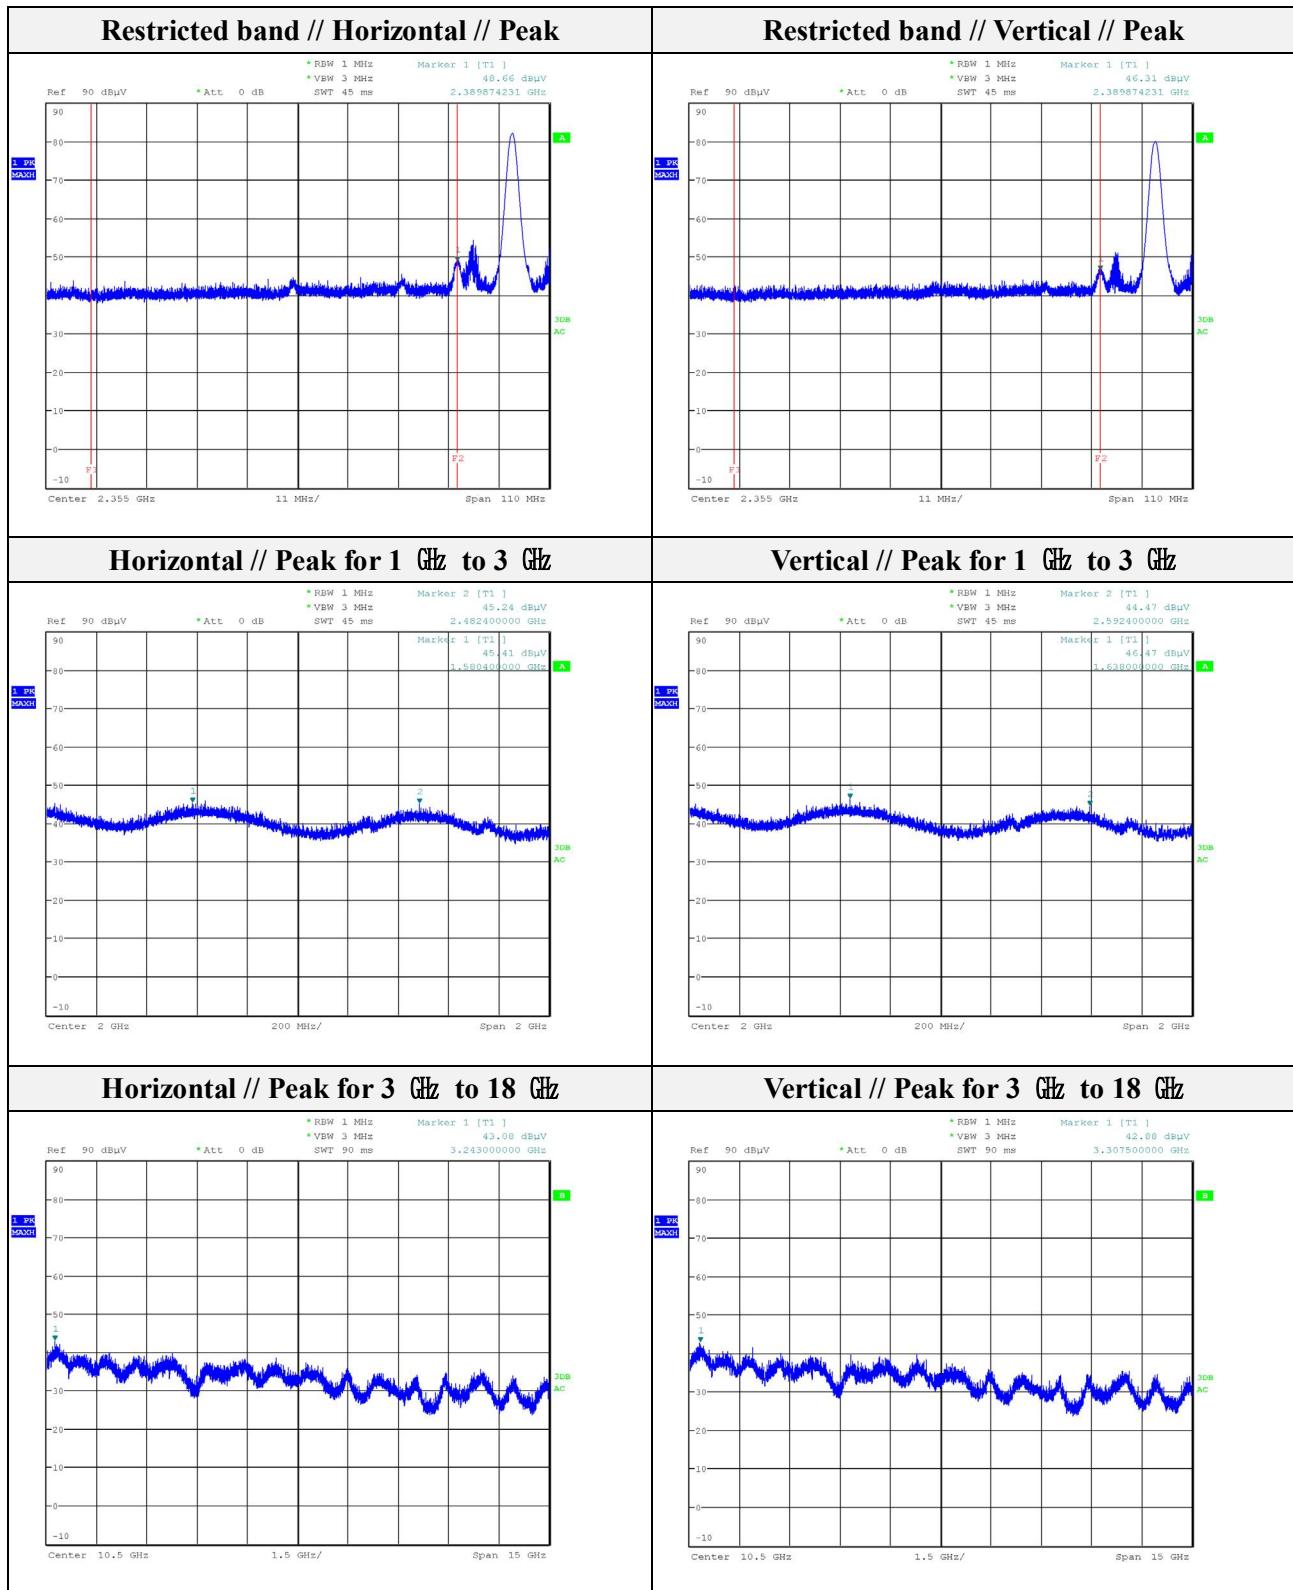

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr


Mode: BDR

Transfer rate: 1 Mbps

Distance of measurement: 3 meter

Channel: 41

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
1 612.20	45.55	Peak	H	-5.29	-	40.26	74.00	33.74
1 633.00	45.16	Peak	V	-5.04	-	40.12	74.00	33.88
2 557.00	44.42	Peak	H	0.35	-	44.77	74.00	29.23
3 322.50	42.35	Peak	V	1.30	-	43.65	74.00	30.35
3 453.00	42.66	Peak	H	1.19	-	43.85	74.00	30.15

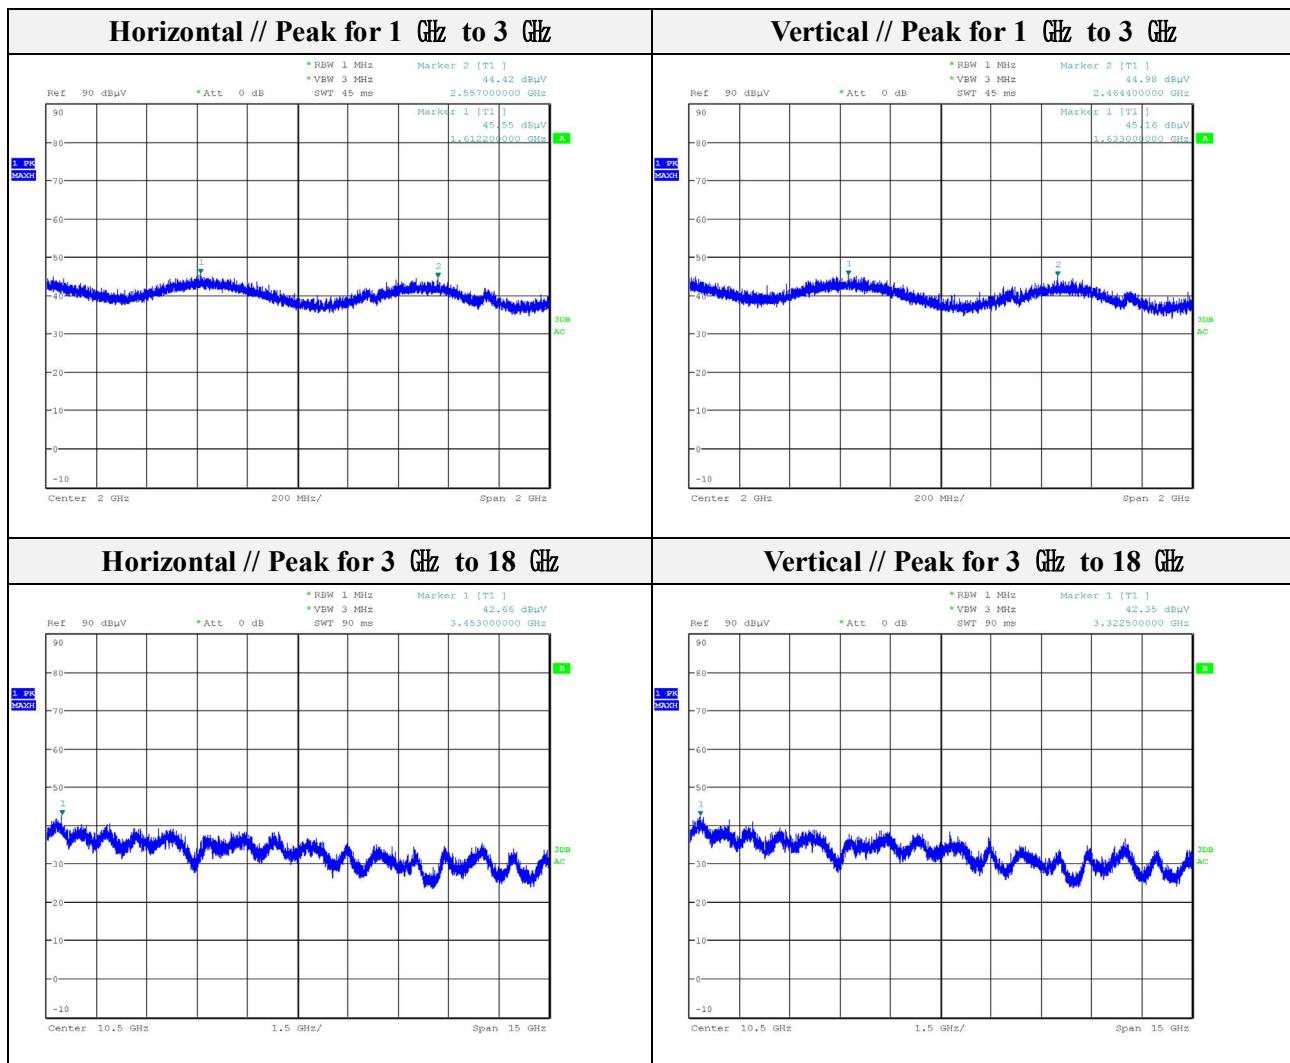

Note.

1. Average test would be performed if the peak result were greater than the average limit.

Mode: BDR

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr


Transfer rate: 1 Mbps
 Distance of measurement: 3 meter
 Channel: 79

- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
1 201.20	50.20	Peak	H	-8.08	-	42.12	74.00	31.88
1 201.20	52.17	Peak	V	-8.08	-	44.09	74.00	29.91
1 840.80	50.32	Peak	V	-3.00	-	47.32	74.00	26.68
2 118.70	50.59	Peak	V	-1.01	-	49.58	74.00	24.42


- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2 488.08	59.55	Peak	H	0.21	-	59.76	74.00	14.24
2 488.28	58.89	Peak	V	0.21	-	59.10	74.00	14.90
2 491.84	47.82	Average	H	0.21	1.15	49.19	54.00	4.81
2 491.87	45.37	Average	V	0.21	1.15	46.74	54.00	7.26

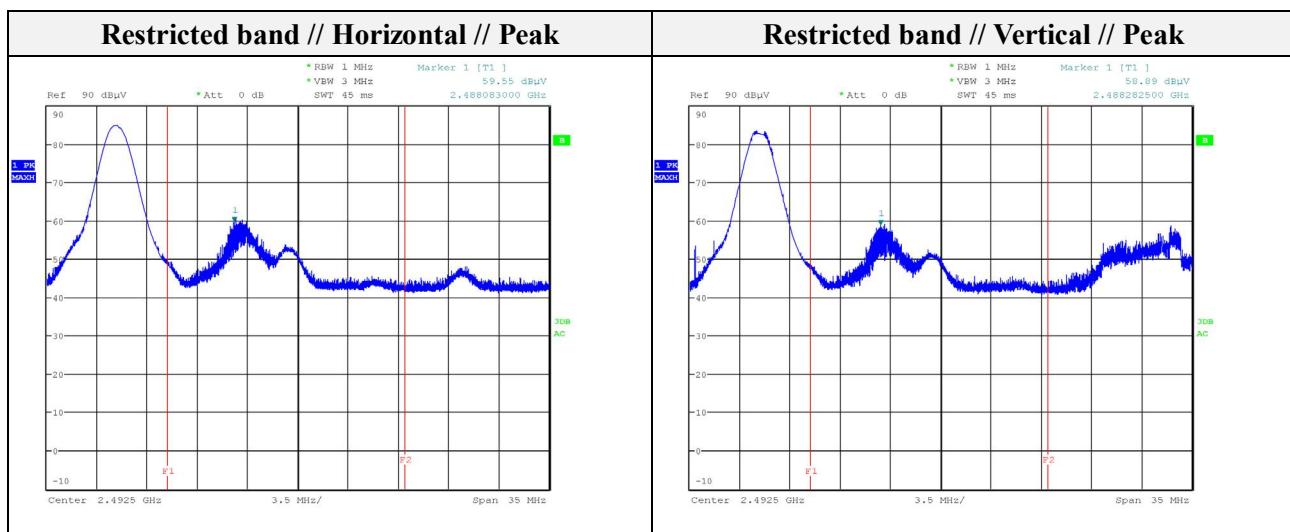

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

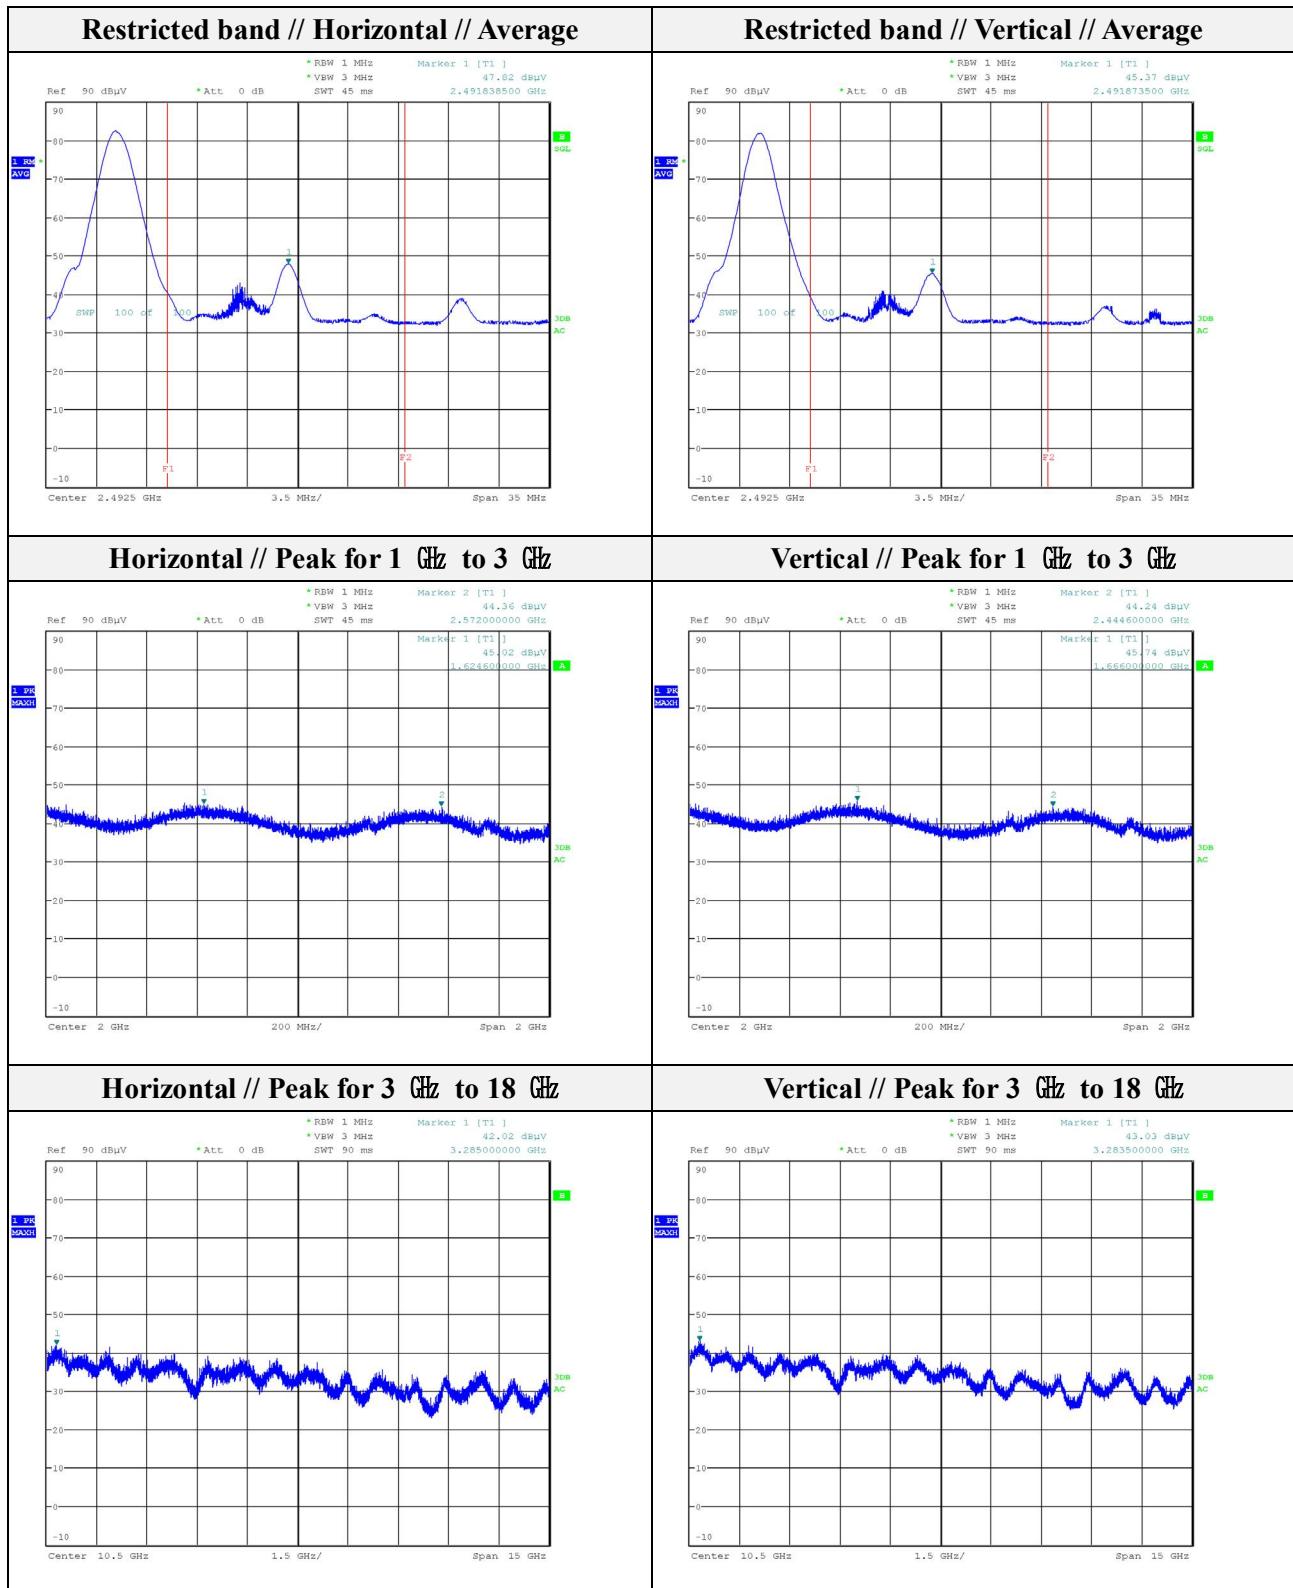

Note.

1. Average test would be performed if the peak result were greater than the average limit.




Mode:	EDR
Transfer rate:	3 Mbps(Worst case)
Distance of measurement:	3 meter
Channel:	01

- Spurious

Frequency (MHz)	Level (dB μ N)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
1633.40	45.37	Peak	V	-5.04	-	40.33	74.00	33.67
1645.40	46.36	Peak	H	-4.90	-	41.46	74.00	32.54
2529.20	44.63	Peak	V	0.30	-	44.93	74.00	29.07
3273.00	42.50	Peak	V	1.34	-	43.84	74.00	30.16
3331.50	42.46	Peak	H	1.29	-	43.75	74.00	30.25

- Band edge

Frequency (MHz)	Level (dB μ N)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2389.87	47.86	Peak	H	0.02	-	47.88	74.00	26.12
2389.87	45.52	Peak	V	0.02	-	45.54	74.00	28.46

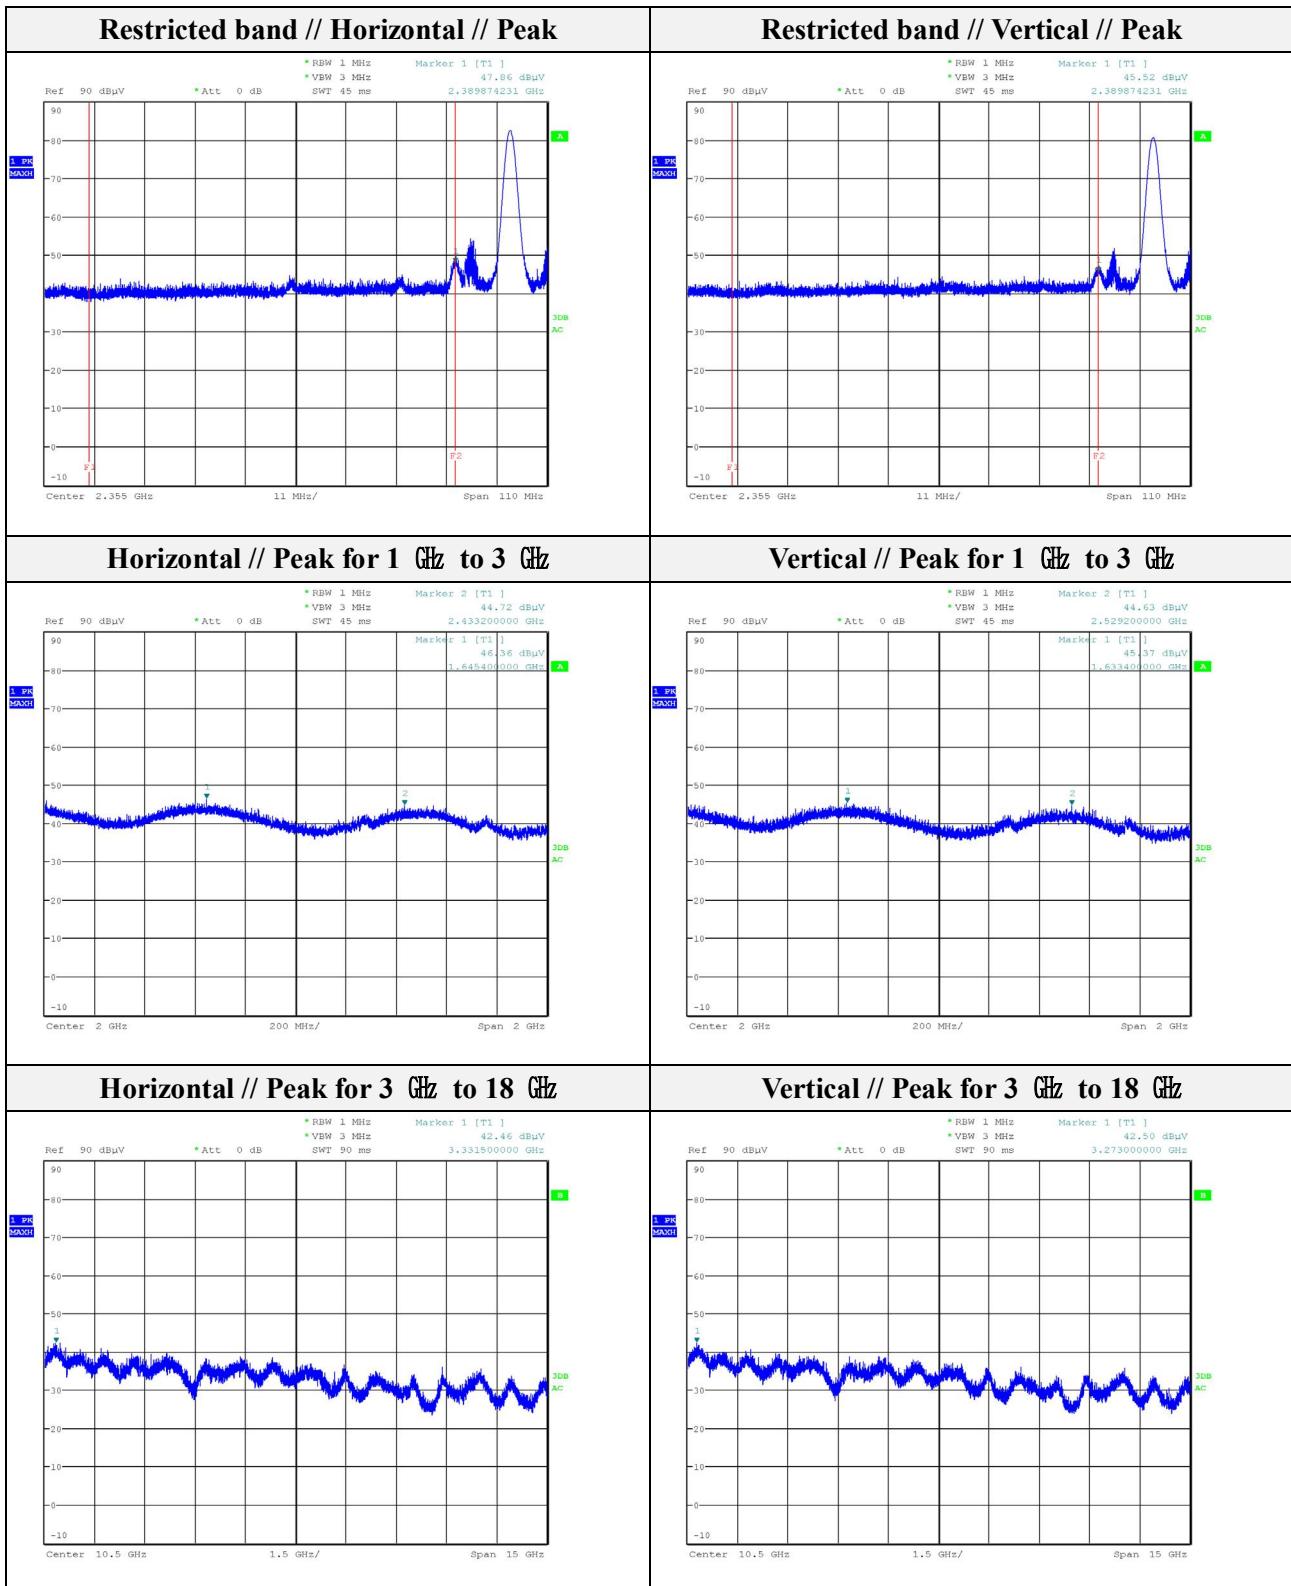

Note.


1. Average test would be performed if the peak result were greater than the average limit.



Mode: EDR
Transfer rate: 3 Mbps(Worst case)
Distance of measurement: 3 meter
Channel: 41

- Spurious

Frequency (MHz)	Level (dB μ N)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
1667.40	45.44	Peak	V	-4.64	-	40.80	74.00	33.20
1695.60	45.78	Peak	H	-4.30	-	41.48	74.00	32.52
2542.20	44.32	Peak	H	0.32	-	44.64	74.00	29.36
3357.00	42.84	Peak	V	1.27	-	44.11	74.00	29.89
3438.00	43.88	Peak	H	1.20	-	45.08	74.00	28.92

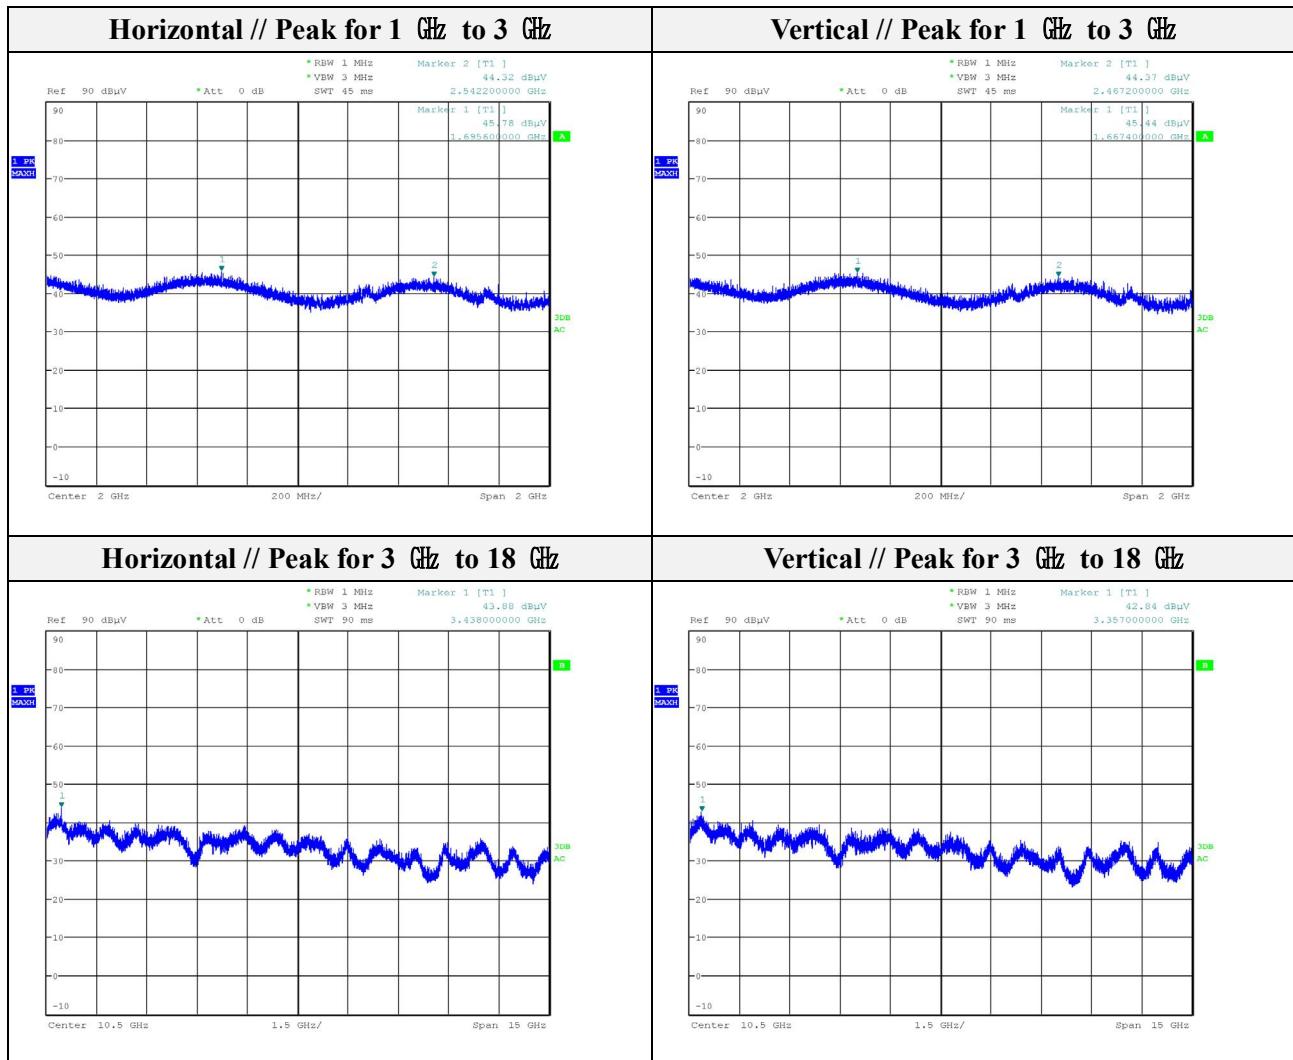

Note.

1. Average test would be performed if the peak result were greater than the average limit.

Mode: **EDR**

Transfer rate: **3 Mbps(Worst case)**

Distance of measurement: **3 meter**


Channel: **79**

- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
1 484.40	45.20	Peak	H	-6.54		38.66	74.00	35.34
1 575.40	45.81	Peak	V	-5.69	-	40.12	74.00	33.88
2 514.80	44.28	Peak	H	0.27	-	44.55	74.00	29.45
2 560.00	45.31	Peak	V	0.36	-	45.67	74.00	28.33
3 396.00	43.21	Peak	H	1.25	-	44.46	74.00	29.54
3 448.50	42.77	Peak	V	1.19	-	43.96	74.00	30.04


- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ N/m)	Limit (dB μ N/m)	Margin (dB)
2 488.36	60.99	Peak	H	0.21	-	61.20	74.00	12.80
2 488.53	59.65	Peak	V	0.21	-	59.86	74.00	14.14
2 491.85	43.79	Average	H	0.22	1.15	45.16	54.00	8.84
2 491.86	44.45	Average	V	0.22	1.15	45.82	54.00	8.18

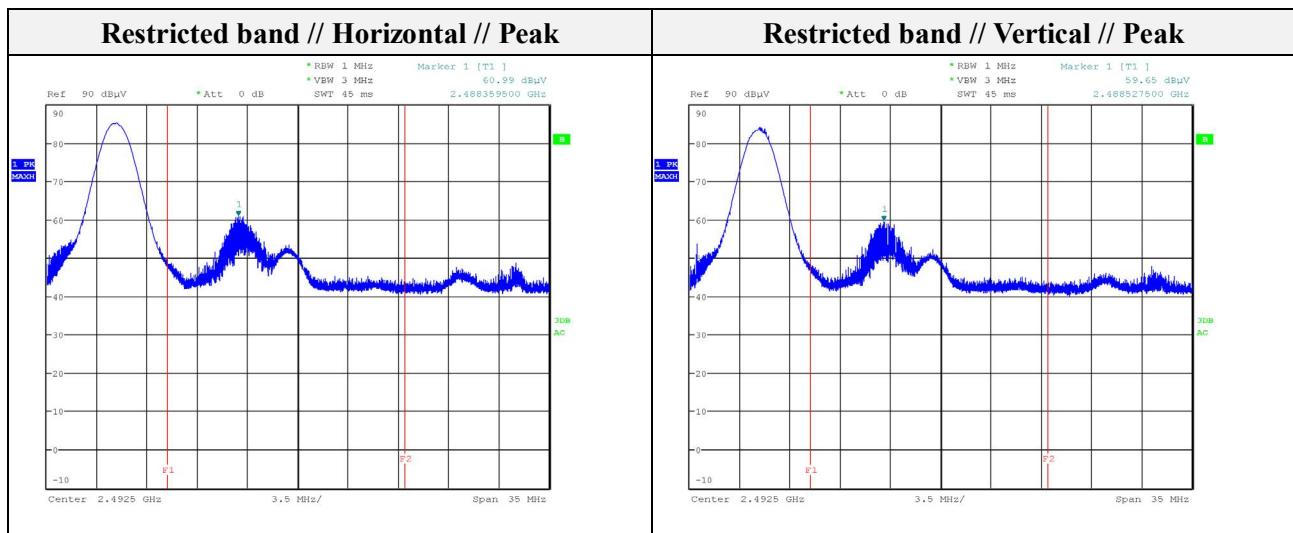

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

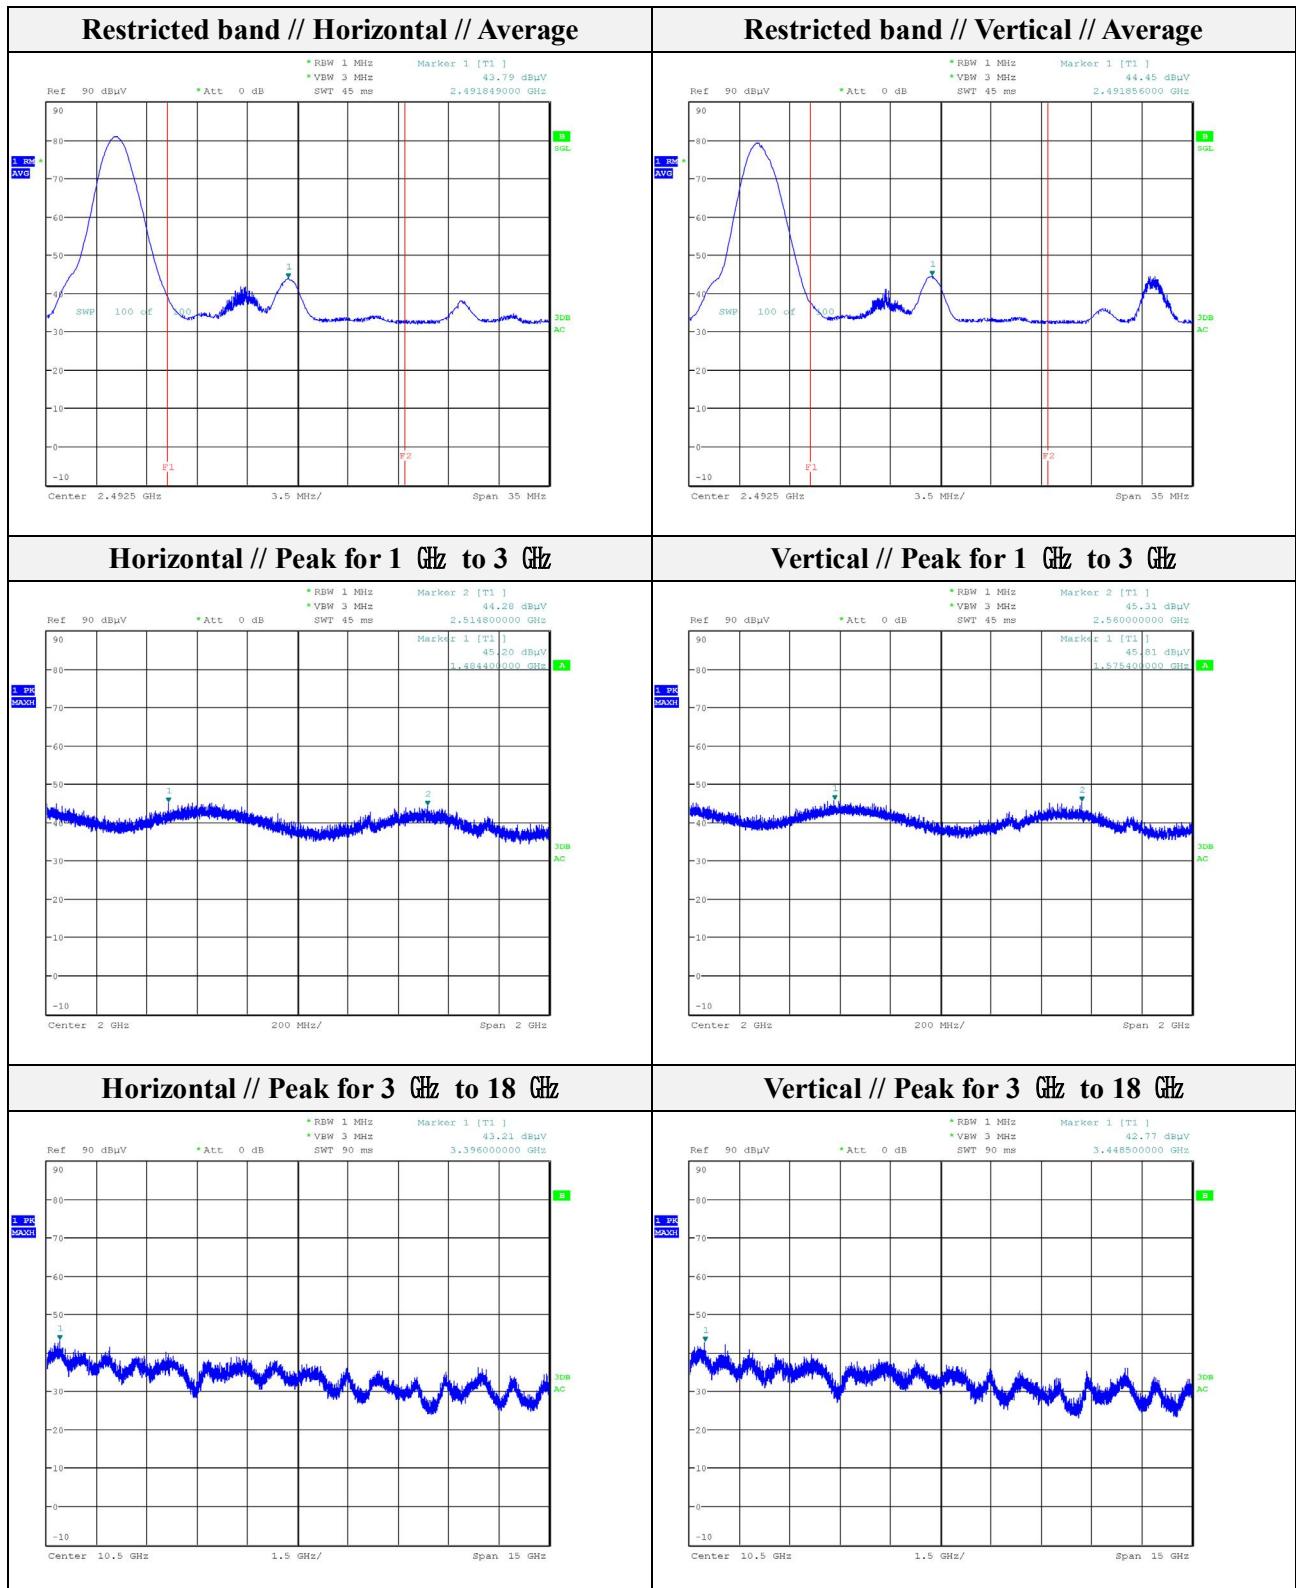


Note.

1. Average test would be performed if the peak result were greater than the average limit.

Test results (18 GHz to 26.5 GHz) – Worst case

Mode:	EDR
Transfer rate:	1 Mbps
Distance of measurement:	3 meter
Channel:	79(Worst case)

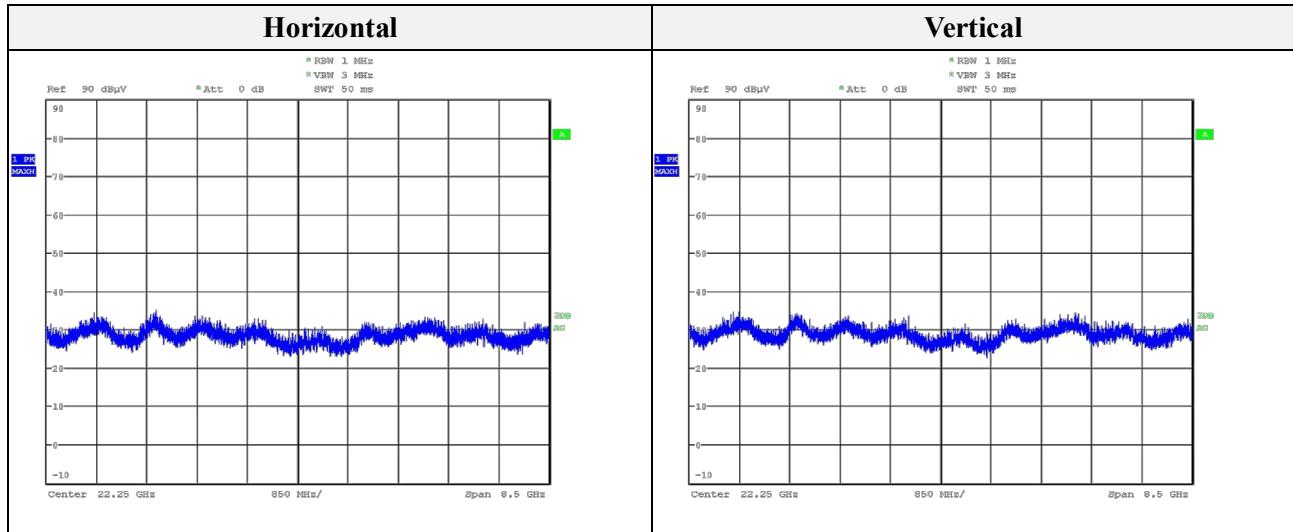

Note.


1. No spurious emission were detected above 18 GHz.

3.7. Conducted band edge and out of band emissions

Test procedure

ANSI C63.10-2013 - Section 7.8.6 and 7.8.8

Test setup








Test setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions(e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
2. RBW = 100 kHz
3. VBW \geq 300 kHz
4. Detector = Peak
5. Number of sweep points $\geq 2 \times$ Span/RBW
6. Trace mode = max hold
7. Sweep time = auto couple
8. The trace was allowed to stabilize

Limit


According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval , as permitted under paragraph(b)(3) of this section , the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))

Test results

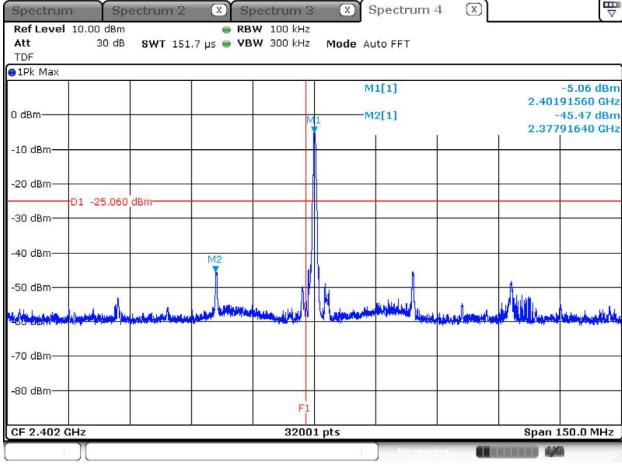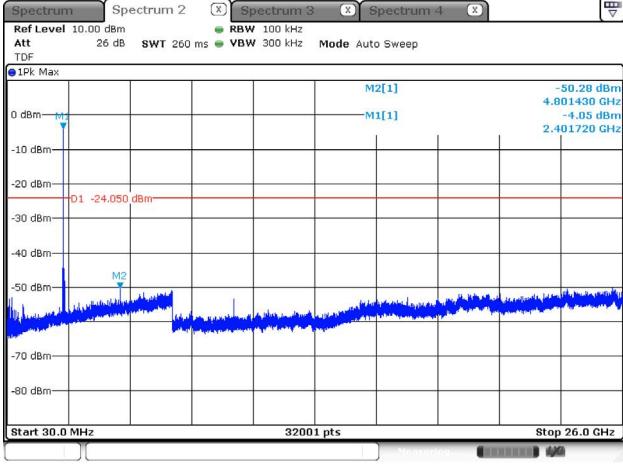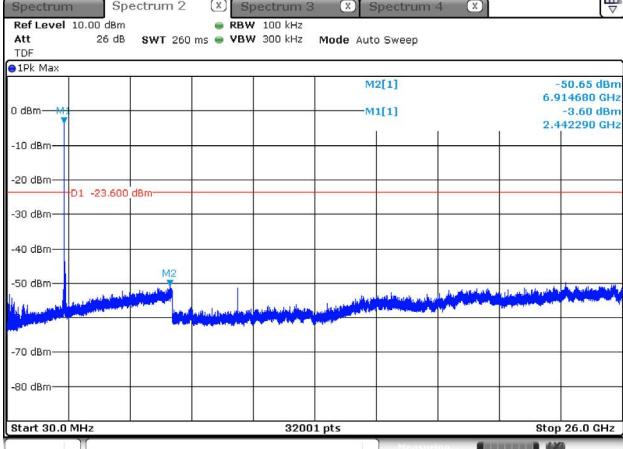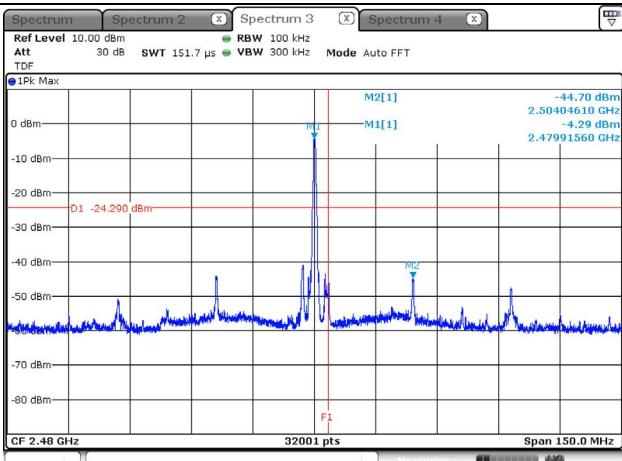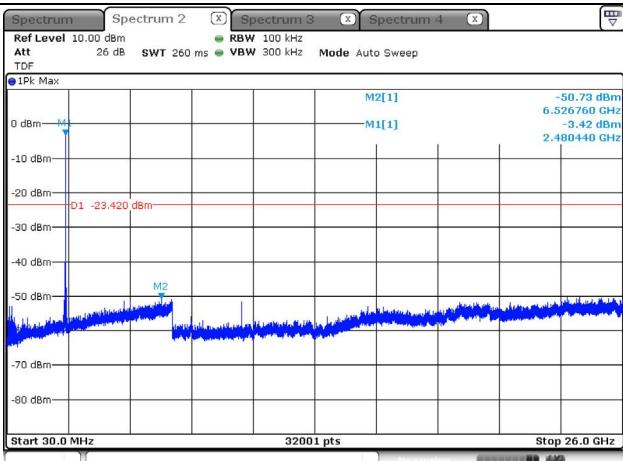CH	BDR(1Mbps)	
01		
41	Blank	
79		

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

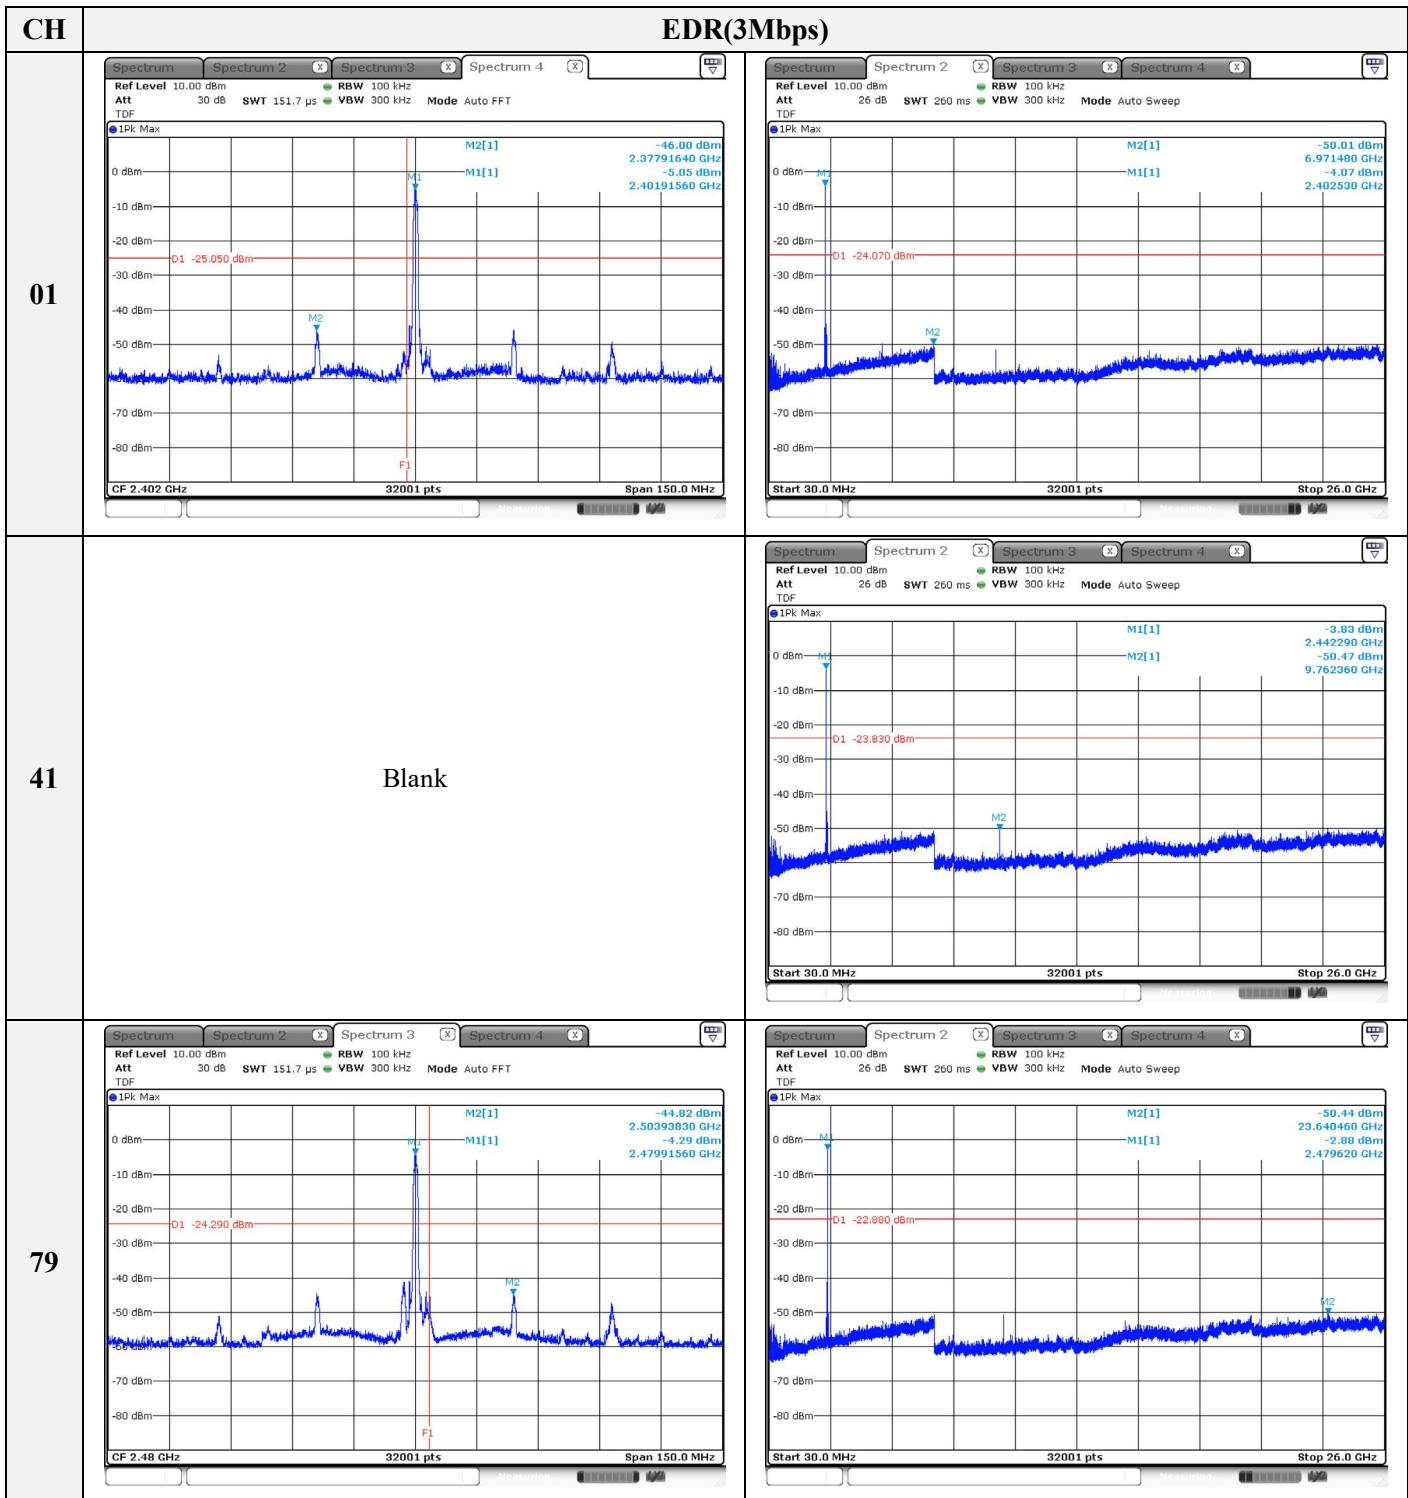


Note:


1. The channel found to contain the maximum PSD level can be used to establish the reference level.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

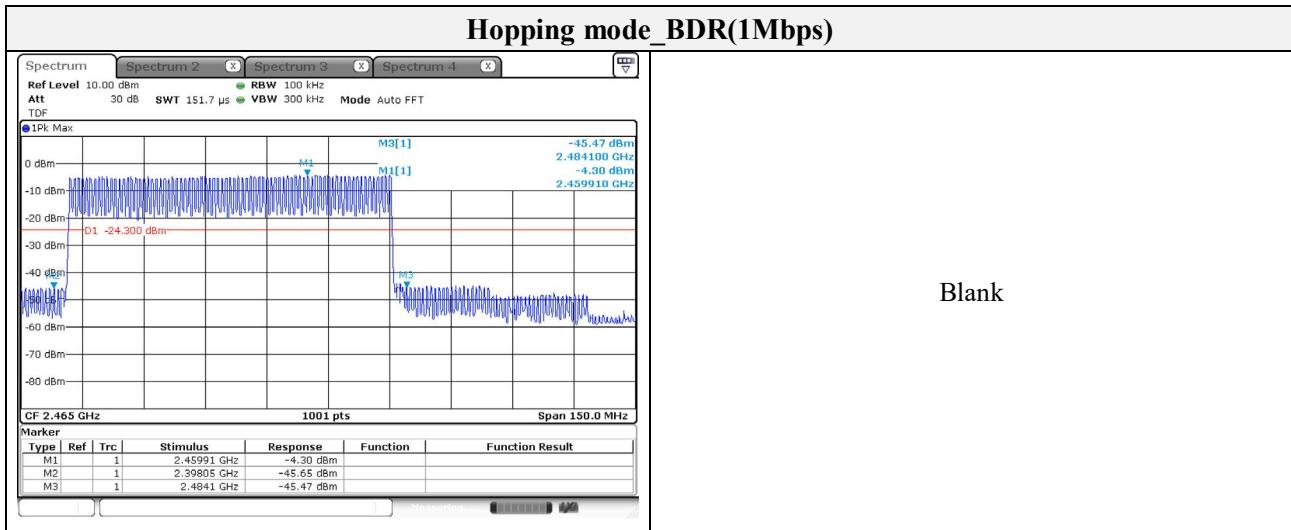

Blank

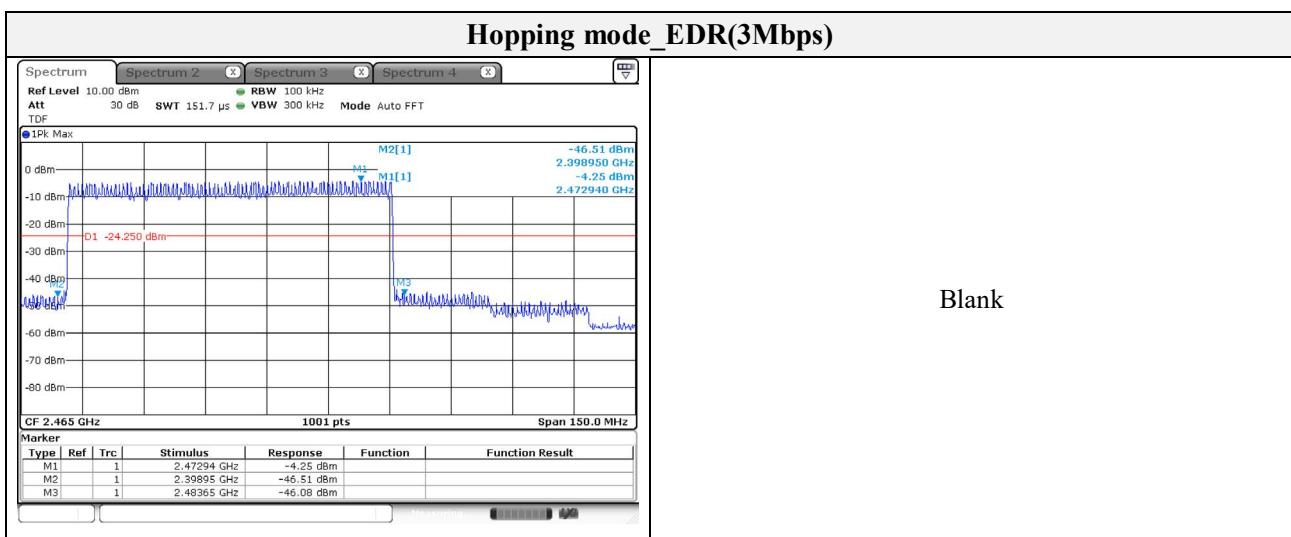

Blank



Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum Analyzer	R&S	FSV30	101389	1 year	2022.01.14
EMI Test Receiver	R&S	ESU26	100551	1 year	2022.04.01
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2022.01.14
SIGNAL GENERATOR	KEYSIGHT	N5182B	MY59100115	1 year	2022.04.29
Power Meter	Anritsu	ML2495A	1438001	1 year	2022.01.14
Pulse Power Sensor	Anritsu	MA2411B	1339205	1 year	2022.01.14
Attenuator	KEYSIGHT	8493C	82506	1 year	2022.01.15
Loop Antenna	Schwarzbeck	FMZB1513	225	2 years	2023.01.18
BILOG ANTENNA	Schwarzbeck	VULB 9168	9168-461	2 years	2022.12.22
Horn Antenna	A.H	SAS-571	414	1 years	2022.01.22
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA 9170550	1 years	2022.01.18
AMPLIFIER	SONOMA INSTRUMENT	310N	401123	1 year	2021.06.08
Preamplifier	HP	8449B	3008A00538	1 year	2021.06.23
BROADBAND AMPLIFIER	SCHWARZBECK	BBV9721	PS9721-003	1 year	2022.01.19
Digital Multi Meter	TEKTRONIX	DMM916	138401	1 year	2022.01.14
DC Power Supply	Agilent	6632B	MY43004114	1 year	2021.06.22
Hipass filter	WEINSCHEL INSTRUMENT	WHJS3000-10TT	1	1 year	2021.06.18


Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Note PC	LG	LG15N365	607QCUK558542
NotePC Power Unit	DELTA ELECTRONICS (JIANGSU) LTD.	ADP-40PH	N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

Appendix B. Test setup photo

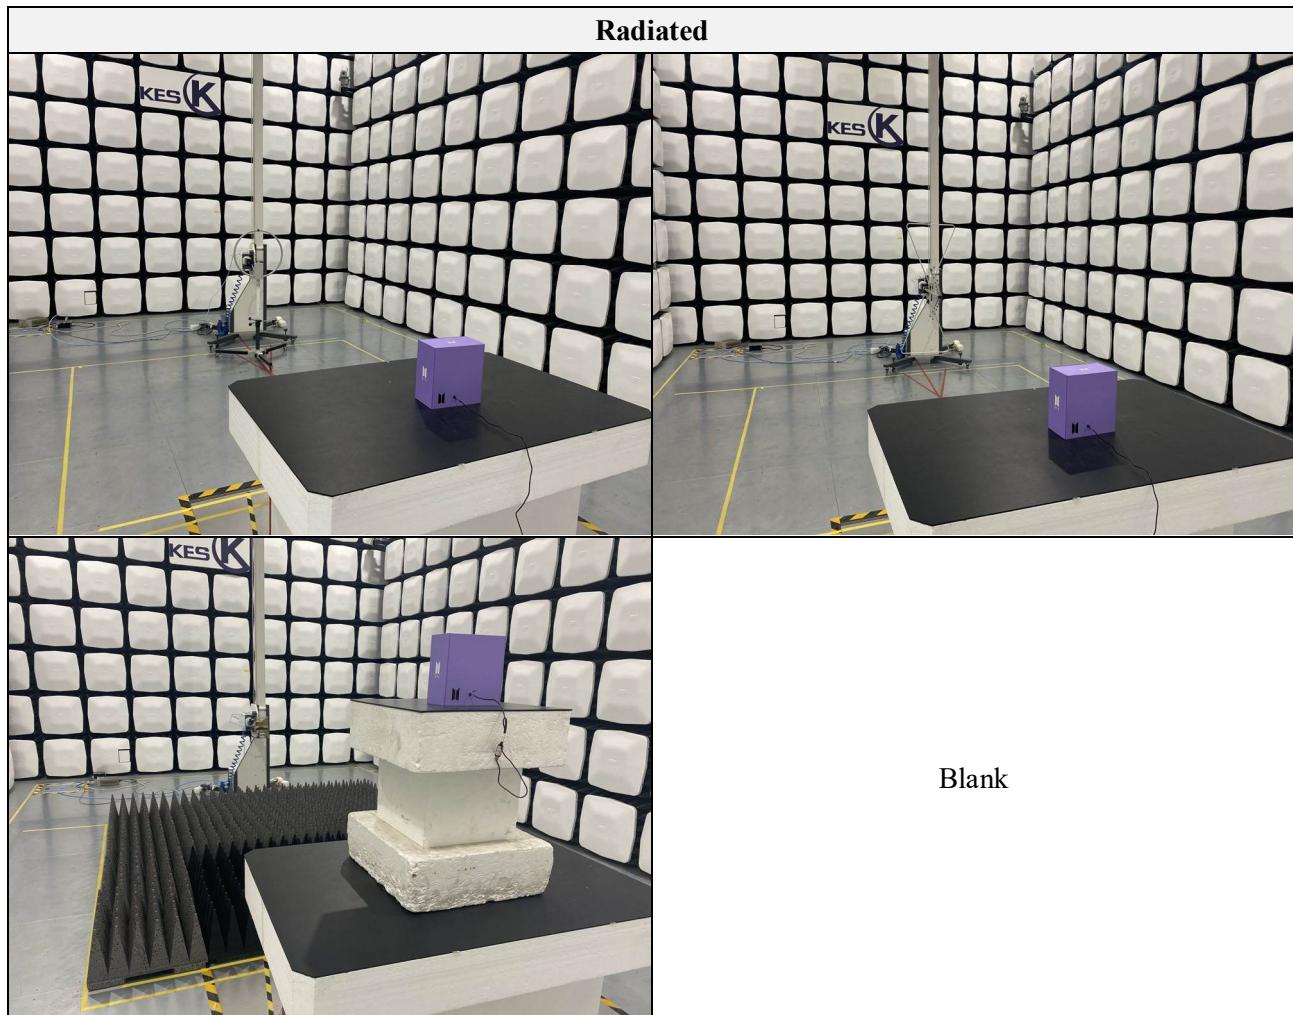

The end of test report.