

FCC Report

Product Name : 15W Car Wireless Charging Module
Brand Mark : N/A
Model No. : W015CN-09
FCC ID : 2AZX2-DB000001
Report Number : BLA-EMC-202307-A3303
Date of sample receipt : 2023/7/13
Date of Test : 2023/7/13 to 2023/8/29
Date of Issue : 2023/8/29
Test standard : FCC CFR Title 47 Part 15 Subpart C Section 15.225
Test result : PASS

Prepared for:

An Energy Technology Co.,Ltd
139 Huaye Road, Jintan District Changzhou City Jiang Su,213200 China

Prepared by:

BlueAsia of Techn Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by: *Jozu*

Review by: *Sueelle*

Approved by: *Blue.Zheng*

Date: 2023/8/29





Report No. : BLA-EMC-202307-A3303

Page 2 of 26

1 Version

Version No.	Date	Description
00	2023/8/29	<i>Original</i>

BlueAsia



2 Contents

	Page
1 COVER PAGE.....	1
1 Version	2
2 Contents	3
3 Test Summary	4
4 General Information	5
4.1 General Description of EUT	5
4.2 Test mode	6
4.3 Description of Support Units	6
4.4 Test Facility	6
4.5 Test Location	6
5 Test Instruments list	7
6 Antenna Requirement	9
6.1 Standard Applicable	9
6.2 Test Result	9
7 Radiated Emissions	10
7.1 Standard Applicable	10
7.2 Test Procedure	10
7.3 Corrected Amplitude & Margin Calculation	11
7.4 Environmental Conditions	11
7.5 Summary of Test Results/Plots	11
8 OUT OF BAND EMISSIONS	16
8.1 Standard Applicable	16
8.2 Test Procedure	16
8.3 Environmental Conditions	16
8.4 5.4 Summary of Test Results/Plots	16
9 Frequency Stability	18
9.1 Standard Applicable	18
9.2 Test Procedure	18
9.3 Environmental Conditions	18
9.4 Summary of Test Results/Plots	18
10 Conducted Emissions	20
10.1 Test Procedure	20
10.2 Basic Test Setup Block Diagram	20
10.3 Environmental Conditions	20
10.4 Test Receiver Setup	20
10.5 Summary of Test Results/Plots	20
11 EMISSION BANDWIDTH	21
11.1 Applicable Standard	21
11.2 Test Procedure	21
11.3 Environmental Conditions	21
11.4 Summary of Test Results/Plots	22
12 Field Strength of the Fundamental Signal	23
13 Test Setup Photo	25
14 EUT Constructional Details	26

3 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	§15.203	Pass
Radiated Emission Limit	§15.209	Pass
Field Strength	§15.225(a)	Pass
Out of Band Emission	§15.225(b)(c)	Pass
Frequency Stability	§15.225(e)	Pass
Conducted Emission	§ 15.207(a)	Pass
Emission Bandwidth	§ 15.215(c)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

4 General Information

4.1 General Description of EUT

Product Name:	15W Car Wireless Charging Module
Model No.:	W015CN-09
Test Model No.:	W015CN-09
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are product appearance and model name for commercial purpose.	
Sample(s) Status	Engineer sample
Hardware:	N/A
Software:	N/A
Operation Frequency:	13.56MHz
Channel Numbers:	1
Modulation Type:	ASK
Antenna Type:	Internal Antenna
Antenna Gain:	0.0dBi
Power Supply:	DC18V
Remark: The Antenna Gain is supplied by the customer	

4.2 Test mode

Transmitting mode:	Keep the EUT in continuously transmitting mode with modulation
Remark: Only the data of the worst mode would be recorded in this report.	

4.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
N/A	N/A	N/A	N/A

4.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC — Designation No.: CN1252**

BlueAsia of Technical Services(Shenzhen) Co., Ltd has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Designation CN1252.

- **ISED — CAB identifier No.: CN0028**

BlueAsia of Technical Services(Shenzhen) Co., Ltd has been registered by Certification and Engineering Bureau of ISED for radio equipment testing with CAB identifier CN0028

4.5 Test Location

All tests were performed at:

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.

Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

5 Test Instruments list

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2020/11/10	2023/11/9
Chamber 2	SKET	966	N/A	2021/07/20	2024/07/19
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Receiver	R&S	ESR7	101199	2022/09/15	2023/09/14
Receiver	R&S	ESPI7	101477	2022/07/16 2023/07/14	2023/07/15 2024/07/13
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/09/15	2023/09/14
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2022/07/16 2023/07/14	2023/07/15 2024/07/13
Amplifier	SKET	PA-000318G-45		N/A	2022/09/13
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2022/07/14 2023/07/14	2023/07/13 2024/07/13
Filter group	SKET	2.4G/5G Filter group r		N/A	2022/07/16 2023/07/14
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/9/14	2025/9/13
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A



Test Equipment Of RF Conducted Test					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Spectrum	KEYSIGHT	N9030A	MY52350152	2023/06/30	2024/06/29
Spectrum	KEYSIGHT	N9010A	MY54330814	2023/06/30	2024/06/29
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2023/06/30	2024/06/29
Signal Generator	Agilent	N5181A	MY46240904	2023/08/02	2024/08/01
Signal Generator	R&S	CMW500	132429	2022/09/07	2023/09/06
BluetoothTester	Anritsu	MT8852B	06262047872	2022/09/07	2023/09/06
Power probe	DARE	RPR3006W	14I00889SN042	2022/09/07	2023/09/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2022/09/14	2023/09/13
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2022/09/14	2023/09/13
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A
Audio Analyzer	AudioPrecision	N/A	ATSI-41094	2023/06/30	2024/06/29



6 Antenna Requirement

6.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

6.2 Test Result

This product has an integral antenna, fulfill the requirement of this section.

BlueAsia



蓝亚 BLUE ASIA

Report No. : BLA-EMC-202307-A3303

Page 10 of 26

7 Radiated Emissions

7.1 Standard Applicable

According to §15.225(a), The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.


According to §15.225(d) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in §15.209.


Note: Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.225(d) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

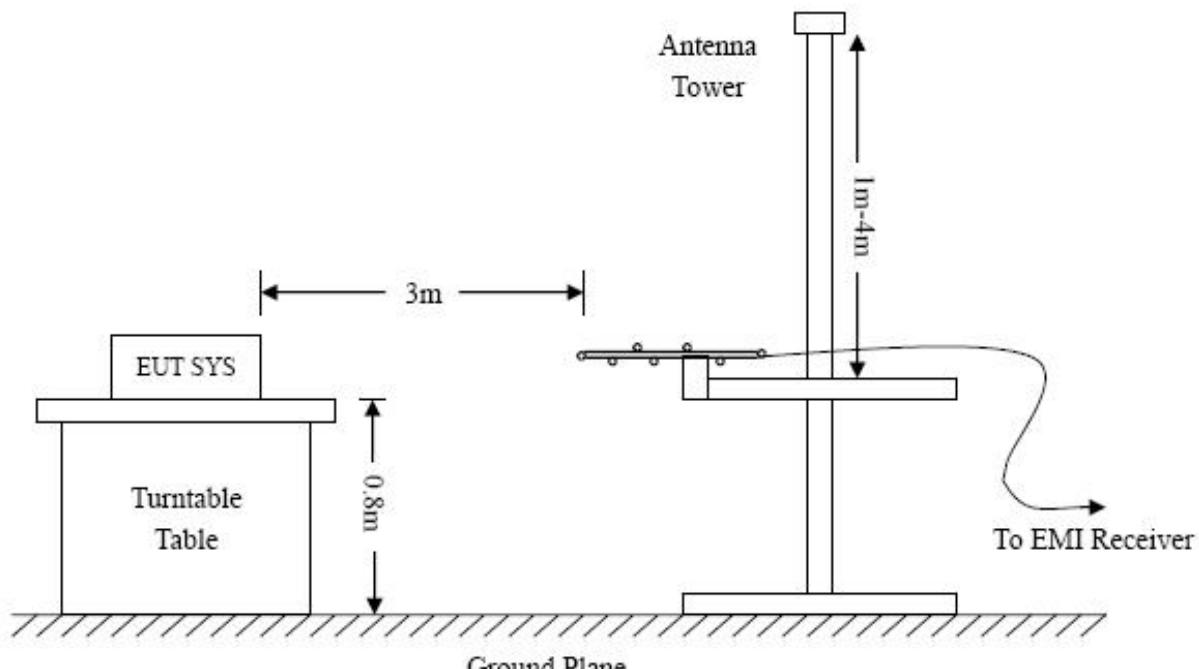

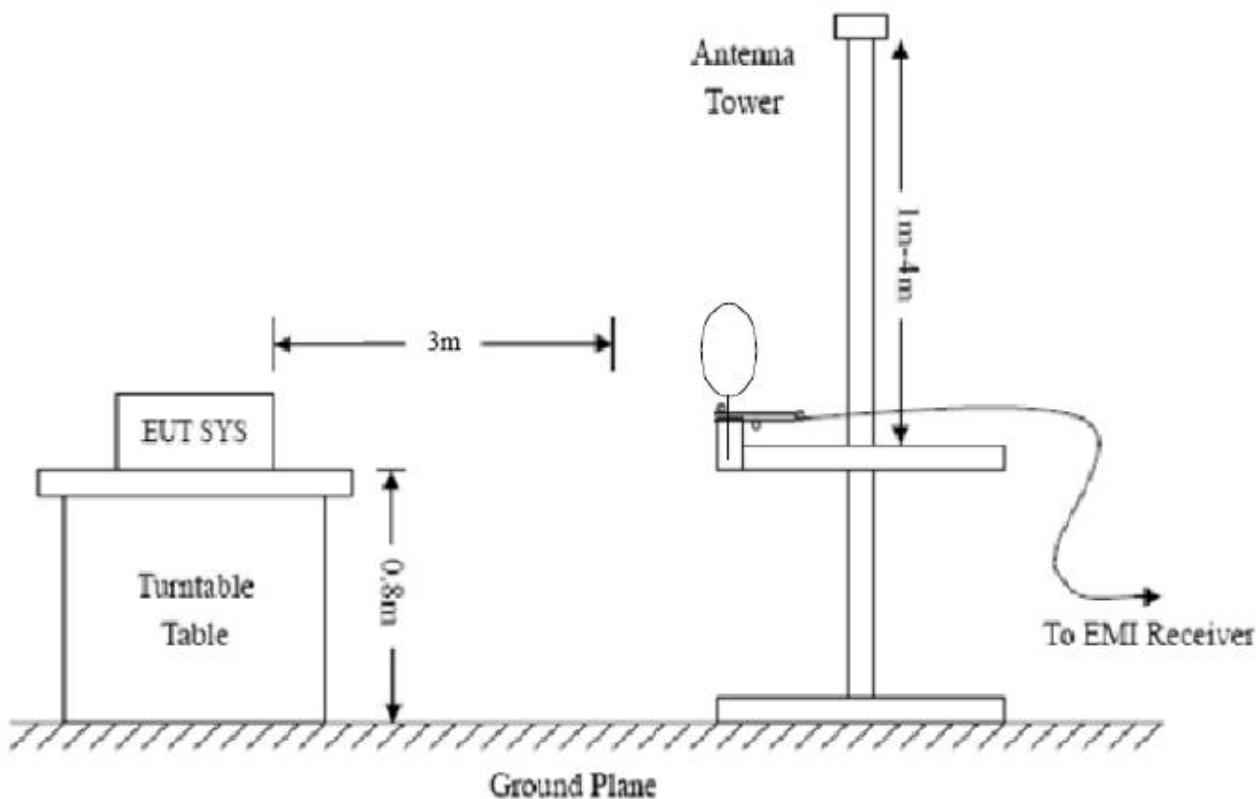

Frequency :9kHz-30MHz
RBW=10KHz,
VBW =30KHz
Sweep time= Auto
Trace = max hold
Detector function = peak

Frequency :30MHz-1GHz
RBW=120KHz,
VBW=300KHz
Sweep time= Auto
Trace = max hold
Detector function = peak, QP

Frequency :Above 1GHz
RBW=1MHz,
VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto
Trace = max hold
Detector function = peak, AV

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$


The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-6\text{dB}\mu\text{V}$ means the emission is $6\text{dB}\mu\text{V}$ below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

7.4 Environmental Conditions

Temperature:	26° C
Relative Humidity:	52%
ATM Pressure:	1022 mbar

7.5 Summary of Test Results/Plots

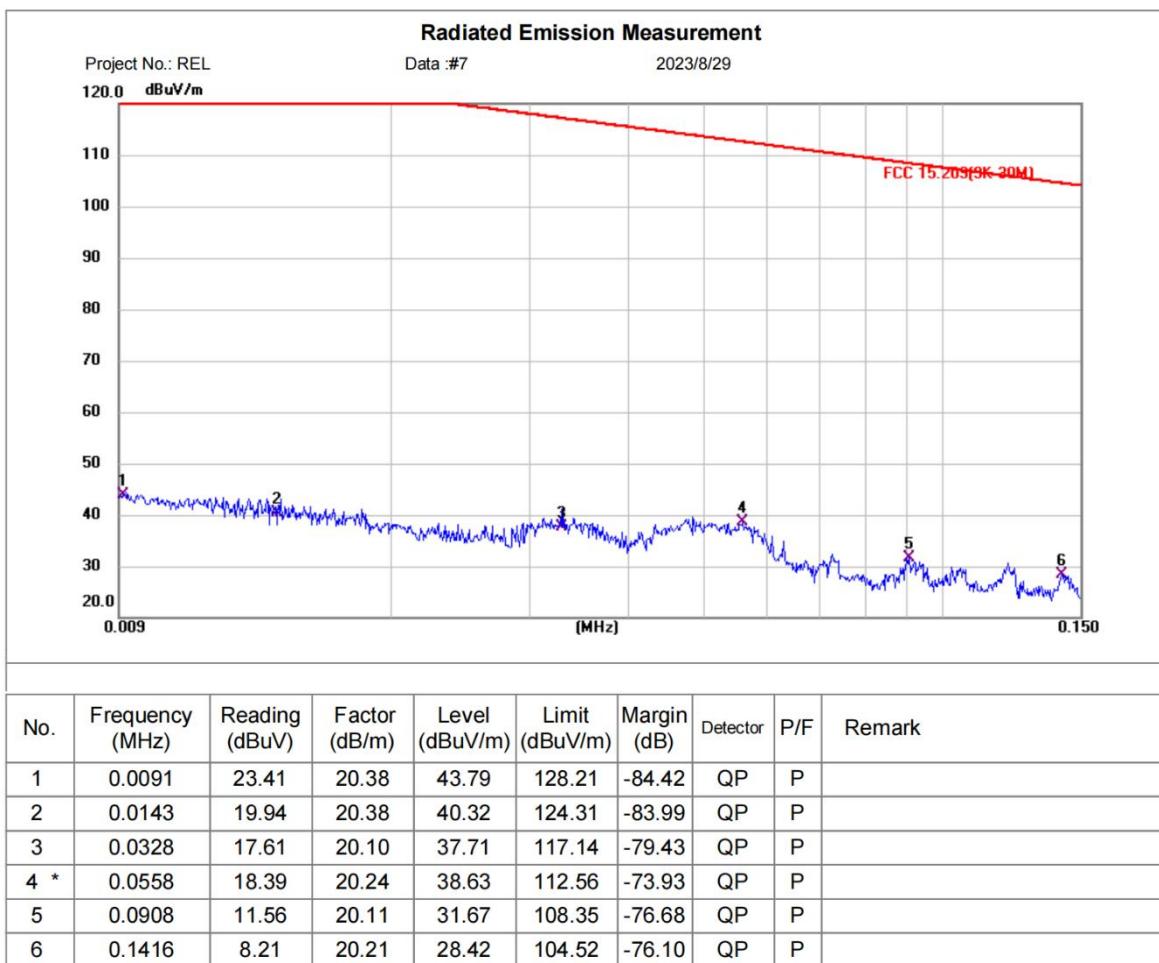Measurement Data
■ 9 kHz ~ 30 MHz

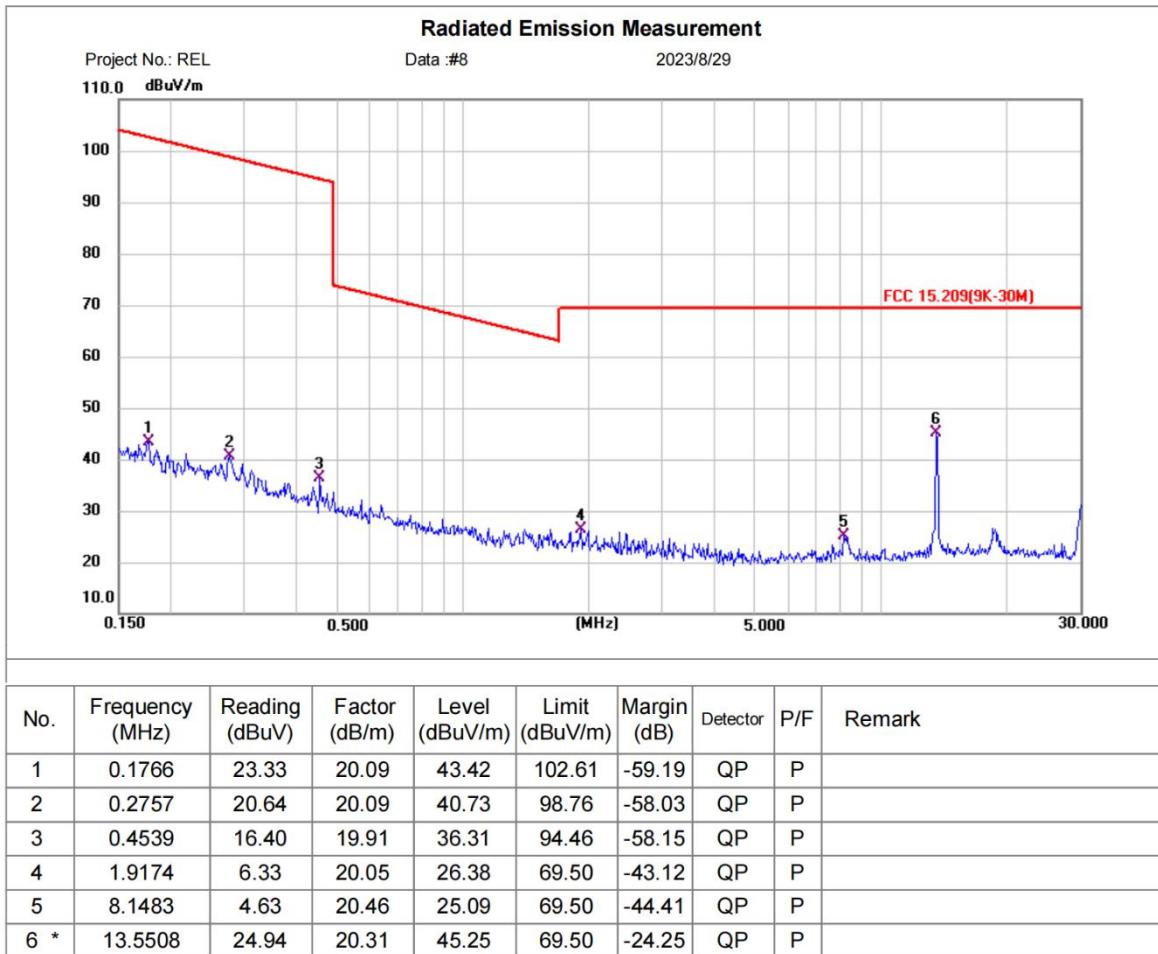




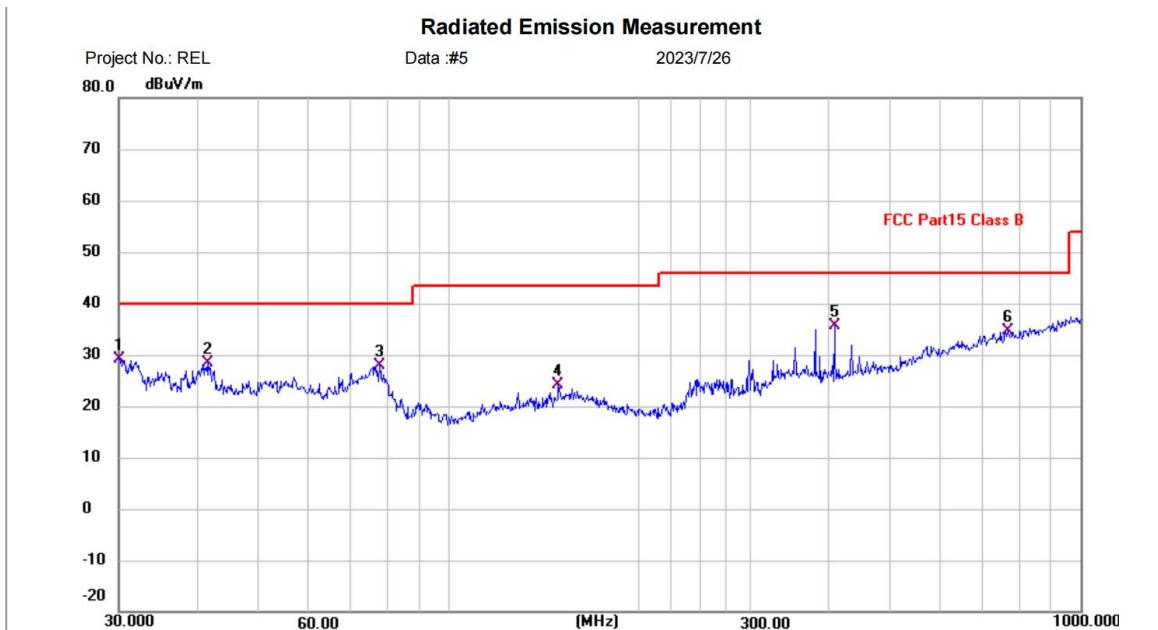
蓝亚 BLUE ASIA

Report No. : BLA-EMC-202307-A3303

Page 14 of 26


■ Below 1GHz

Horizontal:



Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 Class B	Power:	Humidity: %RH
EUT: 15W Car Wireless Charging Module		
M/N: W015CN-09		
Mode: NFC		
Note:		

No.	Frequency (MHz)	Reading (dB _{uV})	Factor (dB/m)	Level (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Detector	P/F	Remark
1	30.1053	6.78	22.32	29.10	40.00	-10.90	QP	P	
2	41.4215	4.86	23.50	28.36	40.00	-11.64	QP	P	
3	77.5927	8.63	19.29	27.92	40.00	-12.08	QP	P	
4	148.9624	0.75	23.34	24.09	43.50	-19.41	QP	P	
5 *	407.5144	9.33	26.24	35.57	46.00	-10.43	QP	P	
6	766.0571	1.32	33.30	34.62	46.00	-11.38	QP	P	

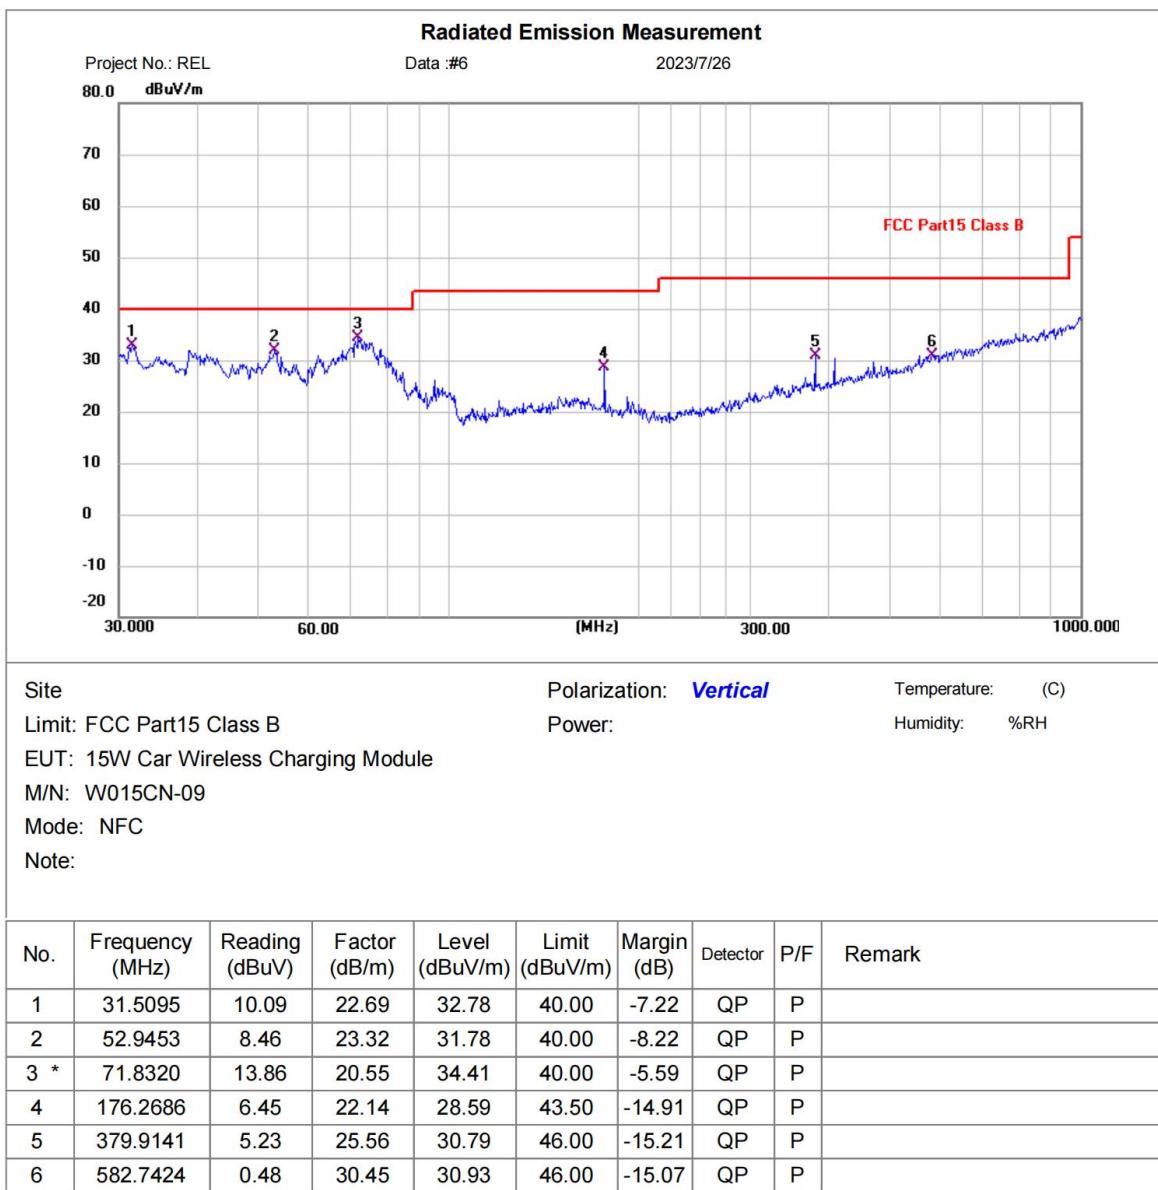Vertical:

Remark:

1. Final Level =Receiver Read level +Correct factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor

8 OUT OF BAND EMISSIONS

8.1 Standard Applicable

According to FCC 15.225 (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters. (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

8.2 Test Procedure

As the radiation test, set the RBW=10kHz VBW=30kHz, observed the outside band of 13.11MHz to 14.01MHz, than mark the higher-level emission for comparing with the FCC rules.

8.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1022 mbar

8.4 5.4 Summary of Test Results/Plots




蓝亚 BLUE ASIA

Report No. : BLA-EMC-202307-A3303

Out of band emission

Vertical (Worst case)

Page 17 of 26

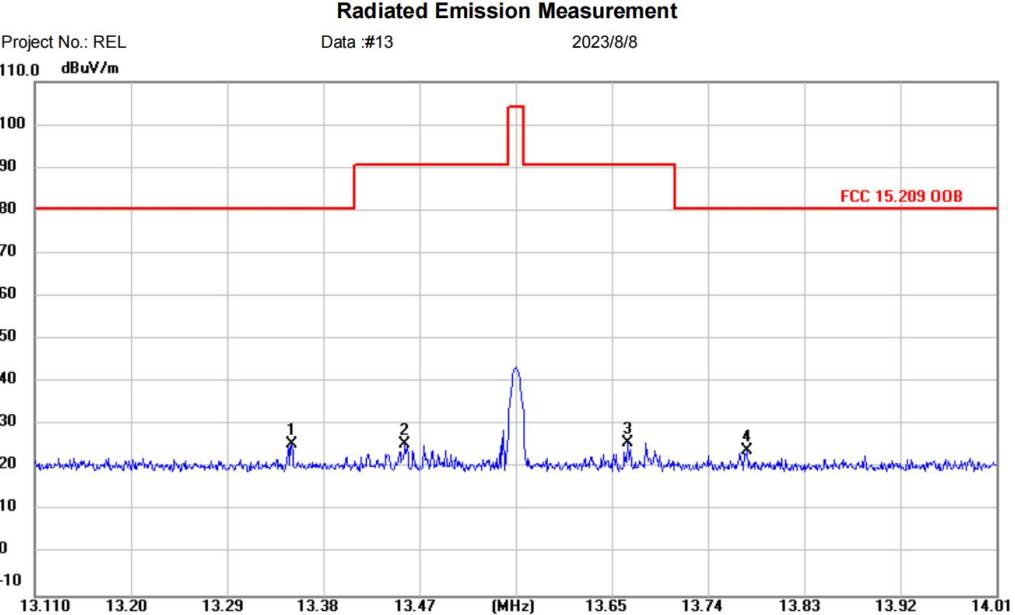

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	13.3503	5.06	20.40	25.46	80.50	-55.04	peak	P	
2	13.4565	5.25	20.35	25.60	90.50	-64.90	peak	P	
3	13.6644	5.63	20.26	25.89	90.50	-64.61	peak	P	
4	13.7767	3.91	20.22	24.13	80.50	-56.37	peak	P	

9 Frequency Stability

9.1 Standard Applicable

According to 15.225(e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

9.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure.

9.3 Environmental Conditions

Relative Humidity:	55%
ATM Pressure:	1015 mbar

9.4 Summary of Test Results/Plots

Reference Frequency: 13.56MHz, Limit: 100ppm			
Environment Temperature (°C)	9.4.1.1.1 Power Supplied (VDC)	Frequency Error	
		Error (Hz)	Error (ppm)
50	3.7	112	8.26
40	3.7	125	9.22
30	3.7	105	7.74
20	3.7	104	7.67
10	3.7	121	8.92
0	3.7	147	10.84
-10	3.7	132	9.73
-20	3.7	126	9.29

Reference Frequency: 13.56MHz, Limit: 100ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Error	
		Error (Hz)	Error (ppm)
20	3.3	105	7.74
	3.7	121	8.92
	4.2	127	9.37

BlueAsia


10 Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

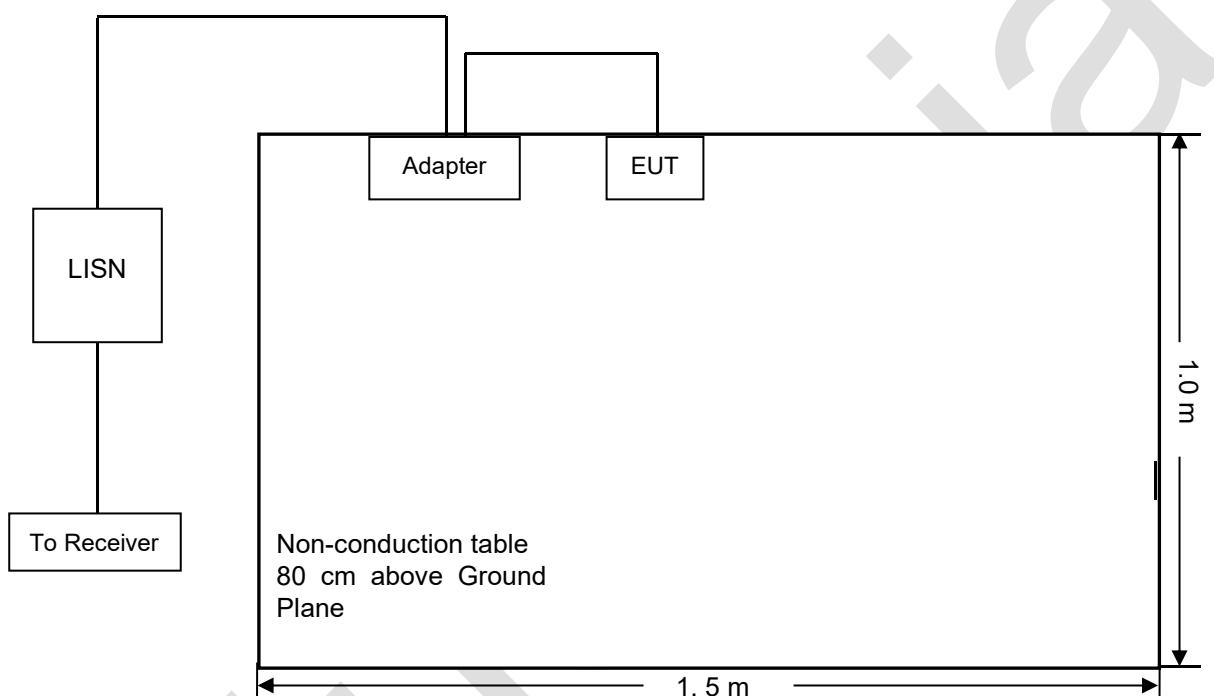

10.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

10.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency 30 MHz
Sweep Speed Auto
IF Bandwidth 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

10.5 Summary of Test Results/Plots

N/A

11 EMISSION BANDWIDTH

11.1 Applicable Standard

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

11.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Set span = 10kHz, centered on a transmitting channel

RBW \geq 1% 20dB Bandwidth, VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down of the emission.


11.3 Environmental Conditions

Temperature:	26 °C
Relative Humidity:	45%
ATM Pressure:	1019 mbar

11.4 Summary of Test Results/Plots




Tx Frequency	20dB Emission bandwidth
13.56MHz	27.20KHz

Please refer to the test plots as below:

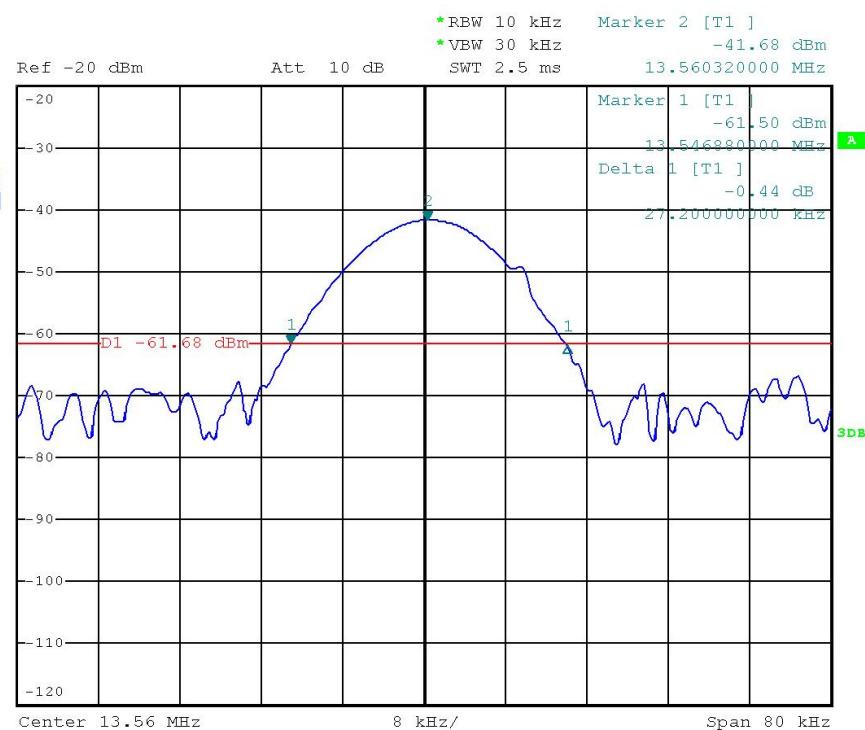


jjjj
Date: 3.AUG.2023 21:02:02

12 Field Strength of the Fundamental Signal

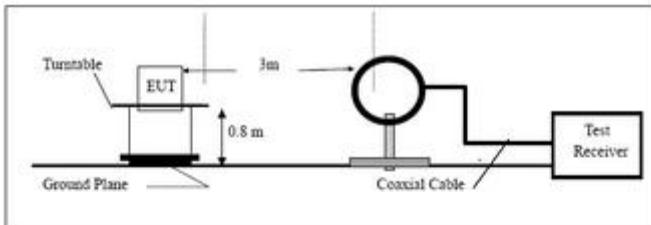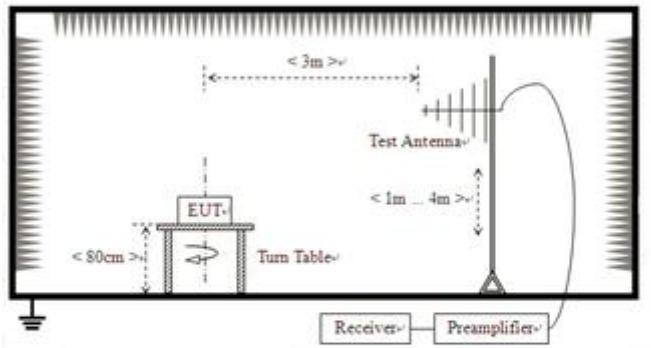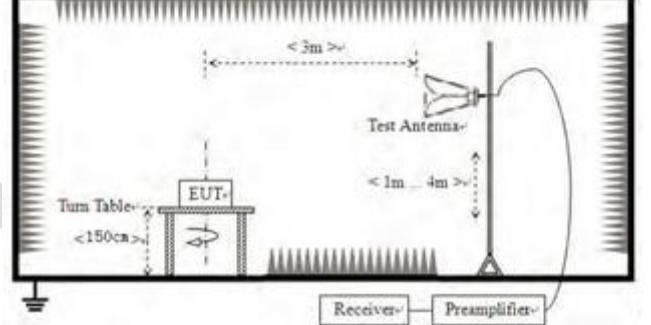Test Requirement:	FCC Part15 C Section 15.223(a)
Test Method:	ANSI C63.10:2013
Limit:	(a) The field strength of any emission within the band 1.705-10.0 MHz shall not exceed 100 microvolts/meter at a distance of 30 meters.
Test setup:	   <p> a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. </p>

	<p>g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</p> <p>Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

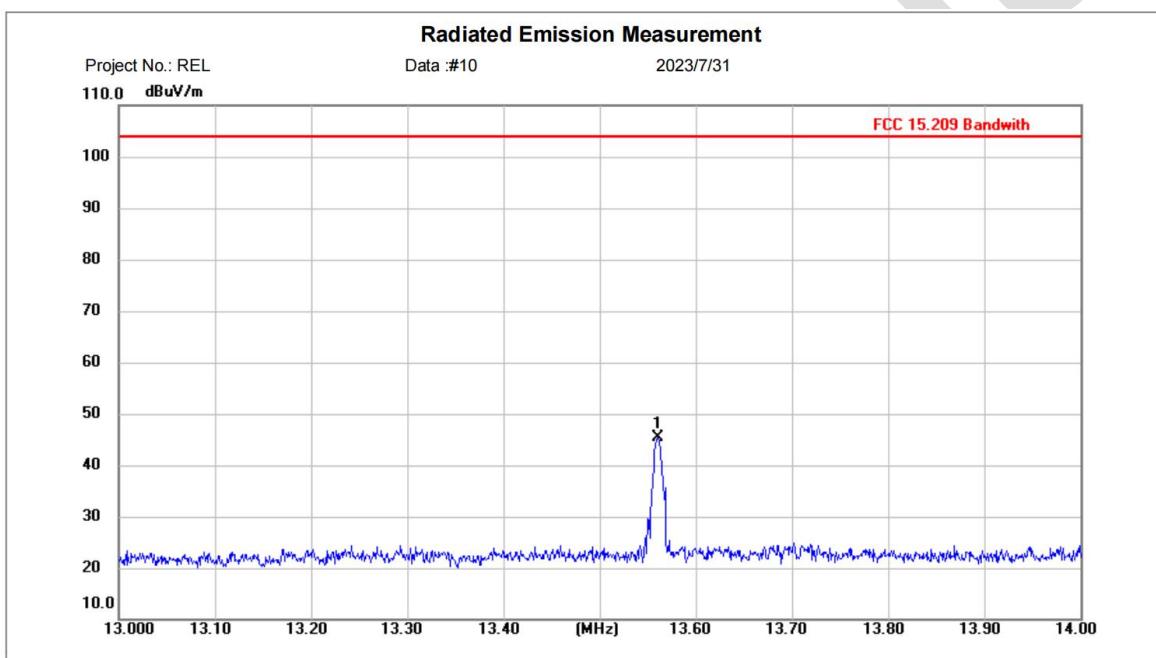

Frequency (MHz)	Read Level (dBuV)	Correct Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
13.56MHz	25.11	20.31	45.42	104	-58.58	X (Worst case)



蓝亚 BLUE ASIA

Report No. : BLA-EMC-202307-A3303

Page 25 of 26

13 Test Setup Photo

Radiated Emission

9KHz-30MHz



30MHz-1G



14 EUT Constructional Details

Reference to the test report No. BLA-EMC-202307-A3301

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia