



EMC TEST REPORT

Report No.: SET2022-14136

Product Name: CPE

FCC ID: 2AZYA-RT2

Model No. : RT2

Applicant: Senwa Global International, S.A. de C.V.

Address: Carretera Mexico-Toluca No. 5324 PB, Colonia El Yaqui
Del. Cuajimalpa de Morelos,
C.P. 05320 Ciudad de Mexico, Mexico

Received Date: 2022.09.16

Dates of Testing: 2022.10.11—2022.10.24

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No. 43 Shahe Road, Xili Street,
Nanshan District, Shenzhen, Guangdong, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **19** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name..... CPE

Model No. RT2

Trade name..... SENWA

Brand Name..... N/A

Applicant..... Senwa Global International, S.A. de C.V.

Applicant Address..... Carretera Mexico-Toluca No. 5324 PB, Colonia El Yaqui
Del. Cuajimalpa de Morelos,
C.P. 05320 Ciudad de Mexico, Mexico

Manufacturer Senwa Global International, S.A. de C.V.

Manufacturer Address Carretera Mexico-Toluca No. 5324 PB, Colonia El Yaqui
Del. Cuajimalpa de Morelos,
C.P. 05320 Ciudad de Mexico, Mexico

Test Standards..... 47 CFR Part 15 Subpart B

Test Result..... PASS

Tested by Ruihong Xie

Ruihong Xie Test Engineer

2022.10.24

Reviewed by Chris You

Chris You Senior Engineer

2022.10.24

Approved by Hou Tao

Hou Tao, Manager

2022.10.24



TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 EUT Description	4
1.2 Test Standards and Results	5
Facilities and Accreditations	6
1.2.1 Facilities	6
1.2.2 Test Environment Conditions.....	6
1.2.3 Measurement Uncertainty	6
2. TEST CONDITIONS SETTING	7
2.1 Test Peripherals	7
2.2 Test Mode	7
2.3 Test Setup and Equipments List.....	8
2.3.1 Conducted Emission	8
2.3.2 Radiated Emission.....	9
3. 47 CFR PART 15B REQUIREMENTS	11
3.1 Conducted Emission	11
3.1.1 Requirement	11
3.1.2 Test Description	11
3.1.3 Test Result.....	11
3.2 Radiated Emission	14
3.2.1 Requirement	14
3.2.2 Test Description	15
3.2.3 Test Result.....	15

Change History		
Issue	Date	Reason for change
1.0	2022.10.24	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Name : CPE
Trade Name.....: SENWA
Brand Name.....: N/A
Hardware Version..... : RT2_TELCEL_Ver 1.0
Software Version..... : RT2_TELCEL_Ver 1.0
Power supply.....: Adaptor
Model No.: AT-506A-120100A
I/p: 100-240V~50/60Hz ,350mA
O/p: 12.0V $\overline{\text{---}}$ 1000mA
Manufacturer: Shenzhen Baijunda Electronic Co., Ltd

*Note1:*The EUT is a CPE;

*Note2 :*For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

- (1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.



Facilities and Accreditations

1.2.1 Facilities

FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until April 19th, 2023.

ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until April 20th, 2023.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

1.2.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 °C - 35 °C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

1.2.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.2 dB (k=2)
Uncertainty of Radiated Emission: (30MHz~1GHz)	Uc = 5.8 dB (k=2)
Uncertainty of Radiated Emission: (1~6GHz)	Uc = 5.1 dB (k=2)
Uncertainty of Radiated Emission: (6~18GHz)	Uc = 5.5 dB (k=2)



2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
Notebook	ThinkPad	E430C	A131101550	N/A

Support Cable:

Description	Shield Type	Ferrite Core	Length
PC Power adapter Cable	Un- shielding	No	1.2m
Mouse Cable	Un- shielding	No	1m
Network Cable	Un- shielding	No	1.2m

2.2 Test Mode


The EUT have the following typical setups during the test:

Setup1: EUT+ Charger +PC Network Port Data transmission;

2.3 Test Setup and Equipments List

2.3.1 Conducted Emission

A. Test Setup:

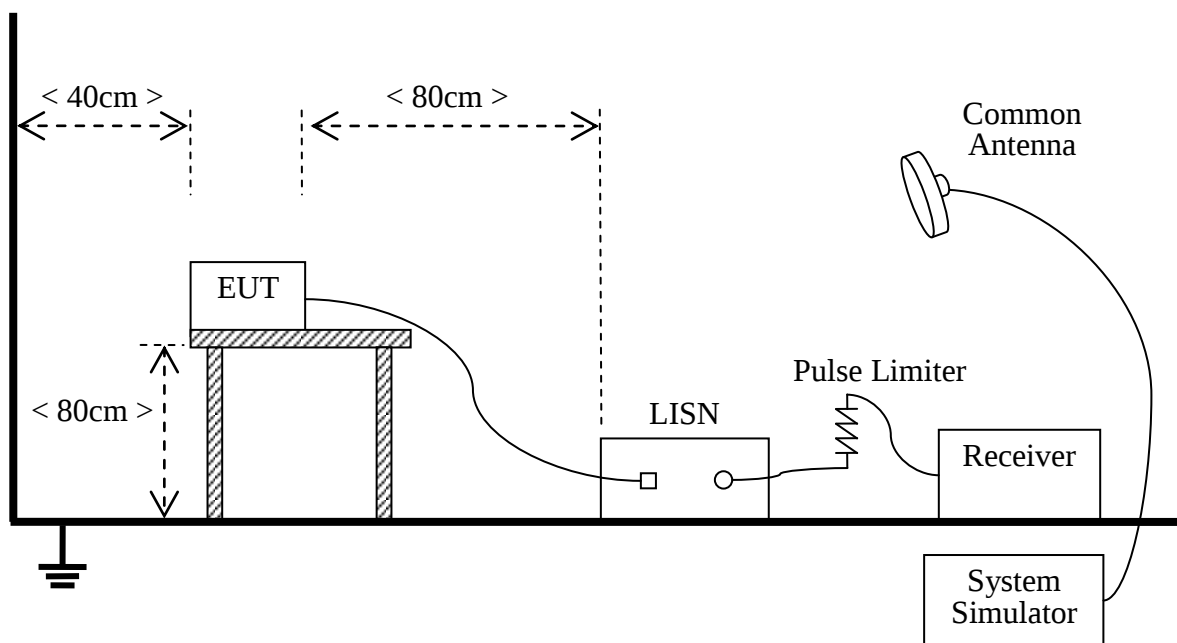

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


B. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2022.07.21	2023.07.20
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2022.07.21	2023.07.20
Cable	MATCHING PAD	W7	/	2022.08.02	2023.08.02


2.3.2 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

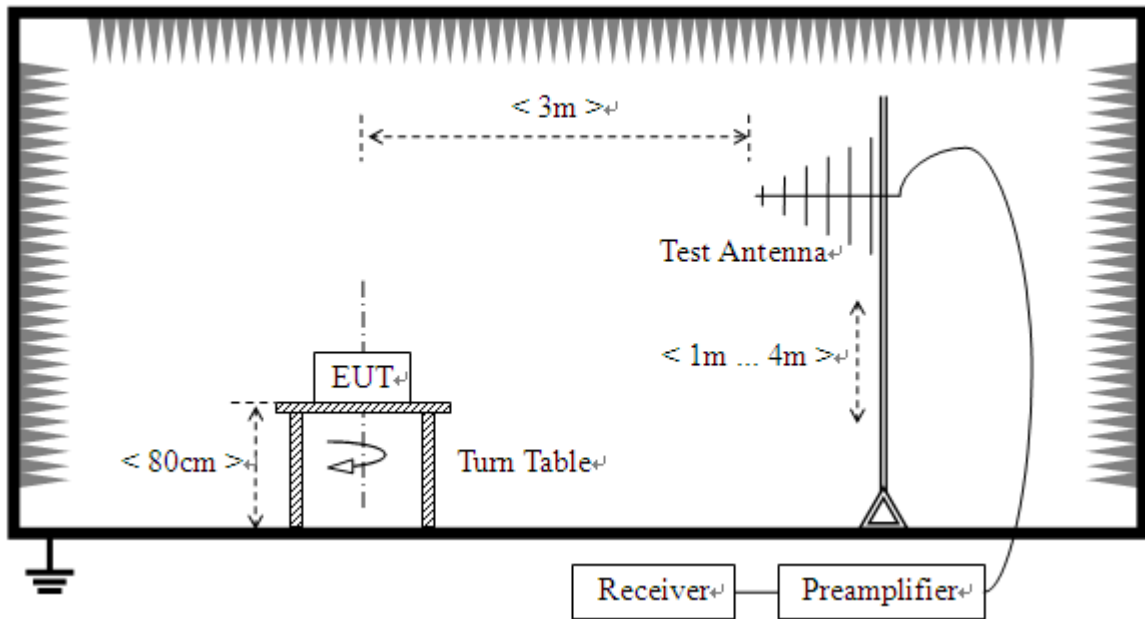

- 2) For radiated emissions above 1GHz

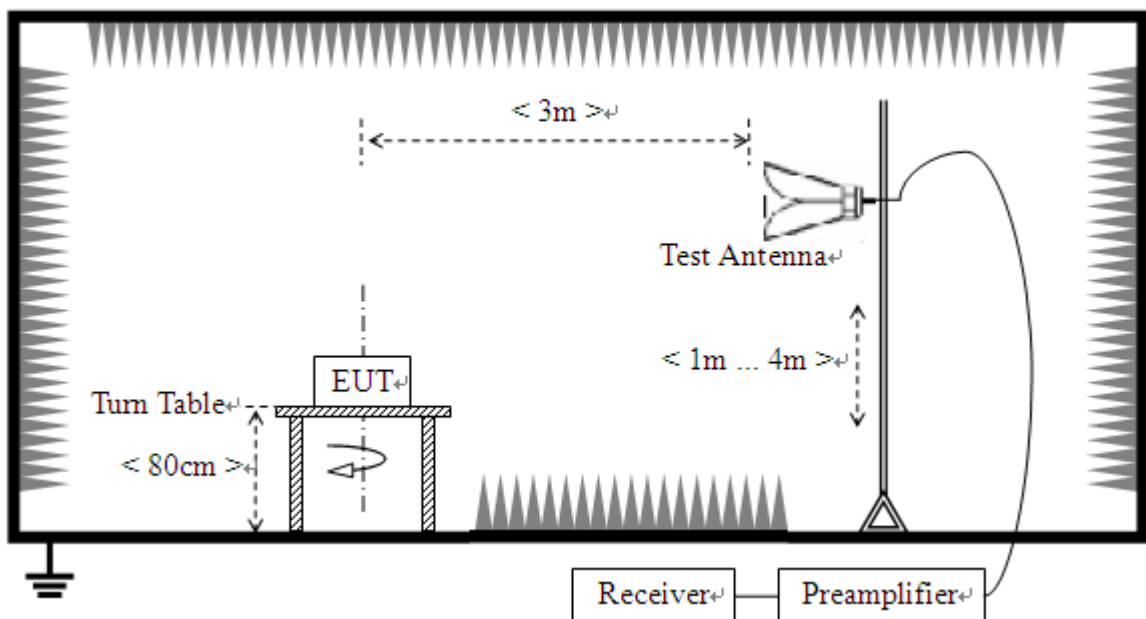

**B. Test Procedure**

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	A0902601	2022.05.23	2023.04.17
Broadband Ant.	2786	ETC	A150402239	2021.09.16	2024.03.03
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2019.03.26	2023.03.25
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2022.07.21	2023.07.20
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2022.03.25	2023.03.24
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2019.03.25	2023.03.24

3. 47 CFR PART 15B REQUIREMENTS

3.1 Conducted Emission

3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2 Test Description

See section 2.3.1 of this report.

3.1.3 Test Result


The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

Note:

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC,50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Test voltage and frequency (120V AC,60Hz)


A. Mains terminal disturbance voltage, L phase, Setup 1

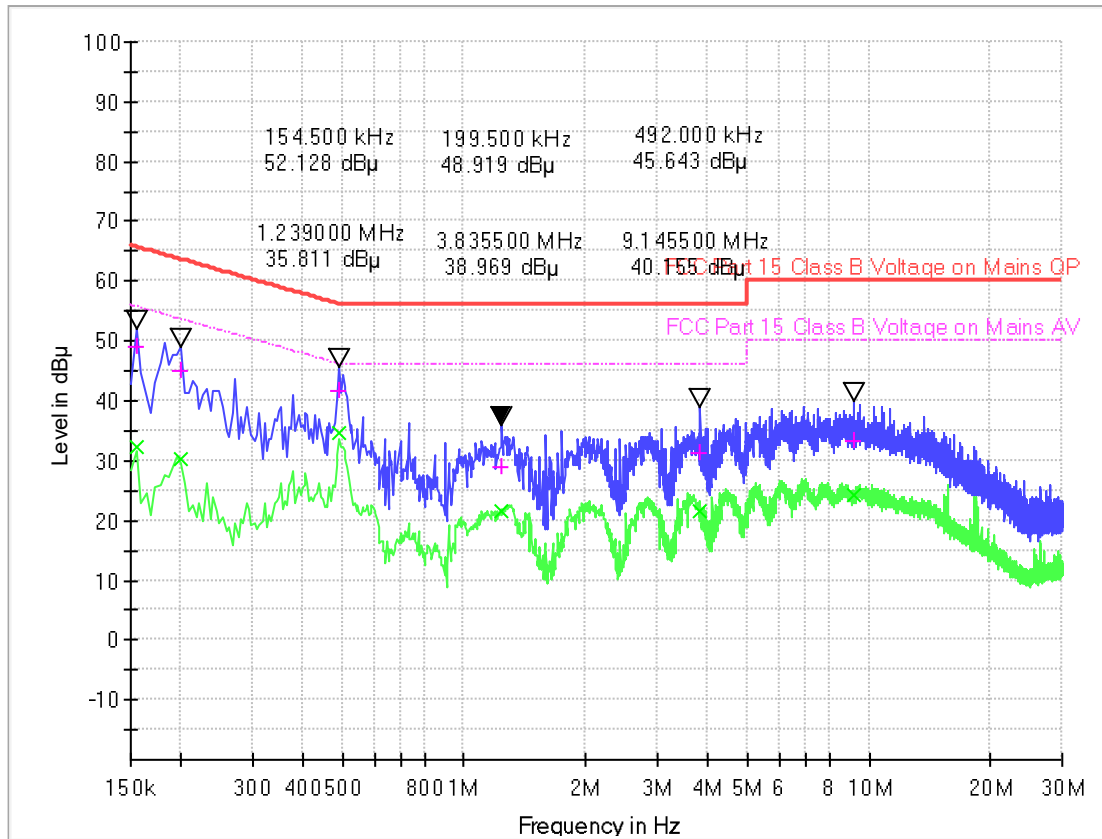

(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.154500	49.10	32.22	0.1	10.3	16.65	65.8	23.53	55.8
0.199500	44.98	30.39	0.1	10.3	18.65	63.6	23.24	53.6
0.492000	41.67	34.66	0.1	10.2	14.46	56.1	11.47	46.1
1.239000	28.86	21.52	0.2	10.2	27.14	56.0	24.48	46.0
3.835500	31.19	21.54	0.2	10.2	24.81	56.0	24.46	46.0
9.145500	33.42	24.09	0.3	10.5	26.58	60.0	25.91	50.0

B. Mains terminal disturbance voltage, N phase, Setup 1

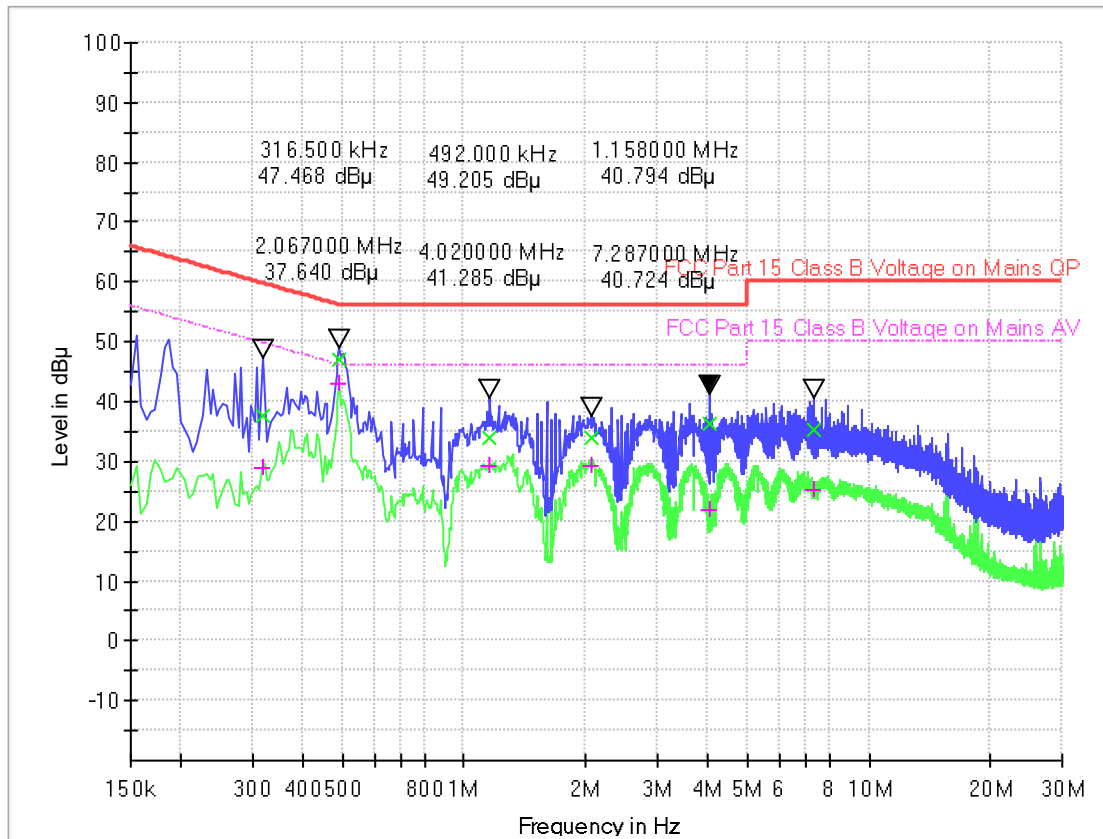

(Plot B: N Phase)

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.316500	37.69	28.96	0.1	10.3	22.11	59.8	20.84	49.8
0.492000	46.94	43.11	0.1	10.2	9.19	56.1	3.02	46.1
1.158000	34.06	29.32	0.1	10.2	21.94	56.0	16.68	46.0
2.067000	33.92	29.17	0.2	10.2	22.08	56.0	16.83	46.0
4.020000	36.20	22.05	0.2	10.2	19.80	56.0	23.95	46.0
7.287000	35.33	25.22	0.2	10.4	24.67	60.0	24.78	50.0

3.2 Radiated Emission

3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	($\mu\text{V/m}$)	(dBuV/m)
30.0 - 88.0	100	3m	100	$20\log 100$
88.0 - 216.0	150	3m	150	$20\log 150$
216.0 - 960.0	200	3m	200	$20\log 200$
Above 960.0	500	3m	500	$20\log 500$

- For frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- For below 1G :QP detector RBW 120kHz ,VBW 300kHz.

For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;AV detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- The tighter limit shall apply at the boundary between two frequency range.
- Limitation expressed in dBuV/m is calculated by $20\log \text{Emission Level}(\mu\text{V/m})$.
- If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $L_{d1} = L_{d2} * (d_2/d_1)^2$.

Example:

F.S Limit at 30m distance is $30\mu\text{V/m}$, then F.S Limitation at 3m distance is adjusted as

$$L_{d1} = L_1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}.$$

3.2.2 Test Description

See section 2.3.2 of this report.


3.2.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.


A.Radiation disturbances, antenna polarization:Vertical,Setup1

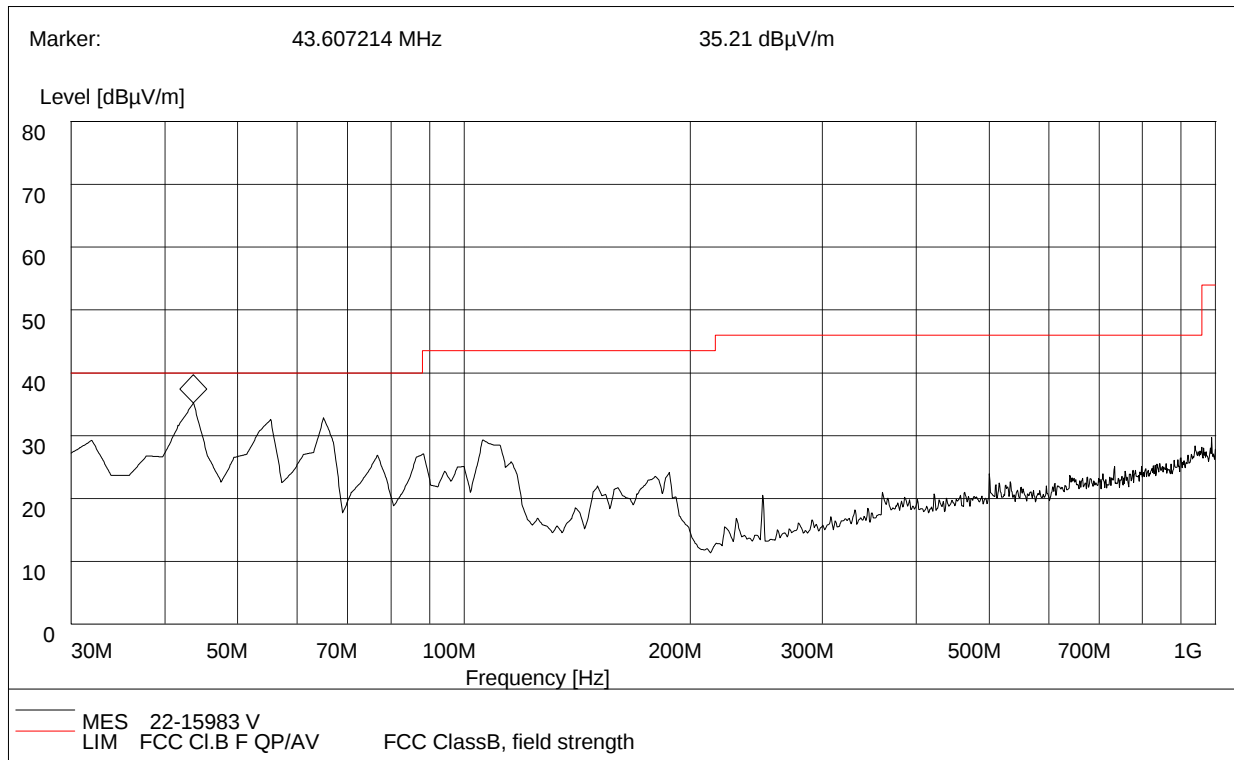

(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
43.40	34.85	120.000	116	40.00	5.15	Vertical	0.1	26.1	Pass
53.31	31.08	120.000	120	40.00	8.92	Vertical	0.1	26.1	Pass
105.24	28.64	120.000	119	43.50	14.86	Vertical	0.2	26.3	Pass
187.70	23.62	120.000	127	43.50	19.88	Vertical	0.2	26.3	Pass
500.17	23.52	120.000	106	46.00	22.48	Vertical	0.5	26.7	Pass
640.26	22.10	120.000	115	46.00	23.90	Vertical	0.5	26.9	Pass


B.Radiation disturbances, antenna polarization: Horizontal,Setup1

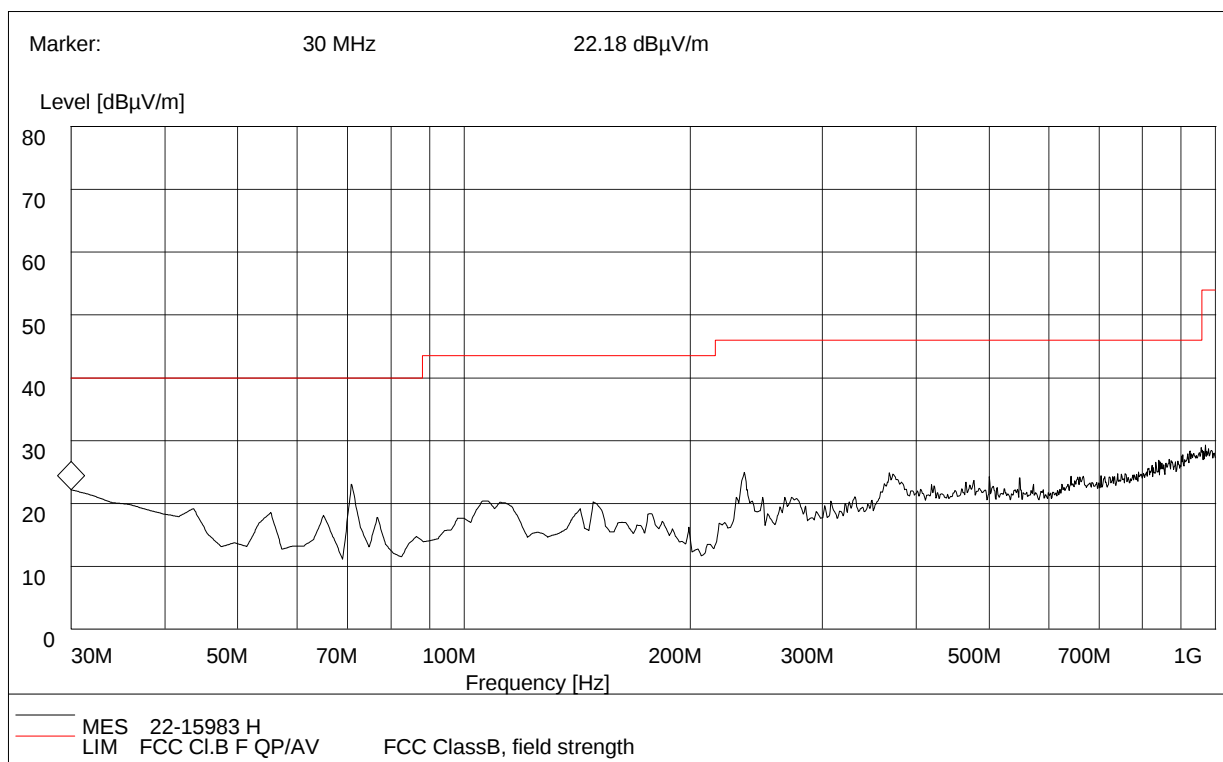

(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	21.00	120.000	114	40.00	19.00	Horizontal	0.1	26.0	Pass
63.27	18.43	120.000	121	40.00	21.57	Horizontal	0.2	26.1	Pass
107.09	20.13	120.000	109	43.50	23.37	Horizontal	0.2	26.4	Pass
148.16	20.04	120.000	126	43.50	23.46	Horizontal	0.3	26.5	Pass
236.33	23.10	120.000	107	46.00	22.90	Horizontal	0.3	26.8	Pass
548.24	23.68	120.000	115	46.00	22.32	Horizontal	0.5	27.1	Pass


A.Radiation disturbances, antenna polarization: Horizontal

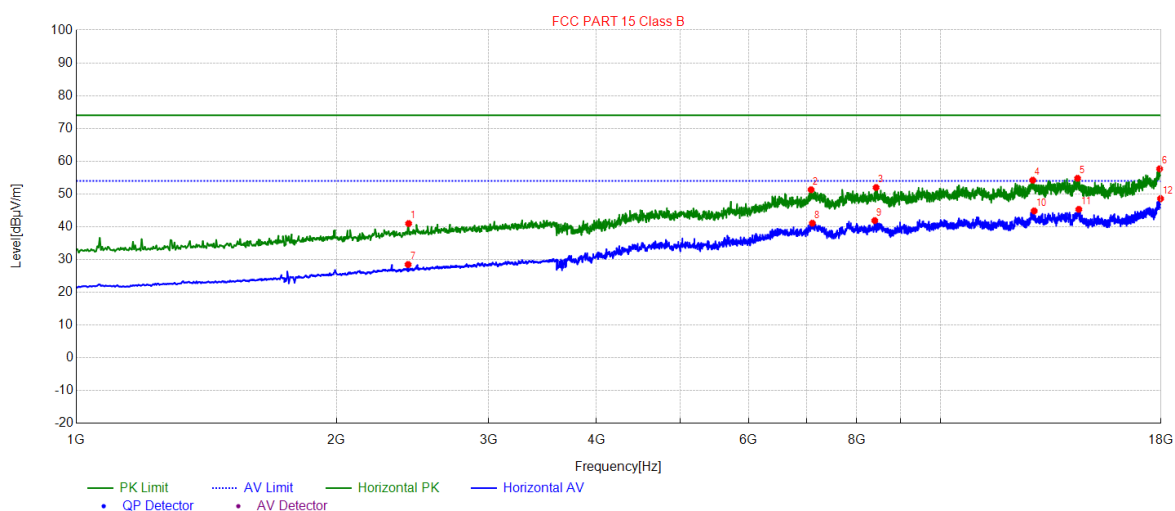

(Plot M: Test Antenna Horizontal 1G – 18G)

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin[dB μV/m]	Trace	Height [cm]	Angle [°]	Polarity
1	2424.6	40.99	-10.56	74.00	33.01	PK	132	114	Horizontal
2	7086	51.29	3.41	74.00	22.71	PK	116	336	Horizontal
3	8425.6	51.97	4.49	74.00	22.03	PK	109	182	Horizontal
4	12791.2	54.20	7.67	74.00	19.80	PK	125	188	Horizontal
5	14413	54.79	9.24	74.00	19.21	PK	133	315	Horizontal
6	17935.4	57.67	14.73	74.00	16.33	PK	119	150	Horizontal
7	2421.2	28.49	-10.57	54.00	25.51	AV	107	243	Horizontal
8	7109.8	41.09	3.43	54.00	12.91	AV	122	49	Horizontal
9	8395	41.89	4.48	54.00	12.11	AV	141	156	Horizontal
10	12838.8	44.83	7.83	54.00	9.17	AV	130	273	Horizontal
11	14460.6	45.31	9.50	54.00	8.69	AV	127	341	Horizontal
12	17979.6	48.58	14.82	54.00	5.42	AV	114	172	Horizontal

B.Radiation disturbances, antenna polarization: Vertical

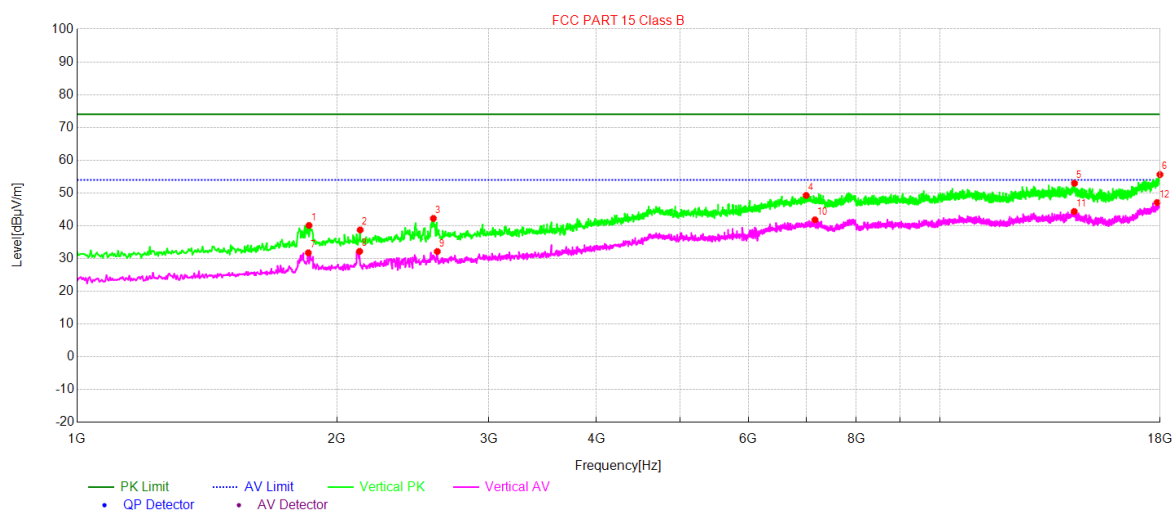

(Plot N: Test Antenna Vertical 1G – 18G)

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin[dB μV/m]	Trace	Height [cm]	Angle [°]	Polarity
1	2584.4	41.03	-10.00	74.00	32.97	PK	109	221	Vertical
2	4658.4	45.35	-1.27	74.00	28.65	PK	107	328	Vertical
3	7164.2	50.69	3.47	74.00	23.31	PK	111	29	Vertical
4	7844.2	51.99	4.01	74.00	22.01	PK	121	80	Vertical
5	11050.4	53.00	6.61	74.00	21.00	PK	114	214	Vertical
6	12801.4	54.42	7.69	74.00	19.58	PK	122	251	Vertical
7	2686.4	29.65	-9.51	54.00	24.35	AV	103	263	Vertical
8	4685.6	34.97	-1.15	54.00	19.03	AV	125	89	Vertical
9	7160.8	40.52	3.46	54.00	13.48	AV	119	304	Vertical
10	7823.8	40.20	3.98	54.00	13.80	AV	127	225	Vertical
11	10635.6	41.77	6.37	54.00	12.23	AV	116	87	Vertical
12	12767.4	44.13	7.62	54.00	9.87	AV	108	134	Vertical

-----End of Report-----