


FCC & ISCED CERTIFICATION TEST REPORT

Project Number : EA2103C-075
Test Report Number : TR-W2106-002
Type of Equipment : remote control
Model Name : DB-5600R
Equipment Class : DXX - Part 15 Low Power Communication Device Transmitter
FCC ID : 2AZYF-DB-5600R
ISED Canada ID : 27289-DB5600R
Applicant : DAELIM TRADING CO., LTD JEUNGPYEONG FACTORY
Address : 23, Jeungpyeongsandan-ro, Jeungpyeong-eup, Jeungpyeong-gun, Chungcheongbuk-do, Republic of Korea
Manufacturer : DAELIM TRADING CO., LTD JEUNGPYEONG FACTORY
Address : 23, Jeungpyeongsandan-ro, Jeungpyeong-eup, Jeungpyeong-gun, Chungcheongbuk-do, Republic of Korea
Regulation : FCC Part 15 Subpart C Section 15.249, ISCED RSS-210 Issue10
Total page of Report : 19 Pages
Date of Receipt : 2021-03-31
Date of Issue : 2021-06-07
Test Result : PASS

This test report only contains the result of a single test of the sample supplied for the examination.
 It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by	Song, In-young / Senior Engineer		2021-06-07
		Signature	Date
Reviewed by	Choi, Yeong-min / Technical Manager		2021-06-07
		Signature	Date

CONTENTS

Page

1. TEST SUMMARY	4
1.1 REGULATIONS AND RESULTS	4
1.2 TEST METHODOLOGY	4
1.3 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	4
1.4 PURPOSE OF THE TEST	4
2. EUT (EQUIPMENT UNDER TEST) INFORMATION	6
2.1 GENERAL DESCRIPTION	6
2.2 ADDITIONAL MODEL	6
3. TEST CONDITION	7
3.1 EQUIPMENT USED DURING TEST	7
3.2 MODE OF OPERATION DURING THE TEST	7
3.3 PRELIMINARY TESTING FOR WORST CASE CONFIGURATION	7
3.4 TEST SETUP DRAWING	8
3.5 EUT MODIFICATIONS	8
4. ANTENNA REQUIREMENT	9
4.1 ANTENNA DESCRIPTION	9
4.2 CONCLUSION	9
5. TEST DATA	10
5.1 RADIATED EMISSIONS AND RESTRICTED BAND AROUND FUNDAMENTAL FREQUENCY	10
5.2 20 DB BANDWIDTH	17
5.3 99% BANDWIDTH	18
APPENDIX I – TEST INSTRUMENTATION	19

Release Control Record

Issue Report No.	Issued Date	Details/Revisions
TR-W2106-002	2021-06-07	Initial Release
-	-	-

1. TEST SUMMARY

1.1 Regulations and results

The sample submitted for evaluation (Hereafter referred to as the EUT) has been tested in accordance with the following regulations or standards.

FCC Reference Section	ISED Reference Section	Description	Result			
			P	F	N.T.	Note
15.205, 15.209 & 15.249(a), (d)	RSS-210 B.10	Radiated Emissions & Restricted band around Fundamental Frequency	P			
15.215	RSS GEN 6.6	20 dB Bandwidth, 99 % Bandwidth	P			
15.207	RSS GEN 8.8	AC Power-line Conducted Emissions			N.T.	Note 1

Remark:

P means Passed

F means Failed

N.T. means Not Tested

Note1. The EUT is operated by battery only. (use manganese dry cell as type AAA)

1.2 Test Methodology

The tests mentioned in clause 1.1 in this test report were performed according to FCC CFR 47 Part 2, CFR 47 Part 15 and ANSI C63.10-2013, and RSS-Gen Issue 5.

1.3 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

1.4 Purpose of the test

The test was performed to determine whether the equipment under test fulfills the requirements of the regulation stated in FCC Part 15 Subpart C Section 15.249, RSS-Gen and RSS-210.

1.5 Test Facility

The measurement facilities are located at 135-60 Gyeongchung-daero, Gonjam-eup, Gwangju-si, Gyeonggi-do 12813, Korea. Our test facilities are accredited as a Conformity Assessment Body (CAB) by the FCC and ISED Canada, designated by the RRA (National Radio Research Agency), and accredited by KOLAS (Korea Laboratory Accreditation Scheme) in Korea and approved by TUV Rheinland, TUV SÜD and Korean Register of Shipping according to the requirement of ISO/IEC 17025.

Laboratory Qualification	Registration No.	Mark
FCC	KR0160	
ISED Canada	12721A	
RRA	KR0160	
TUV Rheinland	UA 50314109-0002	
TUV SÜD	CARAT 094465 0004 Rev.00	
Korean Agency for Technology and Standards	KT733	
KOREAN REGISTER OF SHIPPING	PCT40841-TL001	

Remark. This report is not related to KOLAS accreditation and relevant regulation.

2. EUT (Equipment Under Test) INFORMATION

2.1 General Description

The DAELIM TRADING CO., LTD JEUNGPYEONG FACTORY, Model DB-5600R (referred to as the EUT in this report) is a electronic bidet seat remote control. The product specification described herein was obtained from product data sheet or user's manual.

Equipment Class	<i>DXX – Part 15 Low Power Communication Device Transmitter</i>
Operating Frequency	2 448 MHz
Max. RF Output Power	87.16 dBμV/m (Peak)
Modulation Types	GFSK
Number of Channels	1 channel
Generated or used Freq. in EUT	16 MHz
Type of Antenna	☒ Integrated Type (PCB Pattern) ☐ Dedicated Type
Antenna Gain	0 dBi
Operating Temperature	37.4°F ~ 104°F
Normal Test Voltage	DC 4.5 V
Electrical Rating	DC 4.5 V
Test SW Version	N/A
RF power setting in TEST SW	N/A
Software Version	SWR 1.0
Hardware Version	HWR 1.0

2.2 Additional Model

None

3. TEST CONDITION

3.1 Equipment Used During Test

The following peripheral devices and/or interface cables were connected during the measurement:

Description	Model No.	Serial No.	Manufacturer.
remote control (EUT)	DB-5600R	N/A	DAELIM TRADING CO., LTD JEUNGPYEONG FACTORY

3.2 Mode of operation during the test

For transmitting continuous modulation signal and maximum RF output power, insert AAA battery x 3 in the EUT and then press the operating button on the EUT to the manufacturer's guidance.

3.3 Preliminary Testing for Worst case configuration

For finding worst case configuration and operating mode, preliminary testing was performed and radiated emission and conducted emission tests were performed with the EUT set to transmit and receive at the channel with the highest output power as worst case scenario. All spurious emission tests were performed in X, Y and Z axis direction. And the worst Y-axis (9 kHz ~ 30 MHz, 30 MHz ~ 1 GHz), Z-axis (Above 1 GHz) test condition was recorded in this test report.

Based on preliminary testing following operating modes were selected for the final test as listed below.

3.3.1 Radiated Test Channel and Frequency


Test Channel	Channel	Frequency
Dedicated Channel	-	2 448 MHz

3.3.2 AC power line conducted Emission Test Mode


Test Channel	Channel	Frequency
Dedicated Channel	-	2 448 MHz

3.4 Test Setup Drawing


(Radiated Test below 1 GHz)

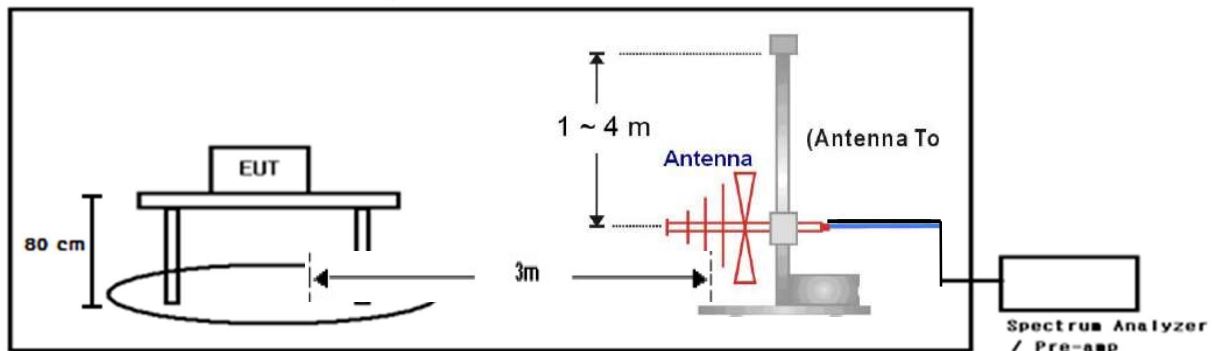

(Radiated Test above 1 GHz)

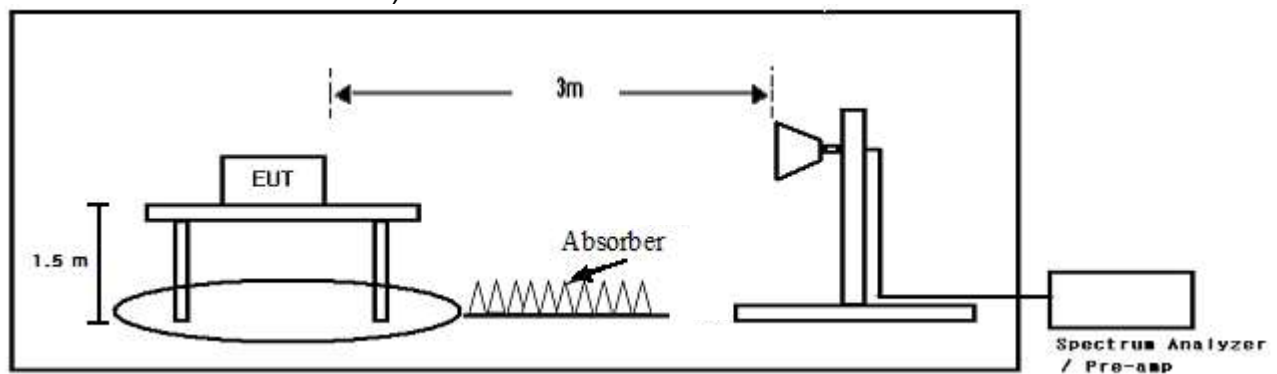

(Conducted Test)

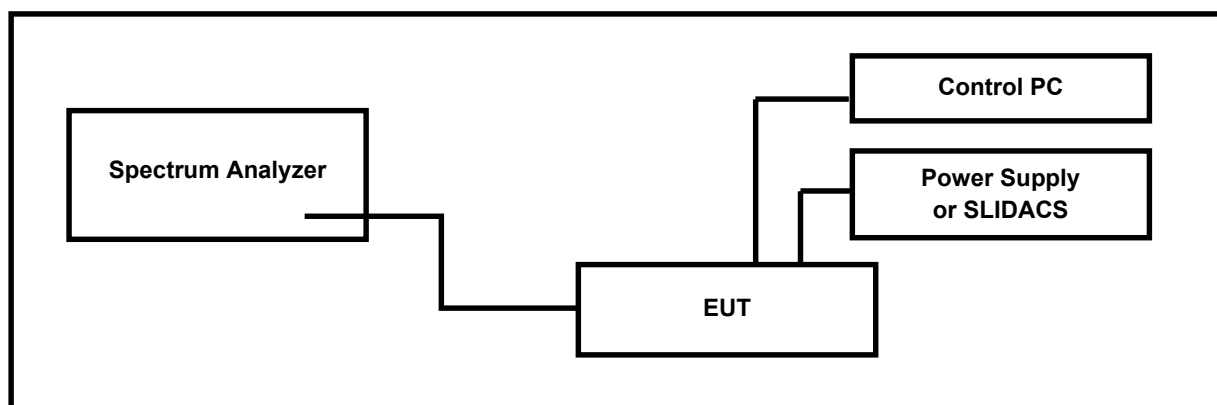

3.5 EUT Modifications

- No EMC Relevant Modifications were performed by this test laboratory.

4. ANTENNA REQUIREMENT

According to FCC CFR 47 Part 15 section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provision of this section.

4.1 Antenna Description

Frequency Band (GHz)	Antenna Type	Max Peak Gain (dBi)	Connector Type
2.402 – 2.480	PCB Pattern	0	-

4.2 Conclusion

The antenna type of the EUT is PCB Pattern Antenna, so the EUT met the requirement.

5. TEST DATA

5.1 Radiated emissions and Restricted band around fundamental frequency

5.1.1 Regulation

Acc. To section 15.249 and RSS-210 Annex B.10, following table shall be applied.

Fundamental Frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902 – 928 MHz	50	500
2 400 -2 483.5 MHz	50	500
5 725 -5 875 MHz	50	500
24.0 – 24.25 GHz	250	2500

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits as below table, whichever is the lesser attenuation.

Frequency (MHz)	Field strength limit ($\mu\text{V}/\text{m}$)	Field strength limit ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F \text{ (kHz)} = 266.7 - 4.9$	48.5 – 13.8	300
0.490 – 1.705	$24000/F \text{ (kHz)} = 49.0 - 14.1$	33.8 - 23.0	30
1.705 – 30.0	30	29.5	30
30 – 88	100	40.0	3
88 - 216	150	43.5	3
216 - 960	200	46.0	3
Above 960	500	54.0	3

Note: The emission limits shown in the above table are based on measurement instrumentation employing a CISPR quasi-peak detector. For the frequency bands 9 – 90 kHz, 110 – 490 kHz and above 1000 MHz, the radiated emission limits are based on measurements employing an average detector.

5.1.2 Method of Measurement

The preliminary radiated emission test was performed using the procedure in ANSI C63.10 2013 to determine the worse operating conditions. The radiated emissions measurements were performed on the 10 m Semi Anechoic Chamber

Radiated Emissions Test, 9 kHz to 30 MHz (Magnetic Field Test)

For frequencies from 9 kHz to 30 MHz measurements were made of the magnetic H field. The EUT was placed on the top of the 0.8-meter height, 1 × 1.5 meter non-metallic table. The measuring antenna is an electrically screened loop antenna. Emissions from the EUT are maximized by adjusting the orientation of the Loop antenna and rotating the EUT on the turntable. Manipulating the system cables also maximizes EUT emissions if applicable. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

Radiated Emissions Test, from 30 MHz to 1 GHz

The frequency spectrum from 30 MHz to 1 GHz was scanned and maximum emission levels maximized at each frequency recorded. The EUT was placed on the top of a rotating table of 0.8-meter height, 1 × 1.5 meter non-metallic table. The measuring antenna was broadband Tri-log antenna. The system rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna. The test receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode. The EUT is situated in three orthogonal planes (if appropriate).

Radiated Emissions Test, above 1 GHz

The frequency spectrum of above 1 GHz was scanned and maximum emission levels maximized at each frequency recorded. The EUT was placed on the top of a rotating table of 1.5-meter height. The measuring antenna was broadband horn antenna. The system rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna. The test receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode. If the peak measured value also meets average limit, measurement with the average detector is unnecessary. The EUT is situated in three orthogonal planes (if appropriate).

5.1.3 Test Site Requirement for KDB 937606

Acc. to KDB 937606, Semi Anechoic Chamber (SAC) shall be verified test results below 30 MHz with Open Area Test Site (OATS), so we compared test results between the measurements from our SAC and an OATS and found test results almost same, so we declare test result for below 30 MHz from our SAC is valid and met the requirement acc. to KDB 937606.

5.1.4 Measurement Uncertainty

Measurement uncertainties were not taken into account and following uncertainty levels have been estimated for tests performed on the apparatus. The measurement uncertainties are given with at least 95 % confidence.

Frequency Range	Uncertainty	Frequency Range	Uncertainty
9 kHz ~ 30 MHz	±2.9 dB	30 MHz ~ 1 GHz	±4.3 dB
1 GHz ~ 18 GHz	±4.9 dB	18 GHz ~ 25 GHz	±5.2 dB

5.1.5 Sample Calculated Example

At 80 MHz

Limit = 40.0 dBuV/m

Result = Receiver reading value + Antenna Factor + Cable Loss – Pre-amplifier gain = 30 dBuV/m


Margin = Limit – Result = 40 – 30 = 10

so the EUT has 10.0 dB margin at 80 MHz


5.1.6 Test Data

Date of Test	2021-05-12 ~ 2021-05-14	Temperature		(25.6 ± 2.7) °C	
		Relative humidity		(61.4 ± 5.9) % R.H.	
Measurement Frequency Range		9 kHz ~ 1 GHz			
Test Result	PASS	Tested By		Do-heon Kim 	
Frequency range	Detector Mode	Resolution BW	Video BW	Video Filtering	Measurement distance
Below 30 MHz	Peak or Q.P.	9 kHz	30 kHz	-	3 m
30 MHz ~ 1 000 MHz	Peak or Q.P.	100 kHz	300 kHz	-	3 m
30 MHz ~ 1 000 MHz	Peak or Average	1 MHz	3 MHz	-	3 m

5.1.6.1 Test Data Fundamental Frequency Level

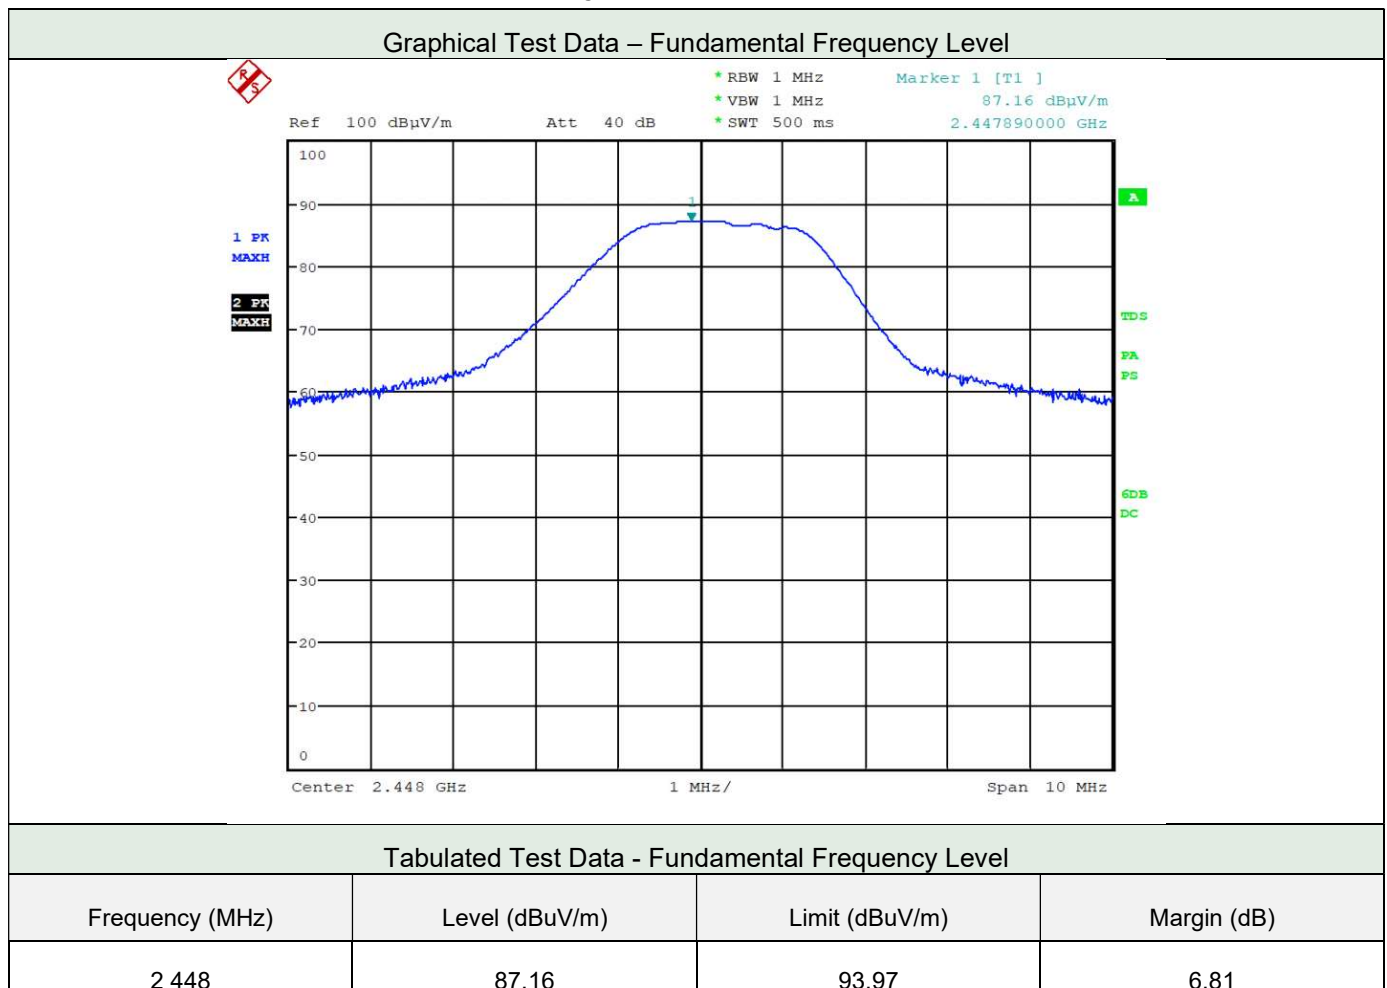


5.1.6.2 Test Data below 30 MHz

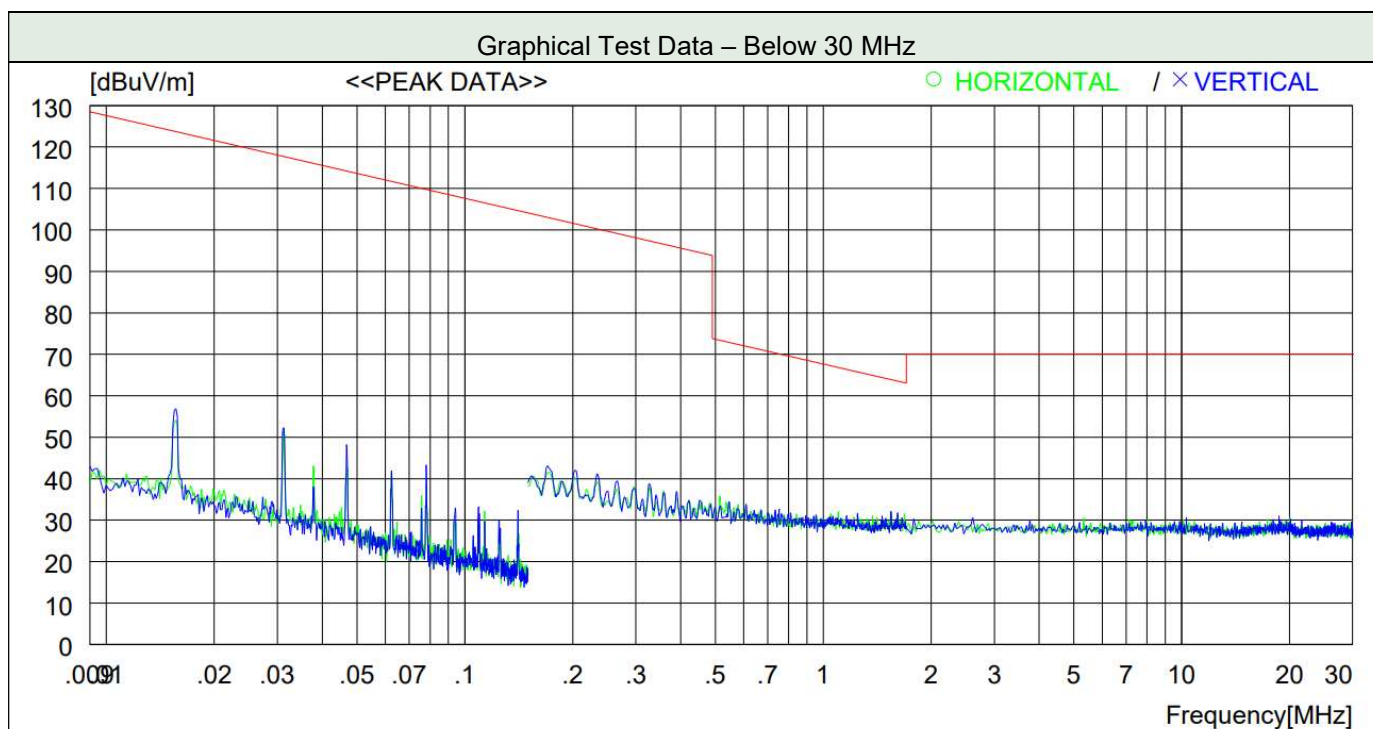


Tabulated Test Data - Below 30 MHz										
Frequency (MHz)	Receiver Reading (dBuV)	Detector Mode	Pol.	Ant. Factor (dB/m)	Corr. Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Azimuth (Degree)
* Spurious emissions that 20 dB below the limits didn't be recorded										

5.1.6.3 Test Data from 30 MHz to 1 GHz

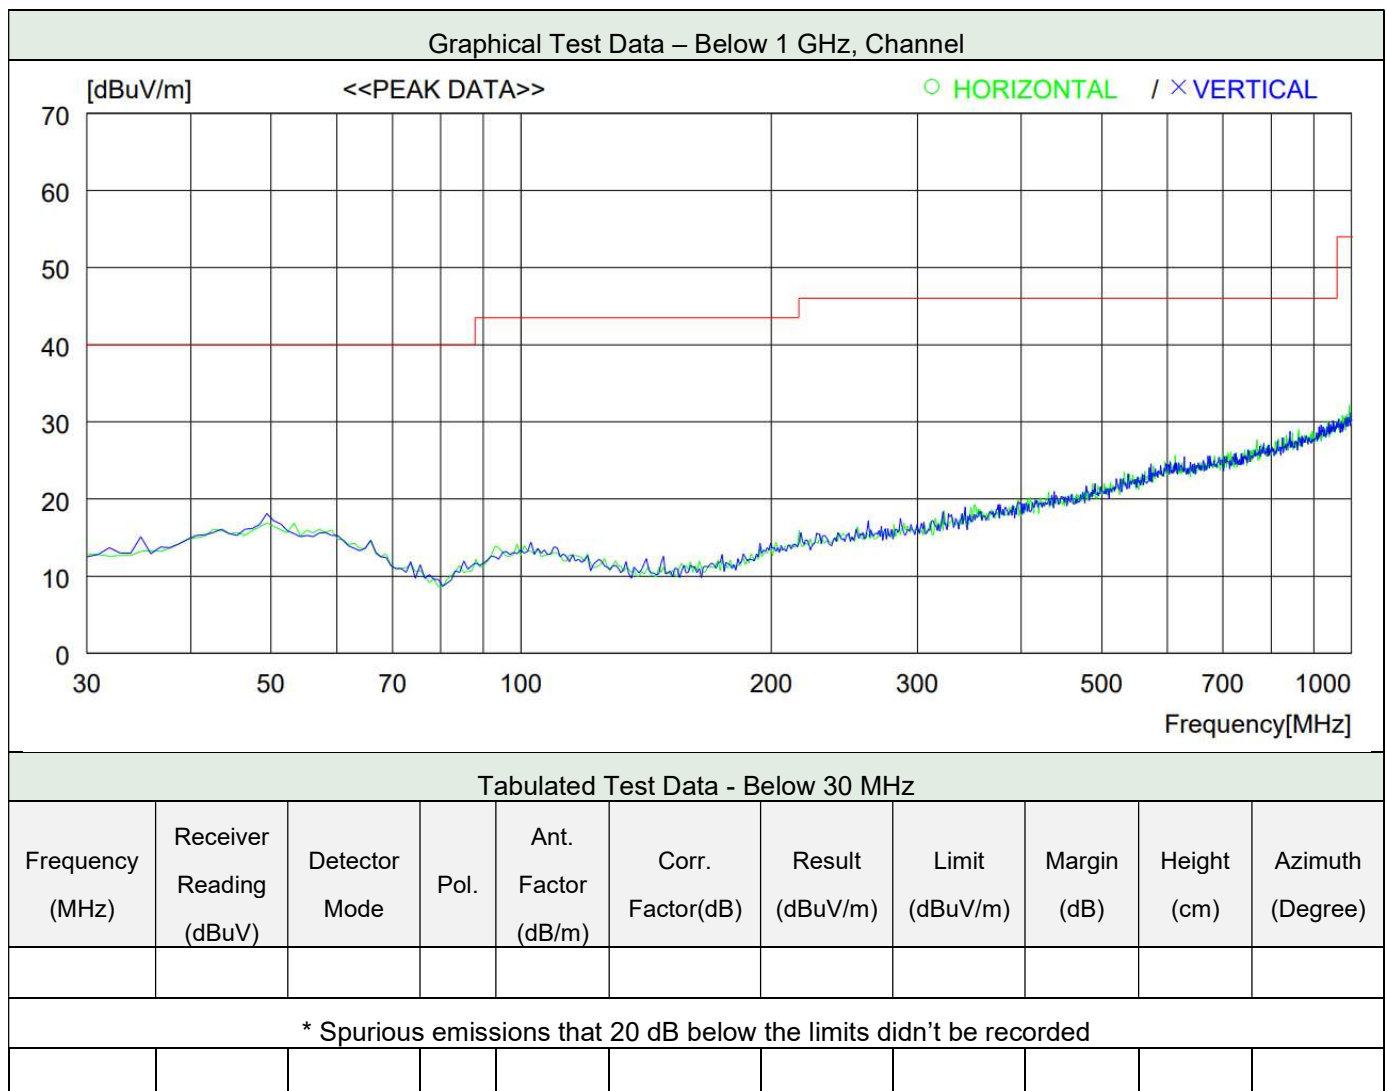

5.1.6.4 Test Data - above 1 GHz

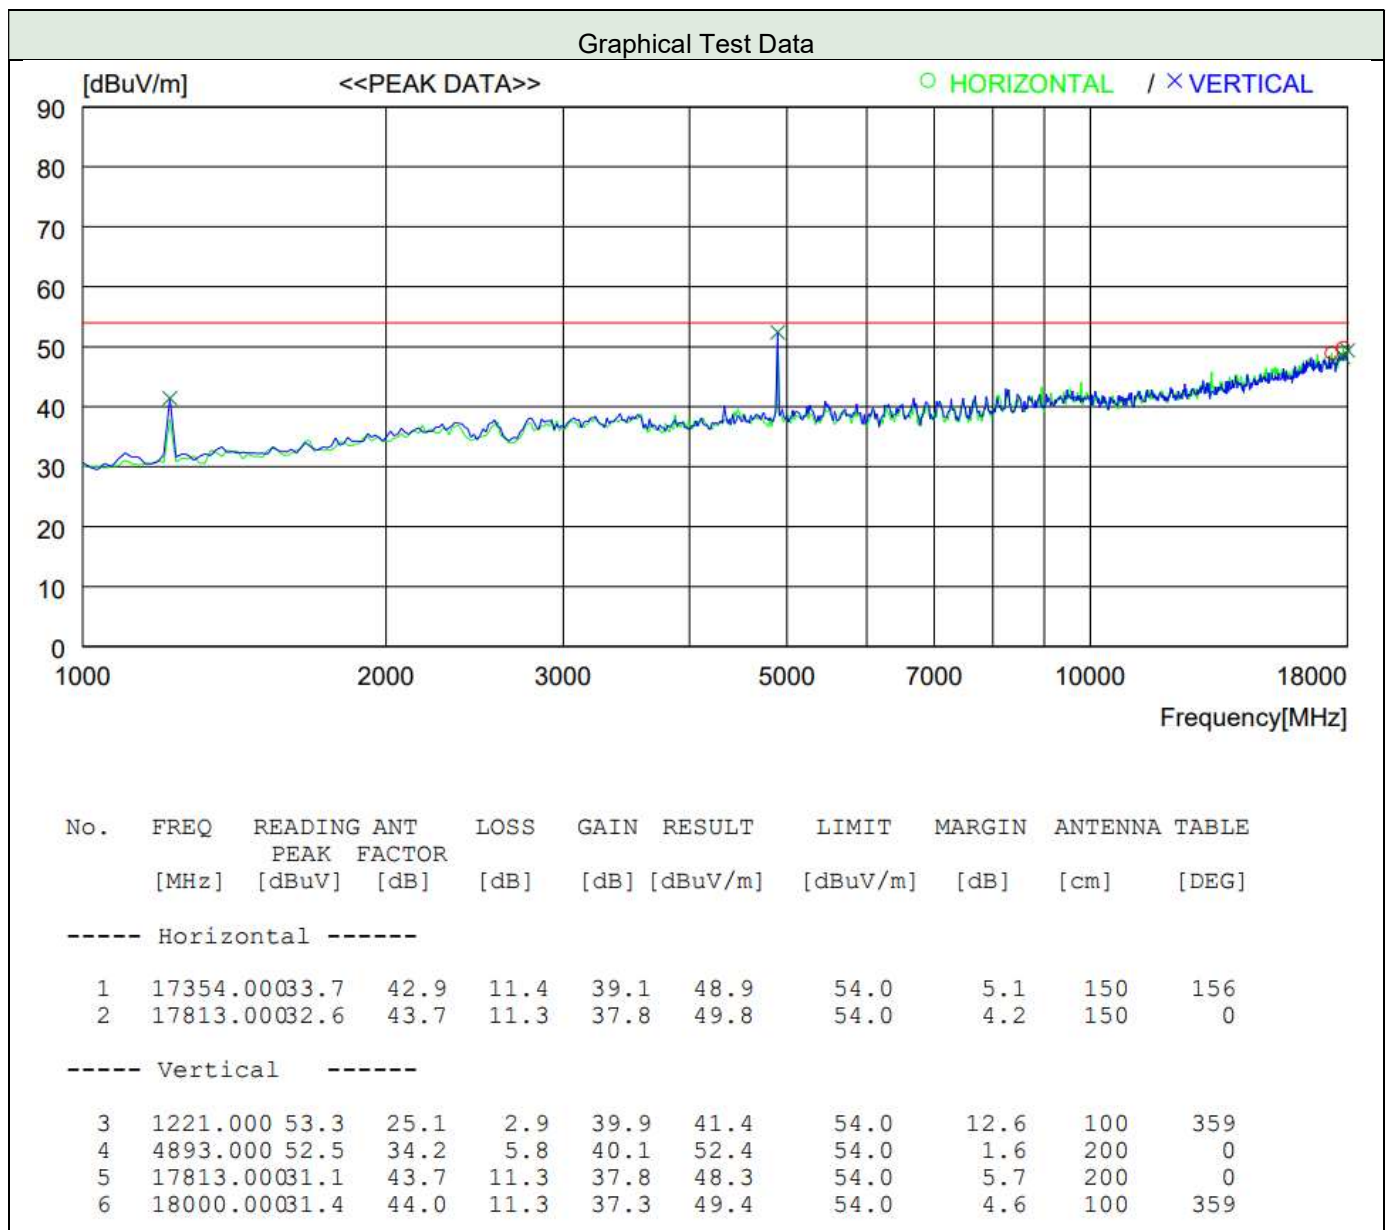


5.2 20 dB bandwidth


5.2.1 Method of Measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution is set to 120 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

5.2.2 Test Data

Date of Test	2021-05-12	Temperature	(25.6 ± 1.0) °C
		Relative humidity	(61.4 ± 3.0) % R.H.
Test Result	PASS	Tested by	Do-heon Kim 

Graphical Test Data – 20 dB bandwidth

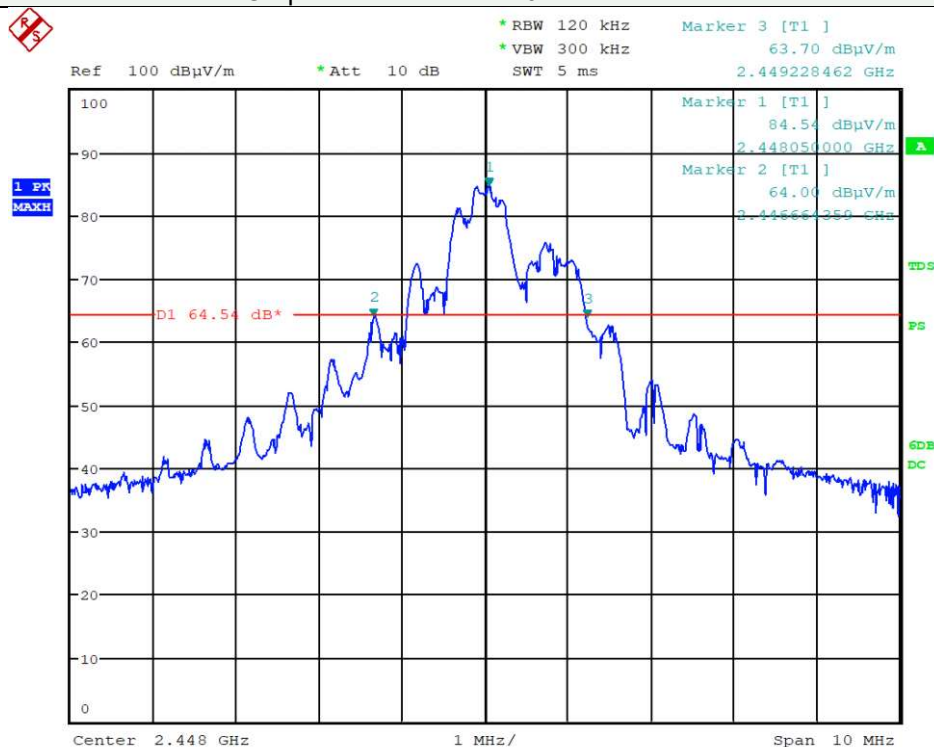

Tabulated Test Data – 20 dB bandwidth


Operating Frequency (MHz)	Measured Value (MHz)	Limit
2 448	2.564	2 400 MHz ~ 2 483.5 MHz


5.3 99% bandwidth

5.3.1 Method of Measurement

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

5.3.2 Test Data

Date of Test	2021-05-12	Temperature	(25.6 ± 1.0) °C
		Relative humidity	(61.4 ± 3.0) % R.H.
Test Result	PASS	Tested by	Do-heon Kim 

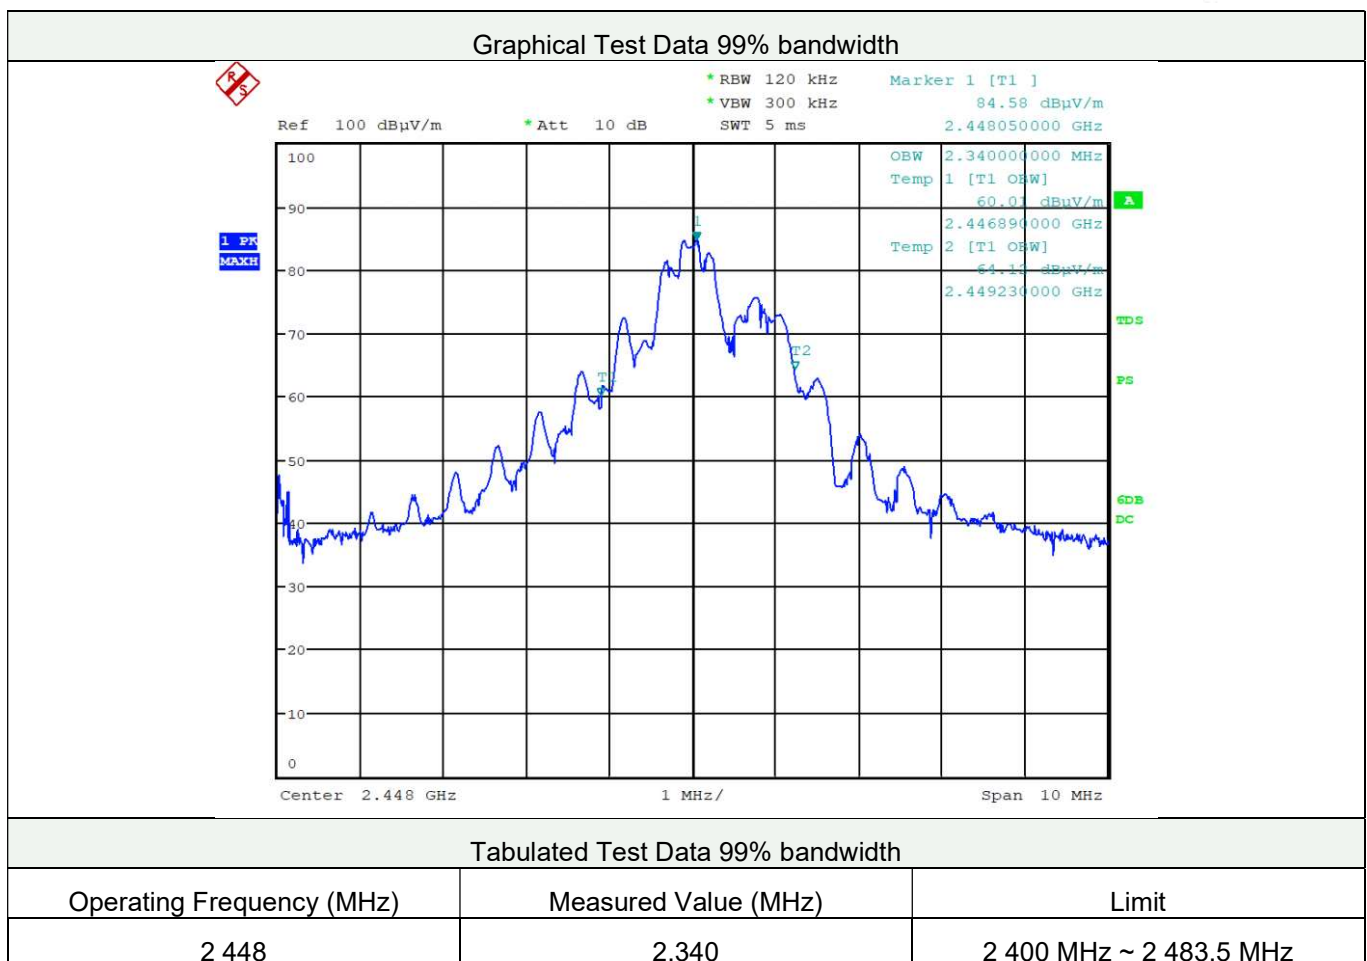

Appendix I – Test Instrumentation

Description	Model No.	Serial No.	Manufacturer.	Due for Cal. Date	Cal. Interval
Test Receiver	ESU 26	100303	Rohde & Schwarz	2022-01-14	1 Y
Loop Antenna	HFH2-Z2	100341	Rohde & Schwarz	2021-06-21	2 Y
TRILOG Broadband Antenna	VULB9163	9163.799	Schwarzbeck	2021-09-17	2 Y
Horn Antenna	HF 907	102426	Rohde & Schwarz	2021-10-29	1 Y
Horn Antenna	BBHA 9170	BBHA 9170 #783	Schwarzbeck	2021-10-29	1 Y
Notch Filter	BRM50702	G318	MICRO-TRONICS	2021-11-04	1 Y
Attenuator	6dB	272.4110.50	Rohde & Schwarz	2022-01-14	1 Y
Pre-Amplifier	310N	344015	Sonoma Instrument	2022-01-14	1 Y
Pre-Amplifier	SCU 18D	19006450	Rohde & Schwarz	2022-04-15	1 Y
Pre-Amplifier	CBL18265035	28706	CERNEX	2022-03-09	1 Y
Turn Table	DT3000-3t	1310814	INNCO SYSTEM	-	N/A
Antenna Master	MA4000-EP	4600814	INNCO SYSTEM	-	N/A
Antenna Master	MA4000-XP-ET	-	INNCO SYSTEM	-	N/A
Camera Controller	HDCon4102	6531445048	PONTIS	-	N/A
CO3000 Controller	Co3000-4Port	CO3000/806/34130814/L	INNCO SYSTEM	-	N/A
CO3000 Controller	Co3000-4Port	CO3000/807/34130814/L	INNCO SYSTEM	-	N/A

The measuring equipment utilized to perform the tests documented in this test report has been calibrated in accordance with manufacturer's recommendations, and is traceable to recognized national standards.