

Prüfbericht-Nr.: Test report no.:	CN2384IS 001	Auftrags-Nr.: Order no.:	168416067	Seite 1 von 16 Page 1 of 16
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2023-03-05	
Auftraggeber: Client:	Beijing Kitten&Puppy Technology Co., Ltd. Room Q-101, Floor 2, Q Area, Anning Zhuang Back Street, Haidian District, Beijing, China			
Prüfgegenstand: Test item:	PAWBBY Smart Self-cleaning Cat Litter Box			
Bezeichnung / Typ-Nr.: Identification / Type no.:	MG-CLB001-US			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	CFR47 FCC Part 15: Subpart C Section 15.247 FCC KDB 558074 D01 15.247 Meas Guidance v05r02			
Wareneingangsdatum: Date of sample receipt:	2023-03-06			
Prüfmuster-Nr.: Test sample no:	A003427359-001 A003427355-001			
Prüfzeitraum: Testing period:	2023-03-13 - 2023-03-19			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	 Signed by: Breeze Jiang		genehmigt von: authorized by:	 Signed by: Lin Lin
Datum: Date:	2023-05-05	Ausstellungsdatum: Issue date:	2023-05-05	
Stellung / Position:	Assistant Project Manager	Stellung / Position:	Reviewer	
Sonstiges / Other:	FCC ID: 2AZYM-MGCLB001US This report is conformity assessment of the combination of that radio product with a non-radio product. Only Radiated Emissions were applied to above model. The certified radio module WBR3 is integrated into above model. Refer to reports with number 708881974877-00 and 708881974888-00 which issued by TÜV SÜD Certification and testing (China) Co., Ltd.. The module with FCC ID: 2ANDL-WBR3 which granted on 01/15/2020.			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

Prüfbericht - Nr.: CN236YVS 001
Test Report No.:

Seite 2 von 16
Page 2 of 16

Test Summary

5.1.1 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.2 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.3 CONDUCTED EMISSION

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	5
2.4	CALIBRATION	5
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	13
5.1.1	<i>Maximum Conducted Output Power</i>	<i>13</i>
5.1.2	<i>Radiated Spurious Emission</i>	<i>14</i>
5.1.3	<i>Conducted Emission</i>	<i>15</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	16
7	LIST OF TABLES.....	16

Prüfbericht - Nr.: **CN236YVS 001**
*Test Report No.:***Seite 4 von 16**
Page 4 of 16

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results of Wi-Fi 2.4G and Bluetooth Low Energy

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China.

FCC Registration No.: 694916

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2023-08-02
Signal Analyzer	R&S	FSV 40	101439	2023-08-01
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2023-08-01
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2023-08-02
Amplifier	R&S	SCU-18F	180070	2023-08-02
Amplifier	R&S	SCU40A	100475	2023-08-02
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-08-06
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2024-08-06
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2023-08-02
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-06-08
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-22

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102428	2023-07-31
Artificial Mains Network	R&S	ENV216	102333	2023-08-01
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty (k=2)
All emissions, radiated	± 4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China. is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUTs is a Smart Self-cleaning Cat Litter Box, which support Wi-Fi 2.4G and Bluetooth Low Energy technology.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	PAWBBY Smart Self-cleaning Cat Litter Box
Type Designation:	MG-CLB001-US
FCC ID:	2AZYM-MGCLB001US
Operating Voltage:	AC 100~240V, 50Hz/60Hz by adapter
Operating Temperature Range:	4 °C ~ +40 °C
Power Adapter:	Model: YJS018Z37-1201500U Input: AC 100-240V~50/60Hz, 0.6A Output: DC 12.0V, 1.5A
Technical Specification of Wi-Fi 2.4G	
Characteristic	Description
Frequency Range:	2400 MHz to 2483.5 MHz
Type of Modulation:	DSSS(DBPSK/DQPSK/CCK) OFDM(BPSK/QPSK/16QAM/64QAM)
Data Rate:	1/2/5.5/11 Mbps for 802.11b 6/9/12/18/24/36/48/54 Mbps for 802.11g MCS0 ~ MCS7 for 802.11n(HT20)
Channel Number:	11 channels for 802.11b/g/n(HT20)
Channel Separation:	5 MHz
Antenna Type:	Integral Antenna
Antenna Gain:	2.5 dBi
Technical Specification of Bluetooth (Low Energy)	
Characteristic	Description
Frequency Range:	2400 MHz to 2483.5 MHz
Type of Modulation:	GFSK
Channel Number:	40 channels
Channel Separation:	2MHz
Antenna Type:	Integral Antenna
Antenna Gain:	2.5 dBi

Identities and difference:

They have the same circuit diagram and structure. The models have two types of color, such as white and blue.

Table 3: RF Channel and Frequency of Wi-Fi 2.4G

RF Channel	802.11 b/g/n(HT20)
	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Test frequencies are lowest channel: 2412 MHz, middle channel: 2437 MHz and highest channel: 2462 MHz for 802.11b/g/n(HT20)

Table 4: RF Channel and Frequency of Bluetooth (Low Energy)

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Test frequencies are lowest channel: 2402 MHz, middle channel: 2440 MHz and highest channel: 2480 MHz for Bluetooth (Low Energy)

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wi-Fi b/g/n transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, Wi-Fi b/g/n connecting mode
- C. On, Bluetooth transmitting mode (Bluetooth Low Energy mode)
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- D. On, Bluetooth (Low Energy) connecting mode

Prüfbericht - Nr.: CN236YVS 001
Test Report No.:

Seite 9 von 16
Page 9 of 16

E. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|-------------------------|-----------------|
| - Application Form | - User Manual |
| - Operation Description | - Block Diagram |
| - Schematics | - Rating Label |
| - PCB Layout | - Parts List |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.2, all tests were performed on model MG-CLB001-US in this report.

This testing was carried out on all operation modes, but only the worst case was presented in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 5: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N
Laptop	Lenovo	T480	PF-16A6N8

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

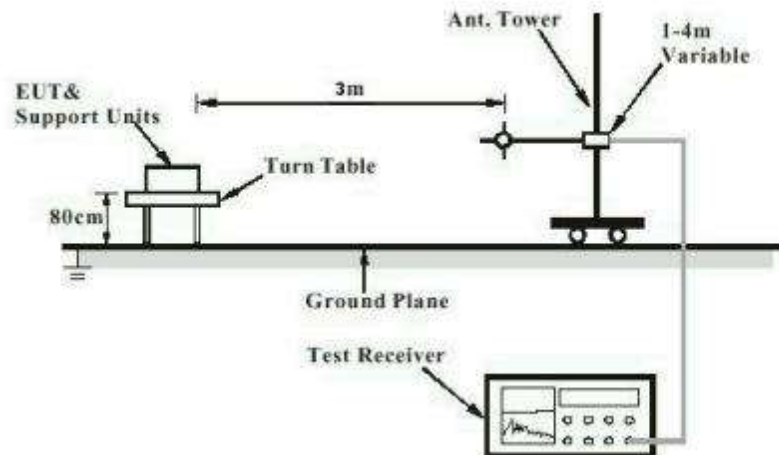


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

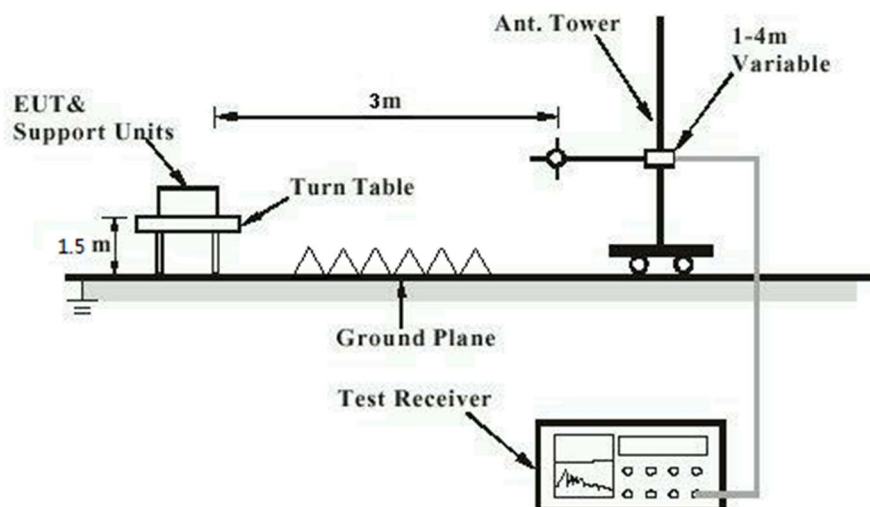


Diagram of Measurement Configuration for Mains Conduction Measurement


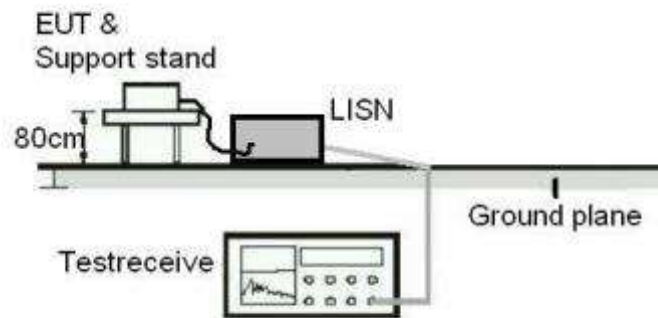


Diagram of Measurement Configuration for Conducted Transmitter Measurement

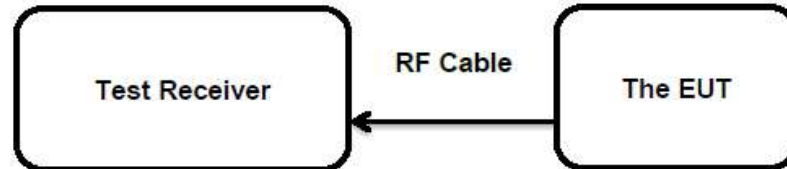

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Maximum Conducted Output Power

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(3)
Basic standard : ANSI C63.10: 2013
Limits : 1.0 Watts
Kind of test site : Shielded Room

Test Setup

Date of testing : 2021-04-23
Input voltage : DC 12V
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 24.3 °C
Relative humidity : 46 %
Atmospheric pressure : 101 kPa

Table 6: Test Result of Maximum Conducted Output Power

Test Mode	Test Channel (MHz)	Measured Power		Module Power		Limit (W)
		(dBm)	(W)	(dBm)	(W)	
BLE 1 Mbps	2402	6.1	0.0041	6.25	0.0042	< 1.0
	2440	5.9	0.0039	6.01	0.0040	
	2480	5.7	0.0037	5.71	0.0037	
WiFi 2.4G 11B	2412	16.9	0.0490	17.86	0.0611	
	2437	16.9	0.0490	18.31	0.0678	
	2462	16.8	0.0479	18.47	0.0703	
WiFi 2.4G 11G	2412	22.1	0.1622	24.05	0.2541	
	2437	21.9	0.1549	24.33	0.2710	
	2462	20.9	0.1230	24.02	0.2523	
WiFi 2.4G 11N20	2412	22.1	0.1622	24.16	0.2606	
	2437	21.2	0.1318	21.01	0.1262	
	2462	20.7	0.1175	21.25	0.1334	
Maximum Measured Value		22.1	0.1622	24.33	0.2710	

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G): 2.5 dBi,

Prüfbericht - Nr.: CN236YVS 001
*Test Report No.:***Seite 14 von 16**
Page 14 of 16

5.1.2 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d) & FCC Part 15.205
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to 15.209(a) of FCC part 15.247(d)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2023-03-13 to 2023-03-19
Input voltage	: AC 120V, 60Hz
Operation mode	: A, C
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN236YVS 001
*Test Report No.:***Seite 15 von 16**
Page 15 of 16

5.1.3 Conducted Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.207(a)
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-03-13 to 2023-03-19
Input voltage	: AC 120V, 60Hz
Operation mode	: B, D
Earthing	: Not connected
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Technical Specification of EUT.....	7
Table 3: RF Channel and Frequency of Wi-Fi 2.4G	8
Table 4: RF Channel and Frequency of Bluetooth (Low Energy)	8
Table 5: Auxiliary Equipment Used during Test	10