

FCC SAR Test Report

Product : Sierra MDX
Trade mark : Sierra
Model/Type reference : MDXTAB-01
Serial Number : N/A
Report Number : EED32P80394906
FCC ID : 2BA33-TAB
Date of Issue: : Jul 09, 2025
Test Standards : Refer to Section 1.5
Test result : PASS

Prepared for:

Sierra International LLC

1 Sierra Place, Litchfield, IL, 62056, United States

Prepared by:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District,

Shenzhen, Guangdong, China

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Compiled by:

Frazer Li

Frazer Li

Reviewed by:

Tom Chen

Tom Chen

Approved by:

Aaron Ma

Aaron Ma

Date:

Jul 09, 2025



Check No.: 3735230323

Table of contents

1 General information	6
1.1 Notes	6
1.2 Application details	6
1.3 Statement of Compliance	7
1.4 EUT Information	8
1.5 Test standard/s	11
1.6 RF exposure limits	12
1.7 SAR Definition	12
1.8 Testing laboratory	13
1.9 Test Environment	13
1.10 Applicant and Manufacturer	13
2 SAR Measurement System Description and Setup	14
2.1 The Measurement System Description	14
2.2 Probe description	15
2.3 Data Acquisition Electronics description	16
2.4 SAM Twin Phantom description	17
2.5 ELI4 Phantom description	18
2.6 Device Holder description	19
3 SAR Test Equipment List	20
4 SAR Measurement Procedures	21
4.1 Spatial Peak SAR Evaluation	21
4.2 Data Storage and Evaluation	22
4.3 Data Storage and Evaluation	26
5 SAR Verification Procedure	28
5.1 Tissue Simulating Liquids	28
5.2 Tissue Verification	29
5.3 System check procedure	31
5.4 System check results	32
6 SAR Measurement variability and uncertainty	33
6.1 SAR measurement variability	33
6.2 SAR measurement uncertainty	33
7 SAR Test Configuration	34
7.1 GSM Test Configurations	34
7.2 UMTS Test Configurations	34
7.3 LTE Test Configuration	39

7.4 WIFI 5G Test Configurations	41
7.5 WIFI 2.4G Test Configurations	44
8 SAR Test Results	46
8.1 Conducted Power Measurements	46
8.1.1 Conducted Power of GSM850	46
8.1.2 Conducted Power of GSM1900	47
8.1.3 Conducted Power of UMTS Band II	47
8.1.4 Conducted Power of UMTS Band IV	48
8.1.5 Conducted Power of UMTS Band V	48
8.1.6 Conducted Power of LTE Band 2	49
8.1.7 Conducted Power of LTE Band 4	52
8.1.8 Conducted Power of LTE Band 5	55
8.1.9 Conducted Power of LTE Band 7	57
8.1.10 Conducted Power of LTE Band 12	59
8.1.11 Conducted Power of LTE Band 13	61
8.1.12 Conducted Power of LTE Band 17	62
8.1.13 Conducted Power of LTE Band 25	63
8.1.14 Conducted Power of LTE Band 26	66
8.1.15 Conducted Power of WiFi 5G	69
8.1.16 Conducted Power of WiFi 2.4G	71
8.1.17 Conducted Power of BT	72
8.2 SAR test results	73
8.2.1 Results overview of GSM850	74
8.2.2 Results overview of GSM1900	75
8.2.3 Results overview of UMTS Band II	76
8.2.4 Results overview of UMTS Band IV	77
8.2.5 Results overview of UMTS Band V	78
8.2.6 Results overview of LTE Band 2	79
8.2.7 Results overview of LTE Band 4	81
8.2.8 Results overview of LTE Band 5	82
8.2.9 Results overview of LTE Band 7	83
8.2.10 Results overview of LTE Band 12	85
8.2.11 Results overview of LTE Band 13	87
8.2.12 Results overview of LTE Band 17	88
8.2.13 Results overview of LTE Band 25	89
8.2.14 Results overview of LTE Band 26	91
8.2.15 Results overview of WiFi 2.4G	93
8.2.16 Results overview of WiFi 5.2G	94
8.2.17 Results overview of WiFi 5.8G	95
8.3 Multiple Transmitter Information	96
8.4 Stand-alone SAR	97
8.5 Simultaneous Transmission Possibilities	98

8.6 SAR Summation Scenario99

8.7 Simultaneous Transmission Conclution 99

Annex A: Appendix A: SAR System performance Check Plots 100

Annex B: Appendix B: SAR Measurement results Plots 100

Annex C: Appendix C: Calibration reports 100

Annex D: Appendix D: Photo documentation100

Modified History

REV.	Modification Description	Issued Date	Remark
REV.1.0	Initial Test Report Release	Jul 09, 2025	

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in this test report.

Centre Testing International Group Co., Ltd. does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report is not to be reproduced or published in full without the prior written permission.

1.2 Application details

Date of receipt of test item:	2023-04-14
Start of test:	2023-04-15
End of test:	2025-06-06

1.3 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Ultra. Model Name: MDXTAB-01 are as below:

Frequency Band	MAX Reported SAR (W/kg)	SAR Test Limit (W/kg)
	1-g SAR Body (0mm)	
GSM850	0.673	1.60
GSM1900	1.200	
UMTS Band II	0.822	
UMTS Band IV	1.165	
UMTS Band V	1.153	
LTE Band 2	1.220	
LTE Band 4	0.765	
LTE Band 5	1.025	
LTE Band 7	1.279	
LTE Band 12	1.056	
LTE Band 13	1.057	
LTE Band 17	1.008	
LTE Band 25	1.219	
LTE Band 26	1.202	
WiFi 2.4G	0.173	
WiFi 5.2G	0.210	
WiFi 5.8G	0.217	
The highest simultaneous SAR is 1.496W/kg per KDB 690783 D01		

Note:

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits(1.6W/kg) according to the FCC rule §2.1093, the ANSI/IEEE C95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and Procedures specified in IEEE Std 1528-2013.

1.4 EUT Information

Device Information:			
Device Type:		Portable device	
Exposure Category:		uncontrolled environment / general population	
Firmware version:		N/A (manufacturer declare)	
Hardware version:		N/A (manufacturer declare)	
Antenna Type :		Internal Antenna	
Antenna Gain:		Bluetooth LE: 0.31dBi; Bluetooth Classic: 0.31dBi; 2.4G WIFI: 0.31dBi; 5G WiFi band 1: 1.53dBi; 5G WiFi band 4: 2.78dBi; GSM 850: 1.81dBi GSM 1900: 1.67dBi WCDMA Band II: 1.67dBi WCDMA Band IV: 1.59dBi WCDMA Band V: 1.81dBi LTE Band 2: 1.67dBi LTE Band 4: 1.59dBi LTE Band 5: 1.81dBi LTE Band 7: 1.75dBi LTE Band 12: 0.18dBi LTE Band 13: 1.63dBi LTE Band 17: 0.18dBi LTE Band 25: 1.67dBi LTE Band 26: 1.81dBi	
Device Operating Configurations:			
Supporting Modes :		GSM850/1900; WCDMA Band II/IV/V; LTE Band 2/4/5/7/12/13/17/25/26; WiFi 2.4G; WiFi 5G; BT;	
Duty Cycle used for SAR testing		Max duty cycle: 2.4G WiFi:97.57%; 5.2G WiFi: 94.34%; 5.8G WiFi: 94.55%;	
Modulation:		GSM(GMSK/8PSK); WCDMA(QPSK); LTE(QPSK/16QAM); WiFi(DSSS/OFDM); BT(GFSK/ π /4DQPSK/8DPSK)	
Operating Frequency Range(s)		Band	TX(MHz)
		GSM850	824~849
		GSM1900	1850~1910
		UMTS Band V	824~849
		UMTS Band IV	1710~1755
		UMTS Band II	1850~1910
		LTE Band 2	1850~1910
		RX(MHz)	
		869~894	
		1930~1990	
		869~894	
		2110~2155	
		1930~1990	
		1930~1990	

	LTE Band 4	1710~1755	2110~2155
	LTE Band 5	824~849	869~894
	LTE Band 7	:2500-2570	2620-2690
	LTE Band 12	699-716	729-746
	LTE Band 13	777-787	746-756
	LTE Band 17	704-716	734-746
	LTE Band 25	1850-1915	1930-1995
	LTE Band 26	824-849	869-894
	WiFi 2.4G	2412~2462	
	WiFi 5G	5150-5250; 5725-5850	
	BT & BLE	2402~2480	
GPRS class level:	GPRS class 12		
EGPRS class level:	EGPRS class 12		
Test Channels (low-mid-high):	128-190-251 (GSM850)		
	512-661-810 (GSM1900)		
	9262-9400-9538 (UMTS Band II)		
	1312-1413-1513 (UMTS Band IV)		
	4132-4182-4233 (UMTS Band V)		
	18700-18900-19100(LTE Band 2)		
	20050-20175-20300(LTE Band 4)		
	20450-20525-20600(LTE Band 5)		
	20850-21100-21350(LTE Band 7)		
	23060-23095-23130(LTE Band 12)		
	23230-23230-23230(LTE Band 13)		
	23780-23790-23800(LTE Band 17)		
	26140-26365-26590(LTE Band 25)		
	26853-26909-26965(LTE Band 26)		
	1/3-6-11/9 (WiFi 2.4G)		
	WiFi 5G 802.11a/n/ac(20M):		
	36-40-44-48-149-153-157-161-165		
	WiFi 5G 802.11 n/ac (40M): 38-46-151-159		
	WiFi 5G 802.11ac 80M: 42-155		
	0-39-78 (BT 2450)		
0-19-39 (BLE 2450)			
Power Source:	Adapter:	model: W0920U-1U05F	

		input: 100-240VAC,50/60Hz,0.45A MAX output : 3.6V~6.0V,3A;6V~9V,2A;9V~12V,1.5A
	Battery:	Rechargeable Li-ion Battery model: 456484 nominal voltage: 3.85V rated capacity: 7792mAh/29.99Wh charging limited voltage: 4.4V

1.5 Test standard/s

ANSI Std C95.1-1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 248227 D01	SAR guidance for IEEE 802.11(Wi-Fi) transmitters v02r02
KDB 447498 D01	General RF Exposure Guidance v06
KDB 648474 D04	Handsets SAR v01r03
KDB 690783 D01	SAR Listings on Grants v01r03
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 941225 D01	3G SAR Procedures v03r01
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 941225 D06	Hotspot SAR v02r01

1.6 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

The limit applied in this test report is shown in bold letters

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

1.7 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = rms electric field strength (V/m)

1.8 Testing laboratory

Test Site	Centre Testing International Group Co., Ltd.
Test Location	Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China
Telephone	+86 (0) 755 3368 3668
Fax	+86 (0) 755 3368 3385

1.9 Test Environment


	Required	Actual
Ambient temperature:	18 – 25 °C	21.5 ± 2.0 °C
Tissue Simulating liquid:	18 – 25 °C	21.5 ± 2.0 °C
Relative humidity content:	30 – 70 %	30 – 70 %

1.10 Applicant and Manufacturer

Applicant/Client :	Sierra International LLC
Applicant Address:	1 Sierra Place, Litchfield, IL, 62056, United States
Manufacturer Name:	Estone Technology LTD
Manufacturer Address:	2F,Building No.1, Jia'an Industrial Park,No.2 Long Chang Road, Bao'an, Shenzhen 518101, China.
Factory:	Estone Technology LTD
Address of Factory:	2F,Building No.1, Jia'an Industrial Park,No.2 Long Chang Road, Bao'an, Shenzhen 518101, China.

2 SAR Measurement System Description and Setup

2.1 The Measurement System Description

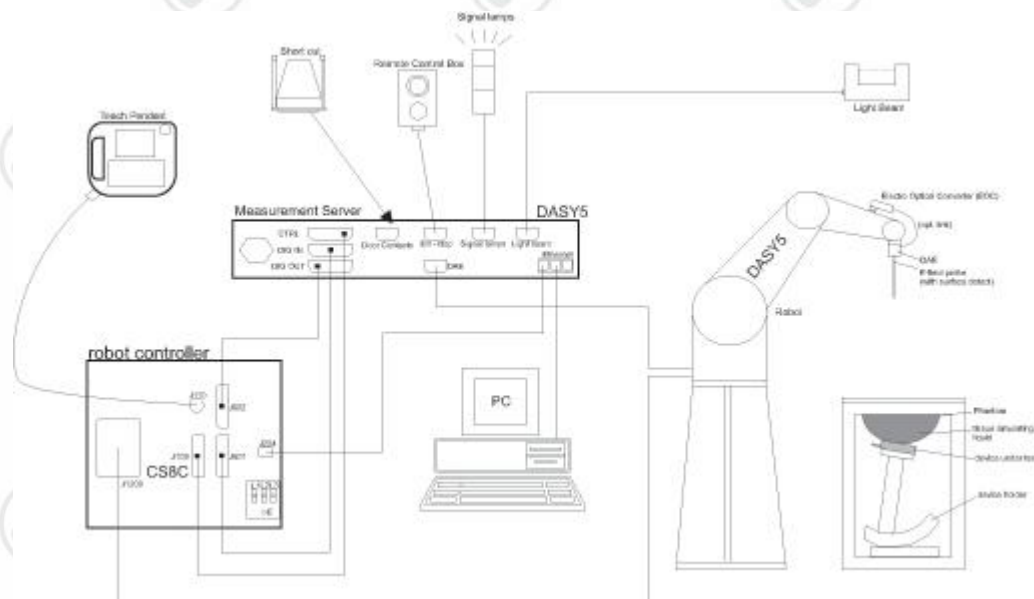

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli TX/RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

2.2 Probe description

Dosimetric Probes: These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor(± 2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Dynamic range	5 μ W/g to 100 mW/g; Linearity: ± 0.2 dB



2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

Batteries: The DAE works with either two standard 9V batteries or two 9V (actually 8.4V or 9.6 V) rechargeable batteries. Because the electronics automatically power-down unused components during braking or between measurements, the battery lifetime depends on system usage. Typical lifetimes are >20 hours for batteries and >10 hours for accus. Remove the batteries if you do not plan to use the DAE for a long period of time.




2.4 SAM Twin Phantom description

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6 mm). The phantom has three measurement areas:

◆ Left hand

◆ Right hand

◆ Flat phantom

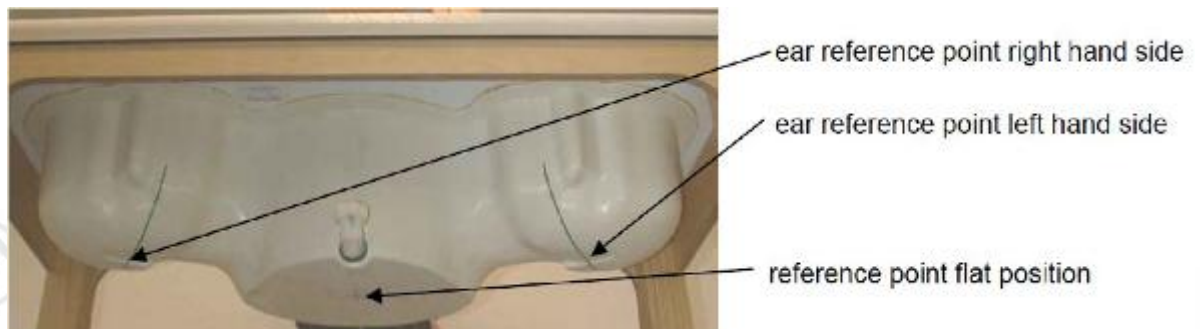

The phantom table for the DASY systems have the size of 100 x 50 x 85 cm (L x W x H). These tables are reinforced for mounting of the robot onto the table. For easy dislocation these tables have fork lift cut outs at the bottom.

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.

A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters.


Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.



2.5 ELI4 Phantom description

The ELI4 phantom is intended for compliance testing of handheld and body mounted wireless devices in the frequency range of 30MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

ELI4 has been optimized regarding its performance and can be integrated into a SPEAG standard phantom table. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points

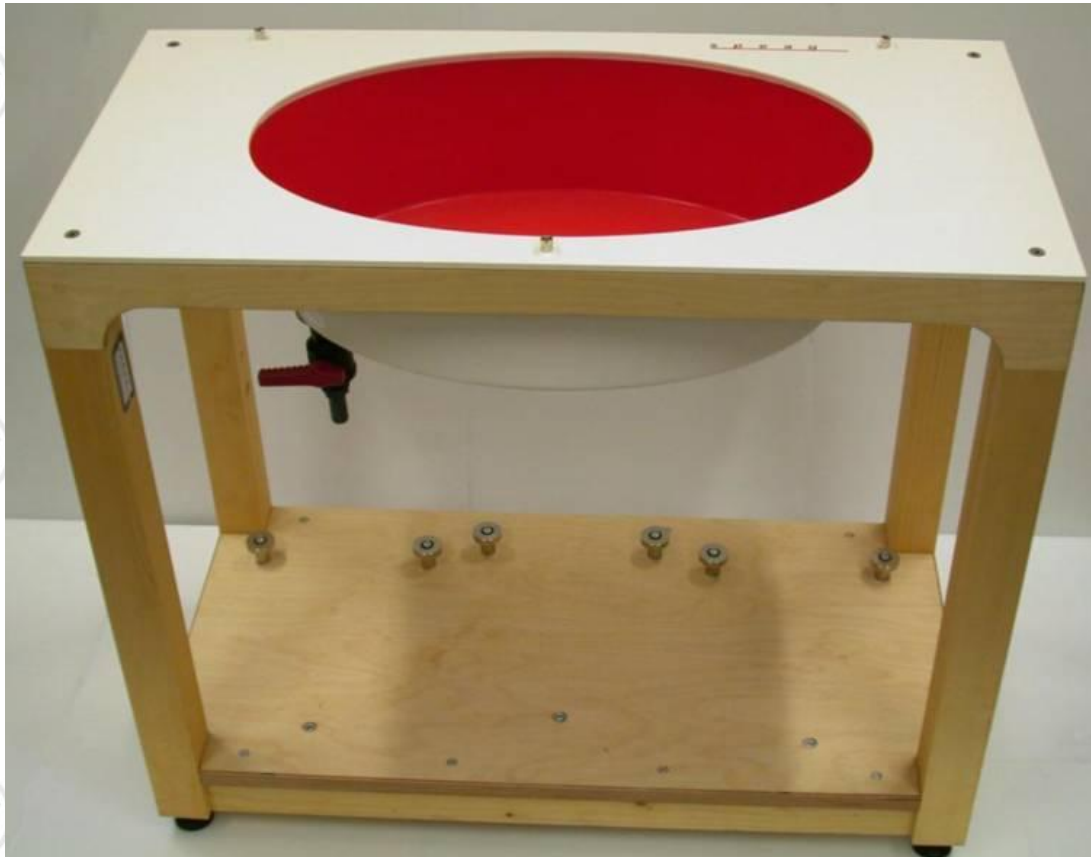

2.6 Device Holder description

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



3 SAR Test Equipment List

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

	Manufacturer	Device Type	Type(Model)	Serial number	Date of last calibration	Valid period
☒	SPEAG	E-Field Probe	EX3DV4	7328	2024-04-18 2025-05-07	One year
☒	SPEAG	E-Field Probe	EX3DV4	7769	2025-02-11	One year
☒	SPEAG	750 MHz Dipole	D750V3	1088	2023-04-11	Three years
☒	SPEAG	835 MHz Dipole	D835V2	4d193	2024-01-17	Three years
☒	SPEAG	1750 MHz Dipole	D1750V2	1134	2024-01-17	Three years
☒	SPEAG	1900 MHz Dipole	D1900V2	5d198	2024-01-18	Three years
☐	SPEAG	2000 MHz Dipole	D2000V2	1078	2024-01-22	Three years
☐	SPEAG	2300 MHz Dipole	D2300V2	1082	2023-01-11	Three years
☒	SPEAG	2450 MHz Dipole	D2450V2	959	2024-01-17	Three years
☒	SPEAG	2600 MHz Dipole	D2600V2	1101	2024-01-22	Three years
☒	SPEAG	5 GHz Dipole	D5GHzV2	1208	2024-01-16	Three years
☒	SPEAG	DAKS probe	DAKS-3.5	1052	2024-04-22	Three years
☒	SPEAG	Planar R140 Vector Reflectometer	DAKS-VNA R140	0200514	2024-04-22	Three years
☒	SPEAG	Data acquisition electronics	DAE4	1458	2025-01-20	One year
☒	Liquid	Head Liquid	750 Head	750	/	/
☒	Liquid	Head Liquid	835 Head	835	/	/
☒	Liquid	Head Liquid	1750 Head	1750	/	/
☒	Liquid	Head Liquid	1900 Head	1900	/	/
☒	Liquid	Head Liquid	2300 Head	2300	/	/
☒	Liquid	Head Liquid	2450 Head	2450	/	/
☒	Liquid	Head Liquid	2600 Head	2600	/	/
☒	Liquid	Head Liquid	5200 Head	5250	/	/
☒	Liquid	Head Liquid	5800 Head	5750	/	/
☒	SPEAG	Software	DASY 5	NA	NCR	NCR
☒	SPEAG	Twin Phantom	SAM V5.0	1875	NCR	NCR
☐	SPEAG	Flat Phantom	ELI V6.0	2024	NCR	NCR
☒	R & S	Universal Radio Communication Tester	CMU200	101553	2024-12-05	One year
☒	R & S	Universal Radio Communication Tester	CMW500	120765	2024-12-16	One year
☒	Agilent	Signal Generator	N5181A	MY50142334	2024-12-05	One year
☒	BONN	Power Amplifier and directional coupler	SU319W	BL-SZ1550140	2024-12-05	One year
☒	KEITHLEY	RF Power Meter	3500	1128079	2024-06-16 2025-06-09	One year

☒	KEITHLEY	RF Power Meter	3500	1128081	2024-06-16 2025-06-09	One year
☒	JINGCHUAN G	Temperature/ Humidity Indicator	GSP-8	EMK197F0009 5	2025-06-05	One year

Note:

- There is no physical damage on the dipole;
- System check with specific dipole is within 10% of calibrated value;
- The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
- The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

4 SAR Measurement Procedures

4.1 Spatial Peak SAR Evaluation

The DASY5 software includes all numerical procedures necessary to evaluate the spatial peak SAR values. The base for the evaluation is a "cube" measurement in a volume of 30mm³ (7x7x7 points). The measured volume must include the 1 g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan. If the 10g cube or both cubes are not entirely inside the measured volumes, the system issues a warning regarding the evaluated spatial peak values within the Postprocessing engine (SEMCAD X). This means that if the measured volume is shifted, higher values might be possible. To get the correct values you can use a finer measurement grid for the area scan. In complicated field distributions, a large grid spacing for the area scan might miss some details and give an incorrectly interpolated peak location. The entire evaluation of the spatial peak values is performed within the Postprocessing engine (SEMCAD X). The system always gives the maximum values for the 1 g and 10 g cubes.

The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- extraction of the measured data (grid and values) from the Zoom Scan
- calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)

3. generation of a high-resolution mesh within the measured volume
4. interpolation of all measured values from the measurement grid to the high-resolution grid
5. extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. calculation of the averaged SAR within masses of 1 g and 10 g

4. 2 Data Storage and Evaluation

Data Storage

The DASY5 software stores the measured voltage acquired by the Data Acquisition Electronics (DAE) as raw data together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and communication system parameters) in measurement files with the extension .da5x. The postprocessing software evaluates the data every time the data is visualized or exported. This allows the verification and modification of the setup after completion of the measurement. For example, if a measurement has been performed with an incorrect crest factor, the parameter can be corrected afterwards and the data can be reevaluated.

To avoid unintentional parameter changes or data manipulations, the parameters in measured files are locked. In the administrator access mode of the software, the parameters can be unlocked. After changing the parameters, the measured scans can be reevaluated in the postprocessing engine.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., E-field, H-field, SAR). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The fields and SAR are calculated from the measured voltage (probe voltage acquired by the DAE) and the following parameters:

Probe parameters:

- Sensitivity

$norm_i$, a_{i0} , a_{i1} , a_{i2}

- Conversion Factor

$convF_i$

- Diode Compression Point

dcp_i

	- Probe Modulation Response Factors	a_i, b_i, c_i, d
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Relative Permittivity	ρ

This parameters are stored in the DASY5 V52 measurement file.

These parameters must be correctly set in the DASY5 V52 software setup. They are available as configuration file and can be imported into the measurement file. The values displayed in the multimeter window are assessed using the parameters of the actual system setup. In the scan visualization and export modes, the parameters stored in the measurement file are used.

The measured voltage is not proportional to the exciting. It must be first linearized.

Approximated Probe Response Linearization using Crest Factor.

This linearization method is enabled when a custom defined communication system is measured. The compensation applied is a function of the measured voltage, the detector diode compression point and the crest factor of the measured signal.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with	V_i	=	linearized voltage of channel i (uV)	(i = x,y,z)
	U_i	=	measured voltage of channel i (uV)	(i = x,y,z)
	cf	=	crest factor of exciting field	(DASY parameter)
dcp_i	=	diode compression point of channel i (uV) (Probe parameter, i = x,y,z)		

Field and SAR Calculation

The primary field data for each channel are calculated using the linearized voltage:

$$E_i - \text{fieldprobes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$H_i - \text{fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = linearized voltage of channel i (i = x,y,z)

Norm_i = sensor sensitivity of channel i (i = x,y,z)

$\mu\text{V}/(\text{V/m})^2$ for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RMS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

Spatial Peak SAR for 1 g and 10 g

The DASY5 software includes all numerical procedures necessary to evaluate the spatial peak SAR values. The base for the evaluation is a "cube" measurement at the points of the fine cube grid consisting of 5 x 5 x 7 points (with 8mm horizontal resolution) or 7 x 7 x 7 points (with 5mm horizontal resolution) or 8 x 8 x 7 points (with 4mm horizontal resolution). The entire evaluation of the spatial peak values is performed within the Postprocessing engine (SEMCAD X). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. extraction of the measured data (grid and values) from the Zoom Scan.
2. calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
3. generation of a high-resolution mesh within the measured volume.
4. interpolation of all measured values from the measurement grid to the high-resolution grid
5. extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
6. calculation of the averaged SAR within masses of 1 g and 10 g.

4.3 Data Storage and Evaluation

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

Step 1: Power reference measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. By default, the Minimum distance of probe sensors to surface is 4 mm. This distance can be modified by the user, but cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties. The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed location point was measured and used as a reference value.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hotspot. The sophisticated interpolation routines implemented in DASY5 software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE 1528-2003 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Step 3: Zoom Scan

The Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The default Zoom Scan is defined in the following table. DASY5 is also able to perform repeated zoom scans if more than 1 peak is found during area scan. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Area scan and Zoom scan resolutions per FCC KDB Publication 865664 D01:

Frequency	Maximun Area Scan resolution ($\Delta x_{Area}, \Delta y_{Area}$)	Maximun Zoom Scan spatial resolution ($\Delta x_{Zoom}, \Delta y_{Zoom}$)	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{Zoom}(n)$	$\Delta z_{Zoom}(1)^*$	$\Delta z_{Zoom}(n>1)^*$	
$\leq 2\text{GHz}$	$\leq 15\text{mm}$	$\leq 8\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5^* \Delta z_{Zoom}(n-1)$	$\geq 30\text{mm}$
2-3GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5^* \Delta z_{Zoom}(n-1)$	$\geq 30\text{mm}$
3-4GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 1.5^* \Delta z_{Zoom}(n-1)$	$\geq 28\text{mm}$
4-5GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 2.5\text{mm}$	$\leq 1.5^* \Delta z_{Zoom}(n-1)$	$\geq 25\text{mm}$
5-6GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 2\text{mm}$	$\leq 2\text{mm}$	$\leq 1.5^* \Delta z_{Zoom}(n-1)$	$\geq 22\text{mm}$

Step 4: Power Drift Monitoring

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. If the value changed by more than 5%, the evaluation should be retested.

5 SAR Verification Procedure

5.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 5.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown as followed:

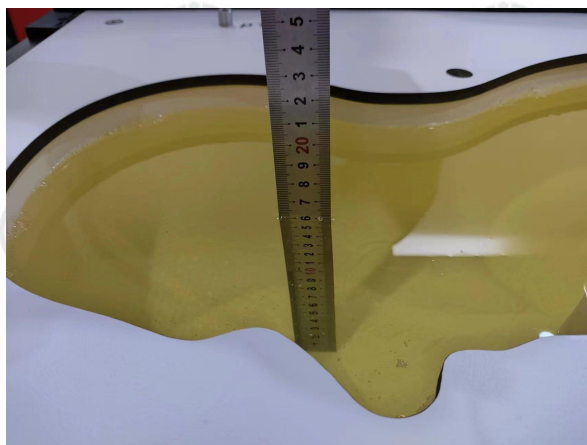


Photo of Liquid Height for Head SAR

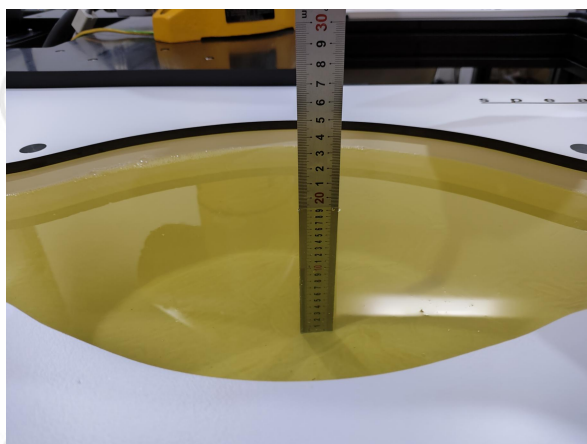


Photo of Liquid Height for Body SAR

5.2 Tissue Verification

The following materials are used for producing the tissue-equivalent materials.

(Liquids used for tests are marked with ☒):

Ingredients (% of weight)	Frequency (MHz)							
Tissue Type	Head Tissue							
frequency band	☒ 750	☒ 835	☒ 1750	☒ 1900	☐ 2300	☒ 2450	☒ 2600	☒ 5200-5800
Water	41.45	41.45	52.64	55.242	62.82	62.7	55.242	65.52
Salt (NaCl)	1.45	1.45	0.36	0.306	0.51	0.5	0.306	0.0
Sugar	56.0	56.0	0.0	0.0	0.0	0.0	0.0	0.0
HEC	1.0	1.0	0.0	0.0	0.0	0.0	0.0	0.0
Bactericide	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	36.8	0.0	17.24
DGBE	0.0	0.0	47.0	44.542	36.67	0.0	44.452	0.0
Diethylenglycol monohexylether	0.0	0.0	0.0	0.0	0.0	0.0	0.0	17.24

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]


Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue simulating liquids: parameters:

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Deviation (Within $\pm 5\%$)		Liquid Temp.	Test Date
		ϵ_r (+/-5%)	σ (S/m) (+/-5%)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$ %	$\Delta\sigma$ %		
750 H	750	41.90 (39.81~44.00)	0.89 (0.85~0.93)	43.03	0.853	2.70	-4.16	20.88°C	3/4/2025
835 H	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	41.06	0.868	-1.06	-3.56	20.25°C	3/2/2025
1800 H	1750	40.10 (38.10~42.10)	1.37 (1.31~1.43)	41.29	1.358	0.46	-0.88	20.04°C	3/3/2025
	1750	40.10 (38.10~42.10)	1.37 (1.31~1.43)	39.77	1.354	-3.24	-1.17	19.70°C	5/15/2025
1900H	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.19	1.430	0.47	2.14	20.33°C	3/5/2025
	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.45	1.408	-3.87	0.57	20.60°C	3/7/2025
	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.88	1.448	-2.80	3.43	20.70°C	5/16/2025
	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.88	1.448	-2.80	3.43	20.50°C	6/5/2025
2450H	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	40.64	1.826	3.67	1.44	20.69°C	3/9/2025
2600 H	2600	39.00 (37.05~40.95)	1.96 (1.86~2.06)	38.74	2.021	-0.67	3.11	20.72°C	3/11/2025
5000H	5250	35.90 (34.11~37.70)	4.71 (4.47~4.95)	36.68	4.895	2.17	3.93	20.85°C	3/10/2025
5000H	5750	35.30 (33.54~37.07)	5.27 (5.01~5.53)	35.16	5.311	-0.40	0.78	20.85°C	3/10/2025
ϵ_r = Relative permittivity, σ = Conductivity									

5.3 System check procedure

The System check is performed by using a System check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the System check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot). System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

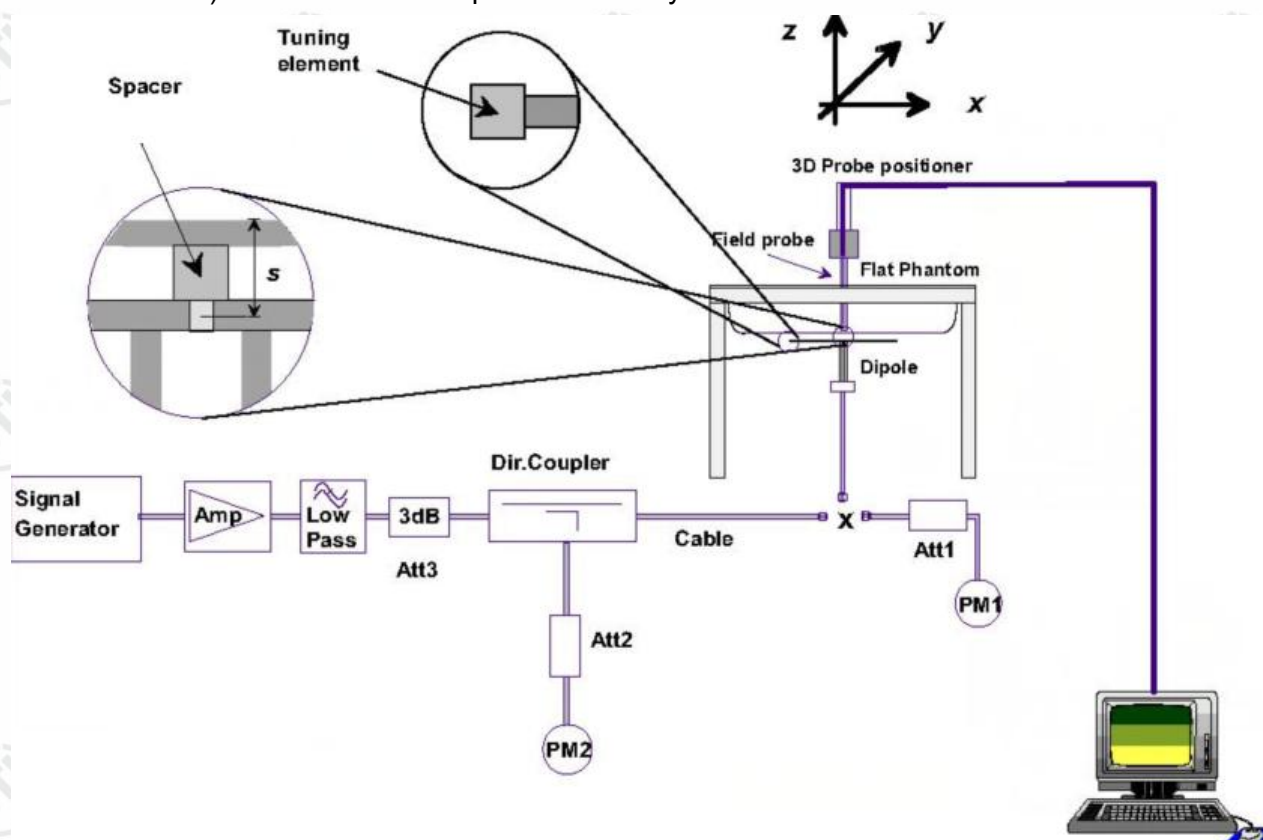

5.4 System check results

The system Check is performed for verifying the accuracy of the complete measurement system and performance of the software. The following table shows System check results for all frequency bands and tissue liquids used during the tests (plot(s) see annex A).

System Check (MHz)	Target SAR (1W) (+/-10%)		Measured SAR (Normalized to 1W)		Measured SAR (Tolerances)		Liquid Temp.	Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)	1-g(%)	10-g(%)		
D750V2 Head	8.58 (7.722~9.438)	5.71 (5.139~6.281)	8.40	5.84	-2.10%	2.28%	20.88°C	3/4/2025
D835V2 Head	9.62 (8.658~10.582)	6.27 (5.643~6.897)	9.52	6.76	-1.04	7.81	20.25°C	3/2/2025
D1750V 2 Head	36.40 (32.76~40.70)	19.40 (17.46~21.34)	35.28	19.08	-3.08	-1.65	20.04°C	3/3/2025
D1750V 2 Head	36.40 (32.76~40.70)	19.40 (17.46~21.34)	39.04	20.64	7.25	6.39	19.70°C	5/15/2025
D1900V 2 Head	40.50 (36.45~44.55)	21.10 (18.99~23.21)	38.32	19.92	-5.38	-5.59	20.33°C	3/5/2025
D1900V 2 Head	40.50 (36.45~44.55)	21.10 (18.99~23.21)	39.20	20.36	-3.21	-3.51	20.60°C	3/7/2025
D1900V 2 Head	40.50 (36.45~44.55)	21.10 (18.99~23.21)	38.00	19.36	-6.17	-8.25	20.70°C	5/16/2025
D1900V 2 Head	40.50 (36.45~44.55)	21.10 (18.99~23.21)	39.20	19.88	-3.21	-5.78	20.50°C	6/5/2025
D2450 Head	53.60 (48.24~58.96)	24.70 (22.23~27.17)	51.60	23.50	-3.73	-4.86	20.69°C	3/9/2025
D2600 Head	57.20 (51.48~62.92)	25.40 (22.86~27.94)	58.30	25.20	1.92	-0.79	20.72°C	3/11/2025
D5250 Head	78.20 (70.38~86.02)	22.10 (19.89~24.31)	78.40	22.40	0.26	1.36	20.85°C	3/10/2025
D5750 Head	77.60 (69.84~85.36)	21.50 (19.35~23.65)	75.00	21.60	-3.35	0.47	20.85°C	3/10/2025
Note: All SAR values are normalized to 1W forward power.								

6 SAR Measurement variability and uncertainty

6.1 SAR measurement variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results. The same procedures should be adapted for measurements according to extremity exposure limits by applying a factor of 2.5 for extremity exposure.

- 1) Repeated measurement is not required when the original highest measured SAR is < 2.0 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 2.0 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 3.0 or when the original or repeated measurement is ≥ 3.6 W/kg ($\sim 10\%$ from the 10-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 3.75 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

6.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

7 SAR Test Configuration

7.1 GSM Test Configurations

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power lever is set to “5” and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS/EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

7.2 UMTS Test Configurations

1) RMC

As the SAR body tests for WCDMA Band II/V, we established the radio link through call processing. The maximum output power were verified on high, middle and low channels for each test band according to 3GPP TS 34.121 with the following configuration:

- 1) 12.2kbps RMC, 64,144,384 kbps RMC with TPC set to ‘all 1’.
- 2) Test loop Mode 1.

For the output power, the configurations for the DPCCH and DPDCH₁ are as followed (EUT do not support the DPDCH_{2-n})

	Channel Bit Rate (kbps)	Channel Symbol Rate (ksps)	Spreading Factor	Spreading Code Number	Bits/Slot
DPCCH	15	15	256	0	10
DPDCH ₁	15	15	256	64	10
	30	30	128	32	20
	60	60	64	16	40
	120	120	32	8	80
	240	240	16	4	160
	480	480	8	2	320
	960	960	4	1	640
DPDCH _n	960	960	4	1, 2, 3	640

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all “1s”. SAR for other spreading codes and multiple DPDCH_n, when supported by the EUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCH_n configuration, are less than ¼ dB higher than those measured in 12.2 kbps RMC.

2) HSDPA

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. In addition, body SAR is also measured for HSDPA when the maximum average outputs of each RF channel with HSDPA active is at ¼ dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/ HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, β_{hs} for HS-DPCCH is set automatically to the correct value when ΔACK , $\Delta NACK$, $\Delta CQI = 8$. The variation of the β_c / β_d ratio causes a power reduction at sub-tests 2 - 4.

Sub-test	$b\beta_c$	$b\beta_d$	$b\beta_d$ (SF)	$b\beta_c / \beta_d$	$b\beta_{hs}$ (1)	CM(dB)(2)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs} / \beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2 : CM=1 for $\beta_c / \beta_d = 12/15$, $\beta_{hs} / \beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3 : For subtest 2 the β_c / β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Note: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

3) HSUPA

Body SAR is also measured for HSDPA when the maximum average outputs of each RF channel with HSDPA active is at ¼ dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-set 1 and QPSK for FRC and 12.2kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA.

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the b values indicated below as well as other applicable procedures described in the 'UMTS Handset' and 'Release 5 HSDPA Data Device' sections of 3G device.

Sub - test	$b\beta_c$	$b\beta_d$	β_d (SF)	$b\beta_c/\beta_d$	$b\beta_{hs}^{(1)}$	$b\beta_{ec}$	$b\beta_{ed}$	β_{ec} (SF)	β_{ed} (code)	CM ⁽²⁾ (dB)	MP R (dB)	AG ⁽⁴⁾ Index	E-TFC I
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/25	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 4/7/15$ $\beta_{ed2}: 4/7/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI = 8P A_{hs} = \beta_{hs}/\beta_c = 30/15P \beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference

Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$

Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$

Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to

TS 25.306 Table 5.1g

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF 4	11484	5.76
	4	4	2		20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF 4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0)

7.3 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames(Maximum TTI)

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

3) A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signaling Value of "NS_01" on the base station simulator.

4) LTE procedures for SAR testing**4.1) Largest channel bandwidth standalone SAR test requirements****4.1.1) QPSK with 1 RB allocation**

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

4.1.2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 4.1.1) are applied to measure the SAR for QPSK with 50% RB allocation.

4.1.3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 4.1.1) and 4.1.2) are ≤ 0.8 W/kg.

Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4.1.4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

4.2) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 4.1) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

7.4 WIFI 5G Test Configurations

1) U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

1.1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.

1.2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.

2) U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

3) OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

3.1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.

3.2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.

3.3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.

3.4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.

3.4.1) The channel closest to mid-band frequency is selected for SAR measurement.

3.4.2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

4) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

7.5 WIFI 2.4G Test Configurations

For WiFi SAR testing, a communication link is set up with the testing software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The RF signal utilized in SAR measurement has 100% duty cycle and its crest factor is 1. The test procedures in KDB 248227D01 v02r02 are applied.

Per KDB 248227 D01 802.11 Wi-Fi SAR v02r02, SAR Test Reduction criteria are as follows:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The relative SAR levels of multiple exposure test positions can be established by area scan measurements on the highest measured output power channel to determine the initial test position. The area scans must be measured using the same SAR measurement configurations, including test channel, maximum output power, probe tip to phantom distance, scan resolution etc.

When the reported SAR for the initial test position is:

- 1) ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- 2) > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
- 3) For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.

SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

8 SAR Test Results

8.1 Conducted Power Measurements

1. For the measurements a Rohde & Schwarz Radio Communication Tester CMU200 was used.
2. Establish communication link between emulator and EUT and set EUT to operate at maximum output power all the time.
3. Source-based Time Averaged Burst Power Calculation:
For TDMA, the following duty cycle factor was used to calculate the Source-based Time Averaged power.

Number of Time slot	1	2	3	4
Duty cycle	1:8.3	1:4.1	1:2.77	1:2.08
Duty cycle factor	-9.19	-6.13	-4.42	-3.18

8.1.1 Conducted Power of GSM850

GSM850		Burst-Averaged output Power (dBm)			Division Factors	Source Based time Average Power(dBm)		
		128CH	190CH	251CH		128CH	190CH	251CH
GSM(CS)		33.53	33.80	33.70	-9.19	24.34	24.61	24.51
GPRS/ EDGE (GMSK)	1 Tx Slot	33.72	33.71	33.42	-9.19	24.53	24.52	24.23
	2 Tx Slots	33.60	33.65	33.36	-6.13	27.47	27.52	27.23
	3 Tx Slots	33.47	33.54	33.23	-4.42	29.05	29.12	28.81
	4 Tx Slots	33.33	33.40	33.09	-3.18	30.15	30.22	29.91
EDGE (8PSK)	1 Tx Slot	27.70	27.51	27.12	-9.19	18.51	18.32	17.93
	2 Tx Slots	27.60	27.45	27.05	-6.13	21.47	21.32	20.92
	3 Tx Slots	27.45	27.36	26.94	-4.42	23.03	22.94	22.52
	4 Tx Slots	27.31	27.21	26.79	-3.18	24.13	24.03	23.61

Note: 1) The conducted power of GSM850 is measured with RMS detector.

2) Source Based time Average Power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

3) The bolded GPRS 4Tx slots mode was selected for SAR testing according the highest Source Based time Average Power table.

4) channel/Frequency: 128/824.2, 190/836.6, 251/848.8

8.1.2 Conducted Power of GSM1900

GSM1900		Burst-Averaged output Power (dBm)			Division Factors	Source Based time Average Power(dBm)		
		512CH	661CH	810CH		512CH	661CH	810CH
GSM(CS)		20.94	21.61	21.92	-9.19	11.75	12.42	12.73
GPRS/ EDGE (GMSK)	1 Tx Slot	20.96	21.55	21.84	-9.19	11.77	12.36	12.65
	2 Tx Slots	20.84	21.47	21.76	-6.13	14.71	15.34	15.63
	3 Tx Slots	20.69	21.32	21.62	-4.42	16.27	16.90	17.20
	4 Tx Slots	20.53	21.16	21.45	-3.18	17.35	17.98	18.27
EDGE (8PSK)	1 Tx Slot	21.01	21.66	21.99	-9.19	11.82	12.47	12.80
	2 Tx Slots	20.88	21.53	21.93	-6.13	14.75	15.40	15.80
	3 Tx Slots	20.70	21.43	21.78	-4.42	16.28	17.01	17.36
	4 Tx Slots	20.57	21.22	21.56	-3.18	17.39	18.04	18.38

Note: 1) The conducted power of GSM1900 is measured with RMS detector.

2) Source Based time Average Power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

3) The bolded GPRS 4Tx slots mode was selected for SAR testing according the highest Source Based time Average Power table.

4) channel/Frequency: 512/1850.2,661/1880,810/1909.8

8.1.3 Conducted Power of UMTS Band II

UMTS Band II		Conducted Power (dBm)		
		9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	14.78	15.06	15.41
HSDPA	Subtest 1	13.78	14.09	14.35
	Subtest 2	13.26	13.63	13.88
	Subtest 3	13.22	13.62	13.94
	Subtest 4	13.24	13.63	13.95
HSUPA	Subtest 1	13.70	14.10	14.31
	Subtest 2	11.66	12.05	12.42
	Subtest 3	12.70	13.01	13.41
	Subtest 4	11.72	12.06	12.42
	Subtest 5	13.78	14.10	14.37

Note: channel /Frequency: 9262/1852.4,9400/1880,9538/1907.6

8.1.4 Conducted Power of UMTS Band IV

UMTS Band II		Conducted Power (dBm)		
		1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	18.70	18.49	18.38
HSDPA	Subtest 1	17.69	17.47	17.38
	Subtest 2	17.21	16.97	16.91
	Subtest 3	17.22	16.95	16.87
	Subtest 4	17.21	16.96	16.87
HSUPA	Subtest 1	17.68	17.40	17.34
	Subtest 2	15.67	15.53	15.48
	Subtest 3	16.71	16.36	16.36
	Subtest 4	15.68	15.40	15.42
	Subtest 5	17.70	17.48	17.42

Note: channel /Frequency: 1312/1712.4,1413/11732.6,1513/1752.6

8.1.5 Conducted Power of UMTS Band V

UMTS Band V		Conducted Power (dBm)		
		4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	24.43	24.49	24.50
HSDPA	Subtest 1	23.42	23.41	23.45
	Subtest 2	22.92	22.95	22.98
	Subtest 3	22.96	22.98	23.02
	Subtest 4	22.93	22.95	23.00
HSUPA	Subtest 1	23.46	23.45	23.37
	Subtest 2	21.48	21.54	21.55
	Subtest 3	22.46	22.54	22.50
	Subtest 4	21.36	21.42	21.53
	Subtest 5	23.40	23.48	23.48

Note: channel /Frequency: 4132/826.4,4182/836.4,4233/846.6

8.1.6 Conducted Power of LTE Band 2

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18607	18900	19193
1.4MHz	QPSK	1	0	16.83	16.90	17.36
		1	3	16.88	16.91	17.39
		1	5	16.78	16.90	17.31
		3	0	16.84	16.93	17.44
		3	2	16.93	17.01	17.45
		3	3	16.79	16.83	17.32
		6	0	15.83	15.95	16.38
	16QAM	1	0	15.86	15.93	16.34
		1	3	16.03	16.13	16.51
		1	5	15.80	15.91	16.30
		3	0	15.81	15.89	16.31
		3	2	15.98	16.08	16.49
		3	3	15.72	15.82	16.22
		6	0	14.92	15.01	15.48
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18615	18900	19185
3MHz	QPSK	1	0	16.84	16.93	17.46
		1	7	16.84	16.93	17.40
		1	14	16.82	17.02	17.36
		8	0	15.84	15.97	16.46
		8	4	15.92	16.03	16.48
		8	7	15.89	15.95	16.49
		15	0	15.91	16.02	16.49
		1	0	15.94	16.03	16.53
	16QAM	1	7	16.26	16.42	16.84
		1	14	15.87	16.15	16.55
		8	0	15.19	15.34	15.78
		8	4	15.15	15.28	15.71
		8	7	15.23	15.34	15.74
		15	0	15.17	15.25	15.80

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18625	18900	19175
5MHz	QPSK	1	0	16.88	17.05	17.55
		1	13	16.80	16.94	17.39
		1	24	16.93	16.96	17.45
		12	0	15.91	16.00	16.53
		12	6	15.94	15.99	16.53
		12	13	15.88	15.97	16.48
		25	0	15.88	15.97	16.49
	16QAM	1	0	16.11	16.26	16.76
		1	13	16.10	16.20	16.64
		1	24	16.16	16.27	16.66
		12	0	15.21	15.35	15.78
		12	6	15.31	15.38	15.84
		12	13	15.19	15.30	15.80
		25	0	15.22	15.34	15.82
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18650	18900	19150
10MHz	QPSK	1	0	16.92	17.10	17.44
		1	24	16.95	17.01	17.46
		1	49	17.02	17.03	17.37
		25	0	15.91	16.00	16.42
		25	12	15.99	16.06	16.42
		25	25	15.98	16.01	16.50
		50	0	15.96	16.01	16.43
	16QAM	1	0	16.31	16.45	16.77
		1	24	16.22	16.28	16.79
		1	49	16.36	16.39	16.69
		25	0	15.23	15.32	15.80
		25	12	15.28	15.35	15.73
		25	25	15.25	15.34	15.79
		50	0	15.32	15.33	15.75

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18675	18900	19125
15MHz	QPSK	1	0	16.84	17.04	17.44
		1	37	16.97	17.03	17.51
		1	74	16.96	17.12	17.43
		36	0	15.95	16.06	16.41
		36	18	15.98	16.06	16.47
		36	38	15.96	16.04	16.42
		75	0	15.96	16.05	16.42
	16QAM	1	0	16.17	16.34	16.68
		1	37	16.19	16.30	16.71
		1	74	16.32	16.40	16.71
		37	0	16.15	16.23	16.61
		37	18	15.33	15.36	15.80
		37	38	16.15	16.23	16.61
		75	0	15.25	15.28	15.68
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18700	18900	19100
20MHz	QPSK	1	0	16.91	17.13	17.23
		1	50	17.04	17.11	17.52
		1	99	17.09	17.14	17.48
		50	0	15.94	16.05	16.33
		50	25	16.04	16.08	16.55
		50	50	16.17	16.05	16.53
		100	0	16.10	16.04	16.47
	16QAM	1	0	16.01	16.20	16.31
		1	50	16.42	16.47	16.74
		1	99	16.63	16.68	16.65
		50	0	15.26	15.46	15.63
		50	25	15.39	15.46	15.78
		50	50	15.50	15.39	15.72
		100	0	15.41	15.39	15.68

8.1.7 Conducted Power of LTE Band 4

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19957	20175	20393
1.4MHz	QPSK	1	0	17.32	17.16	17.18
		1	3	17.40	17.20	17.17
		1	5	17.30	17.13	17.14
		3	0	17.34	17.14	17.09
		3	2	17.39	17.22	17.13
		3	3	17.37	17.12	17.09
		6	0	16.35	16.15	16.12
	16QAM	1	0	16.41	16.25	16.28
		1	3	16.71	16.51	16.43
		1	5	16.45	16.23	16.27
		3	0	16.48	16.25	16.19
		3	2	16.56	16.44	16.35
		3	3	16.43	16.23	16.14
		6	0	15.37	15.42	15.36
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19965	20175	20385
3MHz	QPSK	1	0	17.28	17.26	17.13
		1	7	17.39	17.17	17.11
		1	14	17.36	17.24	17.14
		8	0	16.42	16.24	16.23
		8	4	16.41	16.27	16.19
		8	7	16.32	16.19	16.14
		15	0	16.37	16.22	16.17
	16QAM	1	0	16.64	16.53	16.14
		1	7	16.72	16.63	16.40
		1	14	16.44	16.45	16.29
		8	0	15.66	15.47	15.42
		8	4	15.73	15.49	15.43
		8	7	15.66	15.49	15.46
		15	0	15.60	15.44	15.43

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19975	20175	20375
5MHz	QPSK	1	0	17.43	17.28	17.20
		1	13	17.34	17.22	17.24
		1	24	17.45	17.14	17.16
		12	0	16.41	16.30	16.26
		12	6	16.45	16.26	16.21
		12	13	16.48	16.24	16.20
		25	0	16.48	16.26	16.17
	16QAM	1	0	16.65	16.65	16.34
		1	13	16.54	16.58	16.38
		1	24	16.70	16.55	16.35
		12	0	15.67	15.58	15.49
		12	6	15.72	15.61	15.46
		12	13	15.76	15.52	15.49
		25	0	15.77	15.51	15.48
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20000	20175	20350
10MHz	QPSK	1	0	17.41	17.38	17.15
		1	25	17.45	17.24	17.20
		1	49	17.36	17.11	17.15
		25	0	16.48	16.30	16.23
		25	13	16.49	16.33	16.21
		25	25	16.43	16.19	16.20
		50	0	16.50	16.26	16.22
	16QAM	1	0	16.68	16.52	16.19
		1	25	16.67	16.61	16.42
		1	49	16.63	16.28	16.17
		25	0	15.75	15.64	15.48
		25	13	15.75	15.58	15.47
		25	25	15.71	15.51	15.52
		50	0	15.72	15.56	15.45

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20025	20175	20325
15MHz	QPSK	1	0	17.31	17.17	17.09
		1	37	17.37	17.21	17.17
		1	74	17.31	16.93	17.16
		36	0	16.49	16.23	16.06
		36	18	16.42	16.27	16.19
		36	38	16.43	16.16	16.08
		75	0	16.43	16.16	16.07
	16QAM	1	0	16.68	16.65	16.12
		1	37	16.66	16.61	16.42
		1	74	16.63	16.42	16.19
		37	0	16.72	16.45	16.28
		37	18	15.68	15.61	15.48
		37	38	16.70	16.35	16.29
		75	0	15.76	15.57	15.40
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20050	20175	20300
20MHz	QPSK	1	0	17.26	17.33	17.11
		1	50	17.46	17.35	17.23
		1	99	17.37	17.12	17.17
		50	0	16.50	16.46	16.21
		50	25	16.57	16.32	16.21
		50	50	16.50	16.23	16.26
		100	0	16.50	16.25	16.16
	16QAM	1	0	16.82	16.77	16.53
		1	50	16.61	16.49	16.37
		1	99	16.57	16.24	16.33
		50	0	15.81	15.63	15.39
		50	25	15.79	15.55	15.32
		50	50	15.78	15.43	15.47
		100	0	15.75	15.53	15.38

8.1.8 Conducted Power of LTE Band 5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20407	20525	20643
1.4MHz	QPSK	1	0	23.97	24.11	24.15
		1	3	24.05	24.09	24.14
		1	5	24.02	24.02	24.10
		3	0	23.98	24.00	24.00
		3	2	24.02	24.09	24.09
		3	3	23.98	23.99	24.00
		6	0	23.02	23.10	23.11
	16QAM	1	0	22.96	22.99	23.12
		1	3	23.26	23.18	23.22
		1	5	22.99	22.91	23.05
		3	0	22.99	22.96	22.97
		3	2	23.11	23.13	23.21
		3	3	22.94	22.90	22.96
		6	0	21.97	22.17	22.20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20415	20525	20635
3MHz	QPSK	1	0	24.08	24.15	24.23
		1	7	24.08	24.17	24.16
		1	14	24.07	24.21	24.21
		8	0	23.04	23.11	23.16
		8	4	23.09	23.18	23.19
		8	7	23.03	23.12	23.14
		15	0	23.04	23.10	23.15
	16QAM	1	0	23.24	23.04	23.12
		1	7	23.24	23.31	23.31
		1	14	23.02	23.09	23.10
		7	0	22.17	22.23	22.27
		7	4	22.14	22.20	22.26
		7	7	22.13	22.22	22.24
		15	0	22.13	22.16	22.20

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20425	20525	20625
5MHz	QPSK	1	0	24.11	24.19	24.27
		1	13	24.04	24.11	24.21
		1	24	24.17	24.15	24.21
		12	0	23.06	23.16	23.22
		12	6	23.17	23.18	23.21
		12	13	23.10	23.11	23.15
		25	0	23.20	23.18	23.20
	16QAM	1	0	23.20	23.41	23.21
		1	13	23.03	23.29	23.21
		1	24	23.23	23.28	23.17
		12	0	22.20	22.32	22.31
		12	6	22.29	22.33	22.26
		12	13	22.23	22.24	22.31
		25	0	22.26	22.20	22.33
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20450	20525	20600
10MHz	QPSK	1	0	24.12	24.14	24.14
		1	25	24.17	24.17	24.18
		1	49	24.16	24.16	24.11
		25	0	23.19	23.24	23.17
		25	12	23.15	23.23	23.28
		25	25	23.23	23.13	23.23
		50	0	23.18	23.14	23.08
	16QAM	1	0	23.23	23.10	23.00
		1	25	23.19	23.35	23.23
		1	49	23.30	23.07	22.97
		25	0	22.28	22.34	22.25
		25	12	22.26	22.30	22.30
		25	25	22.30	22.26	22.29
		50	0	22.29	22.26	22.22

8.1.9 Conducted Power of LTE Band 7

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20775	21100	21425
5MHz	QPSK	1	0	16.56	15.99	16.33
		1	13	16.45	15.98	16.40
		1	24	16.42	15.97	16.48
		12	0	15.59	15.05	15.37
		12	6	15.54	15.06	15.44
		12	13	15.43	15.01	15.46
		25	0	15.48	15.02	15.42
	16QAM	1	0	15.50	15.15	15.25
		1	13	15.37	15.09	15.35
		1	24	15.39	15.03	15.33
		12	0	14.54	14.15	14.42
		12	6	14.54	14.20	14.44
		12	13	14.43	14.12	14.50
		25	0	14.51	14.07	14.51
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20800	21100	21400
10MHz	QPSK	1	0	16.55	16.04	16.11
		1	25	16.44	16.02	16.32
		1	49	16.28	15.96	16.34
		25	0	15.50	15.07	15.31
		25	13	15.50	15.11	15.37
		25	25	15.39	15.01	15.47
		50	0	15.47	15.04	15.40
	16QAM	1	0	15.34	15.06	15.12
		1	25	15.43	14.96	15.47
		1	49	15.07	14.95	15.26
		25	0	14.58	14.14	14.40
		25	13	14.53	14.12	14.51
		25	25	14.47	14.01	14.51
		50	0	14.53	14.08	14.47

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20825	21100	21375
15MHz	QPSK	1	0	16.35	15.92	15.99
		1	37	16.26	16.07	16.23
		1	74	16.08	15.79	16.36
		36	0	15.28	15.06	15.24
		36	18	15.30	15.11	15.34
		36	38	15.27	15.07	15.24
		75	0	15.27	15.07	15.26
	16QAM	1	0	15.48	15.19	14.85
		1	37	15.22	15.09	15.37
		1	74	15.18	15.00	15.18
		37	0	15.23	15.04	15.27
		37	18	14.42	14.18	14.42
		37	38	15.25	15.05	15.27
		75	0	14.36	14.12	14.43
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20850	21100	21350
20MHz	QPSK	1	0	16.52	15.96	15.82
		1	50	16.42	16.15	16.29
		1	99	16.16	15.87	16.43
		50	0	16.40	16.10	16.03
		50	25	16.32	16.03	16.23
		50	50	16.26	15.95	16.37
		100	0	15.38	15.02	15.23
	16QAM	1	0	15.31	14.86	14.70
		1	50	15.42	15.17	15.35
		1	99	15.38	15.07	15.61
		50	0	14.47	14.19	14.17
		50	25	14.43	14.22	14.35
		50	50	14.31	14.05	14.42
		100	0	14.36	14.13	14.29

8.1.10 Conducted Power of LTE Band 12

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23017	23095	23173
1.4MHz	QPSK	1	0	23.77	23.78	23.82
		1	3	23.80	23.88	23.86
		1	5	23.78	23.77	23.78
		3	0	23.71	23.75	23.74
		3	2	23.78	23.85	23.87
		3	3	23.71	23.72	23.73
		6	0	22.70	22.86	22.88
	16QAM	1	0	22.67	22.64	22.78
		1	3	23.00	22.87	22.94
		1	5	22.74	22.65	22.76
		3	0	22.66	22.65	22.70
		3	2	22.85	22.81	22.97
		3	3	22.68	22.67	22.71
		6	0	21.70	21.90	21.90
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23025	23095	23165
3MHz	QPSK	1	0	23.84	23.90	23.85
		1	7	23.80	23.88	23.89
		1	14	23.85	23.93	23.92
		8	0	22.80	22.92	22.88
		8	4	22.84	22.95	22.93
		8	7	22.73	22.89	22.84
		15	0	22.83	22.86	22.89
	16QAM	1	0	22.90	22.67	22.67
		1	7	22.76	22.98	22.98
		1	14	22.71	22.85	22.72
		8	0	21.87	21.90	21.95
		8	4	21.83	21.87	21.91
		8	7	21.84	21.92	21.89
		15	0	21.78	21.95	21.86

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23035	23095	23155
5MHz	QPSK	1	0	23.92	23.90	23.93
		1	13	23.75	23.88	23.85
		1	24	23.92	23.89	23.91
		12	0	22.80	22.92	22.88
		12	6	22.80	22.93	22.88
		12	13	22.84	22.85	22.85
		25	0	22.91	22.89	22.88
	16QAM	1	0	22.92	23.00	22.88
		1	13	22.78	22.97	22.87
		1	24	22.94	23.00	22.81
		12	0	21.89	22.05	21.99
		12	6	21.93	22.06	21.98
		12	13	21.90	22.00	21.99
		25	0	22.01	21.94	21.98
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23060	23095	23130
10MHz	QPSK	1	0	23.80	23.78	23.86
		1	25	23.86	23.91	23.83
		1	49	23.80	23.85	23.85
		25	0	22.97	22.90	22.89
		25	13	22.98	22.96	22.90
		25	25	22.88	22.88	22.86
		50	0	22.92	22.87	22.85
	16QAM	1	0	22.89	22.71	22.72
		1	25	22.89	23.03	22.89
		1	49	22.89	22.76	22.68
		25	0	21.98	22.02	22.02
		25	13	22.04	21.99	21.98
		25	25	21.92	21.96	22.01
		50	0	21.98	22.00	21.97

8.1.11 Conducted Power of LTE Band 13

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23205	23230	23255
5MHz	QPSK	1	0	24.62	24.47	24.33
		1	13	24.55	24.36	24.05
		1	24	24.44	24.28	23.88
		12	0	23.52	23.42	23.28
		12	6	23.42	23.40	23.21
		12	13	23.38	23.33	23.00
		25	0	23.39	23.35	23.12
	16QAM	1	0	23.63	23.34	23.35
		1	13	23.57	23.37	23.03
		1	24	23.53	23.26	22.91
		12	0	22.66	22.46	22.30
		12	6	22.58	22.41	22.27
		12	13	22.44	22.41	22.09
		25	0	22.41	22.46	22.22
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				/	23230	/
10MHz	QPSK	1	0	/	24.58	/
		1	25	/	24.39	/
		1	49	/	24.03	/
		25	0	/	23.40	/
		25	13	/	23.38	/
		25	25	/	23.24	/
		50	0	/	23.37	/
	16QAM	1	0	/	23.31	/
		1	25	/	23.38	/
		1	49	/	22.83	/
		25	0	/	22.45	/
		25	13	/	22.44	/
		25	25	/	22.27	/
		50	0	/	22.43	/

8.1.12 Conducted Power of LTE Band 17

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23755	23790	23825
5MHz	QPSK	1	0	23.82	23.83	23.97
		1	13	23.79	23.82	23.93
		1	24	23.81	23.90	23.98
		12	0	22.84	22.80	22.98
		12	6	22.85	22.83	23.02
		12	13	22.83	22.83	22.99
		25	0	22.81	22.80	22.98
	16QAM	1	0	22.74	22.79	23.13
		1	13	22.81	22.81	23.11
		1	24	22.72	22.91	23.09
		12	0	21.90	21.86	22.14
		12	6	21.85	21.84	22.18
		12	13	21.88	21.91	22.11
		25	0	21.88	21.82	22.06
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23780	23790	23800
10MHz	QPSK	1	0	23.84	23.79	23.78
		1	25	23.83	23.73	23.87
		1	49	23.87	23.78	23.83
		25	0	22.83	22.85	22.81
		25	13	22.83	22.84	22.85
		25	25	22.81	22.82	22.90
		50	0	22.78	22.81	22.83
	16QAM	1	0	22.60	22.80	22.73
		1	25	22.79	22.75	23.00
		1	49	22.67	22.93	22.71
		25	0	21.92	21.82	21.89
		25	13	21.91	21.87	21.85
		25	25	21.87	21.90	21.97
		50	0	21.86	21.86	21.90

8.1.13 Conducted Power of LTE Band 25

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26047	26365	26683
1.4MHz	QPSK	1	0	16.95	17.11	17.33
		1	3	16.99	17.20	17.36
		1	5	16.95	17.13	17.34
		3	0	16.94	17.21	17.32
		3	2	17.02	17.22	17.38
		3	3	16.97	17.10	17.27
		6	0	15.95	16.11	16.37
	16QAM	1	0	15.98	16.14	16.26
		1	3	16.10	16.26	16.41
		1	5	15.92	16.07	16.26
		3	0	15.87	16.03	16.18
		3	2	16.07	16.24	16.37
		3	3	15.85	16.01	16.14
		6	0	15.02	15.16	15.36
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26055	26365	26675
3MHz	QPSK	1	0	16.91	17.22	17.45
		1	7	17.03	17.29	17.41
		1	14	16.99	17.32	17.42
		8	0	15.97	16.19	16.38
		8	4	16.00	16.22	16.40
		8	7	15.95	16.19	16.31
		15	0	16.02	16.23	16.40
		1	0	16.03	16.03	16.23
	16QAM	1	7	16.03	16.42	16.53
		1	14	15.91	16.15	16.28
		8	0	15.04	15.26	15.43
		8	4	15.02	15.22	15.41
		8	7	15.06	15.26	15.41
		15	0	14.97	15.23	15.37

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26065	26365	26665
5MHz	QPSK	1	0	17.01	17.25	17.40
		1	13	16.96	17.20	17.39
		1	24	17.04	17.26	17.34
		12	0	16.00	16.27	16.44
		12	6	16.06	16.26	16.41
		12	13	16.00	16.24	16.36
		25	0	15.97	16.25	16.39
	16QAM	1	0	16.05	16.29	16.55
		1	13	15.92	16.21	16.54
		1	24	16.04	16.32	16.47
		12	0	15.08	15.30	15.56
		12	6	15.11	15.34	15.49
		12	13	15.07	15.28	15.46
		25	0	15.08	15.34	15.38
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26090	26365	26640
10MHz	QPSK	1	0	17.06	17.35	17.55
		1	25	17.08	17.26	17.45
		1	49	17.13	17.35	17.37
		25	0	16.04	16.27	16.51
		25	13	16.06	16.27	16.48
		25	25	16.11	16.26	16.40
		50	0	16.07	16.25	16.44
	16QAM	1	0	15.90	16.42	16.51
		1	25	16.06	16.31	16.61
		1	49	16.00	16.45	16.26
		25	0	15.14	15.29	15.55
		25	13	15.16	15.34	15.55
		25	25	15.15	15.29	15.47
		50	0	15.13	15.35	15.47

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26115	26365	26615
15MHz	QPSK	1	0	16.96	17.21	17.44
		1	37	17.10	17.25	17.51
		1	74	17.22	17.27	17.18
		36	0	16.17	16.23	16.47
		36	18	16.07	16.26	16.50
		36	38	16.15	16.25	16.48
		75	0	16.15	16.21	16.48
	16QAM	1	0	16.06	16.36	16.73
		1	37	16.08	16.36	16.61
		1	74	16.26	16.43	16.51
		37	0	16.11	16.25	16.45
		37	18	15.18	15.40	15.63
		37	38	16.12	16.23	16.44
		75	0	15.15	15.31	15.58
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26140	26365	26590
20MHz	QPSK	1	0	17.04	17.29	17.54
		1	50	17.19	17.36	17.47
		1	99	17.30	17.43	17.37
		50	0	16.02	16.24	16.62
		50	25	16.22	16.28	16.62
		50	50	16.24	16.31	16.49
		100	0	16.16	16.28	15.26
	16QAM	1	0	15.94	16.30	16.44
		1	50	16.28	16.50	16.79
		1	99	16.53	16.66	16.61
		50	0	15.26	15.40	15.70
		50	25	15.41	15.46	15.74
		50	50	15.35	15.47	15.58
		100	0	15.32	15.41	14.11

8.1.14 Conducted Power of LTE Band 26

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26785	26909	27033
1.4MHz	QPSK	1	0	24.05	24.01	23.90
		1	3	24.04	24.08	23.94
		1	5	24.01	24.03	23.91
		3	0	24.08	24.15	24.24
		3	2	24.21	24.15	24.20
		3	3	24.06	24.13	24.19
		6	0	22.98	22.99	22.97
	16QAM	1	0	23.11	22.97	23.10
		1	3	23.36	23.25	23.21
		1	5	23.09	22.95	23.09
		3	0	23.07	22.96	23.06
		3	2	23.23	23.18	23.24
		3	3	23.12	22.97	23.02
		6	0	22.10	22.13	22.21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26793	26909	27025
3MHz	QPSK	1	0	24.05	24.10	24.10
		1	7	24.06	24.05	24.02
		1	14	24.09	24.06	23.99
		8	0	23.09	23.07	23.06
		8	4	23.09	23.10	23.12
		8	7	23.00	23.03	23.07
		15	0	23.13	23.10	23.13
	16QAM	1	0	23.33	23.07	23.20
		1	7	23.37	23.35	23.39
		1	14	23.17	23.13	23.11
		8	0	22.24	22.26	22.21
		8	4	22.22	22.19	22.22
		8	7	22.21	22.25	22.21
		15	0	22.23	22.18	22.20

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26803	26909	27015
5MHz	QPSK	1	0	24.18	24.14	24.15
		1	13	24.04	24.08	24.13
		1	24	24.18	24.12	24.07
		12	0	23.21	23.20	23.18
		12	6	23.17	23.16	23.20
		12	13	23.18	23.13	23.18
		25	0	23.28	23.18	23.19
	16QAM	1	0	23.32	23.39	23.28
		1	13	23.18	23.36	23.22
		1	24	23.37	23.39	23.21
		12	0	22.32	22.35	22.34
		12	6	22.33	22.35	22.26
		12	13	22.35	22.31	22.32
		25	0	22.44	22.21	22.36
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26828	26909	26990
10MHz	QPSK	1	0	24.10	24.19	24.20
		1	25	24.09	24.12	24.09
		1	49	24.10	24.14	24.02
		25	0	23.31	23.23	23.25
		25	13	23.30	23.27	23.24
		25	25	23.21	23.19	23.18
		50	0	23.32	23.17	23.22
	16QAM	1	0	23.36	23.26	23.15
		1	25	23.31	23.32	23.33
		1	49	23.31	23.23	23.02
		25	0	22.38	22.35	22.35
		25	13	22.43	22.37	22.38
		25	25	22.33	22.32	22.35
		50	0	22.38	22.30	22.30

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26853	26909	26965
15MHz	QPSK	1	0	24.13	24.09	24.21
		1	37	24.15	24.18	24.22
		1	74	24.07	23.99	24.09
		36	0	23.13	23.11	23.03
		36	18	23.21	23.20	23.12
		36	38	23.13	23.10	23.05
		75	0	23.12	23.06	23.03
	16QAM	1	0	23.36	23.52	23.17
		1	37	23.33	23.41	23.35
		1	74	23.22	23.39	23.02
		37	0	23.16	23.15	23.10
		37	18	22.35	22.32	22.25
		37	38	23.15	23.16	23.12
		75	0	22.26	22.28	22.22

8.1.15 Conducted Power of WiFi 5G

The output power of Wi-Fi 5G is as following:

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
5.2G	802.11a	36	5180	6	9.50	9.06	Yes
		40	5200		9.50	9.21	Yes
		48	5240		9.50	9.20	Yes
	802.11n HT20	36	5180	6.5	9.10	8.54	NO
		40	5200		9.10	9.06	NO
		48	5240		9.10	8.56	NO
	802.11n HT40	38	5190	13.5	7.50	7.30	NO
		46	5230		7.50	6.95	NO
	802.11ac HT20	36	5180	6.5	9.00	8.60	NO
		40	5200		9.00	8.61	NO
		48	5240		9.00	8.77	NO
	802.11ac HT40	38	5190	13.5	7.50	6.75	NO
		46	5230		7.50	7.11	NO
	802.11ac VH80	42	5210	29.3	6.00	5.86	NO

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
5.8G	802.11a	149	5745	6	7.50	7.00	Yes
		157	5785		7.50	6.90	Yes
		165	5825		7.50	7.21	Yes
	802.11n HT20	149	5745	6.5	7.00	6.43	NO
		157	5785		7.00	6.84	NO
		165	5825		7.00	6.22	NO
	802.11n HT40	151	5755	13.5	6.00	4.73	NO
		159	5795		6.00	5.55	NO
	802.11ac HT20	149	5745	6.5	7.00	5.93	NO
		157	5785		7.00	6.62	NO
		165	5825		7.00	6.37	NO
	802.11ac HT40	151	5755	13.5	5.00	3.72	NO
		159	5795		5.00	4.51	NO
	802.11ac VH80	155	5775	29.3	3.50	3.43	NO

8.1.16 Conducted Power of WiFi 2.4G

The output power of WiFi 2.4G is as following:

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power(dBm)	SAR Test (Yes/No)
802.11b	1	2412	1	11.50	11.23	Yes
	6	2437		11.50	11.48	Yes
	11	2462		11.50	11.19	Yes
802.11g	1	2412	6	11.10	10.56	No
	6	2437		11.10	11.01	No
	11	2462		11.10	10.60	No
802.11n (HT20)	1	2412	6.5	9.00	8.66	No
	6	2437		9.00	8.88	No
	11	2462		9.00	8.53	No
802.11n (HT40)	3	2422	13.5	8.50	7.67	No
	6	2437		8.50	7.20	No
	9	2452		8.50	8.18	No

Note: 1) channel /Frequency: 1/2412, 3/2422, 6/2437, 9/2452, 11/2462.

8.1.17 Conducted Power of BT

The output power of BT antenna is as following:

For BT 3.0:

Average Conducted Power(dBm)			
Channel	0CH	39CH	78CH
GFSK	-0.16	-0.13	0.79
$\pi/4$ DQPSK	-1.02	-1.1	0.02
8DPSK	-0.6	-0.56	0.38

Note: channel /Frequency: 0/2402, 39/2441, 78/2480

For BT 4.0:

Average Conducted Power(dBm)			
Channel	0CH	19CH	39CH
BLE_1M	0.01	0.02	0.95
BLE_2M	0.05	0.17	1.05

Note: channel /Frequency: 0/2402, 19/2440, 39/2480.

8.2 SAR test results

Notes:

1) Per KDB447498 D01v06, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

2) Per KDB447498 D01v06, All measurement SAR result is scaled-up to account for tune-up tolerance is compliant.

3) Per KDB865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/Kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/Kg, only one repeated measurement is required.

4) Per KDB865664 D02v01r02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The same procedures should be adapted for measurements according to extremity exposure limits by applying a factor of 2.5 for extremity exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing (Refer to appendix B for details).

5) Per KDB941225 D06, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.

6) Per KDB648474 D04, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is ≤ 1.2 W/kg, no additional SAR evaluations using a headset are required.

8.2.1 Results overview of GSM850

Test Position With 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1-g(W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	190/836.6	GPRS 4TS	0.623	0.301	0.000	33.400	33.500	0.638	20.25°C
Back Side	190/836.6	GPRS 4TS	0.271	0.143	0.030	33.400	33.500	0.277	20.25°C
Left Side	190/836.6	GPRS 4TS	0.231	0.112	0.000	33.400	33.500	0.236	20.25°C
Top Side	190/836.6	GPRS 4TS	0.345	0.250	0.000	33.400	33.500	0.353	20.25°C
Front Side	128/824.2	GPRS 4TS	0.618	0.291	0.000	33.330	33.500	0.643	20.25°C
Front Side	251/848.8	GPRS 4TS	0.612	0.289	0.000	33.090	33.500	0.673	20.25°C

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2W/kg.

8.2.2 Results overview of GSM1900

Test Position With 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1-g(W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	661/1880	GPRS 4TS	1.070	0.462	0.000	21.160	21.500	1.157	20.50°C
Back Side	661/1880	GPRS 4TS	0.951	0.354	0.000	21.160	21.500	1.028	20.50°C
Left Side	661/1880	GPRS 4TS	0.024	0.011	0.020	21.160	21.500	0.026	20.50°C
Top Side	661/1880	GPRS 4TS	1.040	0.509	0.000	21.160	21.500	1.125	20.50°C
Front Side	512/1850.2	GPRS 4TS	0.800	0.288	0.000	20.530	21.500	1.000	20.50°C
Front Side	810/1909.8	GPRS 4TS	1.060	0.489	0.000	21.450	21.500	1.072	20.50°C

Test Position With 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1-g(W/kg)	Liquid Temp.
			1-g	10-g					
SAR1-g >0.8 (W/kg) Repeated									
Front Side	661/1880	GPRS 4TS	1.110	0.400	0.000	21.160	21.500	1.200	20.50°C
Back Side	661/1880	GPRS 4TS	0.807	0.392	0.000	21.160	21.500	0.873	20.50°C
Top Side	661/1880	GPRS 4TS	1.110	0.489	-0.100	21.160	21.500	1.200	20.50°C
Back Side	810/1909.8	GPRS 4TS	0.750	0.342	0.000	20.530	21.500	0.938	20.50°C
Front Side	512/1850.2	GPRS 4TS	0.977	0.450	0.000	21.450	21.500	0.988	20.50°C
Front Side	810/1909.8	GPRS 4TS	1.110	0.400	0.000	21.160	21.500	1.200	20.50°C

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2W/kg.

8.2.3 Results overview of UMTS Band II

Test Position With 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	9400/1880	RMC	0.743	0.351	0.000	15.060	15.500	0.822	20.50°C
Back Side	9400/1880	RMC	0.632	0.310	0.000	15.060	15.500	0.699	20.50°C
Left Side	9400/1880	RMC	0.020	0.014	-0.060	15.060	15.500	0.022	20.50°C
Top Side	9400/1880	RMC	0.732	0.367	0.100	15.060	15.500	0.810	20.50°C
Front Side	9262/1852.4	RMC	0.533	0.263	0.000	14.780	15.500	0.629	20.50°C
Front Side	9538/1907.6	RMC	0.786	0.364	0.000	15.410	15.500	0.802	20.50°C

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2W/kg.

8.2.4 Results overview of UMTS Band IV

Test Position With 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1-g(W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	1413/1732.6	RMC	0.757	0.398	0.130	18.490	19.000	0.851	19.70°C
Back Side	1413/1732.6	RMC	0.873	0.396	0.050	18.490	19.000	0.982	19.70°C
Left Side	1413/1732.6	RMC	0.004	0.001	-0.190	18.490	19.000	0.004	19.70°C
Top Side	1413/1732.6	RMC	0.581	0.309	0.090	18.490	19.000	0.653	19.70°C
Back Side	1312/1712.4	RMC	0.829	0.367	0.000	18.700	19.000	0.888	19.70°C
Back Side	1513/1752.6	RMC	1.010	0.449	0.080	18.380	19.000	1.165	19.70°C

Test Position With 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1-g(W/kg)	Liquid Temp.
			1-g	10-g					
SAR1-g >0.8 (W/kg) Repeated									
Back Side	1413/1732.6	RMC	0.873	0.395	-0.080	18.490	19.000	0.982	19.70°C
Back Side	1312/1712.4	RMC	0.829	0.367	-0.180	18.700	19.000	0.888	19.70°C
Back Side	1513/1752.6	RMC	1.010	0.448	-0.060	18.380	19.000	1.165	19.70°C

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2W/kg.

8.2.5 Results overview of UMTS Band V

Test Position With 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	4182/836.4	RMC	1.140	0.666	0.050	24.490	24.500	1.143	20.25°C
Back Side	4182/836.4	RMC	1.100	0.660	0.030	24.490	24.500	1.103	20.25°C
Left Side	4182/836.4	RMC	0.771	0.342	0.010	24.490	24.500	0.773	20.25°C
Top Side	4182/836.4	RMC	0.668	0.318	-0.070	24.490	24.500	0.670	20.25°C
Front Side	4132/826.4	RMC	1.030	0.601	0.030	24.430	24.500	1.047	20.25°C
Front Side	4233/846.6	RMC	1.050	0.616	0.130	24.500	24.500	1.050	20.25°C

Test Position With 0mm	Test channel /Frequency	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1-g(W/kg)	Liquid Temp.
			1-g	10-g					
SAR1-g >0.8 (W/kg) Repeated									
Front Side	4182/836.4	RMC	1.150	0.665	-0.110	24.490	24.500	1.153	20.25°C
Back Side	4182/836.4	RMC	1.110	0.665	0.000	24.490	24.500	1.113	20.25°C
Front Side	4132/826.4	RMC	1.020	0.601	0.000	24.430	24.500	1.037	20.25°C
Front Side	4233/846.6	RMC	1.050	0.618	0.010	24.500	24.500	1.050	20.25°C

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2W/kg.

8.2.6 Results overview of LTE Band 2

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1- g(W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	18900/1 880	20M QPSK 1RB#50	1.090	0.506	0.000	17.110	17.600	1.220	20.70°C
Back Side	18900/1 880	20M QPSK 1RB#50	0.638	0.316	0.000	17.110	17.600	0.714	20.70°C
Left Side	18900/1 880	20M QPSK 1RB#50	0.023	0.014	-0.020	17.110	17.600	0.025	20.70°C
Top Side	18900/1 880	20M QPSK 1RB#50	1.070	0.534	-0.060	17.110	17.600	1.198	20.70°C
Front Side	18900/1 880	20M QPSK 50%RB#50	0.905	0.417	0.000	16.050	16.500	1.004	20.70°C
Back Side	18900/1 880	20M QPSK 50%RB#50	0.637	0.316	0.000	16.050	16.500	0.707	20.70°C
Left Side	18900/1 880	20M QPSK 50%RB#50	0.019	0.012	-0.110	16.050	16.500	0.021	20.70°C
Top Side	18900/1 880	20M QPSK 50%RB#50	0.910	0.451	0.170	16.050	16.500	1.009	20.70°C
Front Side	18700/1 860	20M QPSK 1RB#50	0.855	0.413	0.000	17.040	17.600	0.973	20.70°C
Front Side	19100/1 900	20M QPSK 1RB#50	0.613	0.322	0.000	17.520	17.600	0.624	20.70°C

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1-g(W/kg)	Liquid Temp.
			1-g	10-g					
SAR1-g >0.8 (W/kg) Repeated									
Front Side	18900/1 880	20M QPSK 1RB#50	1.090	0.507	0.000	17.110	17.600	1.220	20.70°C
Top Side	18900/1 880	20M QPSK 1RB#50	1.070	0.533	-0.090	17.110	17.600	1.198	20.70°C
Front Side	18900/1 880	20M QPSK 50%RB#50	0.898	0.416	0.000	16.050	16.500	0.996	20.70°C
Top Side	18900/1 880	20M QPSK 50%RB#50	0.906	0.450	-0.080	16.050	16.500	1.005	20.70°C

Front Side	18700/1 860	20M QPSK 1RB#50	0.855	0.413	0.000	17.040	17.600	0.973	20.70°C
------------	----------------	--------------------	-------	-------	-------	--------	--------	-------	---------

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2W/kg.

8.2.7 Results overview of LTE Band 4

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1- g(W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	20175/17 32.5	20M QPSK 1RB#50	0.611	0.318	0.000	17.330	17.500	0.635	19.70°C
Back Side	20175/17 32.5	20M QPSK 1RB#50	0.633	0.281	-0.120	17.330	17.500	0.658	19.70°C
Left Side	20175/17 32.5	20M QPSK 1RB#50	0.012	0.007	0.040	17.330	17.500	0.012	19.70°C
Top Side	20175/17 32.5	20M QPSK 1RB#50	0.450	0.239	0.040	17.330	17.500	0.468	19.70°C
Front Side	20175/17 32.5	20M QPSK 50%RB#25	0.388	0.206	0.000	16.320	17.500	0.509	19.70°C
Back Side	20175/17 32.5	20M QPSK 50%RB#25	0.521	0.233	-0.110	16.320	17.500	0.684	19.70°C
Left Side	20175/17 32.5	20M QPSK 50%RB#25	0.010	0.005	-0.200	16.320	17.500	0.012	19.70°C
Top Side	20175/17 32.5	20M QPSK 50%RB#25	0.360	0.191	0.110	16.320	17.500	0.472	19.70°C
Back Side	20050/17 20	20M QPSK 1RB#50	0.605	0.269	0.020	17.260	17.500	0.639	19.70°C
Back Side	20300/17 45	20M QPSK 1RB#50	0.699	0.313	0.000	17.110	17.500	0.765	19.70°C

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2W/kg.

8.2.8 Results overview of LTE Band 5

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1-g(W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	20525/8 36.5	10M QPSK 1RB#25	0.635	0.353	0.000	24.170	24.500	0.685	20.25°C
Back Side	20525/8 36.5	10M QPSK 1RB#25	0.784	0.510	0.210	24.170	24.500	0.846	20.25°C
Left Side	20525/8 36.5	10M QPSK 1RB#25	0.180	0.128	-0.050	24.170	24.500	0.194	20.25°C
Top Side	20525/8 36.5	10M QPSK 1RB#25	0.332	0.190	-0.010	24.170	24.500	0.358	20.25°C
Front Side	20525/8 36.5	10M QPSK 25%RB#25	0.612	0.342	0.000	23.130	24.500	0.839	20.25°C
Back Side	20525/8 36.5	10M QPSK 25%RB#25	0.748	0.459	0.080	23.130	24.500	1.025	20.25°C
Left Side	20525/8 36.5	10M QPSK 25%RB#25	0.191	0.131	0.000	23.130	24.500	0.262	20.25°C
Top Side	20525/8 36.5	10M QPSK 25%RB#25	0.320	0.193	0.130	23.130	24.500	0.439	20.25°C
Back Side	20450/8 29	10M QPSK 1RB#25	0.786	0.482	-0.030	24.170	24.500	0.848	20.25°C
Back Side	20600/8 44	10M QPSK 1RB#25	0.746	0.454	0.000	24.180	24.500	0.803	20.25°C

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2W/kg.

8.2.9 Results overview of LTE Band 7

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1- g(W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	21100/25 35	20M QPSK 1RB#50	1.180	0.568	0.070	16.150	16.500	1.279	20.72°C
Back Side	21100/25 35	20M QPSK 1RB#50	1.110	0.476	0.140	16.150	16.500	1.203	20.72°C
Left Side	21100/25 35	20M QPSK 1RB#50	0.689	0.238	0.100	16.150	16.500	0.747	20.72°C
Top Side	21100/25 35	20M QPSK 1RB#50	0.598	0.188	0.060	16.150	16.500	0.648	20.72°C
Front Side	21100/25 35	20M QPSK 50%RB#25	0.951	0.460	0.000	16.030	16.500	1.060	20.72°C
Back Side	21100/25 35	20M QPSK 50%RB#25	0.505	0.220	-0.080	16.030	16.500	0.563	20.72°C
Left Side	21100/25 35	20M QPSK 50%RB#25	0.678	0.219	-0.030	16.030	16.500	0.755	20.72°C
Top Side	21100/25 35	20M QPSK 50%RB#25	0.600	0.191	-0.110	16.030	16.500	0.669	20.72°C
Front Side	20850/25 10	20M QPSK 1RB#50	1.110	0.543	0.000	16.420	16.500	1.131	20.72°C
Front Side	21350/25 60	20M QPSK 1RB#50	0.850	0.415	0.000	16.290	16.500	0.892	20.72°C

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1-g(W/kg)	Liquid Temp.
			1-g	10-g					
SAR1-g >0.8 (W/kg) Repeated									
Front Side	21100/25 35	20M QPSK 1RB#50	1.180	0.573	-0.010	16.150	16.500	1.279	20.72°C
Back Side	21100/25 35	20M QPSK 1RB#50	1.120	0.480	-0.040	16.150	16.500	1.214	20.72°C
Front Side	21100/25 35	20M QPSK 50%RB#25	0.955	0.463	0.000	16.030	16.500	1.064	20.72°C
Front Side	20850/25 10	20M QPSK 1RB#50	1.120	0.544	0.080	16.420	16.500	1.141	20.72°C

Front Side	21350/25 60	20M QPSK 1RB#50	1.030	0.498	0.000	16.290	16.500	1.081	20.72°C
------------	----------------	--------------------	-------	-------	-------	--------	--------	-------	---------

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2W/kg.

8.2.10 Results overview of LTE Band 12

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1- g(W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	23095/70 7.5	10M QPSK 1RB#25	0.834	0.511	0.100	23.910	24.000	0.851	20.88°C
Back Side	23095/70 7.5	10M QPSK 1RB#25	0.767	0.485	-0.010	23.910	24.000	0.783	20.88°C
Left Side	23095/70 7.5	10M QPSK 1RB#25	0.411	0.189	-0.100	23.910	24.000	0.420	20.88°C
Top Side	23095/70 7.5	10M QPSK 1RB#25	0.389	0.158	0.080	23.910	24.000	0.397	20.88°C
Front Side	23095/70 7.5	10M QPSK 25%RB#25	0.814	0.497	0.050	22.880	24.000	1.053	20.88°C
Back Side	23095/70 7.5	10M QPSK 25%RB#25	0.751	0.474	0.040	22.880	24.000	0.972	20.88°C
Left Side	23095/70 7.5	10M QPSK 25%RB#25	0.408	0.191	-0.130	22.880	24.000	0.528	20.88°C
Top Side	23095/70 7.5	10M QPSK 25%RB#25	0.388	0.157	-0.020	22.880	24.000	0.502	20.88°C
Front Side	23060/70 4	10M QPSK 1RB#25	0.822	0.505	0.080	23.860	24.000	0.849	20.88°C
Front Side	23130/71 1	10M QPSK 1RB#25	0.811	0.503	0.160	23.830	24.000	0.843	20.88°C

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1-g(W/kg)	Liquid Temp.
			1-g	10-g					
SAR1-g >0.8 (W/kg) Repeated									
Front Side	23095/70 7.5	10M QPSK 1RB#25	0.840	0.510	0.030	23.910	24.000	0.858	20.88°C
Front Side	23095/70 7.5	10M QPSK 25%RB#25	0.816	0.498	0.060	22.880	24.000	1.056	20.88°C
Front Side	23060/70 4	10M QPSK 1RB#25	0.823	0.504	-0.160	23.860	24.000	0.850	20.88°C
Front Side	23130/71 1	10M QPSK 1RB#25	0.817	0.506	0.040	23.830	24.000	0.850	20.88°C

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2W/kg.

8.2.11 Results overview of LTE Band 13

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1-g(W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	23230/78 2	10M QPSK 1RB#25	0.986	0.566	0.130	24.390	24.500	1.011	20.88°C
Back Side	23230/78 2	10M QPSK 1RB#25	0.926	0.568	-0.110	24.390	24.500	0.950	20.88°C
Left Side	23230/78 2	10M QPSK 1RB#25	0.328	0.129	0.100	24.390	24.500	0.336	20.88°C
Top Side	23230/78 2	10M QPSK 1RB#25	0.234	0.100	0.010	24.390	24.500	0.240	20.88°C
Front Side	23230/78 2	10M QPSK 25%RB#25	0.958	0.551	0.150	23.240	23.500	1.017	20.88°C
Back Side	23230/78 2	10M QPSK 25%RB#25	0.940	0.574	0.210	23.240	23.500	0.998	20.88°C
Left Side	23230/78 2	10M QPSK 25%RB#25	0.311	0.123	-0.080	23.240	23.500	0.330	20.88°C
Top Side	23230/78 2	10M QPSK 25%RB#25	0.251	0.120	0.070	23.240	23.500	0.266	20.88°C

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1-g(W/kg)	Liquid Temp.
			1-g	10-g					
SAR1-g >0.8 (W/kg) Repeated									
Front Side	23230/78 2	10M QPSK 1RB#25	0.984	0.566	-0.060	24.390	24.500	1.009	20.88°C
Back Side	23230/78 2	10M QPSK 1RB#25	0.924	0.569	-0.050	24.390	24.500	0.948	20.88°C
Front Side	23230/78 2	10M QPSK 25%RB#25	0.996	0.587	0.140	23.240	23.500	1.057	20.88°C
Back Side	23230/78 2	10M QPSK 25%RB#25	0.951	0.584	0.070	23.240	23.500	1.010	20.88°C

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2W/kg.

8.2.12 Results overview of LTE Band 17

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1- g(W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	23790/71 0	10M QPSK 1RB#25	0.824	0.522	0.150	23.730	24.000	0.877	20.88°C
Back Side	23790/71 0	10M QPSK 1RB#25	0.719	0.453	-0.040	23.730	24.000	0.765	20.88°C
Left Side	23790/71 0	10M QPSK 1RB#25	0.198	0.089	0.030	23.730	24.000	0.211	20.88°C
Top Side	23790/71 0	10M QPSK 1RB#25	0.223	0.100	-0.010	23.730	24.000	0.237	20.88°C
Front Side	23790/71 0	10M QPSK 25%RB#25	0.768	0.474	0.160	22.820	24.000	1.008	20.88°C
Back Side	23790/71 0	10M QPSK 25%RB#25	0.697	0.440	0.020	22.820	24.000	0.915	20.88°C
Left Side	23790/71 0	10M QPSK 25%RB#25	0.200	0.093	0.090	22.820	24.000	0.262	20.88°C
Top Side	23790/71 0	10M QPSK 25%RB#25	0.229	0.103	-0.050	22.820	24.000	0.300	20.88°C
Front Side	23780/70 9	10M QPSK 1RB#25	0.763	0.467	0.100	23.830	24.000	0.793	20.88°C
Front Side	23800/71 1	10M QPSK 1RB#25	0.794	0.484	0.100	23.780	24.000	0.835	20.88°C

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1-g(W/kg)	Liquid Temp.
			1-g	10-g					
SAR1-g >0.8 (W/kg) Repeated									
Front Side	23790/71 0	10M QPSK 1RB#25	0.824	0.520	0.130	23.730	24.000	0.877	20.88°C

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2W/kg.

8.2.13 Results overview of LTE Band 25

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1- g(W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	26365/18 82.5	20M QPSK 1RB#50	0.790	0.423	0.000	17.360	17.500	0.816	20.60°C
Back Side	26365/18 82.5	20M QPSK 1RB#50	1.180	0.565	0.030	17.360	17.500	1.219	20.60°C
Left Side	26365/18 82.5	20M QPSK 1RB#50	0.412	0.272	0.010	17.360	17.500	0.425	20.60°C
Top Side	26365/18 82.5	20M QPSK 1RB#50	0.396	0.243	0.001	17.360	17.500	0.409	20.60°C
Front Side	26365/18 82.5	20M QPSK 50%RB#25	0.837	0.445	0.000	16.280	16.500	0.880	20.60°C
Back Side	26365/18 82.5	20M QPSK 50%RB#25	0.934	0.680	-0.040	16.280	16.500	0.983	20.60°C
Left Side	26365/18 82.5	20M QPSK 50%RB#25	0.389	0.260	-0.030	16.280	16.500	0.409	20.60°C
Top Side	26365/18 82.5	20M QPSK 50%RB#25	0.356	0.237	0.200	16.280	16.500	0.374	20.60°C
Back Side	26140/18 60	20M QPSK 1RB#50	0.630	0.336	0.010	17.190	17.500	0.677	20.60°C
Back Side	26590/19 05	20M QPSK 1RB#50	1.170	0.510	0.000	17.470	17.500	1.178	20.60°C

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1-g(W/kg)	Liquid Temp.
			1-g	10-g					
SAR1-g >0.8 (W/kg) Repeated									
Back Side	26365/18 82.5	20M QPSK 1RB#50	1.110	0.791	0.070	17.360	17.500	1.146	20.60°C
Front Side	26365/18 82.5	20M QPSK 50%RB#25	0.929	0.488	-0.230	16.280	16.500	0.977	20.60°C
Back Side	26365/18 82.5	20M QPSK 50%RB#25	0.977	0.725	0.090	16.280	16.500	1.028	20.60°C
Back Side	26590/19 05	20M QPSK 1RB#50	1.180	0.566	0.210	17.470	17.500	1.188	20.60°C

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2W/kg.

8.2.14 Results overview of LTE Band 26

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1- g(W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	26909/83 5.9	15M QPSK 1RB#38	0.720	0.436	0.180	24.180	24.500	0.775	20.25°C
Back Side	26909/83 5.9	15M QPSK 1RB#38	0.877	0.590	0.130	24.180	24.500	0.944	20.25°C
Left Side	26909/83 5.9	15M QPSK 1RB#38	0.389	0.198	0.010	24.180	24.500	0.419	20.25°C
Top Side	26909/83 5.9	15M QPSK 1RB#38	0.401	0.208	-0.010	24.180	24.500	0.432	20.25°C
Front Side	26909/83 5.9	15M QPSK 36%RB#39	0.710	0.418	0.000	23.100	24.500	0.980	20.25°C
Back Side	26909/83 5.9	15M QPSK 36%RB#39	0.861	0.590	0.100	23.100	24.500	1.189	20.25°C
Left Side	26909/83 5.9	15M QPSK 36%RB#39	0.391	0.200	0.080	23.100	24.500	0.540	20.25°C
Top Side	26909/83 5.9	15M QPSK 36%RB#39	0.408	0.203	-0.020	23.100	24.500	0.563	20.25°C
Back Side	26853/83 0.3	15M QPSK 1RB#38	0.911	0.625	0.050	24.150	24.500	0.987	20.25°C
Back Side	26965/84 1.5	15M QPSK 1RB#38	0.886	0.609	0.060	24.220	24.500	0.945	20.25°C

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR1-g(W/kg)	Liquid Temp.
			1-g	10-g					
SAR1-g >0.8 (W/kg) Repeated									
Back Side	26909/83 5.9	15M QPSK 1RB#38	0.909	0.624	0.000	24.180	24.500	0.979	20.25°C
Back Side	26909/83 5.9	15M QPSK 36%RB#39	0.871	0.600	0.110	23.100	24.500	1.202	20.25°C
Back Side	26853/83 0.3	15M QPSK 1RB#38	0.912	0.620	0.110	24.150	24.500	0.989	20.25°C
Back Side	26965/84 1.5	15M QPSK 1RB#38	0.890	0.608	0.080	24.220	24.500	0.949	20.25°C

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2W/kg.

8.2.15 Results overview of WiFi 2.4G

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR _{1-g} (W/kg)	Actual Duty Cycle	Reported SAR 1-g (W/kg)
			1-g	10-g						
Front Side	6/2437	802.11b	0.020	0.010	0.000	11.48	11.50	0.020	97.57%	0.021
Back Side	6/2437	802.11b	0.158	0.057	0.000	11.48	11.50	0.159	97.57%	0.163
Top Side	6/2437	802.11b	0.008	0.003	0.000	11.48	11.50	0.008	97.57%	0.008
Back Side	1/2412	802.11b	0.152	0.056	0.000	11.23	11.50	0.162	99.20%	0.163
Back Side	11/2462	802.11b	0.159	0.059	0.000	11.19	11.50	0.171	98.97%	0.173

Note: Per KDB248227D01:

- 1) SAR is measured for 2.4 GHz 802.11b DSSS using initial test position procedure.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, 802.11g/n OFDM SAR Test is not required.
- 3) Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.
- 4) Scaled SAR = SAR Value * $10^{(0.1 \cdot (\text{Tune up Power} - \text{Conducted Power}))}$
Reported SAR = SAR Value * $10^{(0.1 \cdot (\text{Tune up Power} - \text{Conducted Power}))} / \text{Duty factor} * 100$

8.2.16 Results overview of WiFi 5.2G

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR _{1-g} (W/kg)	Actual Duty Cycle	Reported SAR 1-g (W/kg)
			1-g	10-g						
Front Side	40/5200	802.11a	0.124	0.034	0.000	9.21	9.50	0.133	95.25%	0.139
Back Side	40/5200	802.11a	0.115	0.036	0.000	9.21	9.50	0.123	95.25%	0.129
Right Side	40/5200	802.11a	0.170	0.050	0.000	9.21	9.50	0.182	95.25%	0.191
Top Side	40/5200	802.11a	0.020	0.010	0.000	9.21	9.50	0.021	95.25%	0.022
Right Side	36/5180	802.11a	0.175	0.053	0.000	9.06	9.50	0.194	95.38%	0.203
Right Side	48/5240	802.11a	0.185	0.055	0.000	9.20	9.50	0.198	94.34%	0.210

Note:

1) Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2W/kg.

2) Scaled SAR = SAR Value * $10^{(0.1 \cdot (\text{Tune up Power} - \text{Conducted Power}))}$

Reported SAR = SAR Value * $10^{(0.1 \cdot (\text{Tune up Power} - \text{Conducted Power}))} / \text{Duty factor} * 100$

8.2.17 Results overview of WiFi 5.8G

Test Position With 0mm	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up power (dBm)	Scaled SAR _{1-g} (W/kg)	Actual Duty Cycle	Reported SAR 1-g (W/kg)
			1-g	10-g						
Front Side	165/5825	802.11a	0.130	0.040	0.000	7.21	7.50	0.139	95.43%	0.146
Back Side	165/5825	802.11a	0.118	0.031	0.000	7.21	7.50	0.126	95.43%	0.132
Right Side	165/5825	802.11a	0.172	0.050	0.000	7.21	7.50	0.184	95.43%	0.193
Top Side	165/5825	802.11a	0.030	0.013	0.000	7.21	7.50	0.032	95.43%	0.034
Right Side	149/5745	802.11a	0.170	0.049	0.000	7.00	7.50	0.191	94.55%	0.202
Right Side	157/5785	802.11a	0.180	0.052	0.100	6.90	7.50	0.207	95.29%	0.217

Note:

1) Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot


mode 1-g reported SAR < 1.2W/kg.

2) Scaled SAR = SAR Value * 10^{(0.1*(Tune up Power-Conducted Power))}

Reported SAR = SAR Value * 10^{(0.1*(Tune up Power-Conducted Power))} / Duty factor * 100

8.3 Multiple Transmitter Information

The location of the antennas inside UltraTab-01 is shown as below picture:

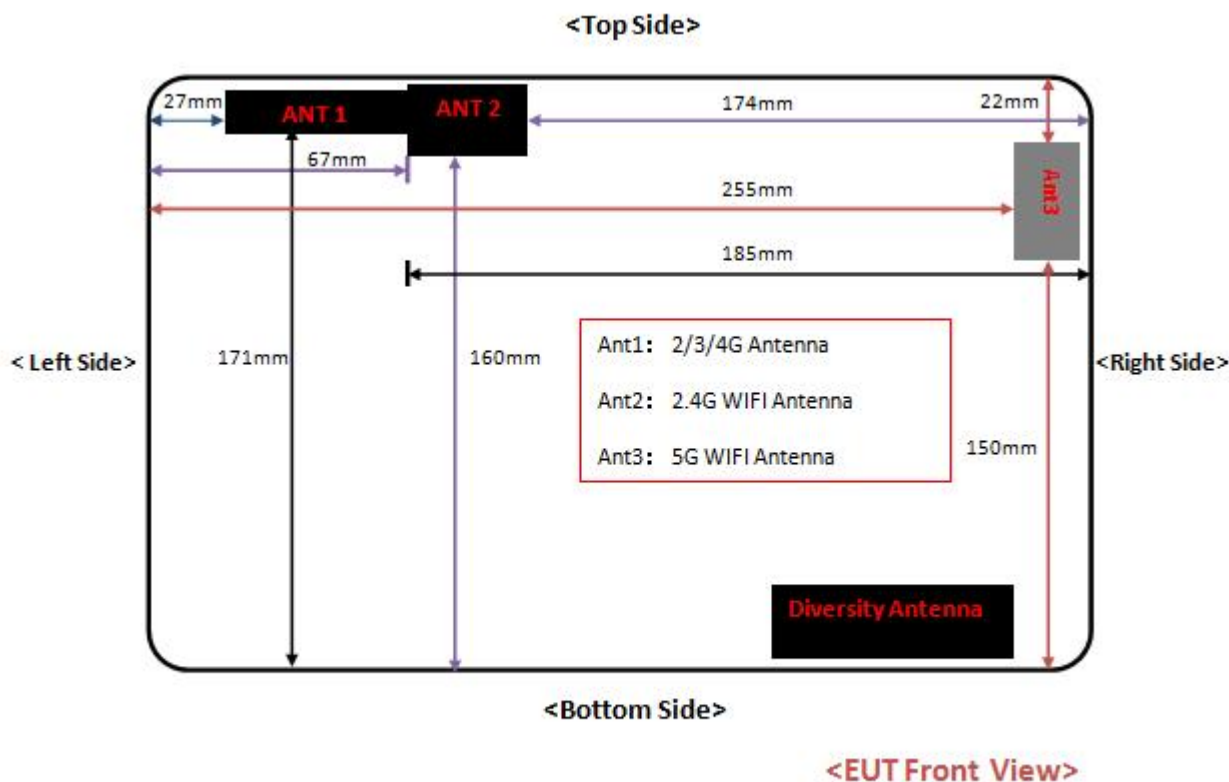

Note:

- 1) Per KDB 941225 D06, particular DUT edges were not required to be evaluated for Hotspot SAR if the antenna-to-edge distance is greater than 2.5cm.
- 2) Per KDB 648474 D04, because the overall diagonal dimension of this device is > 160mm, it is considered a "phablet" device. When hotspot mode applies, product specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2W/kg.

8.4 Stand-alone SAR

Per FCC KDB 447498D01:

- 1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	F (GHz)	Calculation Result	SAR test exclusion Threshold	SAR test exclusion
BT	Body-Worn	1.50	1.41	5.00	2.450	0.44	3.00	Yes

- 2) When the standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)	P_{max} (mW)	Distance(mm)	f(GHz)	X	Estimated SAR(W/Kg)
BT	Body-Worn	1.50	1.41	5.00	2.45	7.50	0.059

Note: 1) maximum possible output power (including tune-up tolerance) declared by manufacturer

2) Held to ear configurations are not applicable to Bluetooth for this device

8.5 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

Simultaneous Tx Combination	Configuration	Body-worn	product specific 10-g SAR
1	GSM + WiFi 2.4G	Yes	Yes
2	UMTS + WiFi 2.4G	Yes	Yes
3	LTE + WiFi 2.4G	Yes	Yes
4	GSM + WiFi 5G	Yes	Yes
5	UMTS + WiFi 5G	Yes	Yes
6	LTE + WiFi 5G	Yes	Yes
7	GSM + BT	Yes	Yes
8	UMTS + BT	Yes	Yes
9	LTE + BT	Yes	Yes

Note:

- 1) The device does not support simultaneous Wi-Fi 2.4G and BT, because the Wi-Fi 2.4G and BT share the same antenna and can't transmit simultaneously.
- 2) Simultaneous Transmission SAR Evaluation is not required for 2.4GHz WLAN and 5GHz WLAN, because the software mechanism have been incorporated to guarantee that the 2.4GHz WLAN and 5GHz WLAN transmitters would not simultaneously operate.
- 3) Held to ear configurations are not applicable to Bluetooth and therefore were not considered for simultaneous transmission.

8.6 SAR Summation Scenario

Test Position		2G/3G/4G Antenna SAR _{max}														WiFi/BT Antenna SAR _{max}	Σ1-g SAR1-g	SPL SP
		GSM 850	GSM 1900	UMTS Band II	UMTS Band IV	UMTS Band V	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 7	LTE Band 12	LTE Band 13	LTE Band 17	LTE Band 25	LTE Band 26	BT-WiFi 2.4G-WiFi 5G		
Body 0mm	Front Side	1.157	1.200	0.822	0.851	1.153	1.220	0.635	0.839	1.279	1.056	1.057	1.008	0.977	0.980	0.146	1.425	NO
	Back Side	1.028	1.028	0.699	1.165	1.113	0.714	0.765	1.025	1.214	0.972	1.010	0.915	1.219	1.202	0.132	1.351	NO
	Left Side	0.026	0.026	0.022	0.004	0.773	0.025	0.012	0.262	0.755	0.528	0.336	0.262	0.425	0.540	/	0.773	NO
	Right Side	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.217	0.217	NO
	Top Side	1.125	1.200	0.810	0.653	0.670	1.198	0.472	0.439	0.669	0.502	0.266	0.300	0.409	0.563	0.034	1.234	NO

Note: Simultaneous Tx Combination of 2G/3G/4G antenna and WiFi 2.4G /WiFi 5G /BT.

8.7 Simultaneous Transmission Conclusion

The above numeral summed SAR results is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01v06.

Annex A: Appendix A: SAR System performance Check Plots

(Please See Appendix A)

Annex B: Appendix B: SAR Measurement results Plots

(Please See Appendix B)

Annex C: Appendix C: Calibration reports

(Please See Appendix C)

Annex D: Appendix D: Photo documentation

(Please See Appendix D)

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full.

*** End of Report ***