



FCC TEST REPORT FCC ID: 2BA5J-MINIPC	
Report Number..... : ZKT-230509L3373E	
Date of Test..... May 09, 2023 to May 30, 2023	
Date of issue..... : May 30, 2023	
Total number of pages..... 65	
Test Result..... : PASS	
Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.	
Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China	
Applicant's name : Shenzhen Hefengyi Electronic Technology Co., Ltd	
Address : 512, Huanan City Global Logistics Center, Pinghu Street, Longgang District, Shenzhen, Guangdong Province, China	
Manufacturer's name : Shanghai Yingzhong Information Technology Co., Ltd	
Address : 2nd Floor, Building 16, No. 68 Zhongchuang Road, Songjiang District, Shanghai	
Test specification:	
Standard..... : FCC CFR Title 47 Part 15 Subpart C Section 15.247	
Test procedure..... : KDB558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013	
Non-standard test method : N/A	
Test Report Form No..... : TRF-EL-110_V0	
Test Report Form(s) Originator..... : ZKT Testing	
Master TRF : Dated: 2020-01-06	
This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report. This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.	
Product name..... : MINI PC	
Trademark : N/A	
FN100	
Model/Type reference..... : FN305, FN60G, FA790, FA780, FA760, FNxxx, FAxxx	
Note: xxx indicates the number 0-9 and the 26 letters a-z	
Ratings..... : Input: 100-240 V~, 50/60 Hz, 1.2 A	
Output: 12.0 V===4.0 A, 48.0 W(Adapter)	



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature).....: Jim Liu

Jim Liu

Reviewer (name + signature).....: Tom Zou

Tom Zou

Approved (name + signature).....: Lake Xie





Table of Contents

	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULT	14
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	18
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 TEST RESULTS	19
5.RADIATED BAND EMISSIONMEASUREMENT	34
5.1 TEST REQUIREMENT:	34
5.2 TEST PROCEDURE	34
5.3 DEVIATION FROM TEST STANDARD	34
5.4 TEST SETUP	35
5.5 EUT OPERATING CONDITIONS	35
5.6 TEST RESULT	36
6.POWER SPECTRAL DENSITY TEST	38
6.1 APPLIED PROCEDURES / LIMIT	38
6.2 TEST PROCEDURE	38
6.3 DEVIATION FROM STANDARD	38
6.4 TEST SETUP	38



6.5 EUT OPERATION CONDITIONS	38
6.6 TEST RESULT	39
7. CHANNEL BANDWIDTH& 99% OCCUPY BANDWIDTH	51
7.1 APPLIED PROCEDURES / LIMIT	51
7.2 TEST PROCEDURE	51
7.3 DEVIATION FROM STANDARD	51
7.4 TEST SETUP	51
7.5 EUT OPERATION CONDITIONS	51
7.6 TEST RESULT	52
8. PEAK OUTPUT POWER TEST	56
8.1 APPLIED PROCEDURES/LIMIT	56
8.2 TEST PROCEDURE	56
8.3 DEVIATION FROM STANDARD	56
8.4 TEST SETUP	56
8.5 EUT OPERATION CONDITIONS	56
8.6 TEST RESULT	57
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	58
9.1 APPLICABLE STANDARD	58
9.2 TEST PROCEDURE	58
9.3 DEVIATION FROM STANDARD	58
9.4 TEST SETUP	58
9.5 EUT OPERATION CONDITIONS	58
9.6 TEST RESULTS	58
10. ANTENNA REQUIREMENT	64
11. TEST SETUP PHOTO	65
12. EUT CONSTRUCTIONAL DETAILS	65



1. VERSION

Report No.	Version	Description	Approved
ZKT-230509L3373E	Rev.01	Initial issue of report	May 30, 2023



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (b)(4)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	Channel Bandwidth& 99% OCB	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	MINI PC
Model No.:	FN100 FN305, FN60G, FA790, FA780, FA760, FNxxx, FAxxx Note: xxx indicates the number 0-9 and the 26 letters a-z
Model Different.:	All the model are of the same circuit and RF module, and the only difference is the model name. The model FN100 is the tested sample.
Hardware Version:	V1.0
Software Version:	V1.0
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20)/802.11n(ax20):11/ 802.11n(HT40)/802.11n(ax40):7
Operation Frequency:	802.11b/802.11g /802.11n(HT20)/802.11n(ax20): 2412-2462MHz 802.11n(HT40)/802.11n(ax40): 2422-2452MHz
Channel separation:	5MHz
Modulation technology:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
RU mode:	Single User mode
Antenna Type:	ANT1: FPC Antenna
Antenna gain:	0.68dBi
Power supply:	Input: 100-240 V~, 50/60 Hz, 1.2 A Output: 12.0 V---4.0 A, 48.0 W(Adapter)



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20) /802.11(ax20)	802.11n(HT40)/802.11(ax40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: EUT use new battery during the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:						
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.						
Mode	802.11b	802.11g	802.11n (HT20)	802.11n (HT40)	802.11n (ax20)	802.11n (ax40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps	8Mbps	16Mbps



3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	MINI PC	N/A	FN100	N/A	EUT
E-2	ADAPTER	N/A	HKA04812040-1C	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	Oct. 28, 2022	Oct. 27, 2023
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSQ	100363	Oct. 28, 2022	Oct. 27, 2023
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Oct. 28, 2022	Oct. 27, 2023
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	Nov. 02, 2022	Nov. 01, 2023
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	Nov. 01, 2022	Oct. 31, 2023
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	Oct. 28, 2022	Oct. 27, 2023
7	Loop Antenna	TESEQ	HLA6121	58357	Nov. 01, 2022	Oct. 31, 2023
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	Nov. 15, 2022	Nov. 14, 2023
9	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	Oct. 28, 2022	Oct. 27, 2023
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	Oct. 28, 2022	Oct. 27, 2023
11	Test Cable	N/A	R-01	N/A	Oct. 28, 2022	Oct. 27, 2023
12	Test Cable	N/A	R-02	N/A	Oct. 28, 2022	Oct. 27, 2023
13	Test Cable	N/A	R-03	N/A	Oct. 28, 2022	Oct. 27, 2023
14	Test Cable	N/A	RF-01	N/A	Oct. 28, 2022	Oct. 27, 2023
15	Test Cable	N/A	RF-02	N/A	Oct. 28, 2022	Oct. 27, 2023
16	Test Cable	N/A	RF-03	N/A	Oct. 28, 2022	Oct. 27, 2023
17	ESG Signal Generator	Agilent	E4421B	N/A	Oct. 21, 2022	Oct. 20, 2023
18	Signal Generator	Agilent	N5182A	N/A	Oct. 21, 2022	Oct. 20, 2023
19	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	Nov. 15, 2022	Nov. 14, 2023
20	Wideband Radio Communication Test	R&S	CMW500	106504	Oct. 28, 2022	Oct. 27, 2023
21	MWRF Power Meter Test system	MW	MW100-RPCB	N/A	Oct. 21, 2022	Oct. 20, 2023
22	D.C. Power Supply	LongWei	TPR-6405D	N/A	Oct. 21, 2022	Oct. 20, 2023
23	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
24	RF Software	MW	MTS8310	V2.0.0.0	\	\
25	Turntable	MF	MF-7802BS	N/A	\	\
26	Antenna tower	MF	MF-7802BS	N/A	\	\



Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Oct. 21, 2022	Oct. 20, 2023
2	LISN	CYBERTEK	EM5040A	E1850400149	Oct. 21, 2022	Oct. 20, 2023
3	Test Cable	N/A	C-01	N/A	Oct. 21, 2022	Oct. 20, 2023
4	Test Cable	N/A	C-02	N/A	Oct. 21, 2022	Oct. 20, 2023
5	Test Cable	N/A	C-03	N/A	Oct. 21, 2022	Oct. 20, 2023
6	EMI Test Receiver	R&S	ESCI3	101393	Oct. 28, 2022	Oct. 27, 2023
7	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	\	\



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

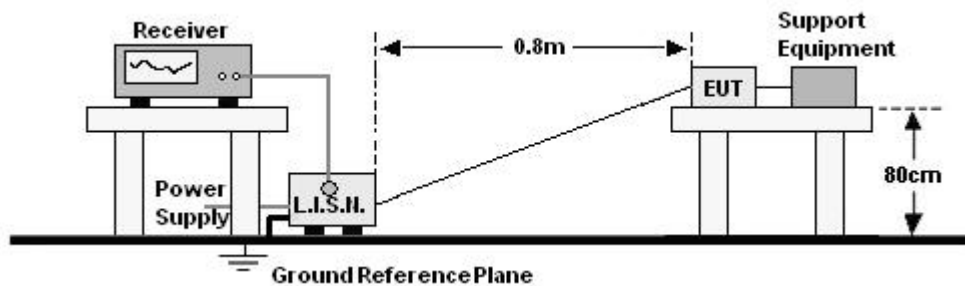


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 test result

Temperature:	25.1℃	Relative Humidity :	50%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz		

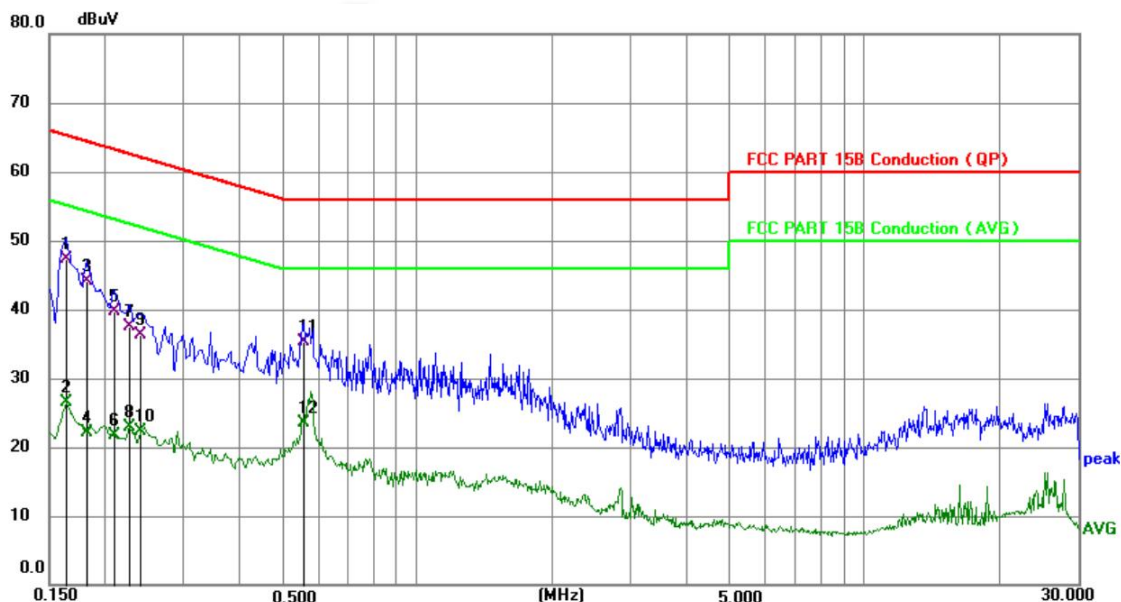


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1 *	0.1635	37.44	9.90	47.34	65.28	-17.94	QP	P
2	0.1635	16.62	9.90	26.52	55.28	-28.76	AVG	P
3	0.1814	34.27	9.90	44.17	64.42	-20.25	QP	P
4	0.1814	12.21	9.90	22.11	54.42	-32.31	AVG	P
5	0.2084	29.82	9.91	39.73	63.27	-23.54	QP	P
6	0.2084	11.84	9.91	21.75	53.27	-31.52	AVG	P
7	0.2265	27.54	9.92	37.46	62.58	-25.12	QP	P
8	0.2265	12.95	9.92	22.87	52.58	-29.71	AVG	P
9	0.2400	26.43	9.93	36.36	62.10	-25.74	QP	P
10	0.2400	12.35	9.93	22.28	52.10	-29.82	AVG	P
11	0.5550	25.33	10.02	35.35	56.00	-20.65	QP	P
12	0.5550	13.52	10.02	23.54	46.00	-22.46	AVG	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



Temperature:	25.1℃	Relative Humidity :	50%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz		

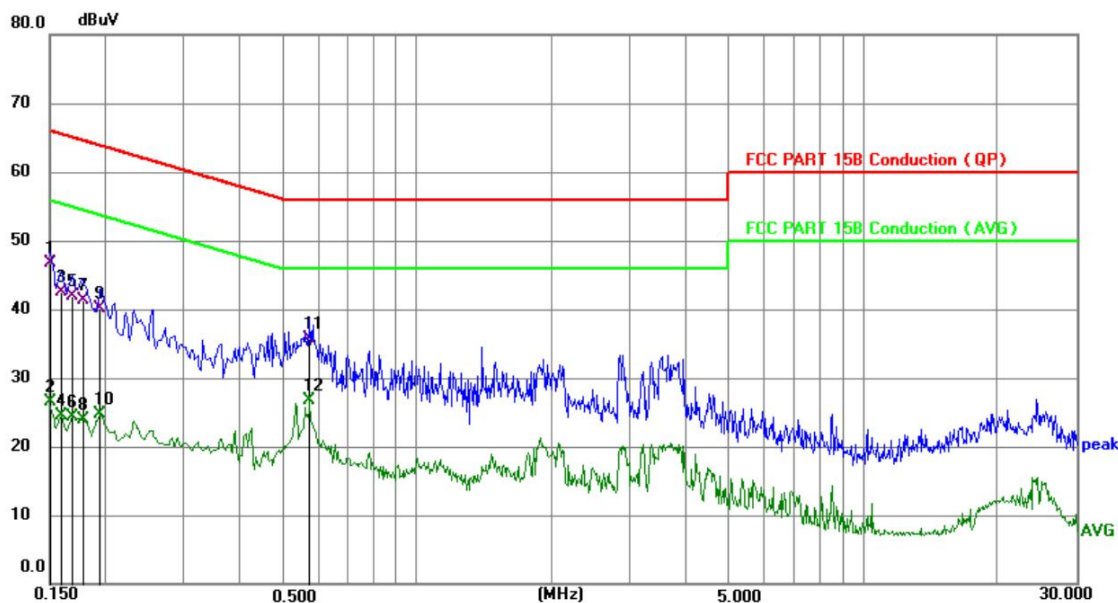

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1 *	0.1500	36.87	9.89	46.76	66.00	-19.24	QP	P
2	0.1500	16.61	9.89	26.50	56.00	-29.50	AVG	P
3	0.1590	32.63	9.89	42.52	65.52	-23.00	QP	P
4	0.1590	14.54	9.89	24.43	55.52	-31.09	AVG	P
5	0.1680	31.93	9.90	41.83	65.06	-23.23	QP	P
6	0.1680	14.37	9.90	24.27	55.06	-30.79	AVG	P
7	0.1770	31.44	9.90	41.34	64.63	-23.29	QP	P
8	0.1770	14.02	9.90	23.92	54.63	-30.71	AVG	P
9	0.1949	30.26	9.91	40.17	63.83	-23.66	QP	P
10	0.1949	14.84	9.91	24.75	53.83	-29.08	AVG	P
11	0.5730	25.73	10.03	35.76	56.00	-20.24	QP	P
12	0.5730	16.65	10.03	26.68	46.00	-19.32	AVG	P

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Mesurement Level = Reading level + Correct Factor



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.



- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

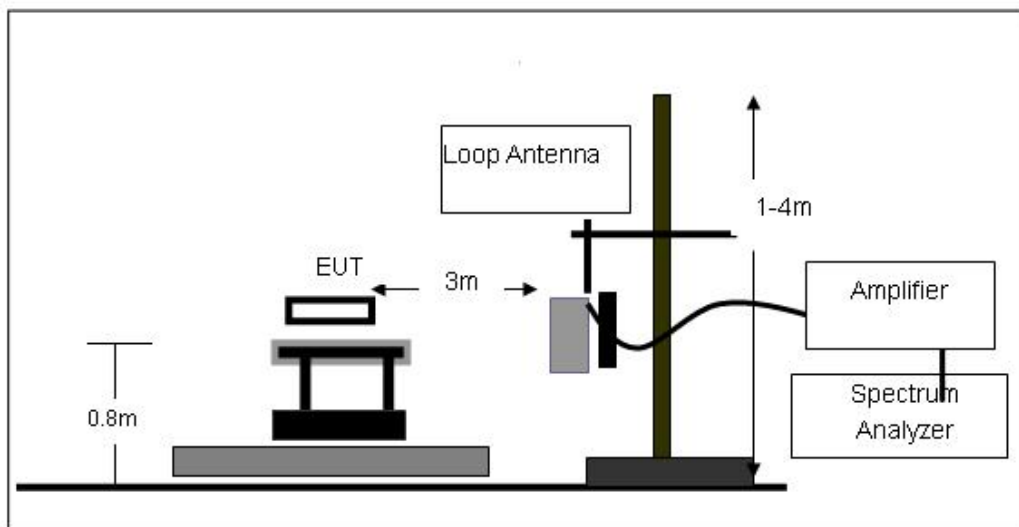




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

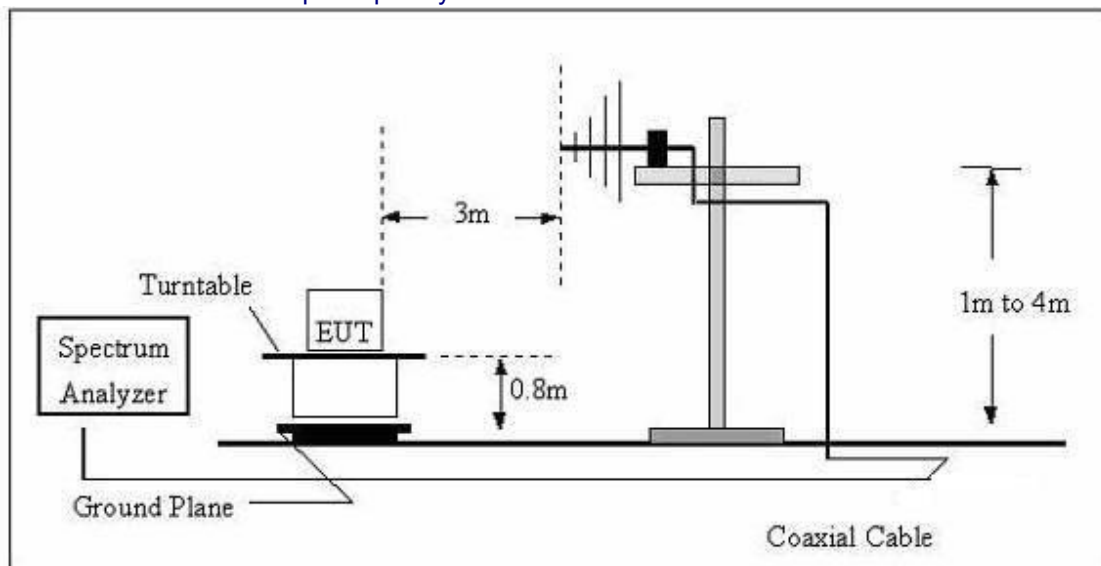

(C) Radiated Emission Test-Up Frequency Above 1GHz

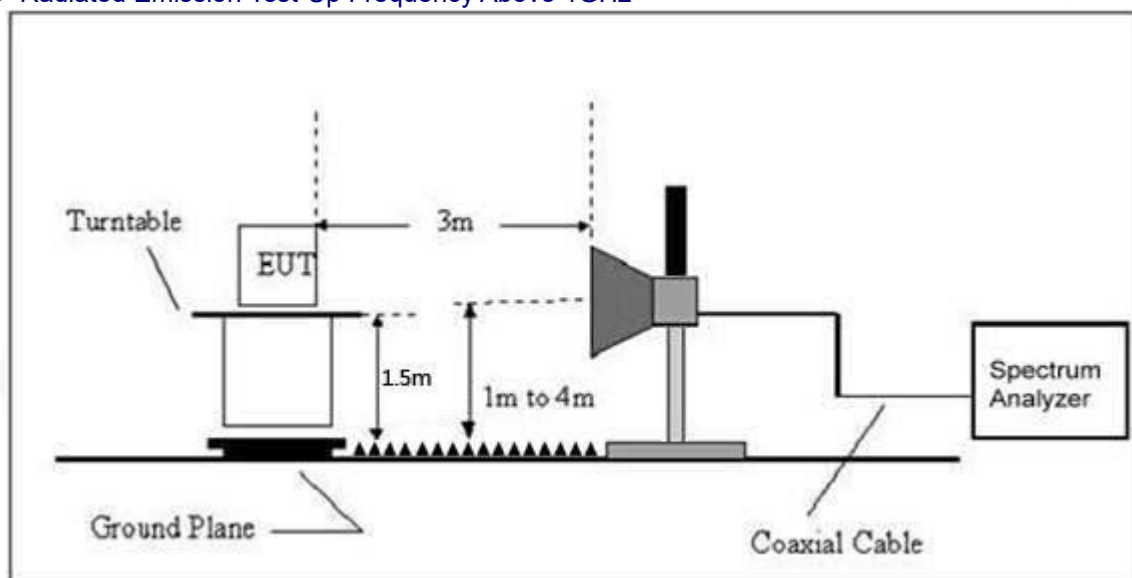

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.




Between 30MHz – 1GHz

Temperature :	25.1℃	Relative Humidity :	50%
Pressure :	101kPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		

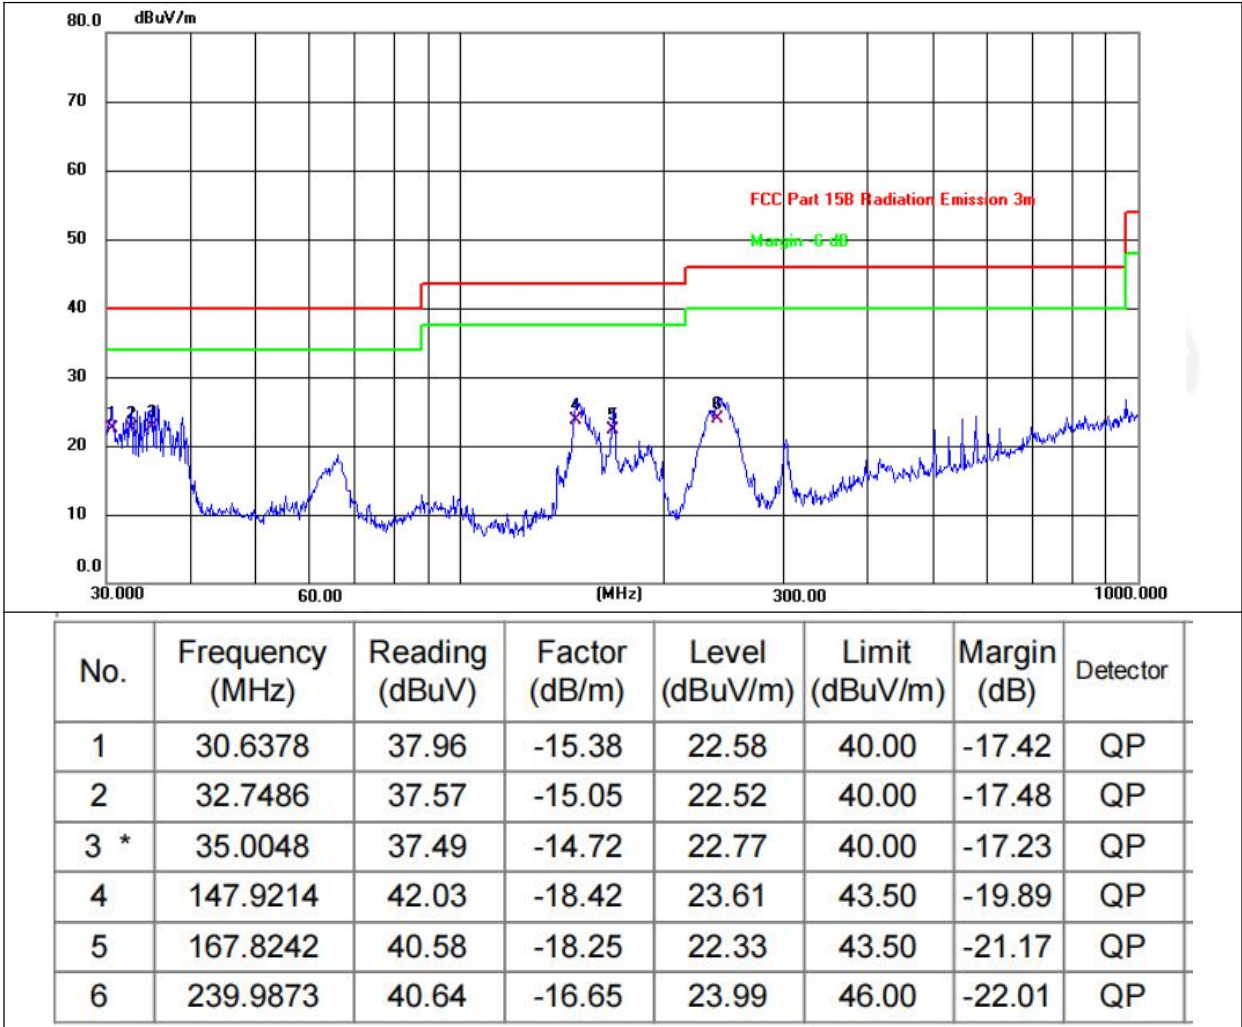



Temperature :	25.1℃	Relative Humidity :	50%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		

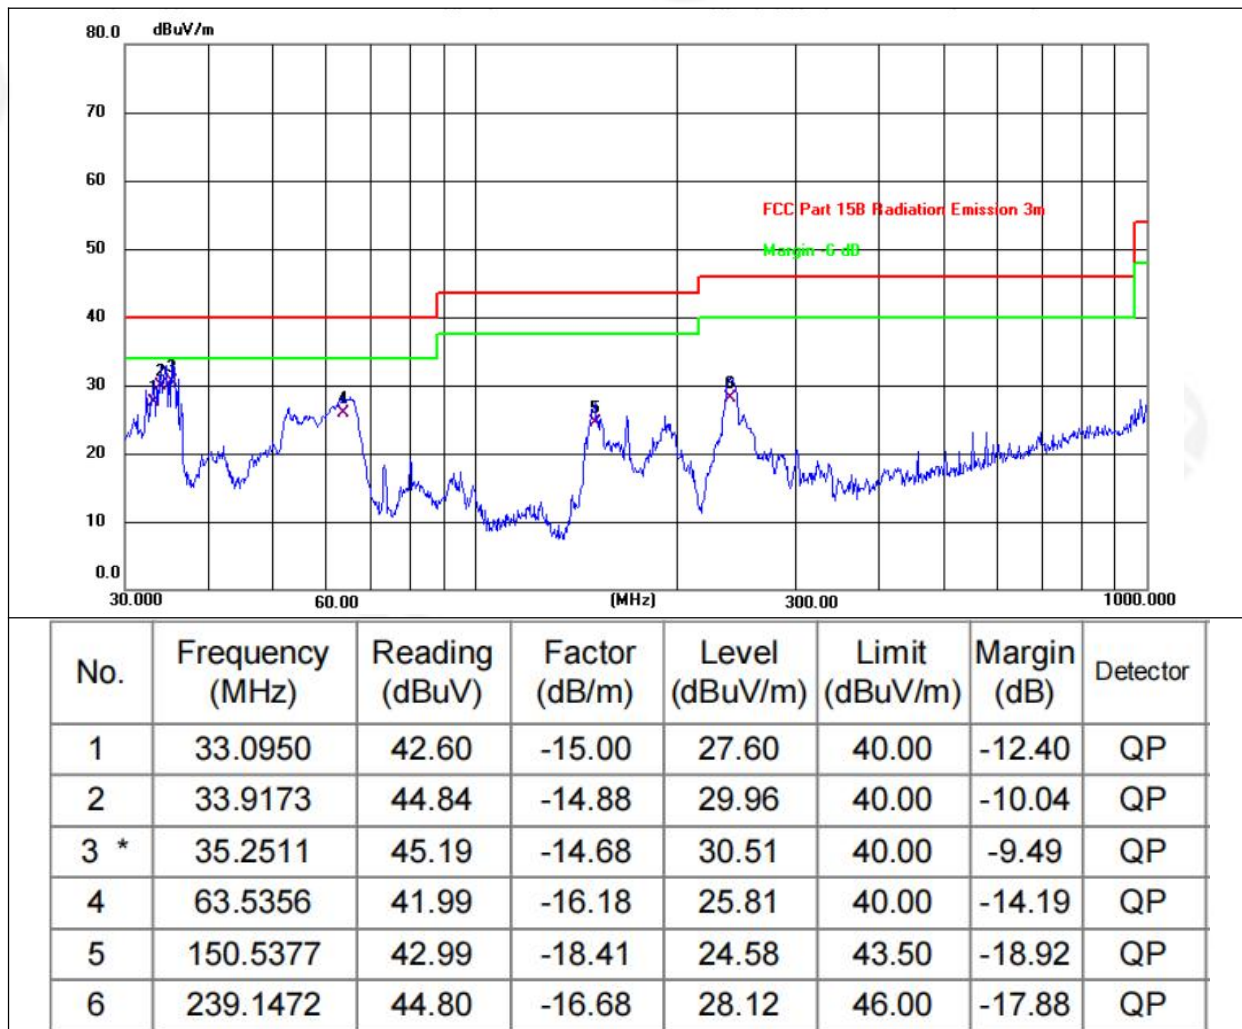

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11b mode (Low Channel:2412MHz).



1GHz~25GHz

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	60.81	30.55	5.77	24.66	60.69	74	-13.31	PK
V	4824.00	43.58	30.55	5.77	24.66	43.46	54	-10.54	AV
V	7236.00	54.16	30.33	6.32	24.55	54.7	74	-19.3	PK
V	7236.00	37.11	30.33	6.32	24.55	37.65	54	-16.35	AV
V	9648.00	51.28	30.85	7.45	24.69	52.57	74	-21.43	PK
V	9648.00	35.06	30.85	7.45	24.69	36.35	54	-17.65	AV
V	12060.00	56.29	31.02	8.99	25.57	59.83	74	-14.17	PK
V	12060.00	38.62	31.02	8.99	25.57	42.16	54	-11.84	AV
H	4824.00	54.04	30.55	5.77	24.66	53.92	74	-20.08	PK
H	4824.00	37.24	30.55	5.77	24.66	37.12	54	-16.88	AV
H	7236.00	51.70	30.33	6.32	24.55	52.24	74	-21.76	PK
H	7236.00	35.98	30.33	6.32	24.55	36.52	54	-17.48	AV
H	9648.00	49.21	30.85	7.45	24.69	50.5	74	-23.5	PK
H	9648.00	35.46	30.85	7.45	24.69	36.75	54	-17.25	AV
H	12060.00	47.22	31.02	8.99	25.57	50.76	74	-23.24	PK
H	12060.00	33.18	31.02	8.99	25.57	36.72	54	-17.28	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	60.86	30.55	5.77	24.66	60.74	74	-13.26	PK
V	4874.00	42.72	30.55	5.77	24.66	42.6	54	-11.4	AV
V	7311.00	53.10	30.33	6.32	24.55	53.64	74	-20.36	PK
V	7311.00	37.37	30.33	6.32	24.55	37.91	54	-16.09	AV
V	9748.00	51.79	30.85	7.45	24.69	53.08	74	-20.92	PK
V	9748.00	35.13	30.85	7.45	24.69	36.42	54	-17.58	AV
V	12185.00	56.26	31.02	8.99	25.57	59.8	74	-14.2	PK
V	12185.00	38.21	31.02	8.99	25.57	41.75	54	-12.25	AV
H	4874.00	53.96	30.55	5.77	24.66	53.84	74	-20.16	PK
H	4874.00	37.42	30.55	5.77	24.66	37.3	54	-16.7	AV
H	7311.00	51.28	30.33	6.32	24.55	51.82	74	-22.18	PK
H	7311.00	35.71	30.33	6.32	24.55	36.25	54	-17.75	AV
H	9748.00	49.14	30.85	7.45	24.69	50.43	74	-23.57	PK
H	9748.00	35.24	30.85	7.45	24.69	36.53	54	-17.47	AV
H	12185.00	47.59	31.02	8.99	25.57	51.13	74	-22.87	PK
H	12185.00	33.59	31.02	8.99	25.57	37.13	54	-16.87	AV



Page 20 of 60

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	62.27	30.55	5.77	24.66	62.15	74	-11.85	PK
V	4924.00	43.50	30.55	5.77	24.66	43.38	54	-10.62	AV
V	7386.00	53.84	30.33	6.32	24.55	54.38	74	-19.62	PK
V	7386.00	37.43	30.33	6.32	24.55	37.97	54	-16.03	AV
V	9848.00	51.28	30.85	7.45	24.69	52.57	74	-21.43	PK
V	9848.00	35.71	30.85	7.45	24.69	37.00	54	-17.00	AV
V	12310.00	56.60	31.02	8.99	25.57	60.14	74	-13.86	PK
V	12310.00	38.58	31.02	8.99	25.57	42.12	54	-11.88	AV
H	4924.00	53.49	30.55	5.77	24.66	53.37	74	-20.63	PK
H	4924.00	37.28	30.55	5.77	24.66	37.16	54	-16.84	AV
H	7386.00	51.04	30.33	6.32	24.55	51.58	74	-22.42	PK
H	7386.00	36.26	30.33	6.32	24.55	36.8	54	-17.2	AV
H	9848.00	49.67	30.85	7.45	24.69	50.96	74	-23.04	PK
H	9848.00	34.50	30.85	7.45	24.69	35.79	54	-18.21	AV
H	12310.00	47.53	31.02	8.99	25.57	51.07	74	-22.93	PK
H	12310.00	33.14	31.02	8.99	25.57	36.68	54	-17.32	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	60.65	30.55	5.77	24.66	60.53	74	-13.47	PK
V	4824.00	43.02	30.55	5.77	24.66	42.9	54	-11.1	AV
V	7236.00	53.35	30.33	6.32	24.55	53.89	74	-20.11	PK
V	7236.00	37.07	30.33	6.32	24.55	37.61	54	-16.39	AV
V	9648.00	52.10	30.85	7.45	24.69	53.39	74	-20.61	PK
V	9648.00	35.17	30.85	7.45	24.69	36.46	54	-17.54	AV
V	12060.00	56.44	31.02	8.99	25.57	59.98	74	-14.02	PK
V	12060.00	38.55	31.02	8.99	25.57	42.09	54	-11.91	AV
H	4824.00	54.25	30.55	5.77	24.66	54.13	74	-19.87	PK
H	4824.00	37.01	30.55	5.77	24.66	36.89	54	-17.11	AV
H	7236.00	51.53	30.33	6.32	24.55	52.07	74	-21.93	PK
H	7236.00	36.22	30.33	6.32	24.55	36.76	54	-17.24	AV
H	9648.00	49.34	30.85	7.45	24.69	50.63	74	-23.37	PK
H	9648.00	35.52	30.85	7.45	24.69	36.81	54	-17.19	AV
H	12060.00	47.20	31.02	8.99	25.57	50.74	74	-23.26	PK
H	12060.00	33.19	31.02	8.99	25.57	36.73	54	-17.27	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	60.54	30.55	5.77	24.66	60.42	74	-13.58	PK
V	4874.00	43.38	30.55	5.77	24.66	43.26	54	-10.74	AV
V	7311.00	53.48	30.33	6.32	24.55	54.02	74	-19.98	PK
V	7311.00	36.86	30.33	6.32	24.55	37.4	54	-16.6	AV
V	9748.00	52.04	30.85	7.45	24.69	53.33	74	-20.67	PK
V	9748.00	34.93	30.85	7.45	24.69	36.22	54	-17.78	AV
V	12185.00	55.86	31.02	8.99	25.57	59.4	74	-14.6	PK
V	12185.00	38.93	31.02	8.99	25.57	42.47	54	-11.53	AV
H	4874.00	54.63	30.55	5.77	24.66	54.51	74	-19.49	PK
H	4874.00	37.45	30.55	5.77	24.66	37.33	54	-16.67	AV
H	7311.00	51.00	30.33	6.32	24.55	51.54	74	-22.46	PK
H	7311.00	36.36	30.33	6.32	24.55	36.9	54	-17.1	AV
H	9748.00	49.26	30.85	7.45	24.69	50.55	74	-23.45	PK
H	9748.00	35.53	30.85	7.45	24.69	36.82	54	-17.18	AV
H	12185.00	46.94	31.02	8.99	25.57	50.48	74	-23.52	PK
H	12185.00	33.03	31.02	8.99	25.57	36.57	54	-17.43	AV



Page 20 of 60

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	61.79	30.55	5.77	24.66	61.67	74	-12.33	PK
V	4924.00	43.38	30.55	5.77	24.66	43.26	54	-10.74	AV
V	7386.00	53.43	30.33	6.32	24.55	53.97	74	-20.03	PK
V	7386.00	37.26	30.33	6.32	24.55	37.8	54	-16.2	AV
V	9848.00	51.72	30.85	7.45	24.69	53.01	74	-20.99	PK
V	9848.00	34.85	30.85	7.45	24.69	36.14	54	-17.86	AV
V	12310.00	55.98	31.02	8.99	25.57	59.52	74	-14.48	PK
V	12310.00	38.27	31.02	8.99	25.57	41.81	54	-12.19	AV
H	4924.00	53.74	30.55	5.77	24.66	53.62	74	-20.38	PK
H	4924.00	37.36	30.55	5.77	24.66	37.24	54	-16.76	AV
H	7386.00	50.80	30.33	6.32	24.55	51.34	74	-22.66	PK
H	7386.00	35.72	30.33	6.32	24.55	36.26	54	-17.74	AV
H	9848.00	48.88	30.85	7.45	24.69	50.17	74	-23.83	PK
H	9848.00	34.86	30.85	7.45	24.69	36.15	54	-17.85	AV
H	12310.00	47.53	31.02	8.99	25.57	51.07	74	-22.93	PK
H	12310.00	32.69	31.02	8.99	25.57	36.23	54	-17.77	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	60.24	30.55	5.77	24.66	60.12	74	-13.88	PK
V	4824.00	42.90	30.55	5.77	24.66	42.78	54	-11.22	AV
V	7236.00	53.30	30.33	6.32	24.55	53.84	74	-20.16	PK
V	7236.00	37.32	30.33	6.32	24.55	37.86	54	-16.14	AV
V	9648.00	51.87	30.85	7.45	24.69	53.16	74	-20.84	PK
V	9648.00	35.42	30.85	7.45	24.69	36.71	54	-17.29	AV
V	12060.00	56.60	31.02	8.99	25.57	60.14	74	-13.86	PK
V	12060.00	38.15	31.02	8.99	25.57	41.69	54	-12.31	AV
H	4824.00	53.69	30.55	5.77	24.66	53.57	74	-20.43	PK
H	4824.00	37.01	30.55	5.77	24.66	36.89	54	-17.11	AV
H	7236.00	51.66	30.33	6.32	24.55	52.2	74	-21.8	PK
H	7236.00	36.14	30.33	6.32	24.55	36.68	54	-17.32	AV
H	9648.00	49.34	30.85	7.45	24.69	50.63	74	-23.37	PK
H	9648.00	34.79	30.85	7.45	24.69	36.08	54	-17.92	AV
H	12060.00	47.41	31.02	8.99	25.57	50.95	74	-23.05	PK
H	12060.00	32.58	31.02	8.99	25.57	36.12	54	-17.88	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	60.02	30.55	5.77	24.66	59.9	74	-14.1	PK
V	4874.00	42.83	30.55	5.77	24.66	42.71	54	-11.29	AV
V	7311.00	53.43	30.33	6.32	24.55	53.97	74	-20.03	PK
V	7311.00	37.01	30.33	6.32	24.55	37.55	54	-16.45	AV
V	9748.00	51.15	30.85	7.45	24.69	52.44	74	-21.56	PK
V	9748.00	35.42	30.85	7.45	24.69	36.71	54	-17.29	AV
V	12185.00	56.40	31.02	8.99	25.57	59.94	74	-14.06	PK
V	12185.00	38.45	31.02	8.99	25.57	41.99	54	-12.01	AV
H	4874.00	54.34	30.55	5.77	24.66	54.22	74	-19.78	PK
H	4874.00	37.56	30.55	5.77	24.66	37.44	54	-16.56	AV
H	7311.00	51.24	30.33	6.32	24.55	51.78	74	-22.22	PK
H	7311.00	36.28	30.33	6.32	24.55	36.82	54	-17.18	AV
H	9748.00	48.55	30.85	7.45	24.69	49.84	74	-24.16	PK
H	9748.00	34.98	30.85	7.45	24.69	36.27	54	-17.73	AV
H	12185.00	46.95	31.02	8.99	25.57	50.49	74	-23.51	PK
H	12185.00	33.20	31.02	8.99	25.57	36.74	54	-17.26	AV



Page 27 of 60

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	61.70	30.55	5.77	24.66	61.58	74	-12.42	PK
V	4924.00	42.98	30.55	5.77	24.66	42.86	54	-11.14	AV
V	7386.00	53.59	30.33	6.32	24.55	54.13	74	-19.87	PK
V	7386.00	38.05	30.33	6.32	24.55	38.59	54	-15.41	AV
V	9848.00	51.35	30.85	7.45	24.69	52.64	74	-21.36	PK
V	9848.00	34.95	30.85	7.45	24.69	36.24	54	-17.76	AV
V	12310.00	56.60	31.02	8.99	25.57	60.14	74	-13.86	PK
V	12310.00	38.58	31.02	8.99	25.57	42.12	54	-11.88	AV
H	4924.00	53.83	30.55	5.77	24.66	53.71	74	-20.29	PK
H	4924.00	37.13	30.55	5.77	24.66	37.01	54	-16.99	AV
H	7386.00	51.11	30.33	6.32	24.55	51.65	74	-22.35	PK
H	7386.00	36.60	30.33	6.32	24.55	37.14	54	-16.86	AV
H	9848.00	49.39	30.85	7.45	24.69	50.68	74	-23.32	PK
H	9848.00	34.78	30.85	7.45	24.69	36.07	54	-17.93	AV
H	12310.00	47.62	31.02	8.99	25.57	51.16	74	-22.84	PK
H	12310.00	32.65	31.02	8.99	25.57	36.19	54	-17.81	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n40

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2422MHz									
V	4844	60.33	30.55	5.77	24.66	60.21	74	-13.79	PK
V	4844	43.16	30.55	5.77	24.66	43.04	54	-10.96	AV
V	7266	53.12	30.33	6.32	24.55	53.66	74	-20.34	PK
V	7266	37.61	30.33	6.32	24.55	38.15	54	-15.85	AV
V	9688	51.92	30.85	7.45	24.69	53.21	74	-20.79	PK
V	9688	35.53	30.85	7.45	24.69	36.82	54	-17.18	AV
V	12110	56.93	31.02	8.99	25.57	60.47	74	-13.53	PK
V	12110	38.29	31.02	8.99	25.57	41.83	54	-12.17	AV
H	4824.00	53.82	30.55	5.77	24.66	53.7	74	-20.3	PK
H	4824.00	37.19	30.55	5.77	24.66	37.07	54	-16.93	AV
H	7236.00	51.73	30.33	6.32	24.55	52.27	74	-21.73	PK
H	7236.00	36.17	30.33	6.32	24.55	36.71	54	-17.29	AV
H	9648.00	49.36	30.85	7.45	24.69	50.65	74	-23.35	PK
H	9648.00	34.92	30.85	7.45	24.69	36.21	54	-17.79	AV
H	12060.00	47.29	31.02	8.99	25.57	50.83	74	-23.17	PK
H	12060.00	32.62	31.02	8.99	25.57	36.16	54	-17.84	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	60.22	30.55	5.77	24.66	60.10	74	-13.90	PK
V	4874.00	43.14	30.55	5.77	24.66	43.02	54	-10.98	AV
V	7311.00	53.56	30.33	6.32	24.55	54.10	74	-19.90	PK
V	7311.00	37.08	30.33	6.32	24.55	37.62	54	-16.38	AV
V	9748.00	51.04	30.85	7.45	24.69	52.33	74	-21.67	PK
V	9748.00	35.35	30.85	7.45	24.69	36.64	54	-17.36	AV
V	12185.00	56.46	31.02	8.99	25.57	60.00	74	-14.00	PK
V	12185.00	38.88	31.02	8.99	25.57	42.42	54	-11.58	AV
H	4874.00	54.23	30.55	5.77	24.66	54.11	74	-19.89	PK
H	4874.00	37.69	30.55	5.77	24.66	37.57	54	-16.43	AV
H	7311.00	51.42	30.33	6.32	24.55	51.96	74	-22.04	PK
H	7311.00	36.30	30.33	6.32	24.55	36.84	54	-17.16	AV
H	9748.00	48.73	30.85	7.45	24.69	50.02	74	-23.98	PK
H	9748.00	34.89	30.85	7.45	24.69	36.18	54	-17.82	AV
H	12185.00	46.83	31.02	8.99	25.57	50.37	74	-23.63	PK
H	12185.00	33.24	31.02	8.99	25.57	36.78	54	-17.22	AV



Page 25 of 60

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2452MHz									
V	4904.00	61.76	30.55	5.77	24.66	61.64	74	-12.36	PK
V	4904.00	42.88	30.55	5.77	24.66	42.76	54	-11.24	AV
V	7356.00	53.45	30.33	6.32	24.55	53.99	74	-20.01	PK
V	7356.00	38.10	30.33	6.32	24.55	38.64	54	-15.36	AV
V	9808.00	51.51	30.85	7.45	24.69	52.8	74	-21.2	PK
V	9808.00	34.87	30.85	7.45	24.69	36.16	54	-17.84	AV
V	12260.00	56.72	31.02	8.99	25.57	60.26	74	-13.74	PK
V	12260.00	38.65	31.02	8.99	25.57	42.19	54	-11.81	AV
H	4904.00	53.96	30.55	5.77	24.66	53.84	74	-20.16	PK
H	4904.00	37.30	30.55	5.77	24.66	37.18	54	-16.82	AV
H	7356.00	51.28	30.33	6.32	24.55	51.82	74	-22.18	PK
H	7356.00	36.90	30.33	6.32	24.55	37.44	54	-16.56	AV
H	9808.00	49.47	30.85	7.45	24.69	50.76	74	-23.24	PK
H	9808.00	34.83	30.85	7.45	24.69	36.12	54	-17.88	AV
H	12260.00	47.57	31.02	8.99	25.57	51.11	74	-22.89	PK
H	12260.00	32.72	31.02	8.99	25.57	36.26	54	-17.74	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ax20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	60.43	30.55	5.77	24.66	60.31	74	-13.69	PK
V	4824.00	42.92	30.55	5.77	24.66	42.8	54	-11.2	AV
V	7236.00	53.44	30.33	6.32	24.55	53.98	74	-20.02	PK
V	7236.00	37.34	30.33	6.32	24.55	37.88	54	-16.12	AV
V	9648.00	51.95	30.85	7.45	24.69	53.24	74	-20.76	PK
V	9648.00	35.50	30.85	7.45	24.69	36.79	54	-17.21	AV
V	12060.00	56.77	31.02	8.99	25.57	60.31	74	-13.69	PK
V	12060.00	38.20	31.02	8.99	25.57	41.74	54	-12.26	AV
H	4824.00	53.87	30.55	5.77	24.66	53.75	74	-20.25	PK
H	4824.00	37.05	30.55	5.77	24.66	36.93	54	-17.07	AV
H	7236.00	51.82	30.33	6.32	24.55	52.36	74	-21.64	PK
H	7236.00	36.24	30.33	6.32	24.55	36.78	54	-17.22	AV
H	9648.00	49.51	30.85	7.45	24.69	50.8	74	-23.2	PK
H	9648.00	34.82	30.85	7.45	24.69	36.11	54	-17.89	AV
H	12060.00	47.56	31.02	8.99	25.57	51.1	74	-22.9	PK
H	12060.00	32.70	31.02	8.99	25.57	36.24	54	-17.76	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	60.12	30.55	5.77	24.66	60	74	-14	PK
V	4874.00	42.95	30.55	5.77	24.66	42.83	54	-11.17	AV
V	7311.00	53.44	30.33	6.32	24.55	53.98	74	-20.02	PK
V	7311.00	37.06	30.33	6.32	24.55	37.6	54	-16.4	AV
V	9748.00	51.15	30.85	7.45	24.69	52.44	74	-21.56	PK
V	9748.00	35.48	30.85	7.45	24.69	36.77	54	-17.23	AV
V	12185.00	56.40	31.02	8.99	25.57	59.94	74	-14.06	PK
V	12185.00	38.63	31.02	8.99	25.57	42.17	54	-11.83	AV
H	4874.00	54.48	30.55	5.77	24.66	54.36	74	-19.64	PK
H	4874.00	37.71	30.55	5.77	24.66	37.59	54	-16.41	AV
H	7311.00	51.34	30.33	6.32	24.55	51.88	74	-22.12	PK
H	7311.00	36.37	30.33	6.32	24.55	36.91	54	-17.09	AV
H	9748.00	48.67	30.85	7.45	24.69	49.96	74	-24.04	PK
H	9748.00	35.11	30.85	7.45	24.69	36.4	54	-17.6	AV
H	12185.00	47.02	31.02	8.99	25.57	50.56	74	-23.44	PK
H	12185.00	33.28	31.02	8.99	25.57	36.82	54	-17.18	AV



Page 3 of 6

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	61.79	30.55	5.77	24.66	61.67	74	-12.33	PK
V	4924.00	42.99	30.55	5.77	24.66	42.87	54	-11.13	AV
V	7386.00	53.73	30.33	6.32	24.55	54.27	74	-19.73	PK
V	7386.00	38.25	30.33	6.32	24.55	38.79	54	-15.21	AV
V	9848.00	51.40	30.85	7.45	24.69	52.69	74	-21.31	PK
V	9848.00	35.03	30.85	7.45	24.69	36.32	54	-17.68	AV
V	12310.00	56.72	31.02	8.99	25.57	60.26	74	-13.74	PK
V	12310.00	38.62	31.02	8.99	25.57	42.16	54	-11.84	AV
H	4924.00	53.89	30.55	5.77	24.66	53.77	74	-20.23	PK
H	4924.00	37.17	30.55	5.77	24.66	37.05	54	-16.95	AV
H	7386.00	51.13	30.33	6.32	24.55	51.67	74	-22.33	PK
H	7386.00	36.73	30.33	6.32	24.55	37.27	54	-16.73	AV
H	9848.00	49.57	30.85	7.45	24.69	50.86	74	-23.14	PK
H	9848.00	34.92	30.85	7.45	24.69	36.21	54	-17.79	AV
H	12310.00	47.72	31.02	8.99	25.57	51.26	74	-22.74	PK
H	12310.00	32.66	31.02	8.99	25.57	36.2	54	-17.8	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ax40

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2422MHz									
V	4844	60.35	30.55	5.77	24.66	60.23	74	-13.77	PK
V	4844	43.35	30.55	5.77	24.66	43.23	54	-10.77	AV
V	7266	53.30	30.33	6.32	24.55	53.84	74	-20.16	PK
V	7266	37.62	30.33	6.32	24.55	38.16	54	-15.84	AV
V	9688	52.10	30.85	7.45	24.69	53.39	74	-20.61	PK
V	9688	35.65	30.85	7.45	24.69	36.94	54	-17.06	AV
V	12110	57.00	31.02	8.99	25.57	60.54	74	-13.46	PK
V	12110	38.30	31.02	8.99	25.57	41.84	54	-12.16	AV
H	4824.00	53.97	30.55	5.77	24.66	53.85	74	-20.15	PK
H	4824.00	37.24	30.55	5.77	24.66	37.12	54	-16.88	AV
H	7236.00	51.74	30.33	6.32	24.55	52.28	74	-21.72	PK
H	7236.00	36.20	30.33	6.32	24.55	36.74	54	-17.26	AV
H	9648.00	49.41	30.85	7.45	24.69	50.7	74	-23.3	PK
H	9648.00	34.94	30.85	7.45	24.69	36.23	54	-17.77	AV
H	12060.00	47.35	31.02	8.99	25.57	50.89	74	-23.11	PK
H	12060.00	32.73	31.02	8.99	25.57	36.27	54	-17.73	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	60.41	30.55	5.77	24.66	60.29	74	-13.71	PK
V	4874.00	43.22	30.55	5.77	24.66	43.1	54	-10.9	AV
V	7311.00	53.66	30.33	6.32	24.55	54.2	74	-19.8	PK
V	7311.00	37.17	30.33	6.32	24.55	37.71	54	-16.29	AV
V	9748.00	51.13	30.85	7.45	24.69	52.42	74	-21.58	PK
V	9748.00	35.42	30.85	7.45	24.69	36.71	54	-17.29	AV
V	12185.00	56.48	31.02	8.99	25.57	60.02	74	-13.98	PK
V	12185.00	39.07	31.02	8.99	25.57	42.61	54	-11.39	AV
H	4874.00	54.41	30.55	5.77	24.66	54.29	74	-19.71	PK
H	4874.00	37.86	30.55	5.77	24.66	37.74	54	-16.26	AV
H	7311.00	51.53	30.33	6.32	24.55	52.07	74	-21.93	PK
H	7311.00	36.42	30.33	6.32	24.55	36.96	54	-17.04	AV
H	9748.00	48.77	30.85	7.45	24.69	50.06	74	-23.94	PK
H	9748.00	35.03	30.85	7.45	24.69	36.32	54	-17.68	AV
H	12185.00	47.00	31.02	8.99	25.57	50.54	74	-23.46	PK
H	12185.00	33.33	31.02	8.99	25.57	36.87	54	-17.13	AV



Page 66 of 66

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2452MHz									
V	4904.00	61.83	30.55	5.77	24.66	61.71	74	-12.29	PK
V	4904.00	42.99	30.55	5.77	24.66	42.87	54	-11.13	AV
V	7356.00	53.54	30.33	6.32	24.55	54.08	74	-19.92	PK
V	7356.00	38.18	30.33	6.32	24.55	38.72	54	-15.28	AV
V	9808.00	51.69	30.85	7.45	24.69	52.98	74	-21.02	PK
V	9808.00	35.01	30.85	7.45	24.69	36.3	54	-17.7	AV
V	12260.00	56.84	31.02	8.99	25.57	60.38	74	-13.62	PK
V	12260.00	38.71	31.02	8.99	25.57	42.25	54	-11.75	AV
H	4904.00	54.06	30.55	5.77	24.66	53.94	74	-20.06	PK
H	4904.00	37.49	30.55	5.77	24.66	37.37	54	-16.63	AV
H	7356.00	51.32	30.33	6.32	24.55	51.86	74	-22.14	PK
H	7356.00	37.04	30.33	6.32	24.55	37.58	54	-16.42	AV
H	9808.00	49.54	30.85	7.45	24.69	50.83	74	-23.17	PK
H	9808.00	34.97	30.85	7.45	24.69	36.26	54	-17.74	AV
H	12260.00	47.57	31.02	8.99	25.57	51.11	74	-22.89	PK
H	12260.00	32.86	31.02	8.99	25.57	36.4	54	-17.6	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. RADIATED BAND EMISSION MEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


5.3 DEVIATION FROM TEST STANDARD

No deviation



5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

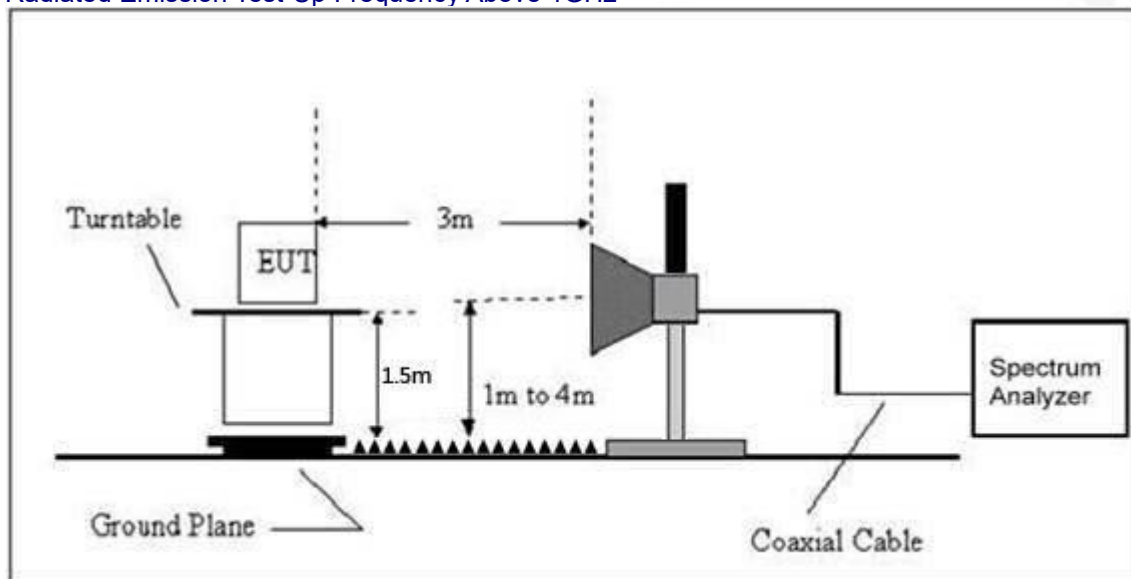

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margi n (dB)	Detec tor Type	Result
802.11b	Low Channel 2412MHz										
	H	2390.00	59.46	30.22	4.85	23.98	58.07	74	-15.93	PK	PASS
	H	2390.00	47.54	30.22	4.85	23.98	46.15	54	-7.85	AV	PASS
	H	2400.00	61.24	30.22	4.85	23.98	59.85	74	-14.15	PK	PASS
	H	2400.00	48.89	30.22	4.85	23.98	47.5	54	-6.5	AV	PASS
	V	2390.00	58.79	30.22	4.85	23.98	57.4	74	-16.6	PK	PASS
	V	2390.00	48.02	30.22	4.85	23.98	46.63	54	-7.37	AV	PASS
	V	2400.00	60.51	30.22	4.85	23.98	59.12	74	-14.88	PK	PASS
	V	2400.00	49.59	30.22	4.85	23.98	48.20	54	-5.80	AV	PASS
	High Channel 2462MHz										
	H	2483.50	58.75	30.22	4.85	23.98	57.36	74	-16.64	PK	PASS
	H	2483.50	47.31	30.22	4.85	23.98	45.92	54	-8.08	AV	PASS
	H	2485.50	61.43	30.22	4.85	23.98	60.04	74	-13.96	PK	PASS
	H	2485.50	50.05	30.22	4.85	23.98	48.66	54	-5.34	AV	PASS
	V	2483.50	59.65	30.22	4.85	23.98	58.26	74	-15.74	PK	PASS
	V	2483.50	48.10	30.22	4.85	23.98	46.71	54	-7.29	AV	PASS
	V	2485.50	58.93	30.22	4.85	23.98	57.54	74	-16.46	PK	PASS
	V	2485.50	47.76	30.22	4.85	23.98	46.37	54	-7.63	AV	PASS
802.11g	Low Channel 2412MHz										
	H	2390.00	59.20	30.22	4.85	23.98	57.81	74	-16.19	PK	PASS
	H	2390.00	47.31	30.22	4.85	23.98	45.92	54	-8.08	AV	PASS
	H	2400.00	60.74	30.22	4.85	23.98	59.35	74	-14.65	PK	PASS
	H	2400.00	48.11	30.22	4.85	23.98	46.72	54	-7.28	AV	PASS
	V	2390.00	58.91	30.22	4.85	23.98	57.52	74	-16.48	PK	PASS
	V	2390.00	47.66	30.22	4.85	23.98	46.27	54	-7.73	AV	PASS
	V	2400.00	60.05	30.22	4.85	23.98	58.66	74	-15.34	PK	PASS
	V	2400.00	49.46	30.22	4.85	23.98	48.07	54	-5.93	AV	PASS
	High Channel 2462MHz										
	H	2483.50	59.26	30.22	4.85	23.98	57.87	74	-16.13	PK	PASS
	H	2483.50	47.90	30.22	4.85	23.98	46.51	54	-7.49	AV	PASS
	H	2485.50	61.82	30.22	4.85	23.98	60.43	74	-13.57	PK	PASS
	H	2485.50	50.54	30.22	4.85	23.98	49.15	54	-4.85	AV	PASS
	V	2483.50	60.13	30.22	4.85	23.98	58.74	74	-15.26	PK	PASS
	V	2483.50	47.80	30.22	4.85	23.98	46.41	54	-7.59	AV	PASS
	V	2485.50	58.63	30.22	4.85	23.98	57.24	74	-16.76	PK	PASS
	V	2485.50	47.47	30.22	4.85	23.98	46.08	54	-7.92	AV	PASS
802.11n20	Low Channel 2412MHz										
	H	2390.00	59.79	30.22	4.85	23.98	58.4	74	-15.6	PK	PASS
	H	2390.00	47.18	30.22	4.85	23.98	45.79	54	-8.21	AV	PASS
	H	2400.00	61.13	30.22	4.85	23.98	59.74	74	-14.26	PK	PASS
	H	2400.00	48.77	30.22	4.85	23.98	47.38	54	-6.62	AV	PASS
	V	2390.00	58.83	30.22	4.85	23.98	57.44	74	-16.56	PK	PASS
	V	2390.00	47.39	30.22	4.85	23.98	46	54	-8	AV	PASS
	V	2400.00	60.62	30.22	4.85	23.98	59.23	74	-14.77	PK	PASS
	V	2400.00	49.42	30.22	4.85	23.98	48.03	54	-5.97	AV	PASS
	High Channel 2462MHz										
	H	2483.50	58.66	30.22	4.85	23.98	57.27	74	-16.73	PK	PASS
	H	2483.50	47.22	30.22	4.85	23.98	45.83	54	-8.17	AV	PASS
	H	2485.50	61.17	30.22	4.85	23.98	59.78	74	-14.22	PK	PASS
	H	2485.50	50.82	30.22	4.85	23.98	49.43	54	-4.57	AV	PASS
	V	2483.50	60.25	30.22	4.85	23.98	58.86	74	-15.14	PK	PASS
	V	2483.50	48.91	30.22	4.85	23.98	47.52	54	-6.48	AV	PASS
	V	2485.50	58.56	30.22	4.85	23.98	57.17	74	-16.83	PK	PASS



	V	2485.50	47.28	30.22	4.85	23.98	45.89	54	-8.11	AV	PASS
802.11n40	Low Channel 2422MHz										
	H	2390.00	59.86	30.22	4.85	23.98	58.47	74	-15.53	PK	PASS
	H	2390.00	47.34	30.22	4.85	23.98	45.95	54	-8.05	AV	PASS
	H	2400.00	61.24	30.22	4.85	23.98	59.85	74	-14.15	PK	PASS
	H	2400.00	48.97	30.22	4.85	23.98	47.58	54	-6.42	AV	PASS
	V	2390.00	58.78	30.22	4.85	23.98	57.39	74	-16.61	PK	PASS
	V	2390.00	47.32	30.22	4.85	23.98	45.93	54	-8.07	AV	PASS
	V	2400.00	60.83	30.22	4.85	23.98	59.44	74	-14.56	PK	PASS
	V	2400.00	49.67	30.22	4.85	23.98	48.28	54	-5.72	AV	PASS
	High Channel 2452MHz										
	H	2483.50	58.60	30.22	4.85	23.98	57.21	74	-16.79	PK	PASS
	H	2483.50	47.45	30.22	4.85	23.98	46.06	54	-7.94	AV	PASS
	H	2485.50	61.09	30.22	4.85	23.98	59.7	74	-14.3	PK	PASS
	H	2485.50	50.96	30.22	4.85	23.98	49.57	54	-4.43	AV	PASS
	V	2483.50	60.31	30.22	4.85	23.98	58.92	74	-15.08	PK	PASS
	V	2483.50	49.08	30.22	4.85	23.98	47.69	54	-6.31	AV	PASS
	V	2485.50	58.81	30.22	4.85	23.98	57.42	74	-16.58	PK	PASS
	V	2485.50	47.56	30.22	4.85	23.98	46.17	54	-7.83	AV	PASS
802.11 ax20	Low Channel 2412MHz										
	H	2390.00	59.87	30.22	4.85	23.98	58.48	74	-15.52	PK	PASS
	H	2390.00	47.22	30.22	4.85	23.98	45.83	54	-8.17	AV	PASS
	H	2400.00	61.25	30.22	4.85	23.98	59.86	74	-14.14	PK	PASS
	H	2400.00	48.82	30.22	4.85	23.98	47.43	54	-6.57	AV	PASS
	V	2390.00	58.95	30.22	4.85	23.98	57.56	74	-16.44	PK	PASS
	V	2390.00	47.41	30.22	4.85	23.98	46.02	54	-7.98	AV	PASS
	V	2400.00	60.65	30.22	4.85	23.98	59.26	74	-14.74	PK	PASS
	V	2400.00	49.59	30.22	4.85	23.98	48.2	54	-5.8	AV	PASS
	High Channel 2462MHz										
	H	2483.50	58.75	30.22	4.85	23.98	57.36	74	-16.64	PK	PASS
	H	2483.50	47.32	30.22	4.85	23.98	45.93	54	-8.07	AV	PASS
	H	2485.50	61.30	30.22	4.85	23.98	59.91	74	-14.09	PK	PASS
	H	2485.50	50.84	30.22	4.85	23.98	49.45	54	-4.55	AV	PASS
	V	2483.50	60.26	30.22	4.85	23.98	58.87	74	-15.13	PK	PASS
	V	2483.50	49.00	30.22	4.85	23.98	47.61	54	-6.39	AV	PASS
	V	2485.50	58.73	30.22	4.85	23.98	57.34	74	-16.66	PK	PASS
	V	2485.50	47.44	30.22	4.85	23.98	46.05	54	-7.95	AV	PASS
802.11 ax40	Low Channel 2422MHz										
	H	2390.00	60.04	30.22	4.85	23.98	58.65	74	-15.35	PK	PASS
	H	2390.00	47.40	30.22	4.85	23.98	46.01	54	-7.99	AV	PASS
	H	2400.00	61.36	30.22	4.85	23.98	59.97	74	-14.03	PK	PASS
	H	2400.00	48.99	30.22	4.85	23.98	47.6	54	-6.4	AV	PASS
	V	2390.00	58.83	30.22	4.85	23.98	57.44	74	-16.56	PK	PASS
	V	2390.00	47.34	30.22	4.85	23.98	45.95	54	-8.05	AV	PASS
	V	2400.00	61.00	30.22	4.85	23.98	59.61	74	-14.39	PK	PASS
	V	2400.00	49.77	30.22	4.85	23.98	48.38	54	-5.62	AV	PASS
	High Channel 2452MHz										
	H	2483.50	58.68	30.22	4.85	23.98	57.29	74	-16.71	PK	PASS
	H	2483.50	47.53	30.22	4.85	23.98	46.14	54	-7.86	AV	PASS
	H	2485.50	61.15	30.22	4.85	23.98	59.76	74	-14.24	PK	PASS
	H	2485.50	51.03	30.22	4.85	23.98	49.64	54	-4.36	AV	PASS
	V	2483.50	60.40	30.22	4.85	23.98	59.01	74	-14.99	PK	PASS
	V	2483.50	49.10	30.22	4.85	23.98	47.71	54	-6.29	AV	PASS
	V	2485.50	58.94	30.22	4.85	23.98	57.55	74	-16.45	PK	PASS
	V	2485.50	47.69	30.22	4.85	23.98	46.3	54	-7.7	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit



6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS


6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

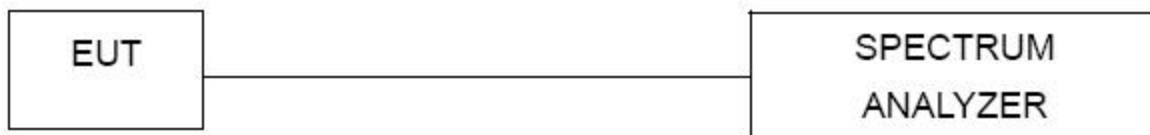

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.



6.6 TEST RESULT

Temperature :	25.4℃	Relative Humidity :	52%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX b Mode		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-11.87	8	PASS
2437 MHz	-11.99	8	PASS
2462 MHz	-11.83	8	PASS





TX CH06




TX CH11





Temperature :	25.4℃	Relative Humidity :	52%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX g Mode		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-16.07	8	PASS
2437 MHz	-16.12	8	PASS
2462 MHz	-15.79	8	PASS

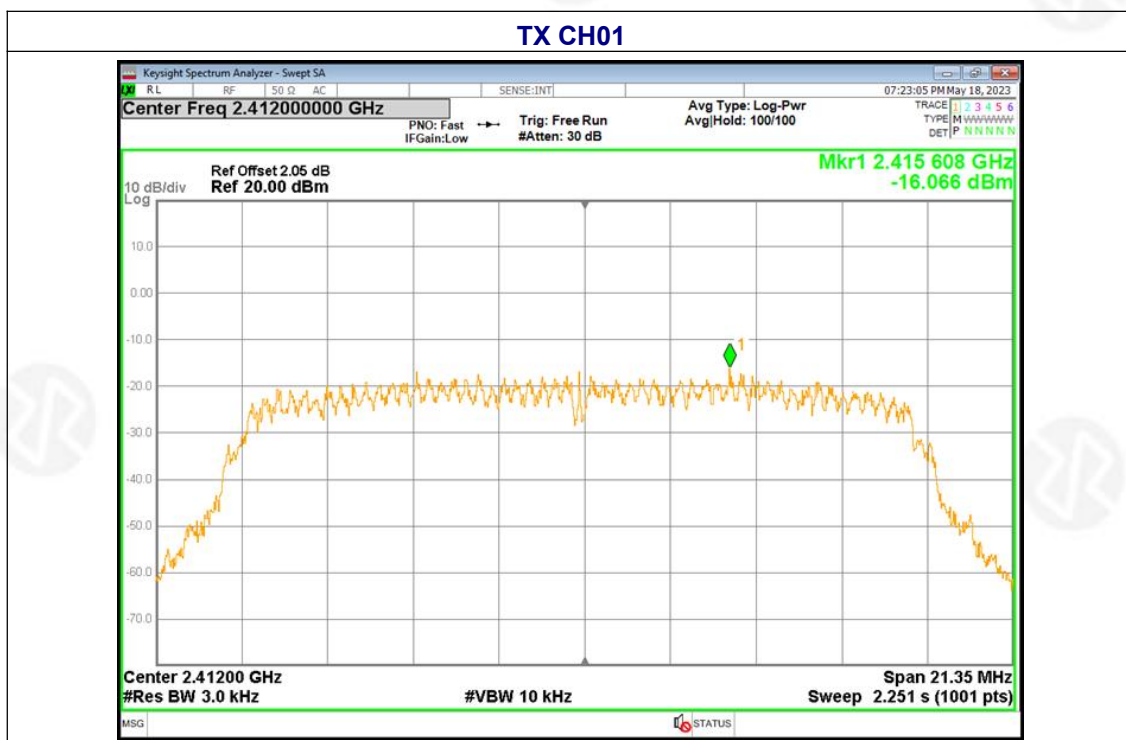



TX CH06




TX CH11






Temperature :	25.4℃	Relative Humidity :	52%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX n Mode(20M)		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-15.71	8	PASS
2437 MHz	-15.73	8	PASS
2462 MHz	-15.40	8	PASS

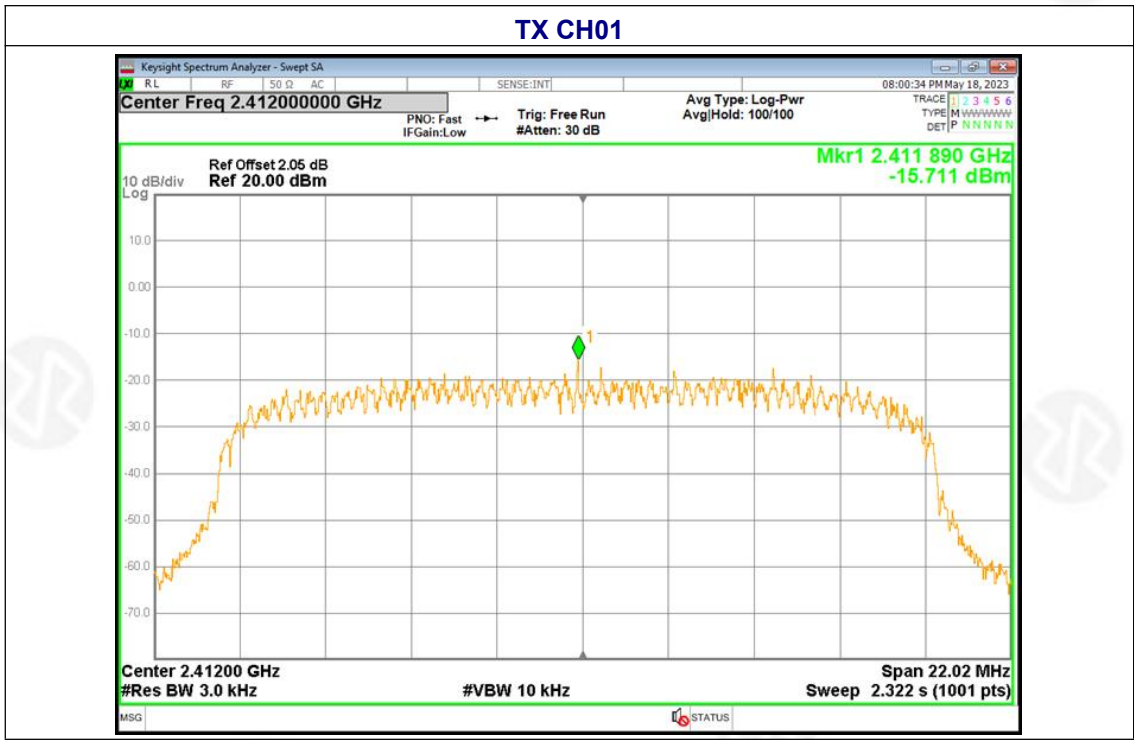




TX CH06

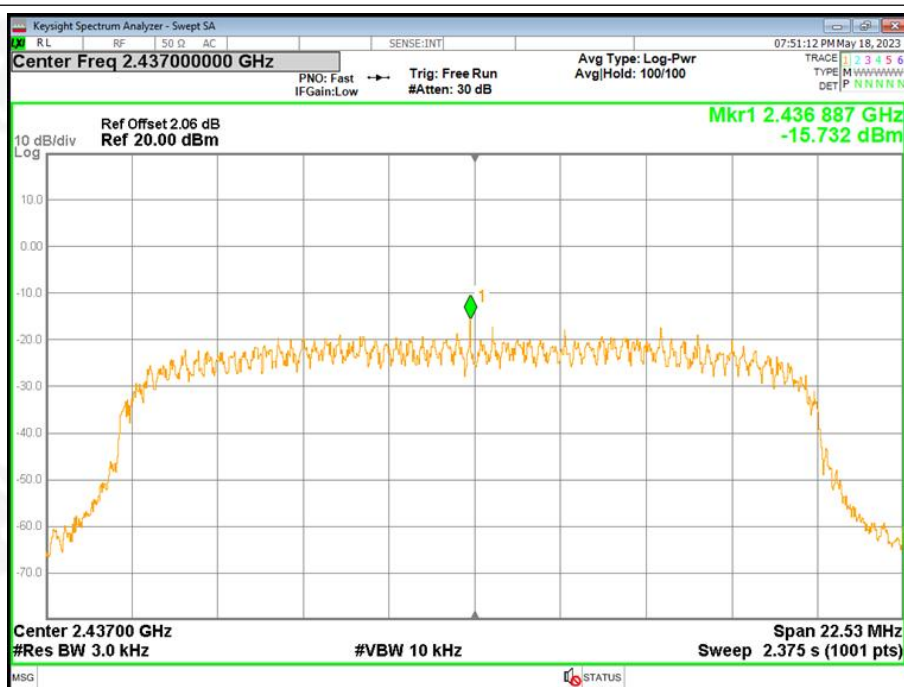


TX CH11

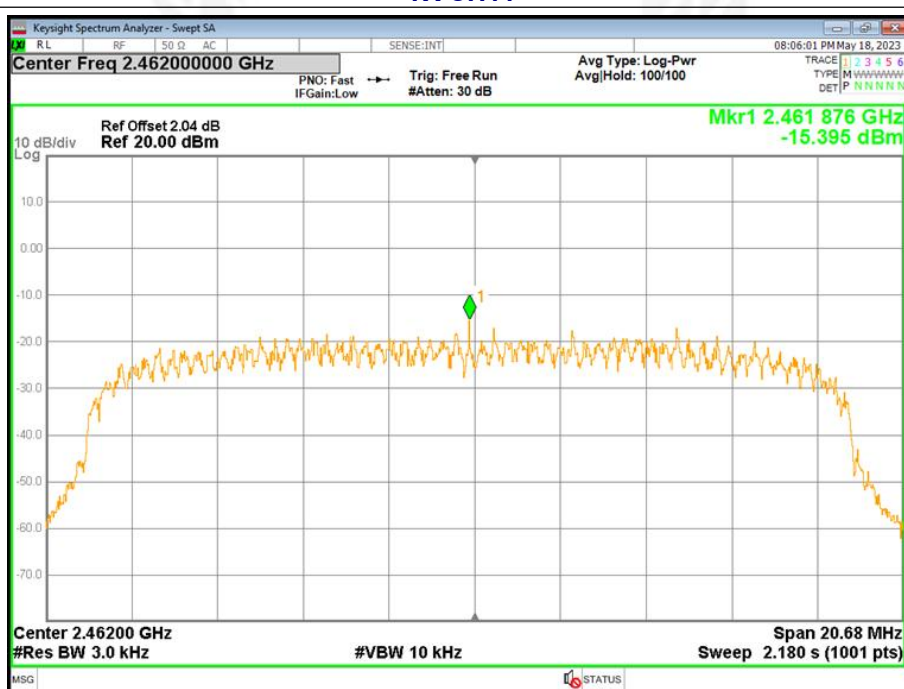



Temperature :	25.4℃	Relative Humidity :	52%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX n Mode(40M)		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2422 MHz	-17.29	8	PASS
2437 MHz	-16.94	8	PASS
2452 MHz	-16.84	8	PASS

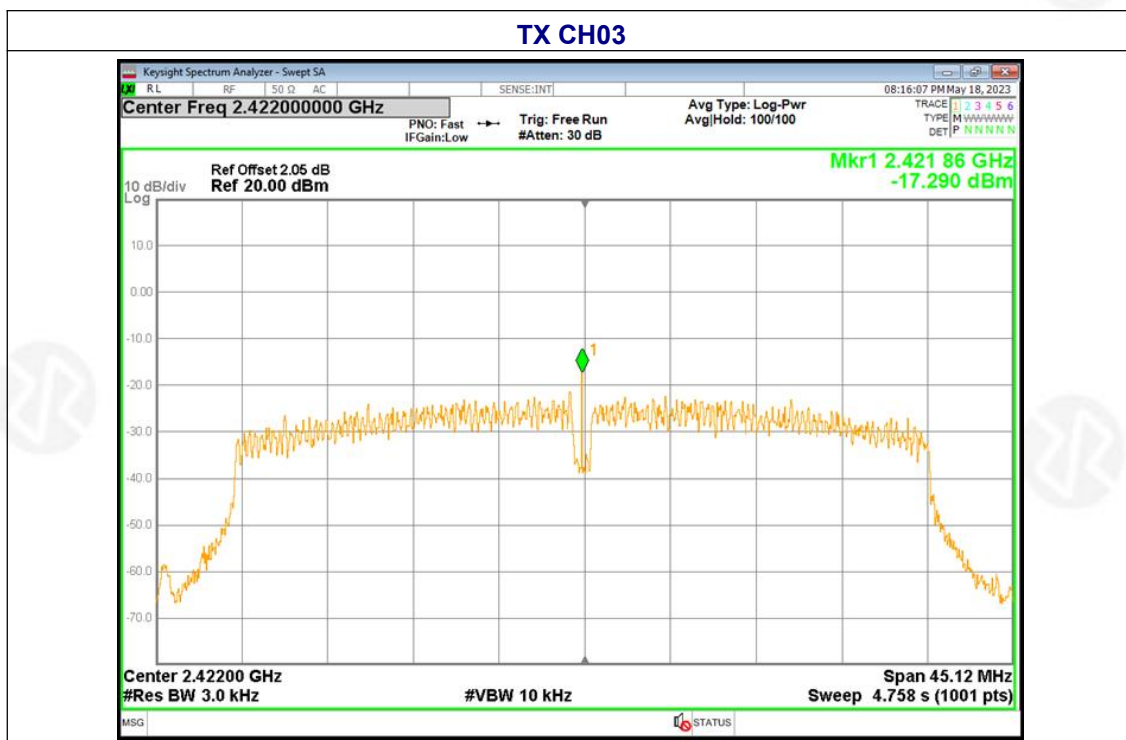



Keysight Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:INT 08:25:51 PM May 18, 2023

Center Freq 2.43700000 GHz PNO: Fast IFGain:Low Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr Avg/Hold: 100/100

TRACE 1 2 3 4 5 6
TYPE M W W W W W W W
DET P N N N N N N

Ref Offset 2.06 dB
Ref 20.00 dBm

Mkr1 2.436 86 GHz
-16.937 dBm

10 dB/div
Log

Center 2.43700 GHz
#Res BW 3.0 kHz
#VBW 10 kHz

Span 45.05 MHz
Sweep 4.750 s (1001 pts)

MSG STATUS

The image shows a Keysight Spectrum Analyzer display. The main plot area shows a signal trace in orange, with a prominent peak at 2.43686 GHz. A green diamond marker is placed on this peak, indicating its frequency and power level (-16.937 dBm). The y-axis is labeled '10 dB/div Log' and ranges from -70.0 to 10.0. The x-axis represents frequency, with a center frequency of 2.43700 GHz. The plot area is divided into a grid. Above the plot, various settings are displayed, including 'Center Freq 2.43700000 GHz', 'PNO: Fast', 'IFGain:Low', 'Trig: Free Run', '#Atten: 30 dB', 'Avg Type: Log-Pwr', and 'Avg/Hold: 100/100'. The top right corner shows the date and time '08:25:51 PM May 18, 2023'. The bottom of the screen shows 'MSG' and 'STATUS' indicators.

Keysight Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:INT 08:35:40 PM May 18, 2023

Center Freq 2.45200000 GHz PNO: Fast IFGain:Low Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr Avg|Hold: 100/100

TRACE 1 2 3 4 5 6 TYPE M W W W W W W W DET P N N N N N N

Ref Offset 2.04 dB Ref 20.00 dBm

Mkr1 2.451 86 GHz -16.837 dBm

The spectrum analyzer display shows a signal centered at 2.45200 GHz. The y-axis represents power in dBm, ranging from -70.0 to 10.0. The x-axis represents frequency in GHz, ranging from 2.445 to 2.455. A sharp peak is visible at 2.45186 GHz, marked with a green diamond and labeled 'Mkr1 2.451 86 GHz -16.837 dBm'. The signal has a bandwidth of 3.0 kHz and a resolution bandwidth of 10 kHz. The display also shows the center frequency, reference offset, and various measurement parameters.


10 dB/div Log

Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 46.97 MHz Sweep 4.953 s (1001 pts)




Temperature :	25.4℃	Relative Humidity :	52%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX ax Mode(20M)		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-15.34	8	PASS
2437 MHz	-16.34	8	PASS
2462 MHz	-16.15	8	PASS

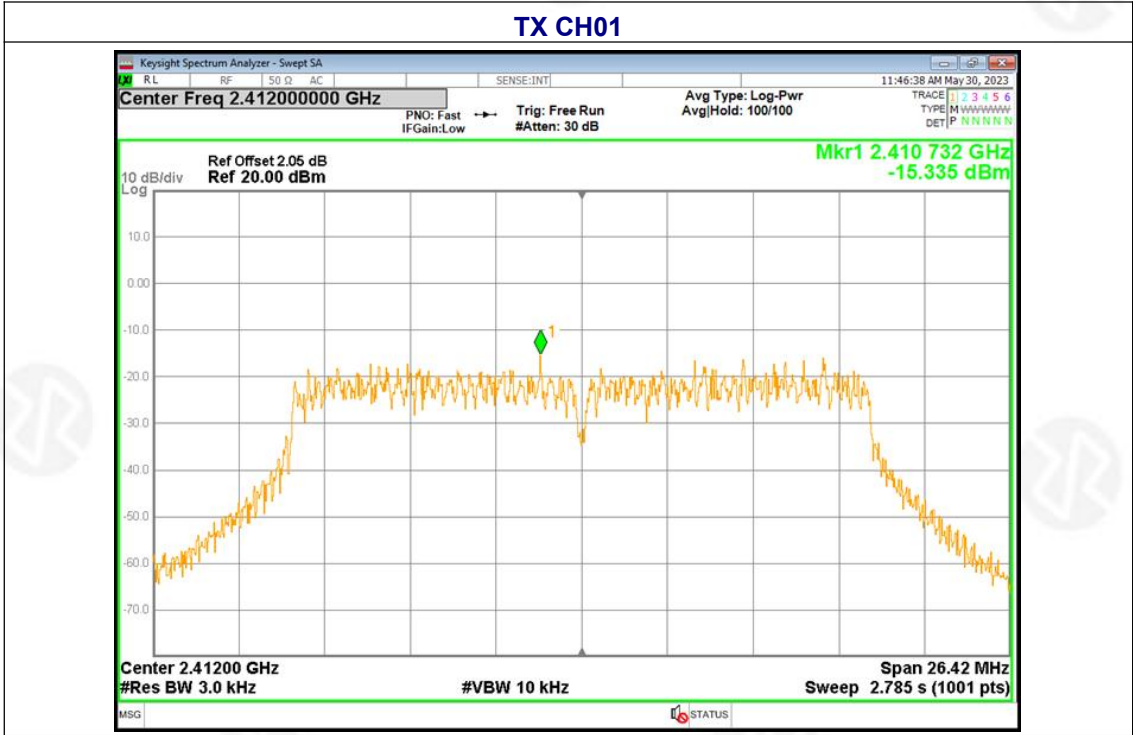




TX CH06

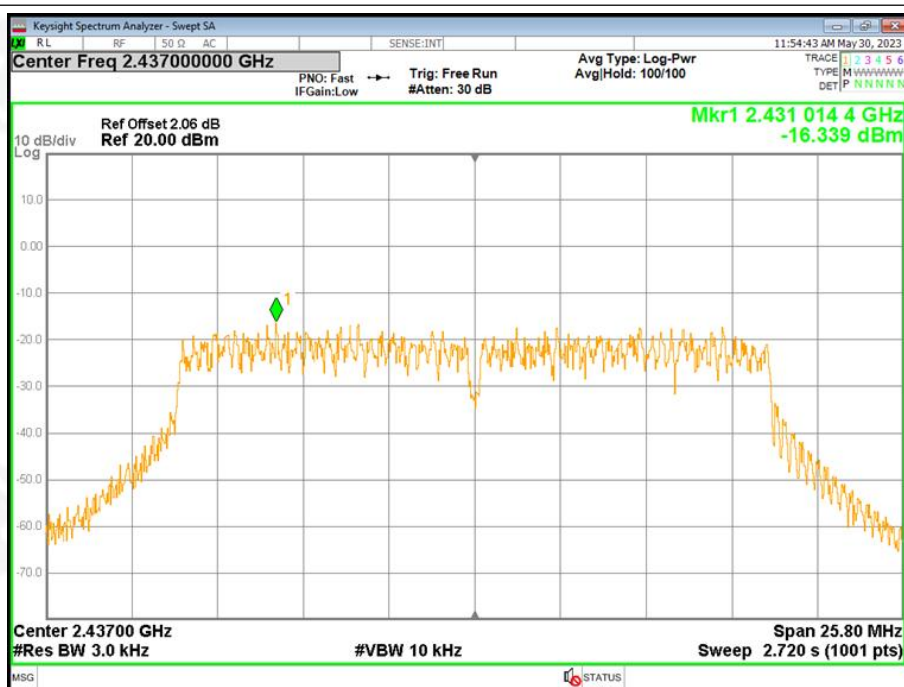


TX CH11

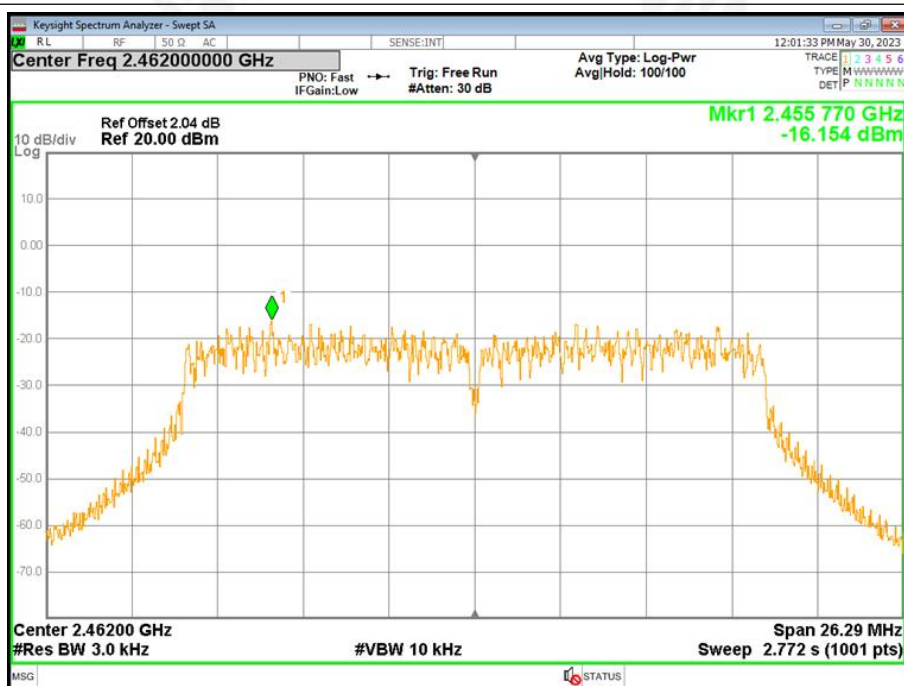




Temperature :	25.4℃	Relative Humidity :	52%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX ax Mode(40M)		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2422 MHz	-16.11	8	PASS
2437 MHz	-18.14	8	PASS
2452 MHz	-17.2	8	PASS

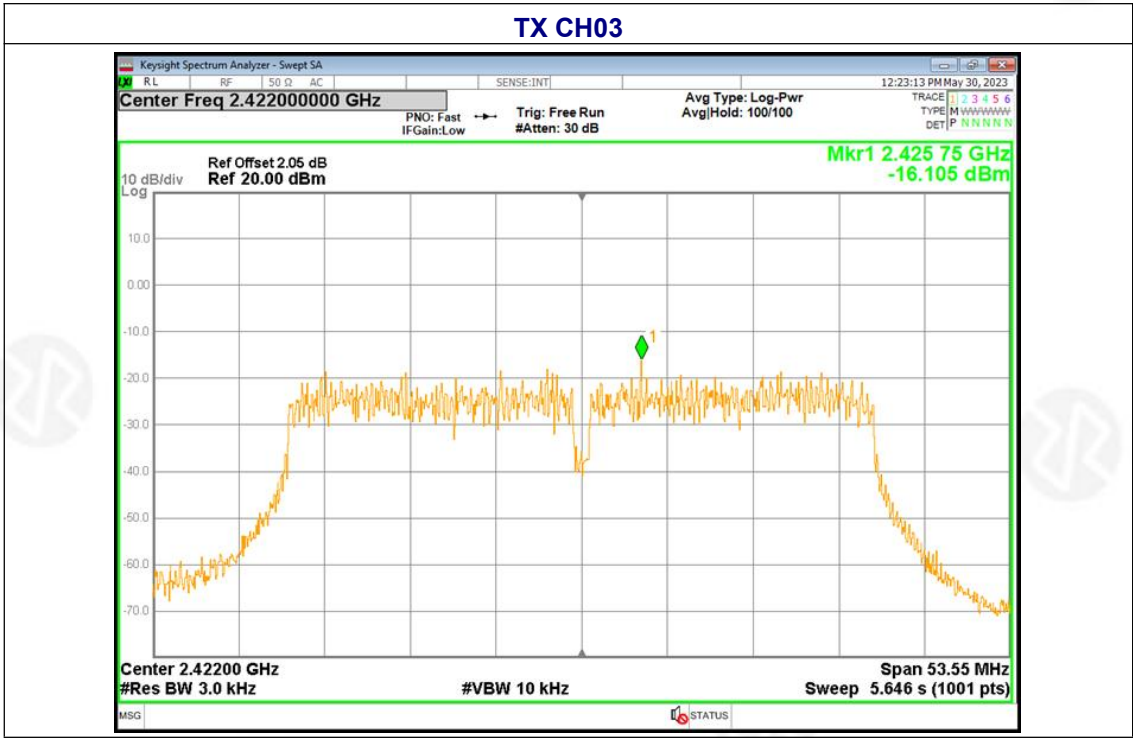




TX CH06

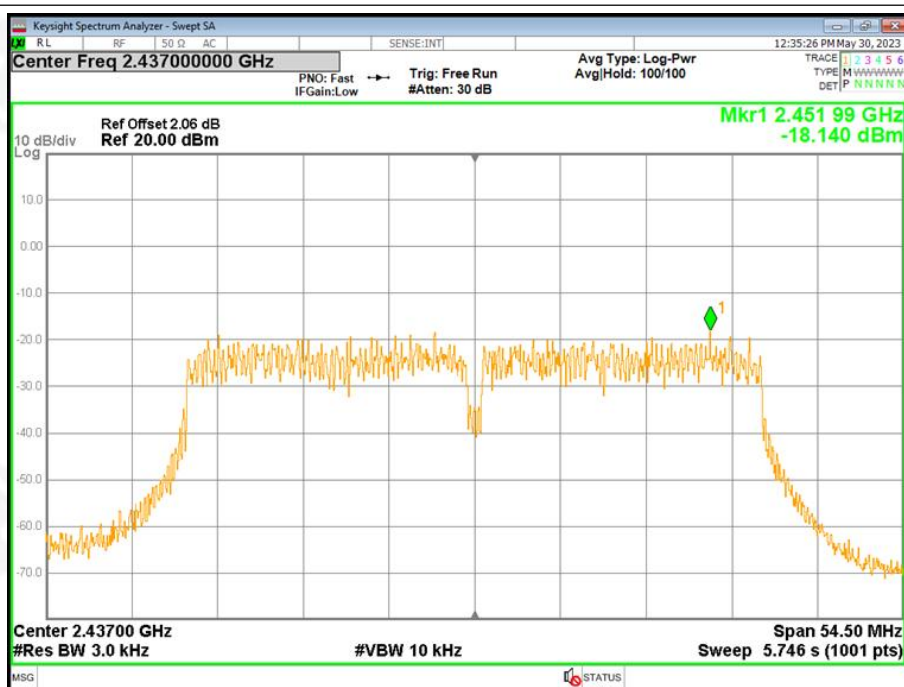

TX CH09

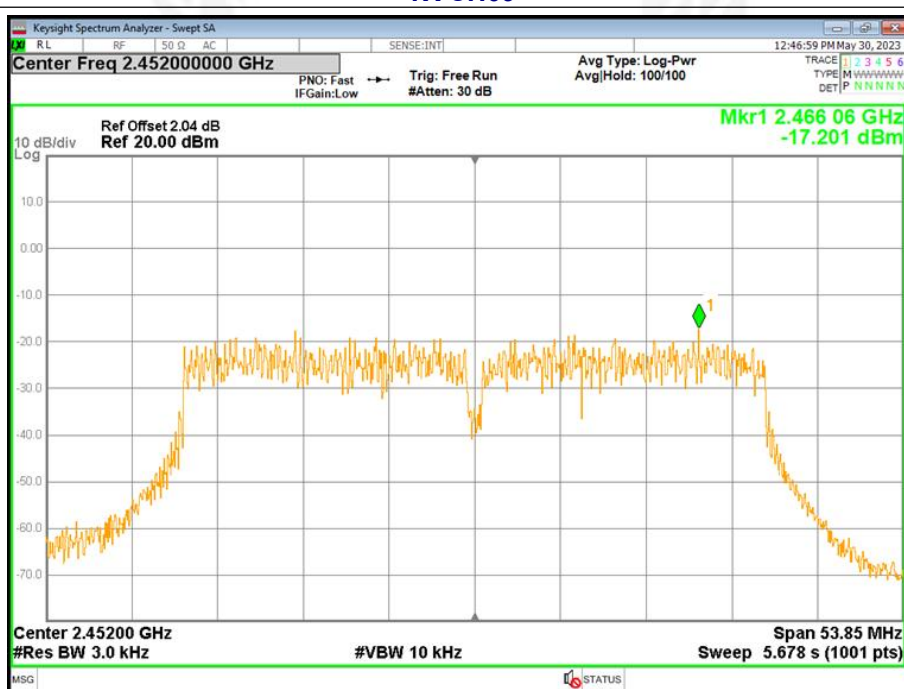



7. CHANNEL BANDWIDTH& 99% OCCUPY BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULT

Temperature :	25.4℃	Relative Humidity :	52%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX Mode		

Test CH	-6dB Occupy Bandwidth (MHz)						Limit(KHz)	Result
	802.11b	802.11g	802.11n (HT20)	802.11 (ax20)	802.11n (HT40)	802.11 (ax40)		
Lowest	11.082	14.233	11.326	17.610	30.083	35.699	>500	Pass
Middle	11.061	14.748	15.019	17.200	30.030	36.333		
Highest	11.079	14.695	13.785	17.526	31.314	35.902		




Test plot as follows:


802.11b

802.11g



Lowest channel

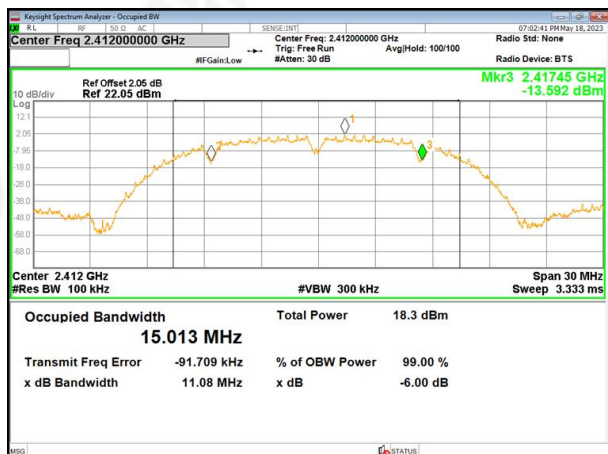

Middle channel

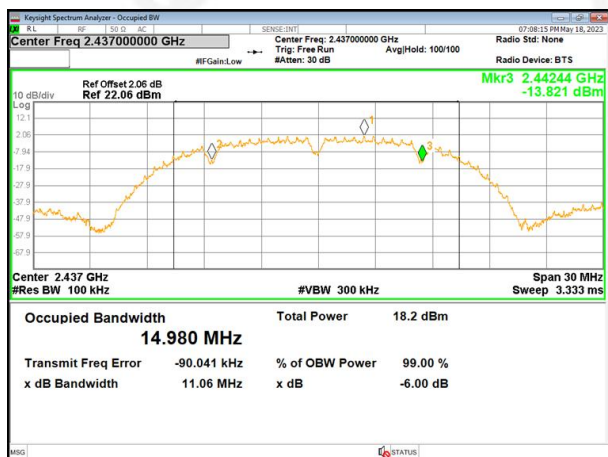

Highest channel

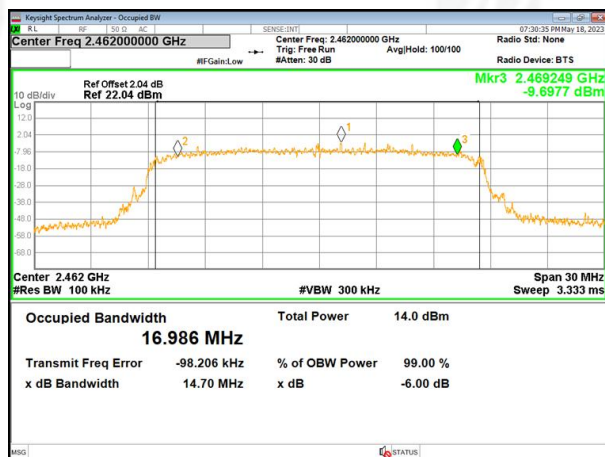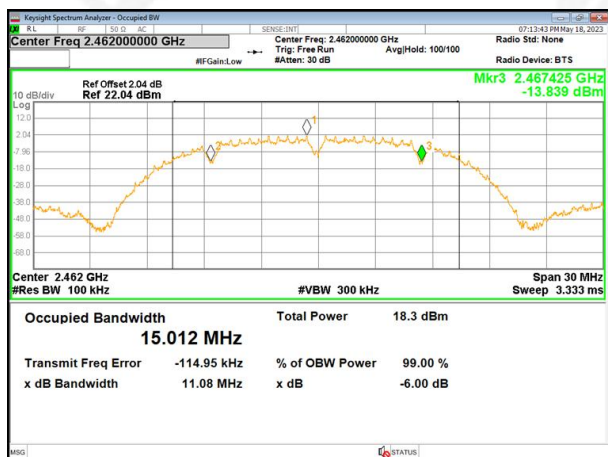






802.11n(HT20)

802.11n(HT40)


Lowest channel

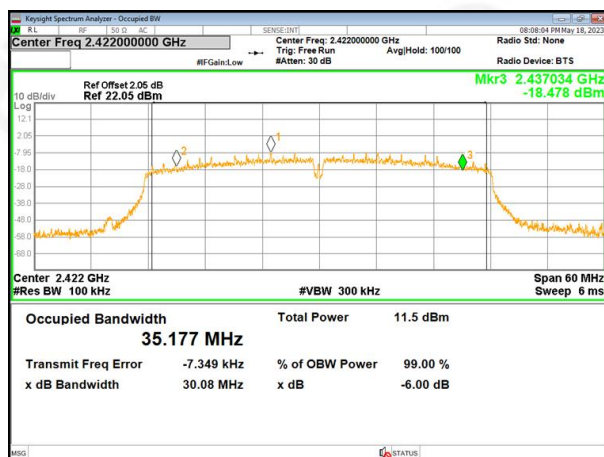

Middle channel

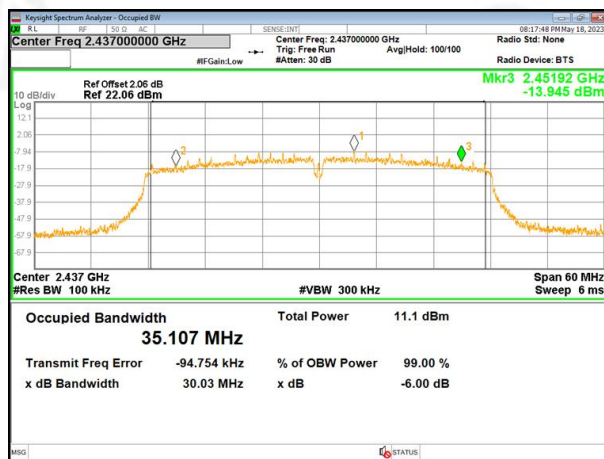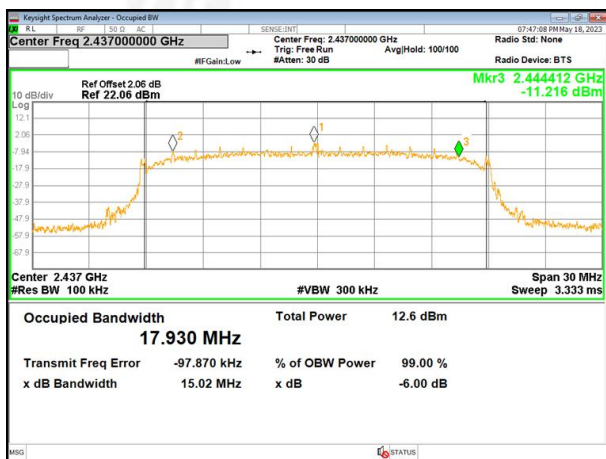

Highest channel


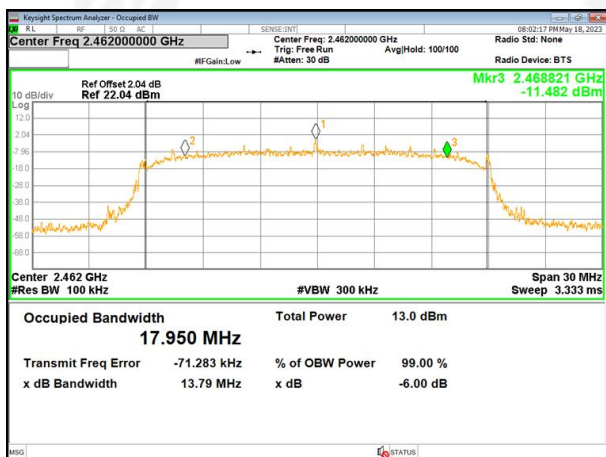






802.11(ax20)

802.11(ax40)



Lowest channel

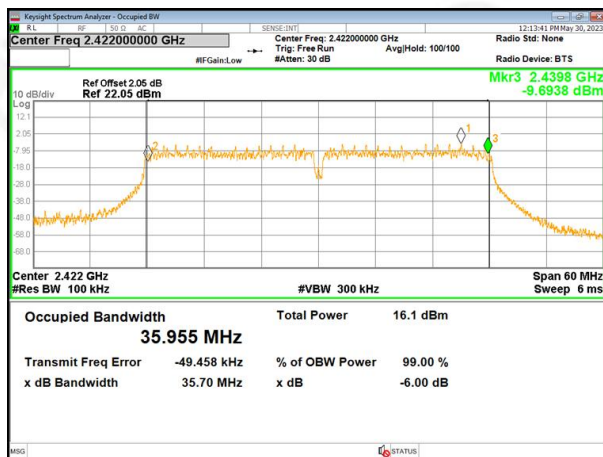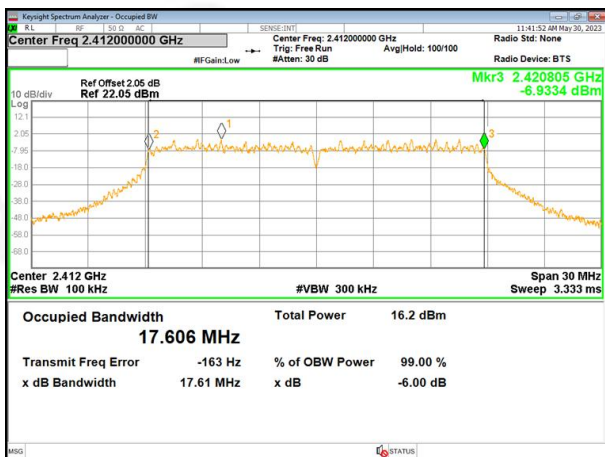

Middle channel

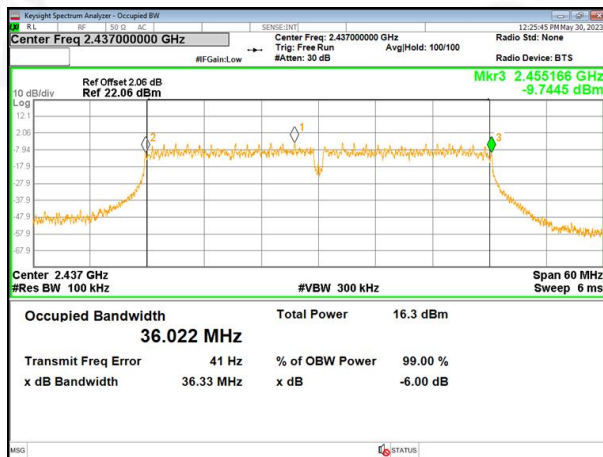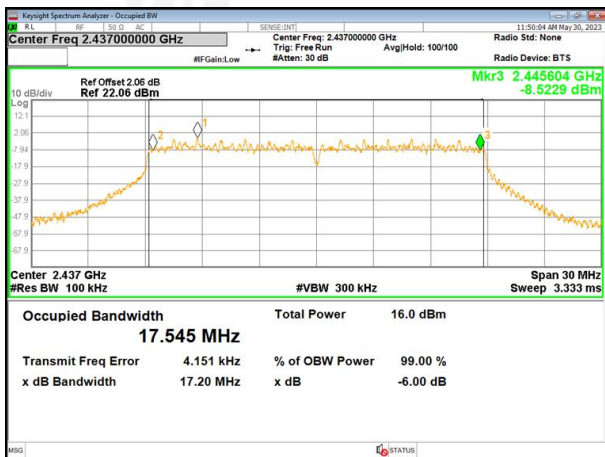

Highest channel

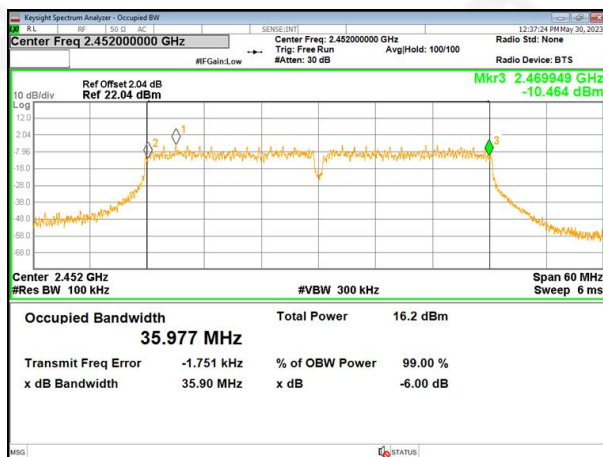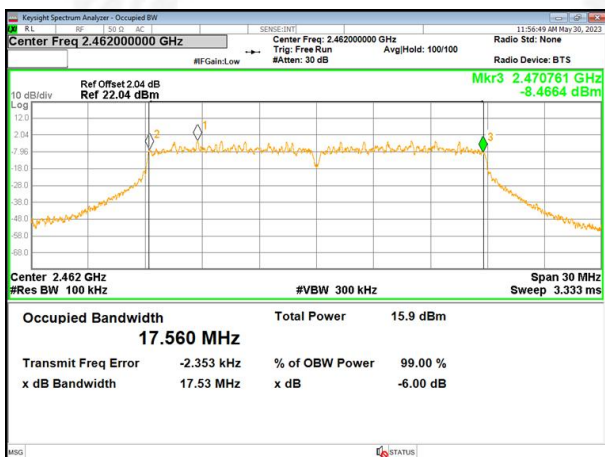



8. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



8.6 TEST RESULT

Temperature :	25.2℃	Relative Humidity :	55%
Pressure :	101kPa	Test Voltage :	DC 12V

Test CH	Peak Output Power (dBm)						Limit(dBm)	Result
	802.11b	802.11g	802.11n (HT20)	802.11 (ax20)	802.11 (HT40)	802.11 (ax40)		
Lowest	13.45	12.50	11.45	14.64	9.98	14.37	30.00	Pass
Middle	13.28	12.41	11.37	14.55	9.58	14.59		
Highest	13.40	12.8	11.72	14.43	9.68	14.53		



9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS




Test plot as follows:

Test mode:	802.11b
------------	---------

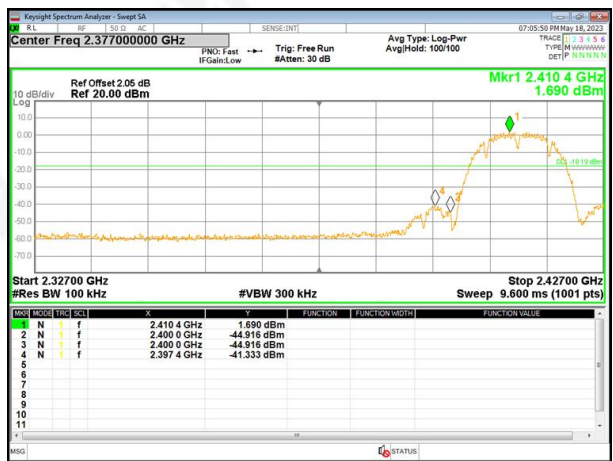


Lowest channel

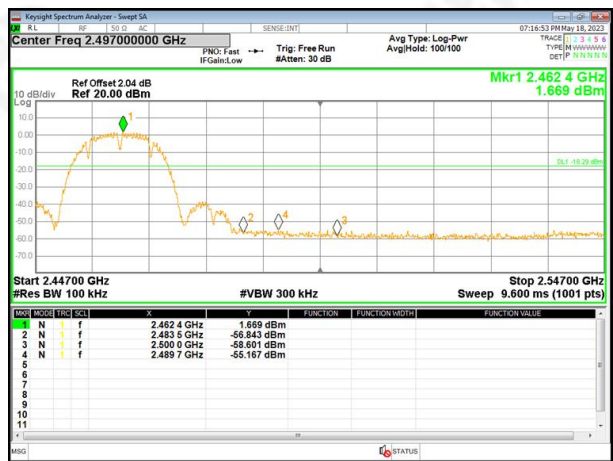


Highest channel

Test mode:	802.11g
------------	---------

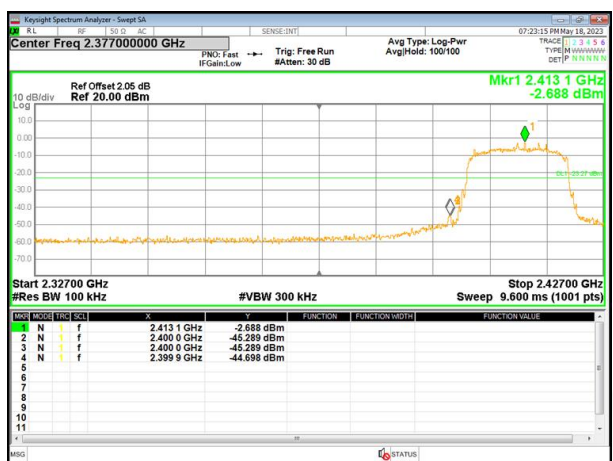


Lowest channel

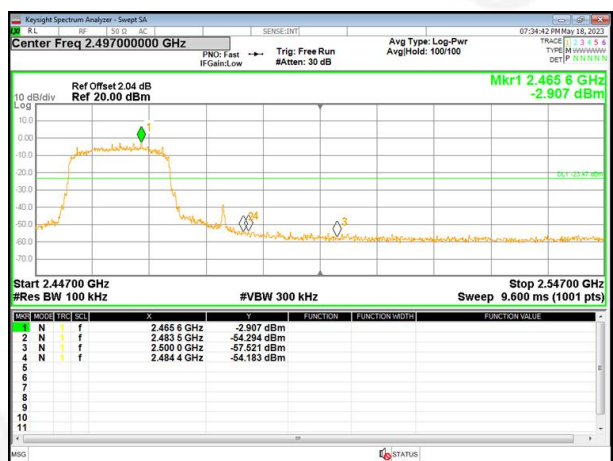


Highest channel

Test mode:	802.11n(HT20)
------------	---------------

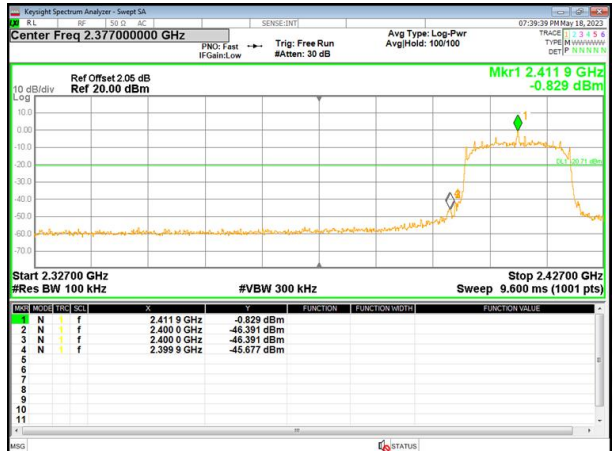


Lowest channel

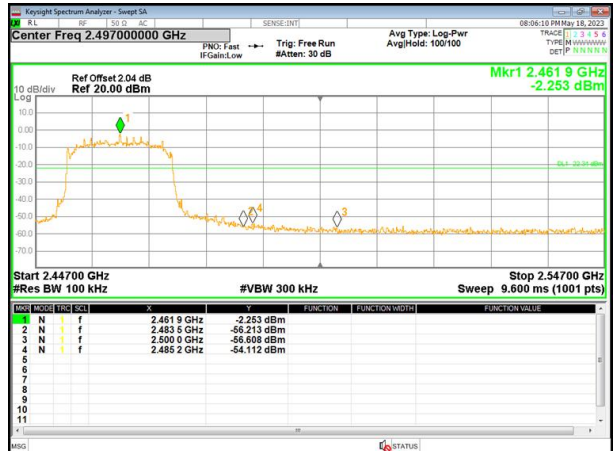

Highest channel




Test mode:

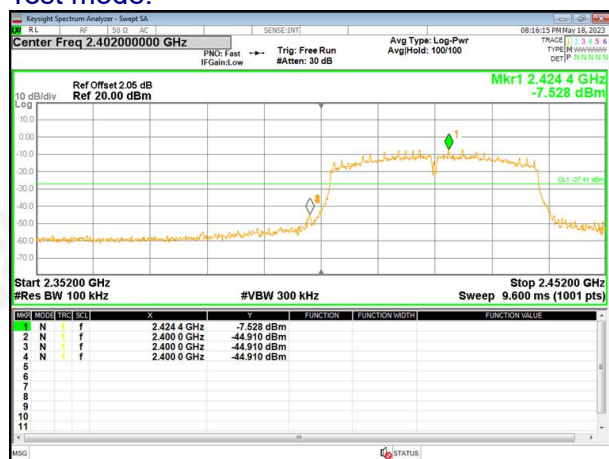

Lowest channel

802.11n(HT40)

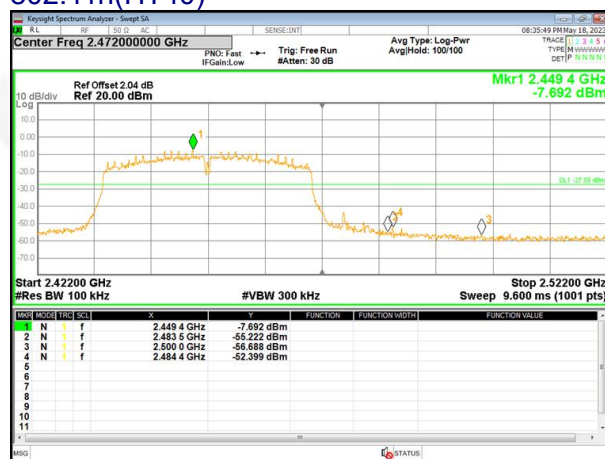

Highest channel

Test mode:




Lowest channel

802.11(ax20)



Highest channel

Test mode:

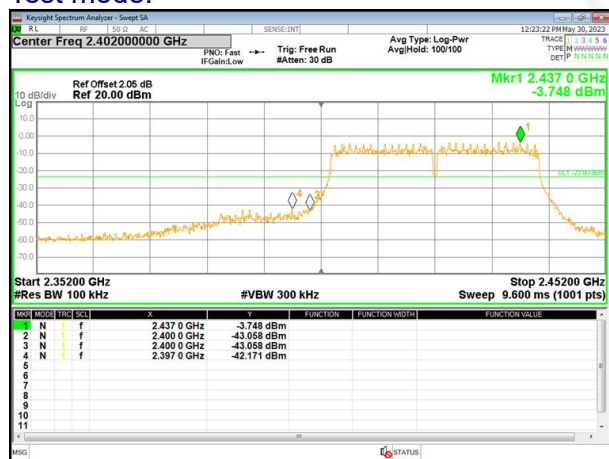

Lowest channel

802.11n(ax40)



Highest channel





Test plot as follows:



802.11b

802.11g



Lowest channel

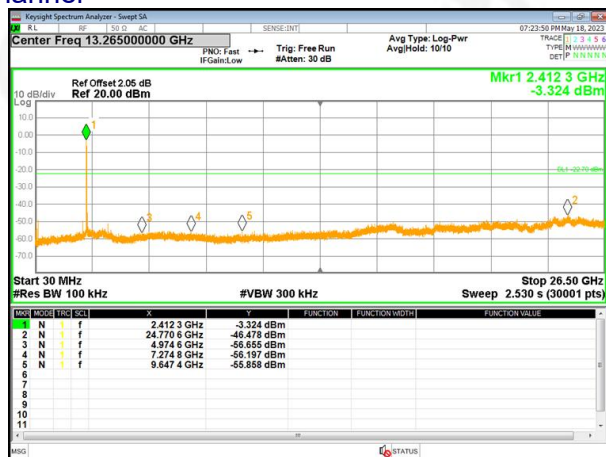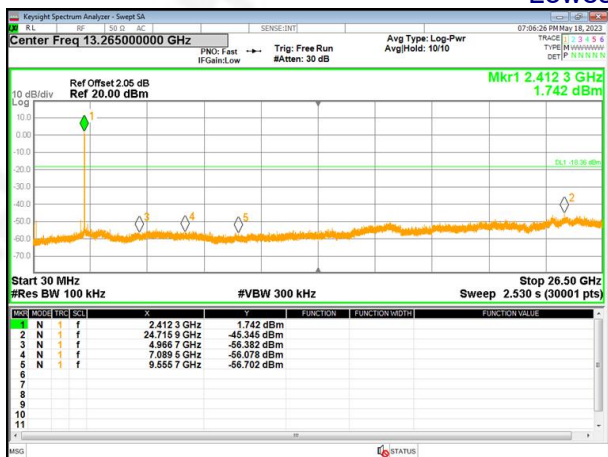

Middle channel

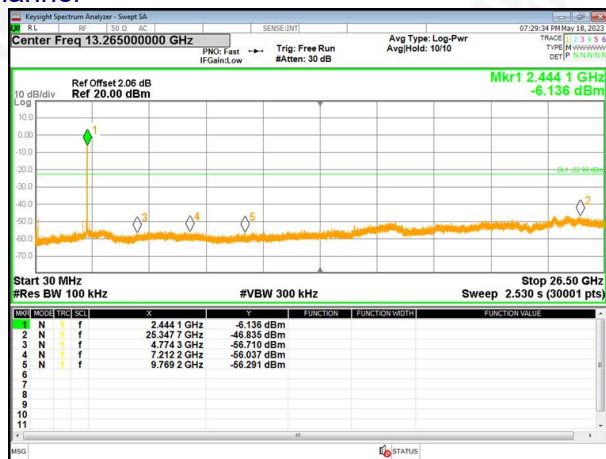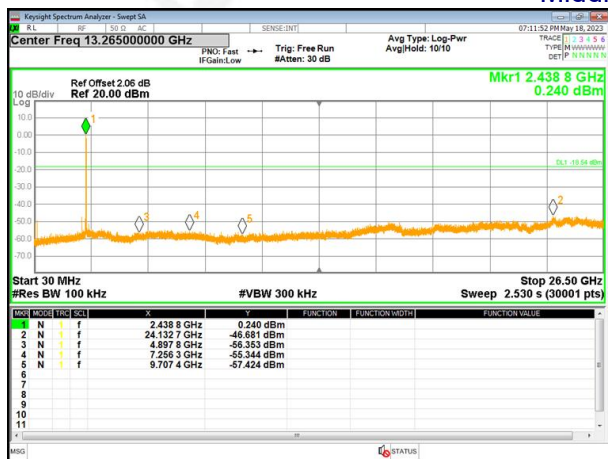

Highest channel

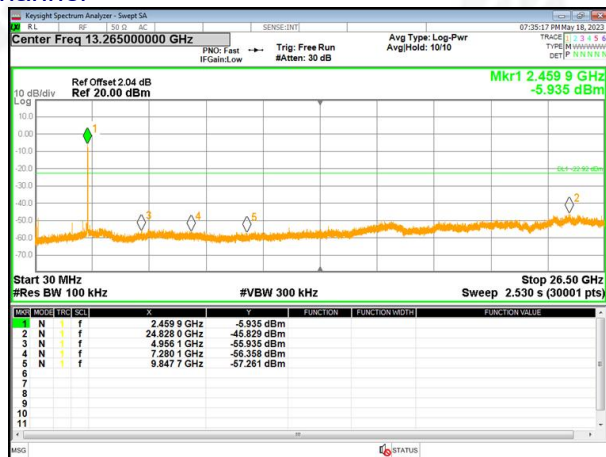
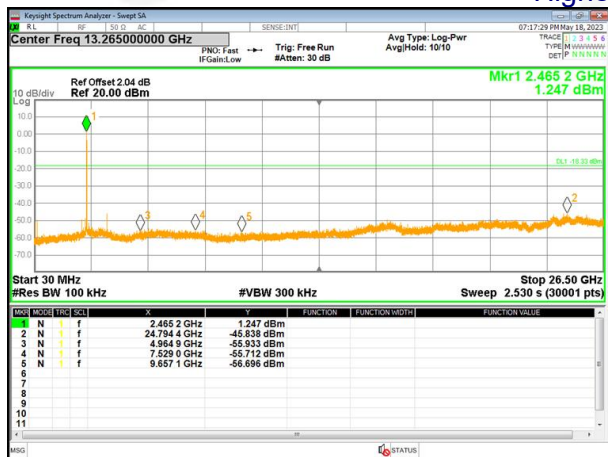






802.11n(HT20)

802.11n(HT40)


Lowest channel

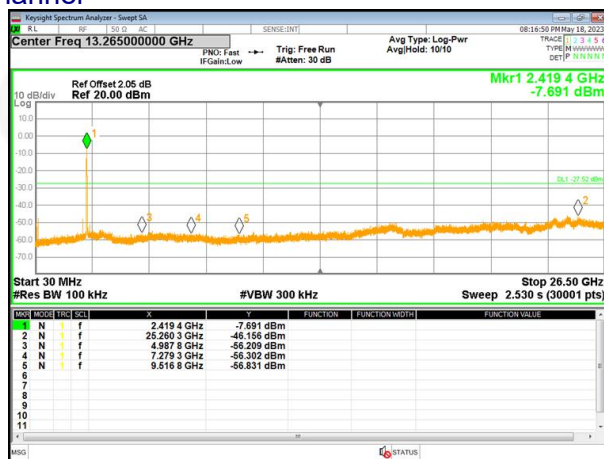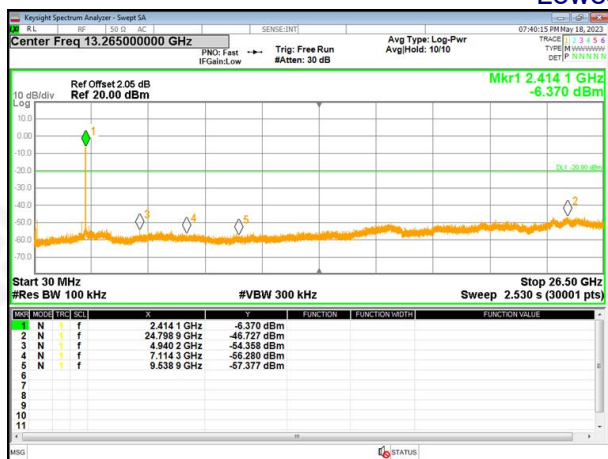

Middle channel

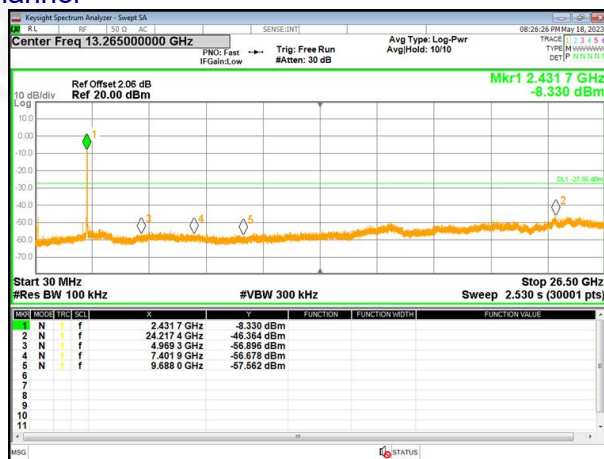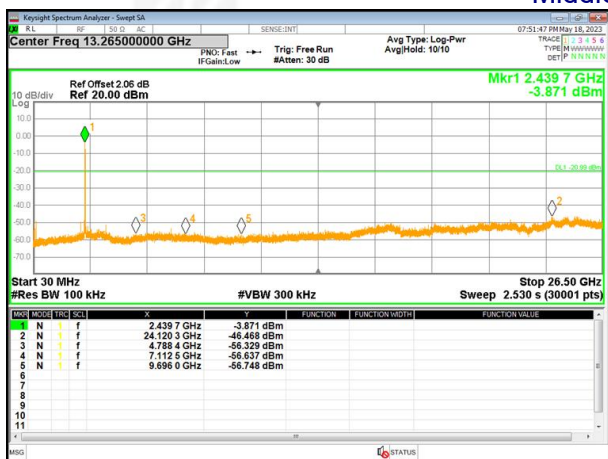

Highest channel


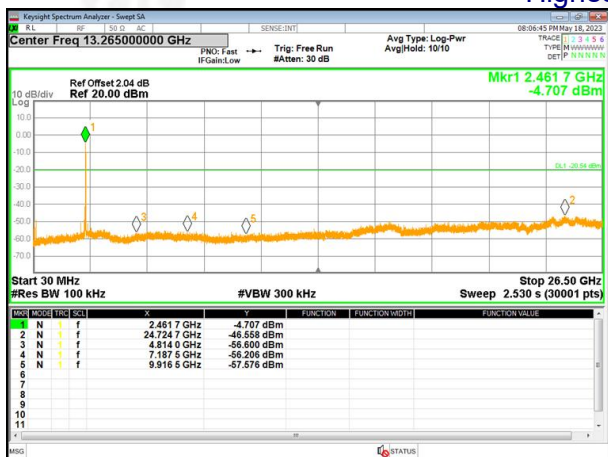






802.11n(ax20)

802.11n(ax40)



Lowest channel

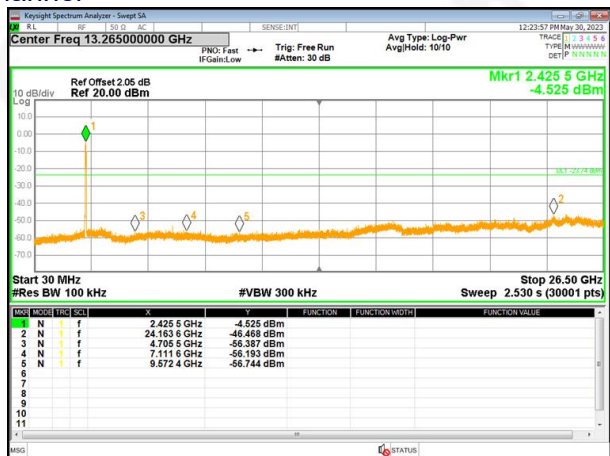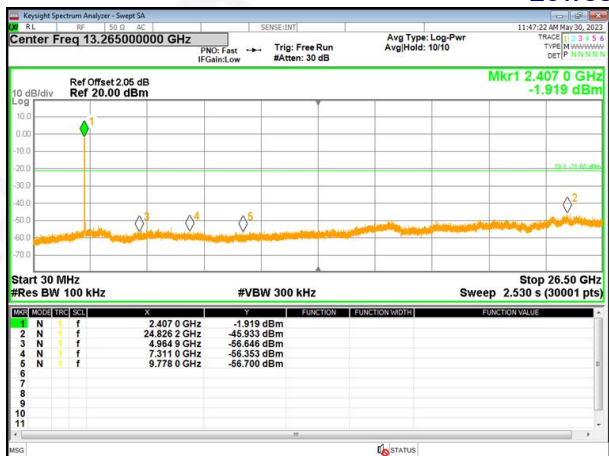

Middle channel

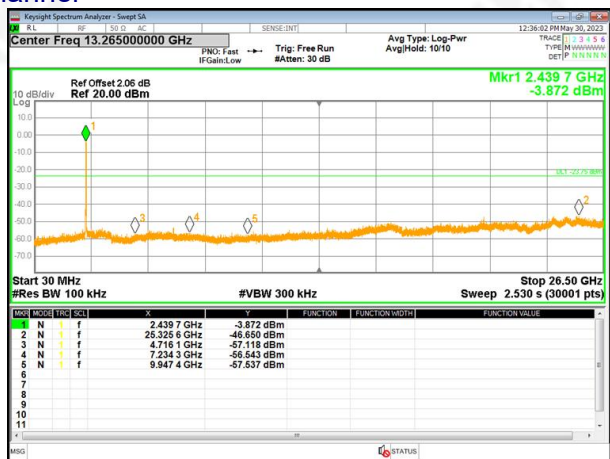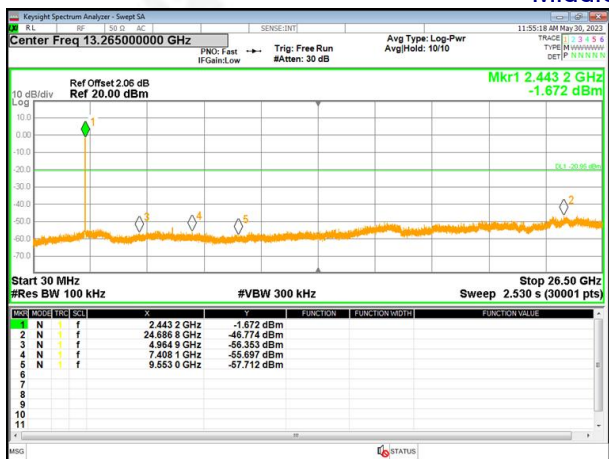

Highest channel

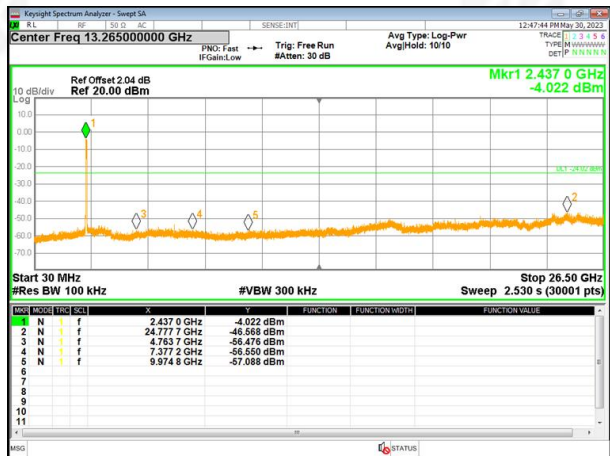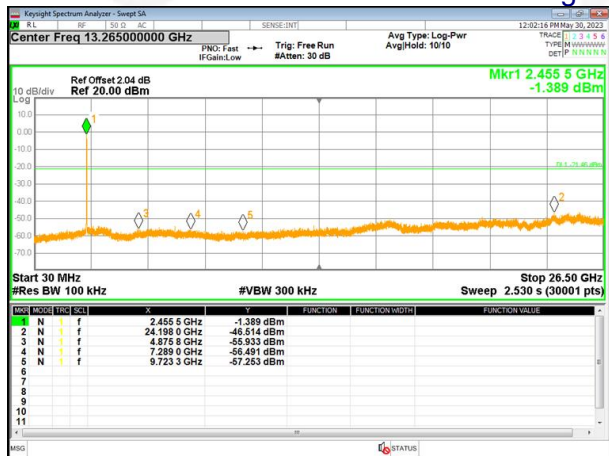



10. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(b)(4)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is FPC Antenna, the best case gain of the antenna is 0.68dBi, reference to the appendix II for details	



11. TEST SETUP PHOTO

Reference to the appendix I for details.

12. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****