

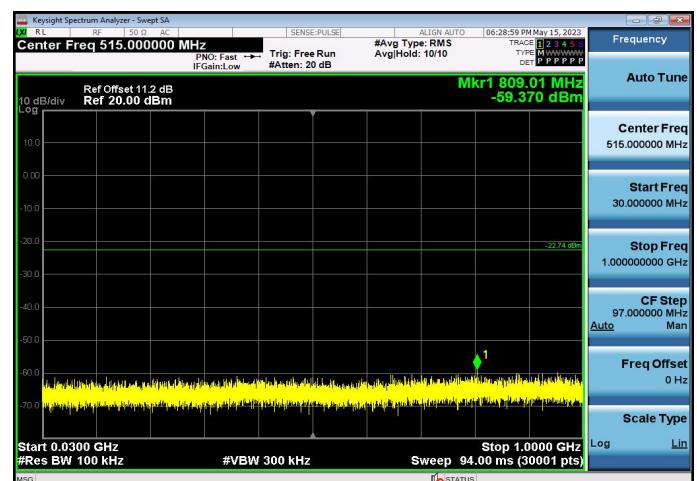
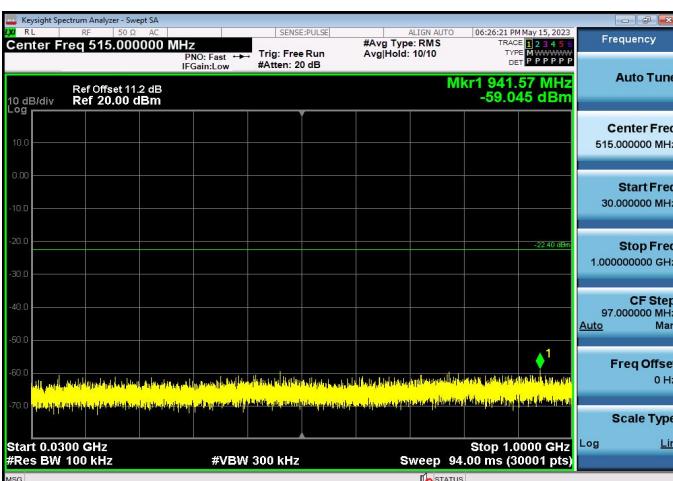
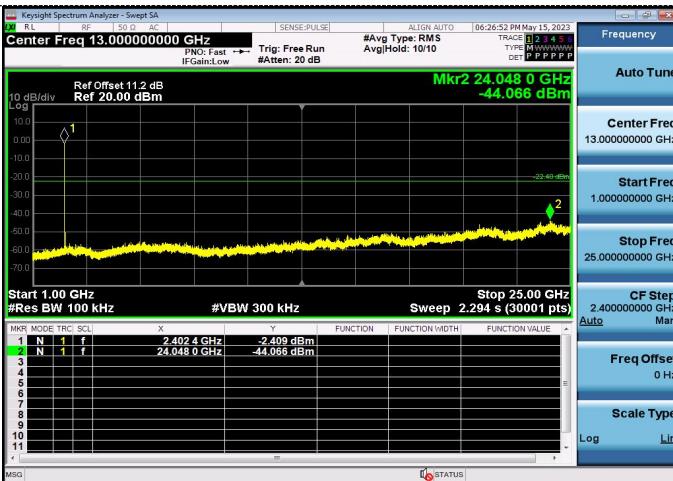


Right ear



**GFSK 1Mbps (CH00)****GFSK 1Mbps (CH19)****reference****reference****30MHz-1G****30MHz-1G**

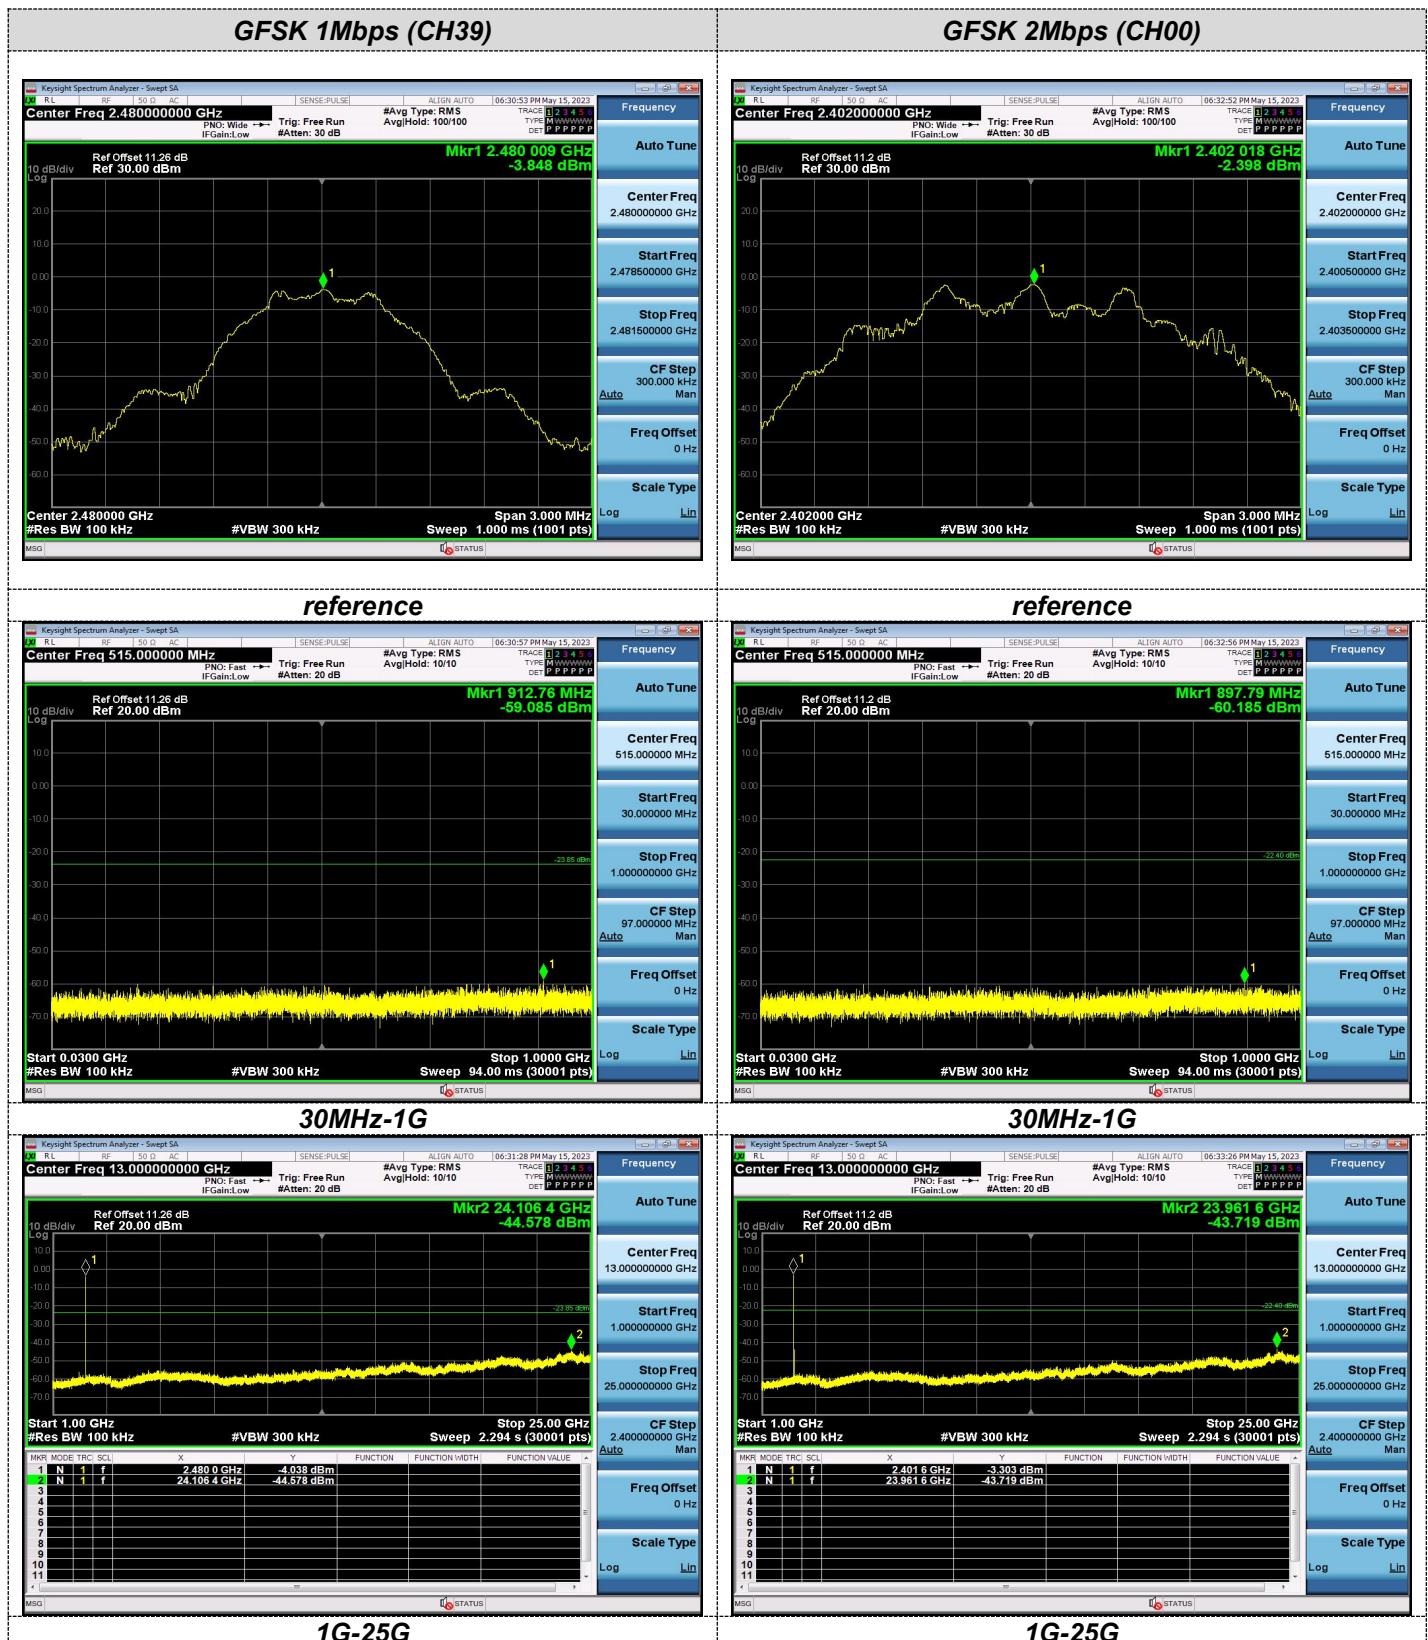


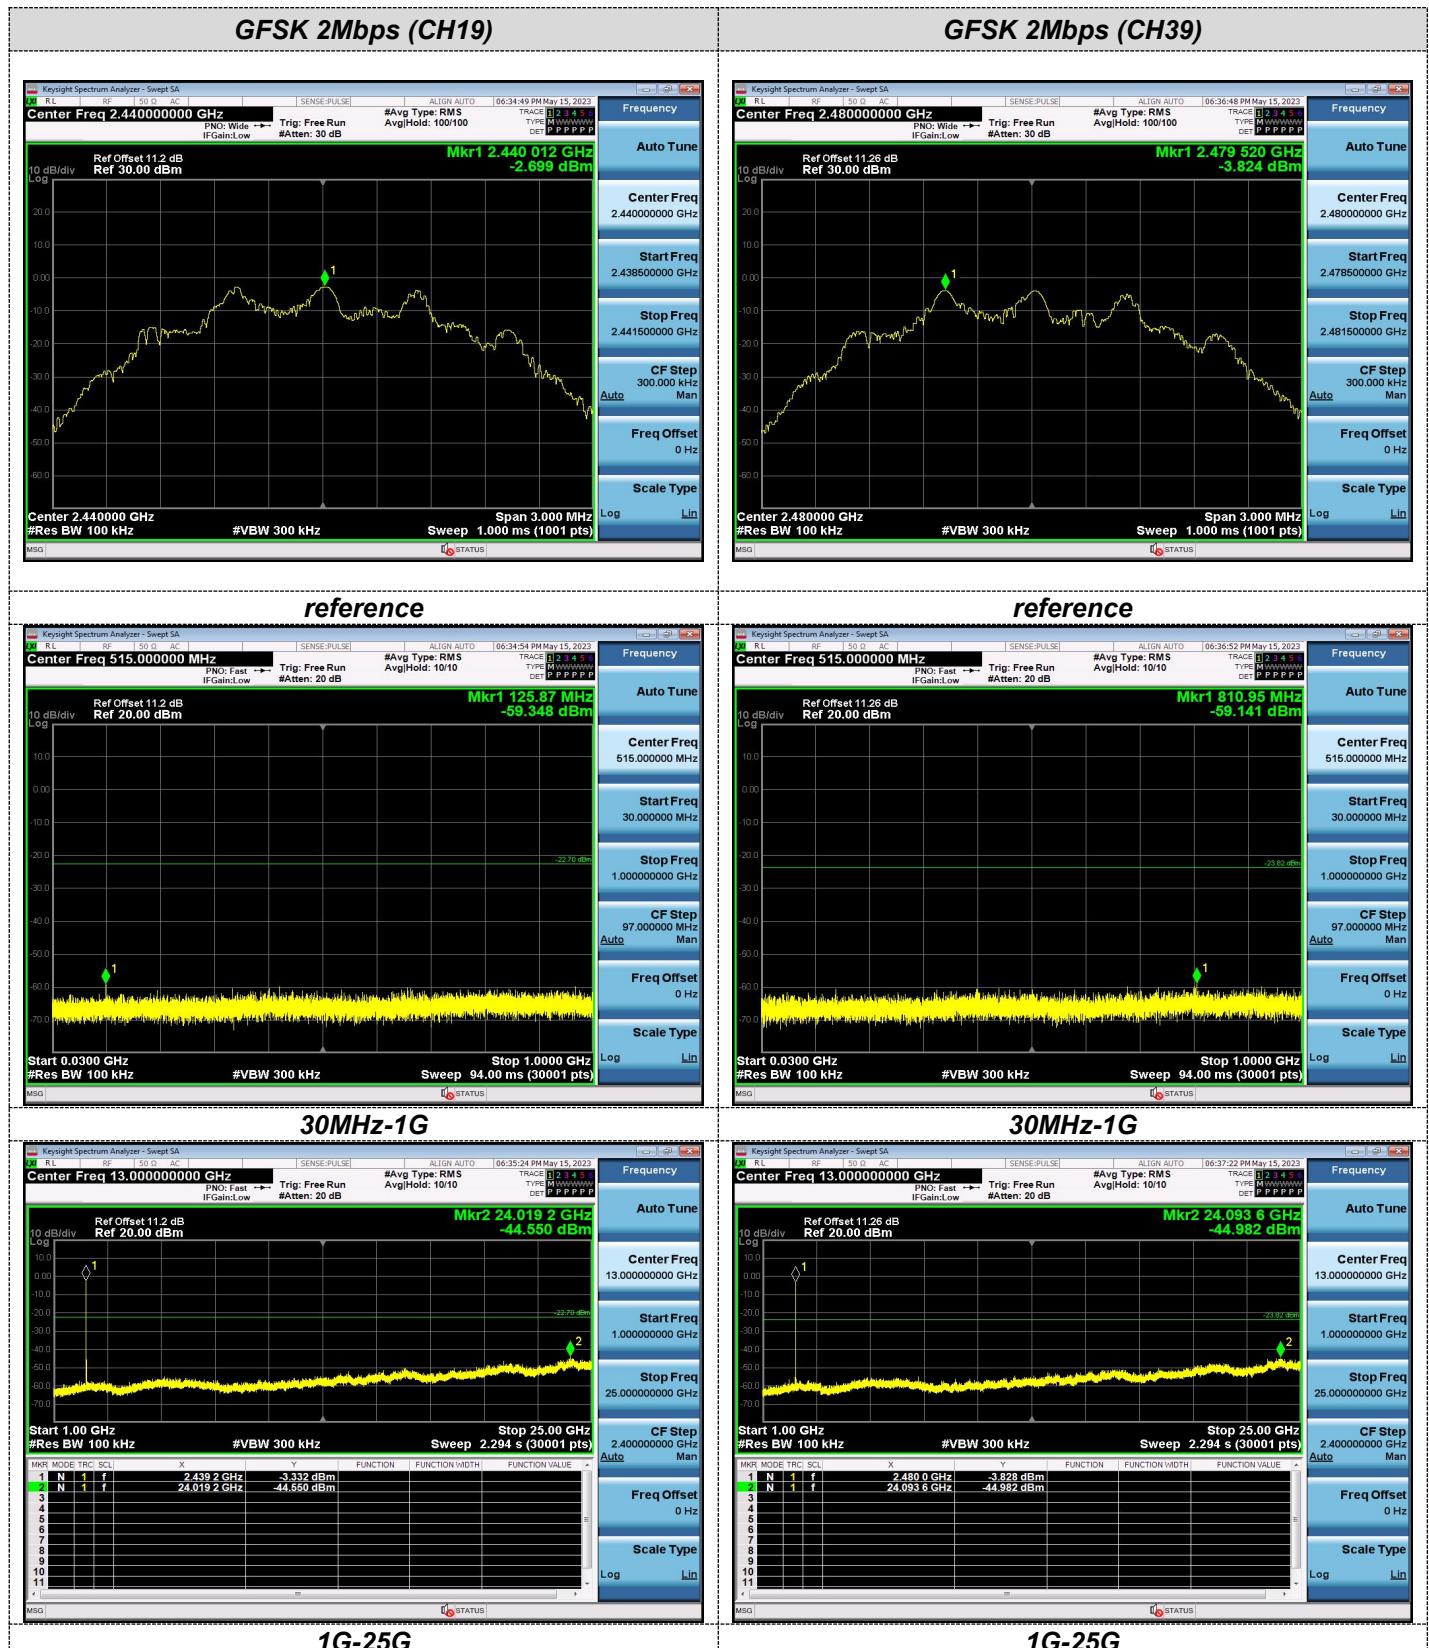


Band-edge Measurements for RF Conducted Emissions:

Left ear

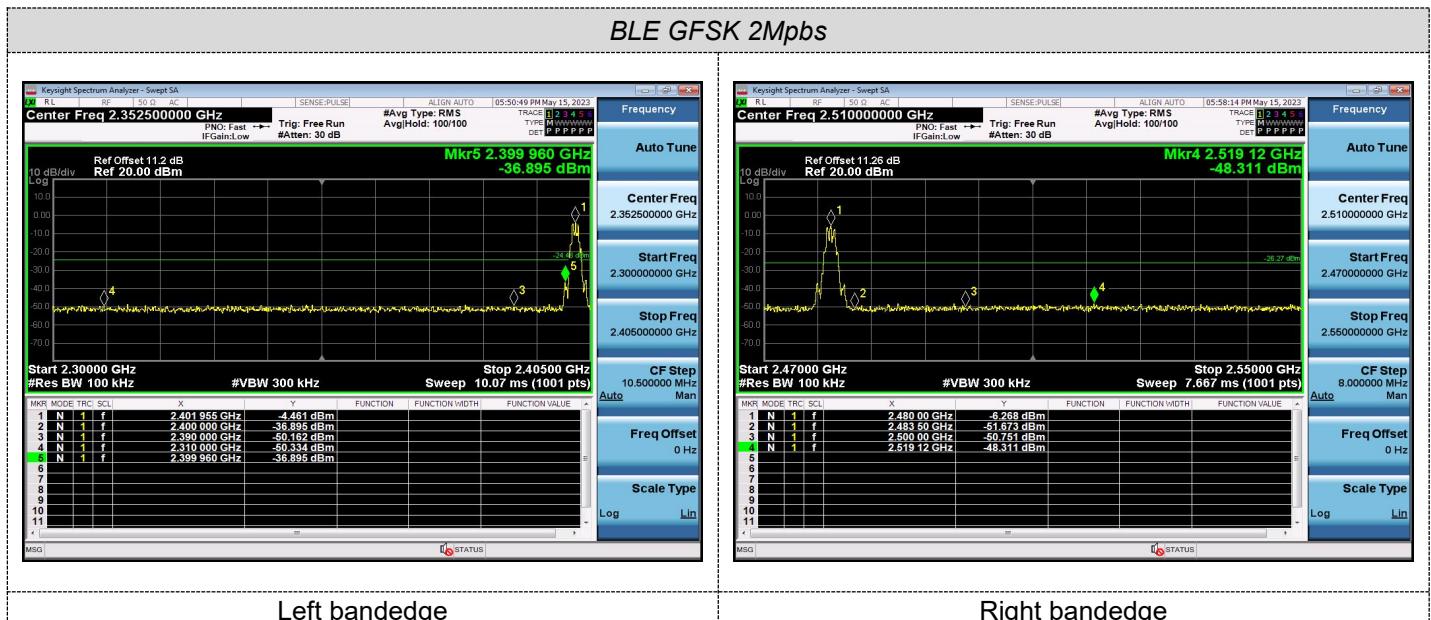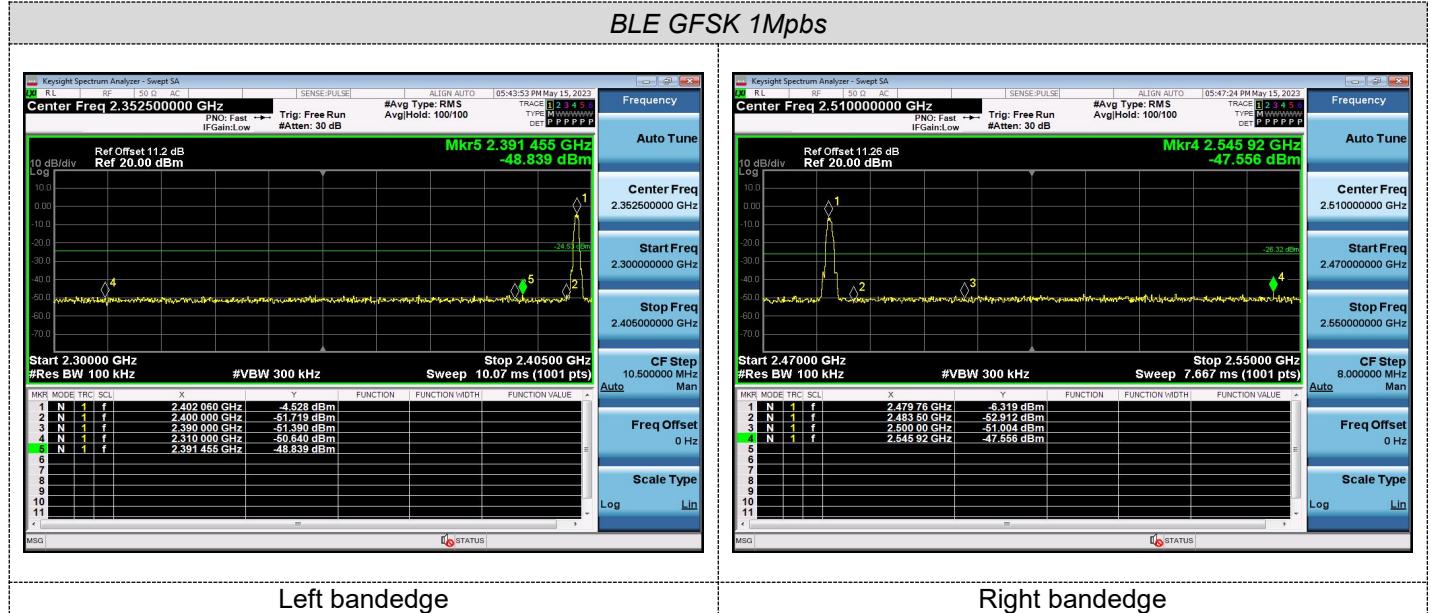

Right ear

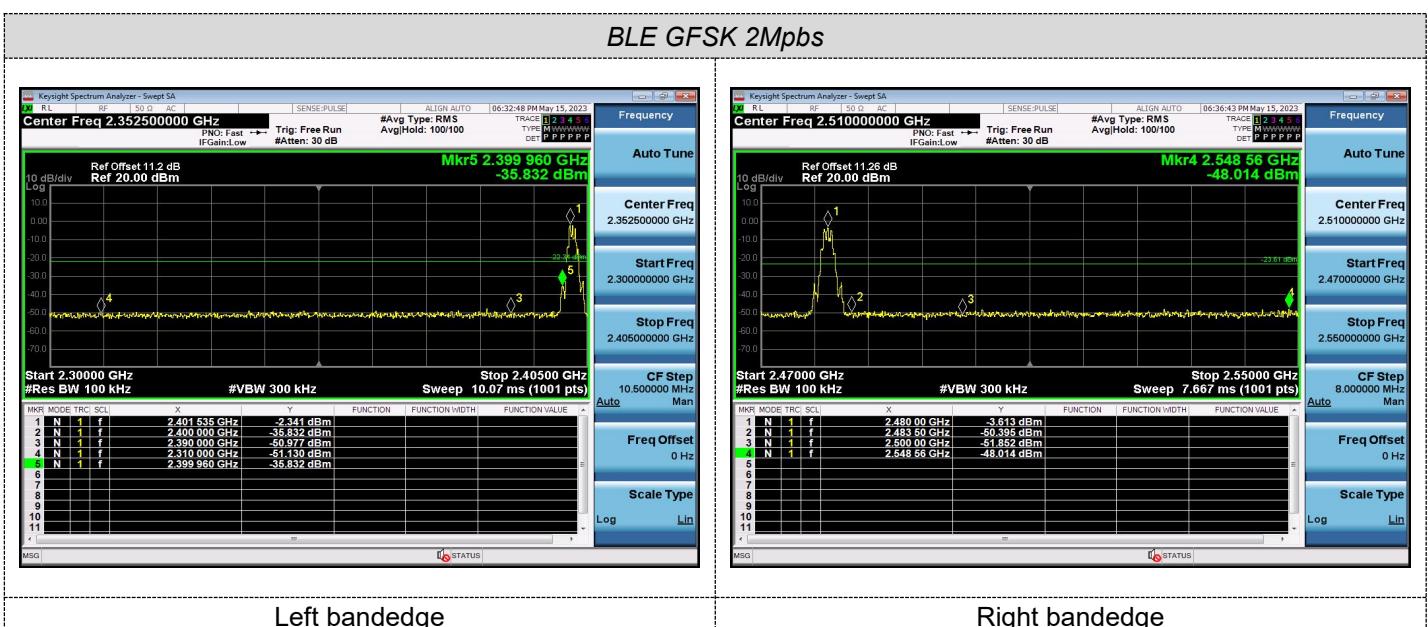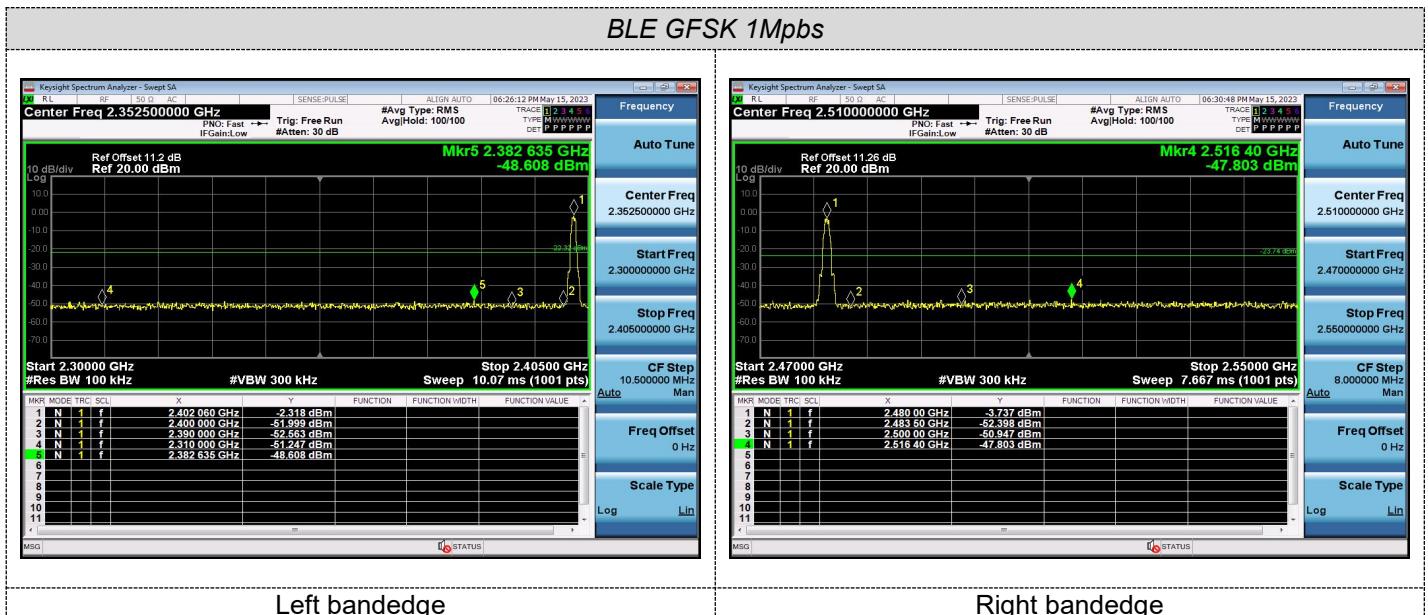

## 4.7 Antenna Requirement

### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):



(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### Antenna Connected Construction

The maximum gain of antenna was -4.62 dBi for left ear, the maximum gain of antenna was -2.04 dBi for right ear.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen GUOREN Certification Technology Service Co., Ltd. does not assume any responsibility.

## 5 Test Setup Photos of the EUT

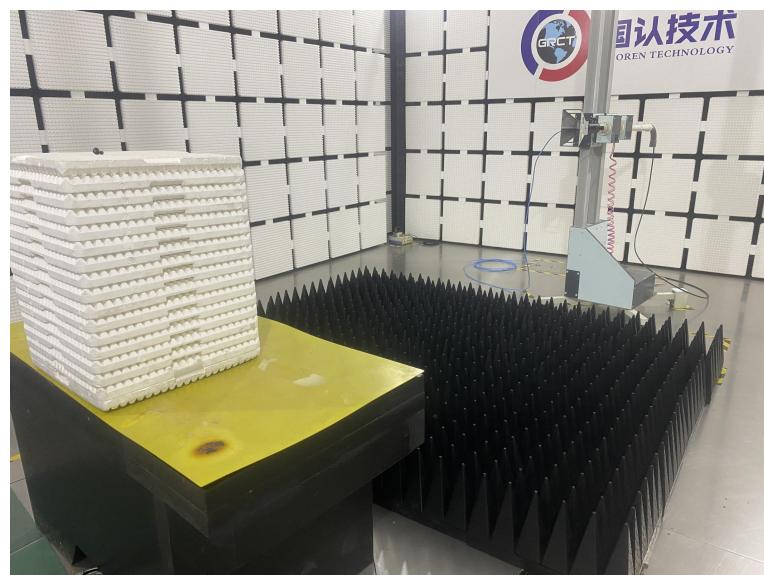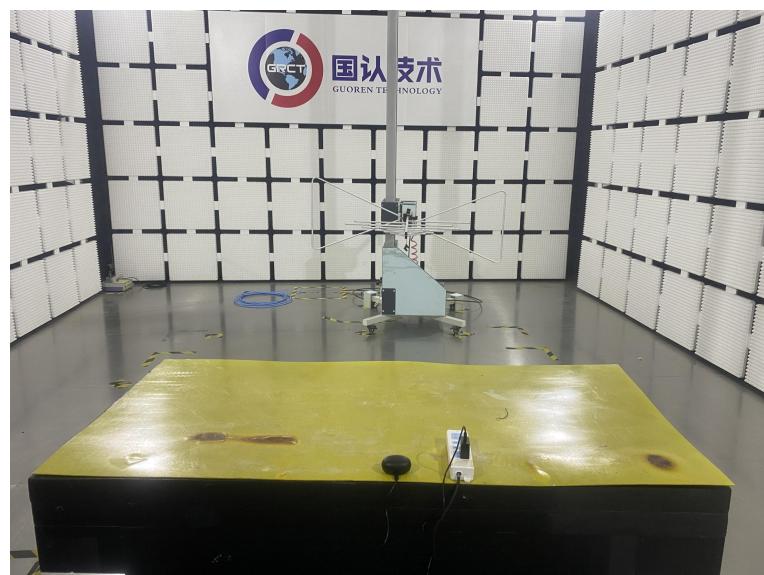

## **6 Photos of the EUT**

Reference to the test report No. **GRCTR230502003-01**.

\*\*\*\*\* **End of Report** \*\*\*\*\*