



# REPORT

## For

### **Avari Wireless Corporation**

8618 Commerce Court,  
Burnaby, BC V5A 4N6  
Canada  
1400 112th Ave SE, Ste 100, Bellevue, WA, USA 98004

Date of Issue: July 3, 2025  
Report No.: 20.01.25-1205-1  
Revison No.: Rev. 0  
Project No.: 25-1205  
Equipment: Tri-Band Medium Power Remote Unit  
Model No.: RU37-3-PS-BFH-21-5N-D0-1  
FCC ID: 2BA6ERU373PSBFH21B  
ISED ID: 32235-RU373PSBFH  
HVIN: RU37-3-PS-BFH-21-5N-D0-1

#### ONE STOP GLOBAL CERTIFICATION SOLUTIONS

ISO 17025 ACCREDITED

ISO 17020 ACCREDITED  
205 – 8291 92 Street, Delta, BC  
V4G 0A4, Canada  
Phone: 604-247-0444  
Fax: 604-247-0442  
[www.labtestcert.com](http://www.labtestcert.com)

ISO 17065 ACCREDITED

## Table of Contents

TEST REPORT .....	4
Revision History .....	5
Result Summary.....	6
1. EUT Information .....	8
EUT Description and Variant Models .....	8
Client Equipment Used During Test .....	11
Software and Firmware.....	11
Input/Output Ports.....	11
Power Interface.....	12
EUT Operation Modes .....	12
EUT Configuration Modes .....	12
2. Description of Test Setup .....	13
Test Equipment Verified for function .....	13
Measurement Uncertainty .....	13
Test Station Photo .....	14
Test Station Cables and Loads .....	14
Test Station Insertion Loss .....	14
3. Test Result .....	15
3.1 AGC Threshold .....	15
Test setup .....	16
Results – Output Power FCC Requirement .....	16
3.2 Occupied Bandwidth.....	17
Test setup .....	18
3.3 Out of Band Rejection .....	37
Test setup .....	37
Results - Out of Band Rejection (150PS) .....	38
Results - Out of Band Rejection (450 PS) .....	39
Results - Out of Band Rejection (800PS) .....	41
3.4 Input-Versus-Output Signal Comparison.....	43
Test setup .....	44
Results - Spectrum Emission Mask (150PS) .....	45
Results - Spectrum Emission Mask (450 PS) .....	55
Results - Spectrum Emission Mask (800PS) .....	65
3.5 Input/Output Power and Amplifier/Booster Gain .....	78
Test setup .....	78
Results .....	79
3.6 Out-Of-Band / Out-Of-Block Intermodulation and Spurious Emissions.....	80
Test setup .....	81
Results .....	82
3.7 Noise Figure .....	109
Test setup .....	110
Results .....	110
3.8 Frequency Stability .....	111
3.9 Radiated Spurious Emissions – Enclosure 9 kHz – 30 MHz .....	112
Test Method .....	113
Test Setup .....	113
Test Result .....	114
3.10 Radiated Spurious Emissions – Enclosure 30 MHz – 1 GHz.....	115
Test Method .....	116

Test Setup	116
Test Result	118
3.11 Radiated Spurious Emissions – Enclosure above 1 GHz .....	119
Test Method	120
Test Setup	120
Test Result	121
3.12 Conducted Emissions at AC Power Port.....	122
Test Method	122
Test Setup	123
Test Results	124
List of test equipment .....	126
Annex .....	127
Annex 1 - ISO 17025 ACCREDITATION CERTIFICATE.....	127

## TEST REPORT

**RSS-119 — Land Mobile and Fixed Equipment Operating in the Frequency Range 27.41-960 MHz**  
**RSS-Gen — General Requirements for Compliance of Radio Apparatus**  
**FCC Part 90 - PRIVATE LAND MOBILE RADIO SERVICES**

<b>Report Reference No.</b> .....	20.01.25-1205-1
<b>Report Revision History</b> .....	Rev. 0 July 3, 2025
Compiled by (+ signature) .....	Zara Vali 
Approved by (+ signature) .....	Jack Qin 
Date of issue .....	July 3, 2025
Total number of pages .....	126
<b>FCC Site Registration No.:</b>	CA5970
<b>IC Site Registration No.:</b>	5970A-2
<b>Testing Laboratory</b> .....	LabTest Certification Inc.
Address .....	Unit 3128-20800 Westminster HWY, Richmond, BC, V6V 2W3, Canada
<b>Applicant's name</b> .....	Avari Wireless Corporation
Address .....	8618 Commerce Court, Burnaby, BC V5A 4N6 Canada 1400 112th Ave SE, Ste 100, Bellevue, WA, USA 98004
<b>Manufacturer's Name</b> .....	Avari Wireless Corporation
Address .....	8618 Commerce Court, Burnaby, BC V5A 4N6 Canada 1400 112th Ave SE, Ste 100, Bellevue, WA, USA 98004
<b>Test specification:</b>	
Standards .....	<ul style="list-style-type: none"><li>➤ RSS-119, Issue 12 2015, Amendment (April 1, 2022)</li><li>➤ RSS-Gen, Issue 5 2018</li><li>➤ RSS-131, Issue 4 2022</li><li>➤ FCC Part 90</li><li>➤ FCC Part 2</li></ul>
Test procedure .....	<ul style="list-style-type: none"><li>➤ ANSI C63.26: 2015</li><li>➤ KDB 935210 D05, v01r04</li></ul>
<b>Test item description :</b>	
Trade Mark .....	RU37™
Model/Type reference (HVIN) .....	RU37-3-PS-BFH-21-5N-D0-1

Prepared by: LabTest Certification Inc.  
Date Issued: July 3, 2025  
Project No.: 25-1205

Client: Avari Wireless Inc.  
Report No.: 20.01.25-1205-1  
Revision No.: Rev 0

FVIN.....	7
PMN.....	VL-Series Remote Unit
Serial Number .....	10911183E01BF5011
FCC ID .....	2BA6ERU373PSBFH21B

#### Possible test case verdicts:

- test case does not apply to the test object .....	N/A
- test object does meet the requirement.....	P (Pass)
- test object does not meet the requirement.....	F (Fail)
Date of receipt of test item .....	June 16, 2025
Date of performance of tests .....	June 16-17, 2025

#### Revision History

Revision	Date	Reason For Change	Author
0	July 3, 2025	Initial Data	Zara Vali

## Result Summary

The tests indicated in Test Summary were performed on the product constructed as described below. The test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested **complies** with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item tested. LabTest does not make any claims of compliance for samples or variants which were not tested.

The Compliance Status is a judgment based on the direct measurements and calculated highest emissions to appropriate standard limits. Measurement uncertainty values, provided on calibration certificates, were not be used in the judgment of the final status of compliance.

Test Item	Standard	Measurement Method	Result
AGC Threshold	RSS-119, Issue 12 2015, Amendment (April 1, 2022) RSS-Gen, Issue 5 2018 FCC Part 2 2.1046(a) FCC Part 90	ANSI C63.26-2015, Section 7.2.3.1 KDB 935210 D05, v01r04, Clause 3.2, 4.2	PASS
Occupied Bandwidth	RSS-119, Issue 12 2015, Amendment (April 1, 2022) RSS-Gen, Issue 5 2018 FCC Part 2 2.1046(a) FCC Part 90	ANSI C63.26-2015, Section 7.2.3.1 KDB 935210 D05, v01r04	PASS
Out of Band Rejection	RSS-119, Issue 12 2015, Amendment (April 1, 2022) RSS-Gen, Issue 5 2018 FCC Part 90	ANSI C63.26-2015, Section 7.2.3.2 KDB 935210 D05, v01r04, Clause 3.3, 4.3	PASS
Input-versus-output Signal Comparison	RSS-119, Issue 12 2015, Amendment (April 1, 2022) RSS-Gen, Issue 5 2018 FCC Part 90	ANSI C63.26-2015, Section 7.2.3.3 KDB 935210 D05, v01r04, Clause 3.4, 4.4	PASS
Input/output Power and Amplifier/Booster Gain	RSS-119, Issue 12 2015, Amendment (April 1, 2022) RSS-Gen, Issue 5 2018 FCC Part 90	ANSI C63.26-2015, Section 7.2.3.4 KDB 935210 D05, v01r04, Clause 3.5, 4.5	PASS
Noise Figure	RSS-119, Issue 12 2015, Amendment (April 1, 2022) RSS-Gen, Issue 5 2018 FCC Part 90	ANSI C63.26-2015, Section 7.2.3.5 KDB 935210 D05, v01r04, Clause 4.6	PASS
Measuring out-of-band/out-of-block (including intermodulation) and spurious emissions	RSS-119, Issue 12 2015, Amendment (April 1, 2022) RSS-Gen, Issue 5 2018 FCC Part 90	ANSI C63.26-2015, Section 7.2.3.6 Section 7.2.3.7 KDB 935210 D05, v01r04, Clause 3.6, 4.7	PASS
Frequency stability	RSS-119, Issue 12 2015, Amendment (April 1, 2022) RSS-Gen, Issue 5 2018 FCC Part 2.1055	ANSI C63.26-2015, Section 7.2.3.8 KDB 935210 D05, v01r04, Clause 3.7, 4.8	N/A

Prepared by: LabTest Certification Inc.  
Date Issued: July 3, 2025  
Project No.: 25-1205

Client: Avari Wireless Inc.  
Report No.: 20.01.25-1205-1  
Revision No.: Rev 0

Spurious emissions radiated measurements above 1 GHz	RSS-119, Issue 12 2015, Amendment (April 1, 2022) RSS-Gen, Issue 5 2018 FCC Part 90 FCC Part 2.1053	ANSI C63.26-2015, Section 7.2.3.9 KDB 935210 D05, v01r04, Clause 3.8, 4.9	PASS
Spurious radiated emissions below 1 GHz	RSS-119, Issue 12 2015, Amendment (April 1, 2022) RSS-Gen, Issue 5 2018 FCC Part 90 FCC Part 2.1053	ANSI C63.26-2015, Section 5.5 KDB 935210 D05, v01r04, Clause 3.8, 4.9	PASS
Conducted Emissions at AC Main	RSS-119, Issue 12 2015, Amendment (April 1, 2022) RSS-Gen, Issue 5 2018 FCC Part 90	ANSI C63.4: 2014	PASS

## 1. EUT Information

### EUT Description and Variant Models

#### Description:

The 150-450-800MHz RU37 is a Tri-band Remote Unit (RU) that provides up to 5 Watt of output power per band. The unit supports up to 3 bands in a sealed chassis for Class A operation.

On the downlink path, the RU37 remote unit receives a stream of digitized RF signals from a Master Unit. The RU then converts the digital signal into analog RF signals. The analog RF signal is further amplified in the RF module and then sent through a filter to passive antenna for broadcasting.

On the Uplink path, the RU37 PS remote unit receives analog RF signals from portable radios over the air through passive antennae. The RF signals are then converted into a digital data stream and delivered over optical fiber to a Master Unit DMU . The RU37 Remote Unit also accommodates a 1 Gbps Ethernet backhaul for transporting IP data from nearby IP devices such as security cameras and Wi-Fi access points.

The intentional transmitter only exists in the downlink path and hence the EMC tests in this report is dedicated to the downlink emission.

In order to build up a complete signal booster system, the DMU was connected as the Auxiliary device. The DMU does NOT radiate over an antenna port. The radio RF signal source was directly injected and received via coaxial cables.

EUT Picture



#### Variant Models:

The following variant models were not tested as part of this evaluation but have been identified by the manufacturer as being electrically identical models, depopulated models, or with reasonable similarity to the models tested. LabTest does not make any claims of compliance for samples or variants which were not tested.

The variant models of RU37-3-PS-BFH-21-5N-D0-1 are listed as follows:

Tri Band

RU33-3-PS-BFH-21-5N-D0-1  
RU37-3-PS-BFH-21-5N-A0-1  
RU33-3-PS-BFH-21-5N-A0-1

Dual Band

RU37-2-PS-FH-21-3N-D0-1  
RU33-2-PS-FH-21-3N-D0-1  
RU37-2-PS-FH-21-3N-A0-1  
RU33-2-PS-FH-21-3N-A0-1  
RU37-2-PS-BH-21-1N-D0-1  
RU33-2-PS-BH-21-1N-D0-1  
RU37-2-PS-BH-21-1N-A0-1  
RU33-2-PS-BH-21-1N-A0-1  
RU37-2-PS-BF-21-3N-D0-1  
RU33-2-PS-BF-21-3N-D0-1  
RU37-2-PS-BF-21-3N-A0-1  
RU33-2-PS-BF-21-3N-A0-1

Single Band

RU37-1-PS-F-21-1N-D0-1  
RU33-1-PS-F-21-1N-D0-1  
RU37-1-PS-F-21-1N-A0-1  
RU33-1-PS-F-21-1N-A0-1  
RU37-1-PS-B-21-1N-D0-1  
RU33-1-PS-B-21-1N-D0-1  
RU37-1-PS-B-21-1N-A0-1  
RU33-1-PS-B-21-1N-A0-1  
RU37-1-PS-H-21-1N-D0-1  
RU33-1-PS-H-21-1N-D0-1  
RU37-1-PS-H-21-1N-A0-1  
RU33-1-PS-H-21-1N-A0-1

Application for .....	PS 150-450-800MHz Remote Unit, Tri Band Medium Power DAS
Passing Transmit Frequency .....	851 MHz – 869 MHz 450 MHz – 480 MHz 152 MHz – 174 MHz
Operating Transmit Frequency FCC .....	851 MHz – 869 MHz 450 MHz – 454 MHz 456 MHz – 462.5375 MHz 462.7375 MHz – 467.5375 MHz 467.7375 MHz – 480 MHz 150.8 MHz – 156.2475 MHz 157.1875 MHz – 161.575 MHz 161.775 MHz – 161.9625 MHz 162.0375 MHz – 173.4 MHz

Passing Receive Frequency .....	806 MHz – 824 MHz 450 MHz – 480 MHz 152 MHz – 174 MHz
Operating Receive Frequency FCC.....	806 MHz – 824 MHz 450 MHz – 454 MHz 456 MHz – 462.5375 MHz 462.7375 MHz – 467.5375 MHz 467.7375 MHz – 480 MHz 150.8 MHz – 156.2475 MHz 157.1875 MHz – 161.575 MHz 161.775 MHz – 161.9625 MHz 162.0375 MHz – 173.4 MHz
Number of Channels .....	Up to 32 channels
Rated RF Output (e.i.r.p.) .....	37 dBm
Modulation Type .....	P25 Phase I C4FM, CQPSK; P25 Phase II HDQPSK on full band of Band 800, Band 450 and Band 150 FM on Band 800 between 851 MHz – 869 MHz only;
Equipment mobility .....	Fixed
Operating condition.....	-40 to +50 °C
Mass of equipment (g).....	< 39,000g
Dimensions (W X D X H)	434.1 x 683.4 x 314.2 mm
Supply Voltage:	<u>48V</u> DC <u>5</u> Amps
If DC Power:	<p><input type="checkbox"/> Internal Power Supply  <input checked="" type="checkbox"/> External Power Supply  <input type="checkbox"/> Battery</p> <p><input type="checkbox"/> Nickel Cadmium  <input type="checkbox"/> Alkaline  <input type="checkbox"/> Nickel-Metal Hydride  <input type="checkbox"/> Lithium-Ion  <input type="checkbox"/> Other</p>

### Client Equipment Used During Test

Use*	Product Type	Manufacturer	Model	Comments
EUT	<i>RU37, 150-450-800 PS</i>	Avari Wireless Corporation	VL-RU37-3-PS-BFH-21-D0-1	EUT where the RF (I/O) antenna is attached via duplexers/multiplexer when necessary.
AE1	<i>DMU, 150PS, 450PS, 800PS</i>	Avari Wireless Corporation	VL-DMU-2-PS-FH-1-4N-D-1F	Auxiliary equipment, which is the front end of system interfaced to Base Station.
AE2	Element Manager (DMC)	Avari Wireless Corporation	EM-1A	Auxiliary equipment provides the configuration and control interface to <i>DMU</i> and <i>RU37</i> .
AE3	Power Supply	MeanWell	HGL-480H-48	AC to DC Converter, I/P: 120VAC, 60Hz, 5.5A O/P: +48VDC, 480W

Abbreviations:

EUT - Equipment Under Test,  
 AE - Auxiliary/Associated Equipment, or  
 SIM - Simulator (Not Subjected to Test)

### Software and Firmware

Use*	Description	Version
EUT	Software installed	7.2.1-0.6069
AE1	Software installed	7.2.1-0.6069
AE2	Software installed	7.2.1-0.1773

Abbreviations:

EUT - Equipment Under Test,  
 AE - Auxiliary/Associated Equipment, or  
 SIM - Simulator (Not Subjected to Test)

### Input/Output Ports

Port #	Name	Type*	Cable Max. >3m	Cable Shielded	Comments
1	DC Power Port	DC	No	No	Dual feed 48 VDC Assembly
2	1 * RF Input/Output Ports	I/O	No	No	N-Type Coaxial
3	2 * Optical Fibre I/O Ports	I/O	No	No	LC/UPC Duplex
4	2 * TP	TP	No	No	RJ-45

\*Note: AC = AC Power Port DC = DC Power Port N/E = Non-Electrical

I/O = Signal Input or Output Port (Not Involved in Process Control)

TP = Telecommunication Ports

Prepared by: LabTest Certification Inc.  
Date Issued: July 3, 2025  
Project No.: 25-1205

Client: Avari Wireless Inc.  
Report No.: 20.01.25-1205-1  
Revision No.: Rev 0

### Power Interface

Mode #	Voltage (V)	Current (A)	Power (W)	Frequency (DC/AC-Hz)	Phases (#)	Comments
1	48	5	240	DC	-	DC power port is connected to AC/DC convertor.

### EUT Operation Modes

Mode #	Description
1	UL and DL transmission and receiving ON

### EUT Configuration Modes

Mode #	Description
1	DMU maximum input threshold set to -10 dBm, uplink attenuation set to 0dB; RU uplink and downlink attenuation set to 0dB.

## 2. Description of Test Setup

### Test Equipment Verified for function


Model #	Description	Checked Function	Results
KT-N9038A	Spectrum Analyzer	Frequency and Amplitude	Connected 50MHz and -20 dBm Ref_signal and checked OK
JB1	Antenna, 30 to 2000MHz	Checked structure	Normal – no damage
SAS-571	Antenna, 1 to 18GHz	Checked structure	Normal – no damage
KT-N5172B	Signal Generator	Frequency, Amplitude and Modulation	Within MFR Specs
KT-N9020B-526	MXA Signal Analyzer	Frquency and Amplitude	Within MFR Specs

### Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests:

Parameter	Uncertainty
Radio Frequency	±1 ppm
Total RF Power: Conducted	±1 dB
RF Power Density: Conducted	±2.75 dB
Spurious Emissions: Conducted	±3 dB
Temperature	±1 °C
Humidity	±5 %
DC and Low Frequency Voltages	±3 %
Radiated Emission, 30 to 18,000MHz	± 4.95 dB

## Test Station Photo

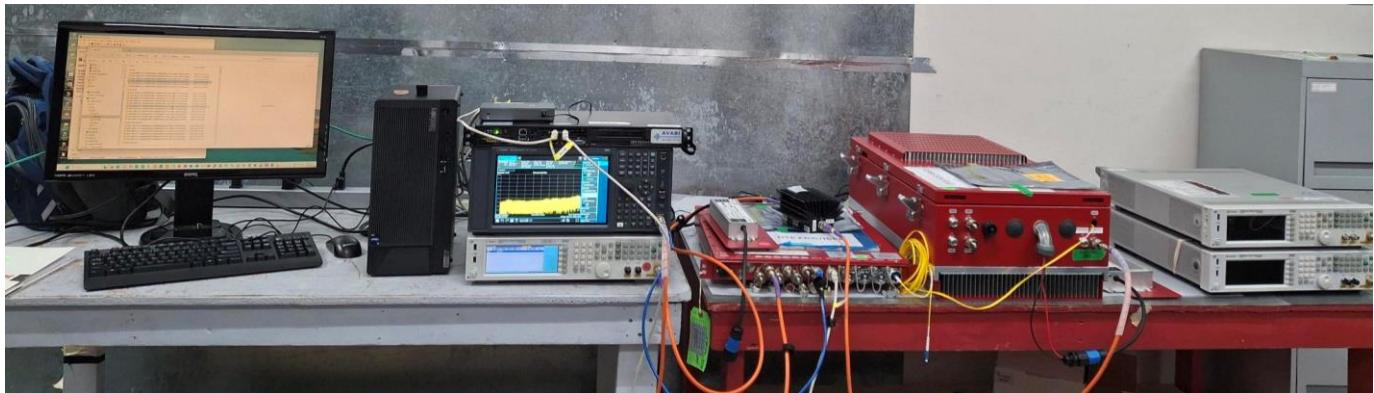

## Test Station Cables and Loads

Model #	Manufacture	Description
3 x TM8-N1S1-60	MegaPhase	N male to SMA male coaxial cable in 60 inches
1 x 49-30-34	Aeroflex	30dB 25W attenuator

## Test Station Insertion Loss

	Band 800
DL Transmitter	31.1
UL Receiver	0.6

	Band 450
DL Transmitter	30.6
UL Receiver	0.4

	Band 150
DL Transmitter	30.2
UL Receiver	0.2

### 3. Test Result

#### 3.1 AGC Threshold

Governing Doc	RSS-119, Issue 12 2015, Amendment (April 1, 2022) RSS-Gen, Issue 5 2018 FCC Part 2 2.1046(a) FCC Part 90		Room Temperature (°C)	21	
Test Procedure	ANSI C63.26-2015, Section 7.2.3.1 KDB 935210 D05, v01r04, Clause 3.2, 4.2		Relative Humidity (%)	45	
Test Location	Bench top, Richmond Lab		Barometric Pressure (hPa)	1012	
Test Engineer	Zara Vali		Date	June 16, 2025	
EUT Voltage	<input checked="" type="checkbox"/> +48VDC		<input type="checkbox"/> 120VAC @ 60Hz		
Test Equipment Used	Manufacturer	Model	Serial Number	Calibration date	Calibration due
Signal Generator	Keysight	N5172B-506	MY53050270	Dec 12, 2023	Dec 12, 2026
Spectrum Analyzer	Keysight	N9020B-526	MY62153079	Aug 1, 2023	Aug 1, 2025
Frequency Range:	<input checked="" type="checkbox"/> 150 MHz – 173.4 MHz <input checked="" type="checkbox"/> 450 MHz – 480 MHz <input checked="" type="checkbox"/> 851 MHz – 869 MHz				
Detector:	<input checked="" type="checkbox"/> Peak				
Type of Facility:	<input checked="" type="checkbox"/> Test bench				
Distance:	<input checked="" type="checkbox"/> Direct				
Arrangement of EUT:	<input checked="" type="checkbox"/> Table-top only		<input type="checkbox"/> Floor-standing only	<input type="checkbox"/> Rack Mounted	
Output power is:	less than or equal 36.83 dBm in 800 band less than or equal 32.97 dBm in 450 band less than or equal 32.83 dBm in 150 band				
Compliant	<input checked="" type="checkbox"/>	Non-Compliant	<input type="checkbox"/>	Not Applicable	<input type="checkbox"/>


## Test setup

### Description of test set-up:

Output power is measured by connecting a spectrum analyzer to RF output connector of EUT via 30dB Attenuator. With a nominal input power and the amplifier properly adjusted the RF output is measured.

The EUT was set to **Operation Mode #1 with configuration Mode #1**.

The maximum output power is measured when the Automatic Level Control (ALC) starting to compress the power and hold to a constant level.



## Results – Output Power FCC Requirement

Frequency Range (MHz)	Frequency (MHz)	Input Power Trip ALC (dBm)	Output Power (dBm)	Output Power (Watt)
150 PS 152 – 173.4	152	-9	32.83	1.92
	162.7	-9.8	32.5	1.78
	173.4	-10.8	32.3	1.7

Frequency Range (MHz)	Frequency (MHz)	Input Power Trip ALC (dBm)	Output Power (dBm)	Output Power (Watt)
450 PS 450 - 480	450	-10.4	32.94	1.97
	465	-11.4	32.97	1.98
	480	-10.4	32.3	1.7

Frequency Range (MHz)	Frequency (MHz)	Input Power Trip ALC (dBm)	Output Power (dBm)	Output Power (Watt)
800PS 851 - 869	851	-5.6	36.83	4.82
	860	-7.2	36.75	4.73
	869	-7.8	36.49	4.46

### 3.2 Occupied Bandwidth

Governing Doc	RSS-119, Issue 12 2015, Amendment (April 1, 2022) RSS-Gen, Issue 5 2018 FCC Part 2 2.1046(a) FCC Part 90		Room Temperature (°C)	21		
Test Procedure	ANSI C63.26: 2015		Relative Humidity (%)	45		
Test Location	Bench top, Richmond Lab		Barometric Pressure (hPa)	1012		
Test Engineer	Zara Vali		Date	June 16, 2025		
EUT Voltage	<input checked="" type="checkbox"/> +48VDC		<input type="checkbox"/> 120VAC @ 60Hz			
Test Equipment Used	Manufacturer	Model	Serial Number	Calibration date		
Signal Generator	Keysight	N5172B-506	MY53050270	Dec 12, 2023		
Spectrum Analyzer	Keysight	N9020B-526	MY62153079	Aug 1, 2023		
Frequency Range:	<input checked="" type="checkbox"/> 150 MHz – 173.4 MHz <input checked="" type="checkbox"/> 450 MHz – 480 MHz <input checked="" type="checkbox"/> 851 MHz – 869 MHz					
Detector:	<input checked="" type="checkbox"/> Peak					
Type of Facility:	<input checked="" type="checkbox"/> Test bench					
Distance:	<input checked="" type="checkbox"/> Direct					
Arrangement of EUT:	<input checked="" type="checkbox"/> Table-top only		<input type="checkbox"/> Floor-standing only	<input type="checkbox"/> Rack Mounted		
Output signal has an 99% occupied channel bandwidth less than the designated channel bandwidth on any location on the operating band.						
<ul style="list-style-type: none"> <li>- C4FM &lt; 8.261 kHz</li> <li>- CQPSK &lt; 4.912 kHz</li> <li>- HDQPSK &lt; 9.573 kHz</li> </ul>						
<input checked="" type="checkbox"/> Compliant		<input type="checkbox"/> Non-Compliant	<input type="checkbox"/> Not Applicable	<input type="checkbox"/>		

## Test setup



Occupied Bandwidth is measured by connecting a Spectrum Analyzer to the RF output connector via 30dB attenuator. The required measurement resolution bandwidth (RBW) is 1% of the emission bandwidth. 99% energy rule was applied to measure the occupied channel bandwidth. The emission bandwidth is measured as the width of the signal between two frequency points on the channel edge, outside of which the transmission power is attenuated at least 26dB below the transmitter output power

The EUT was set to **Operation Mode #1 with configuration Mode #1**.

The occupied bandwidth of UL output is measured under one input conditions: Nominal: with input 0.5dB below AGC threshold



## Results – Occupied Bandwidth 150PS

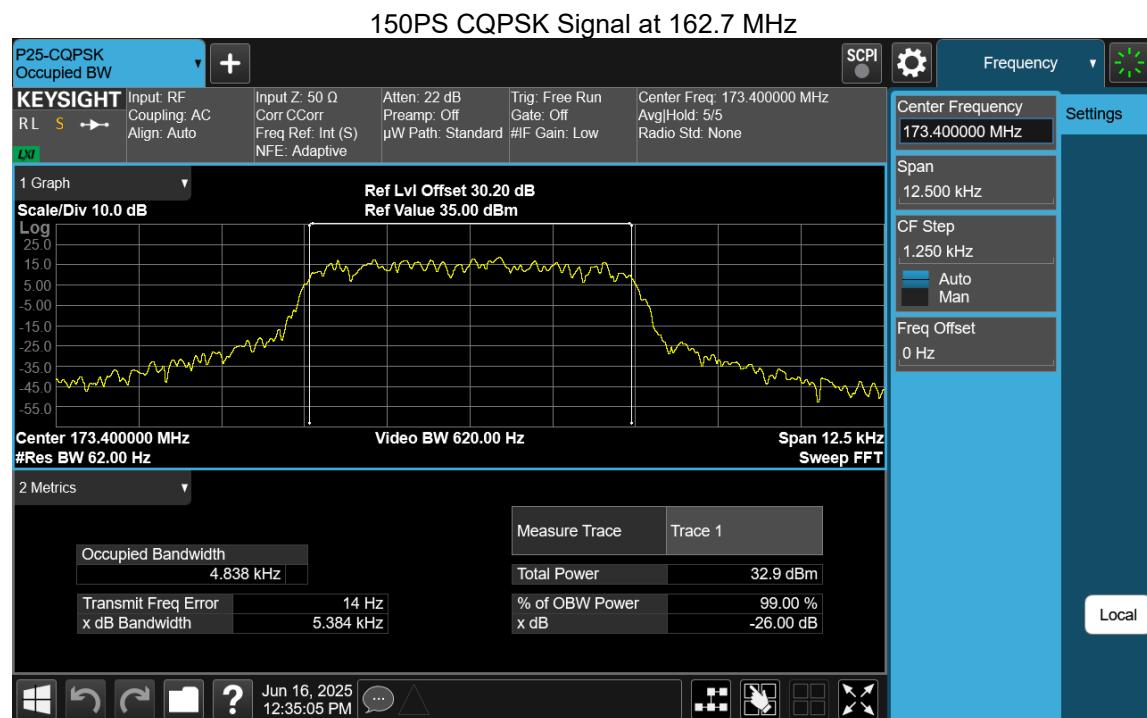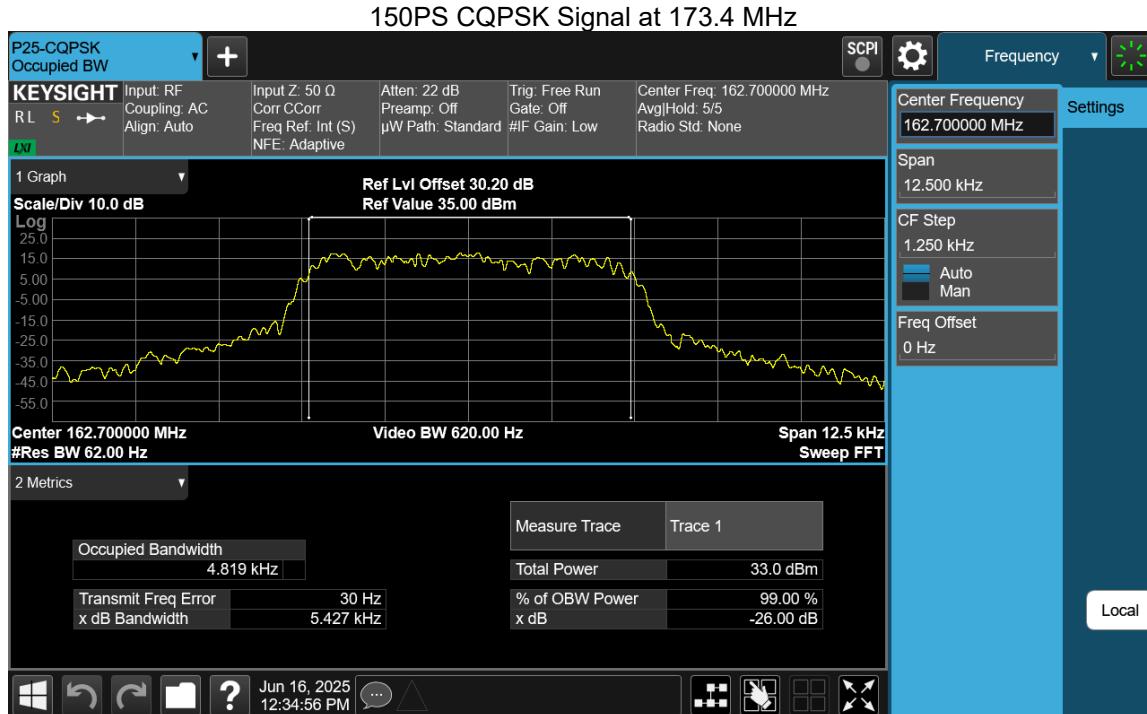




Prepared by: LabTest Certification Inc.  
 Date Issued: July 3, 2025  
 Project No.: 25-1205



Client: Avari Wireless Inc.  
 Report No.: 20.01.25-1205-1  
 Revision No.: Rev 0



### 150PS C4FM Signal at 173.4 MHz



### 150PS C4FM Signal at 162.7 MHz

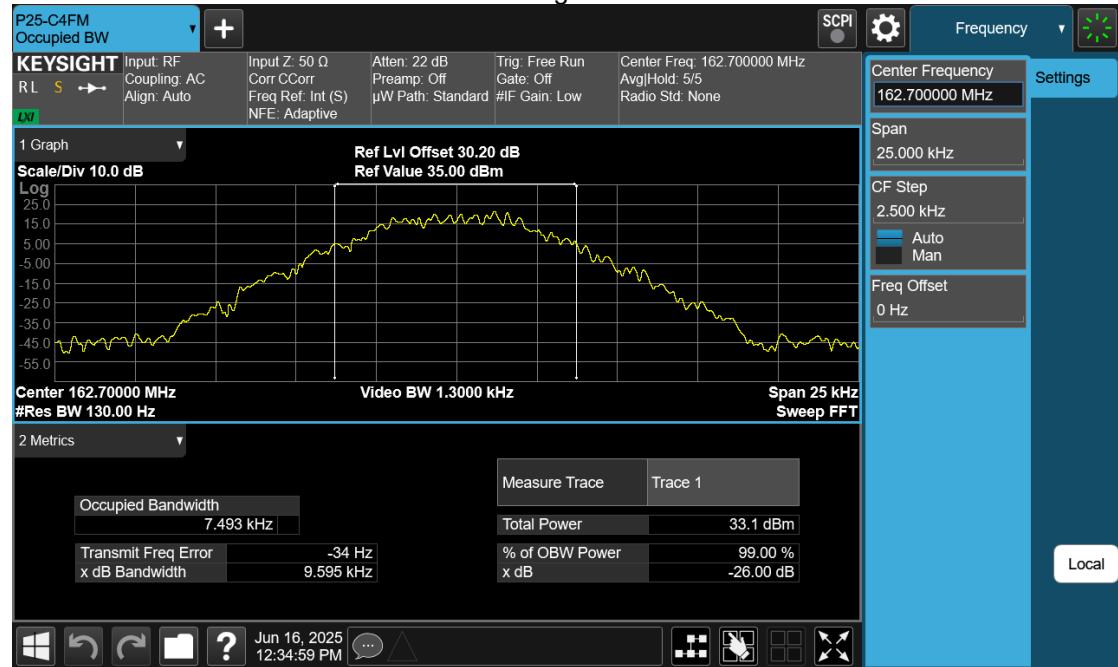


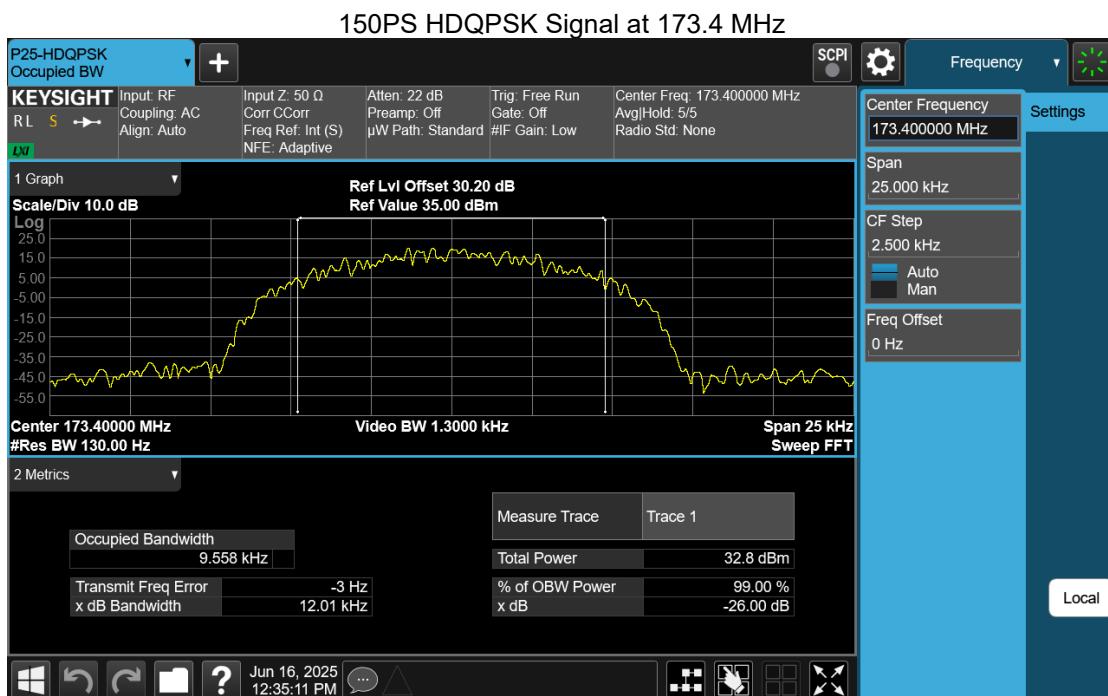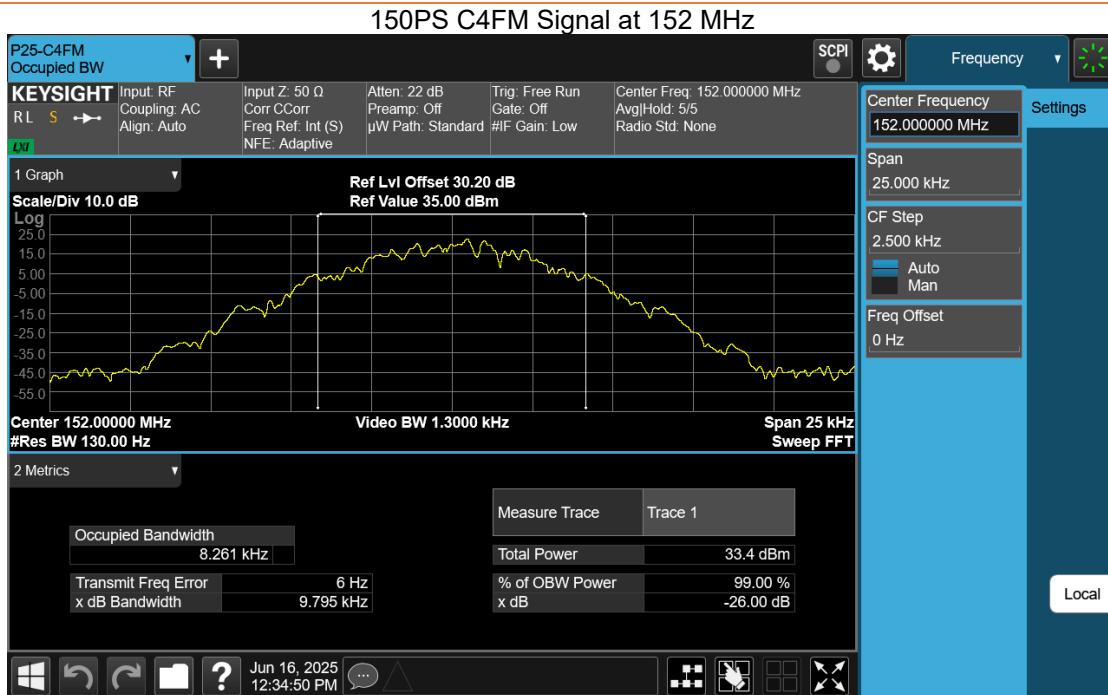

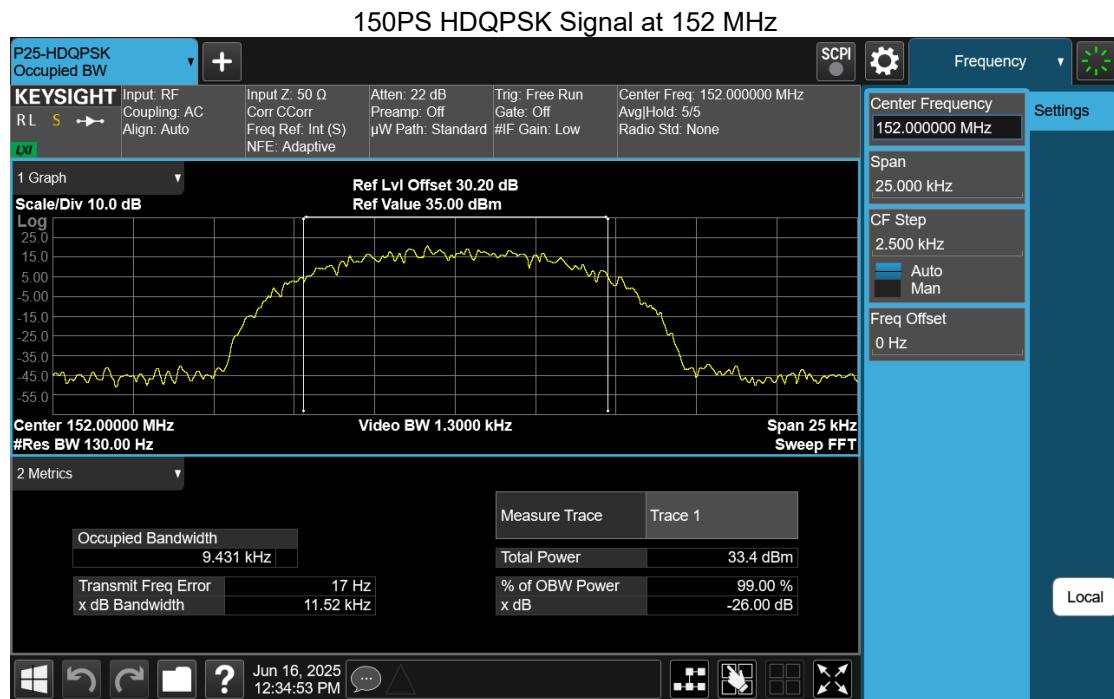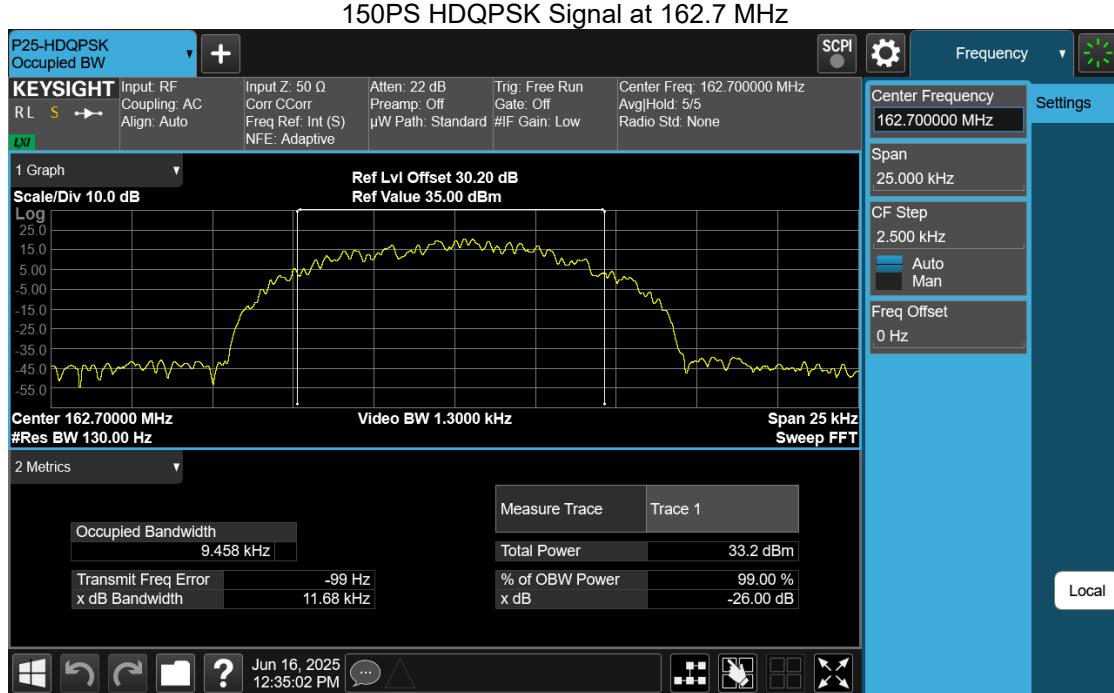



## Results – Occupied Bandwidth 450 PS



### 450 PS CQPSK Signal at 480 MHz


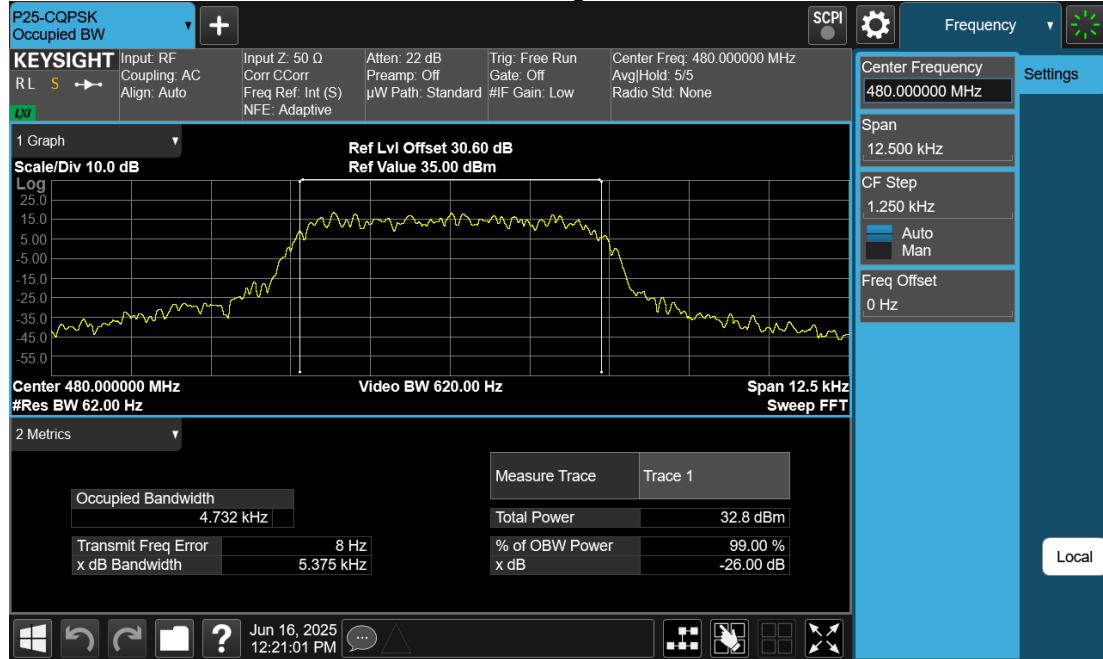




### 450 PS CQPSK Signal at 465 MHz

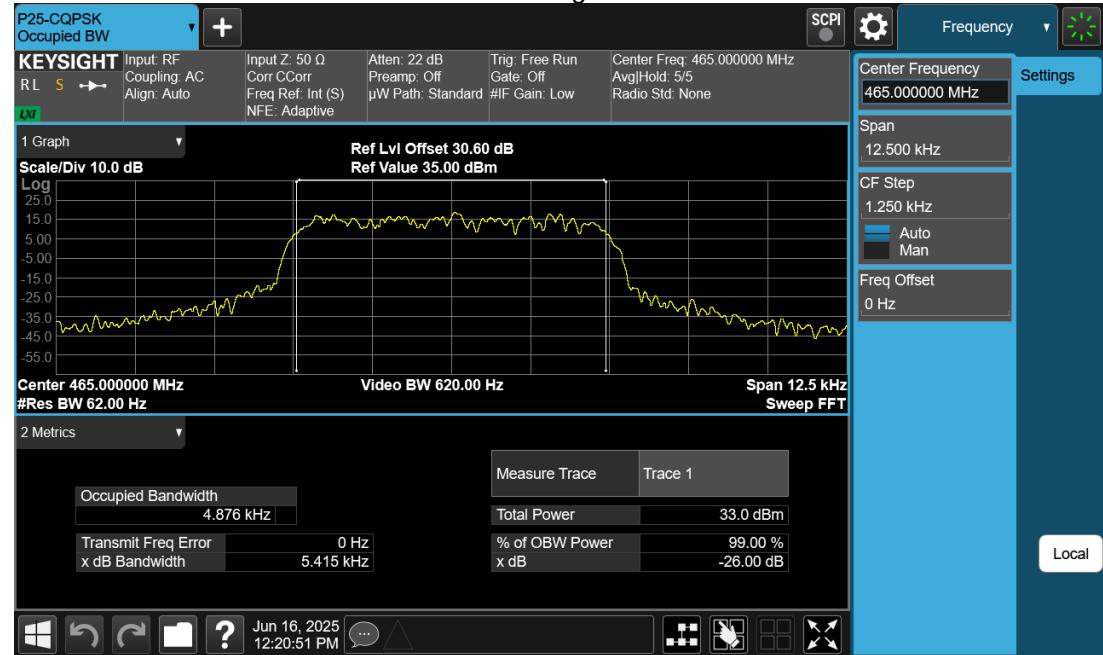

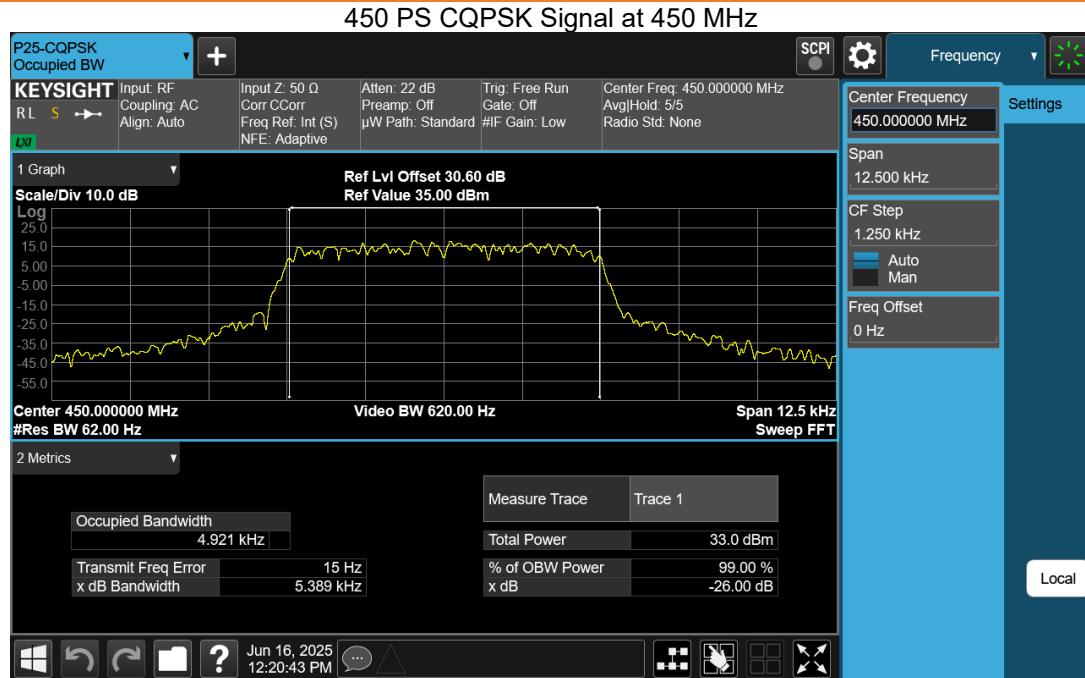

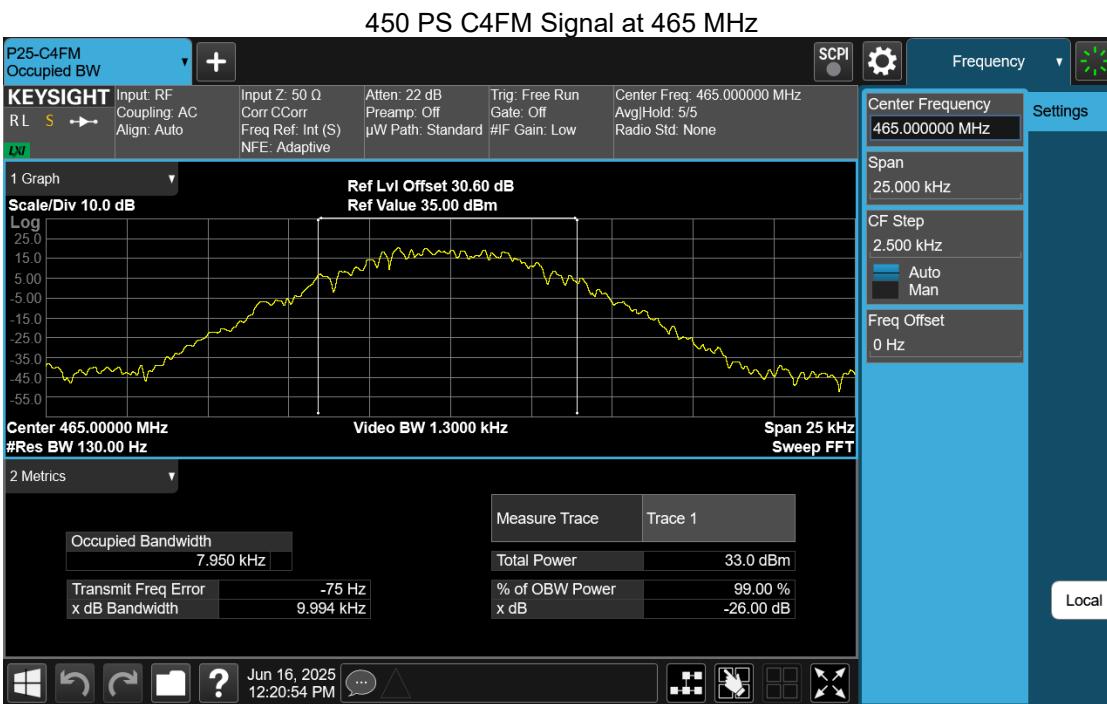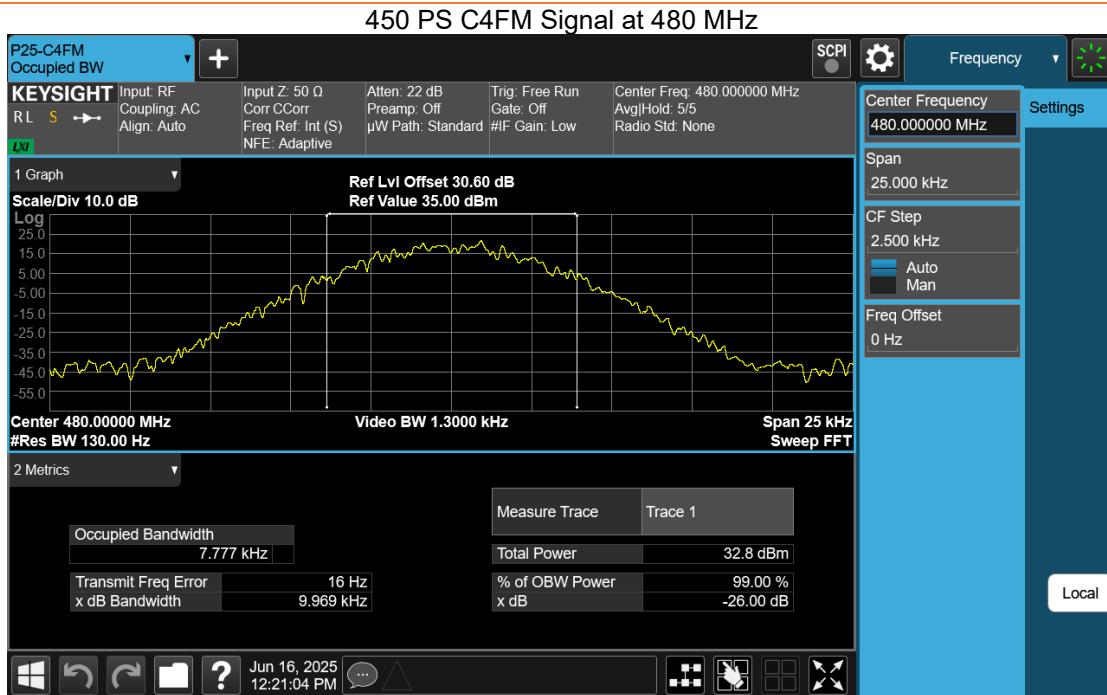


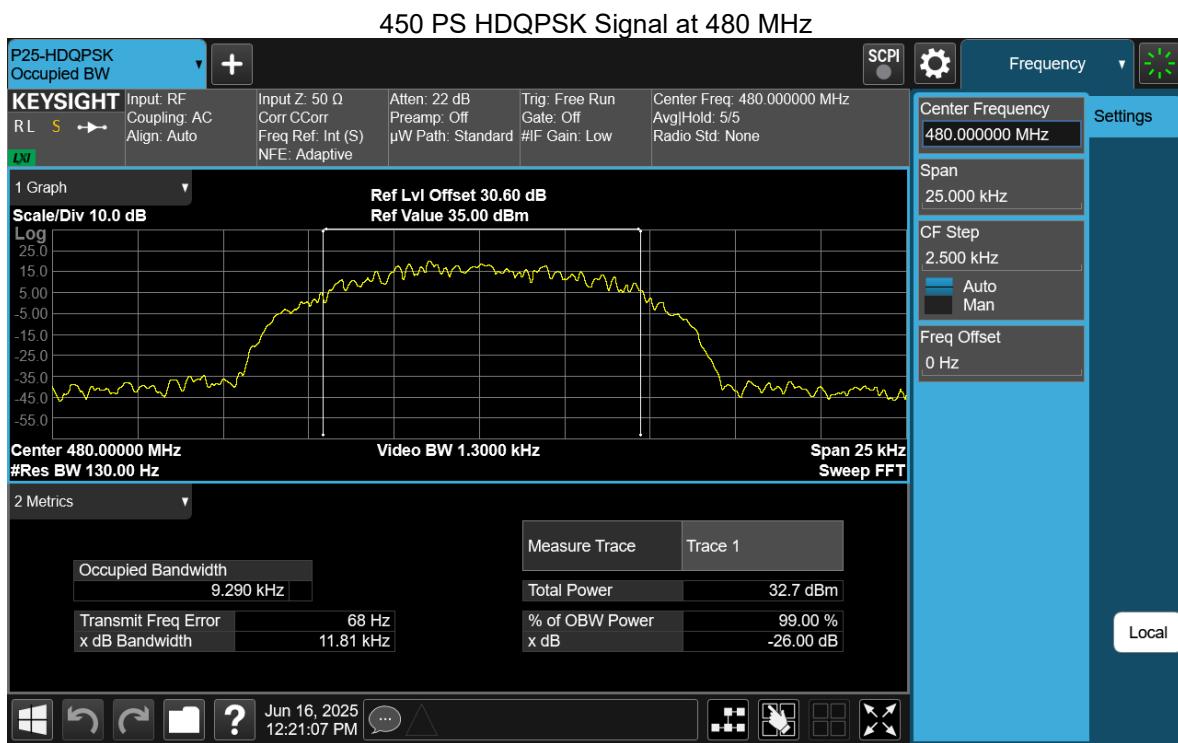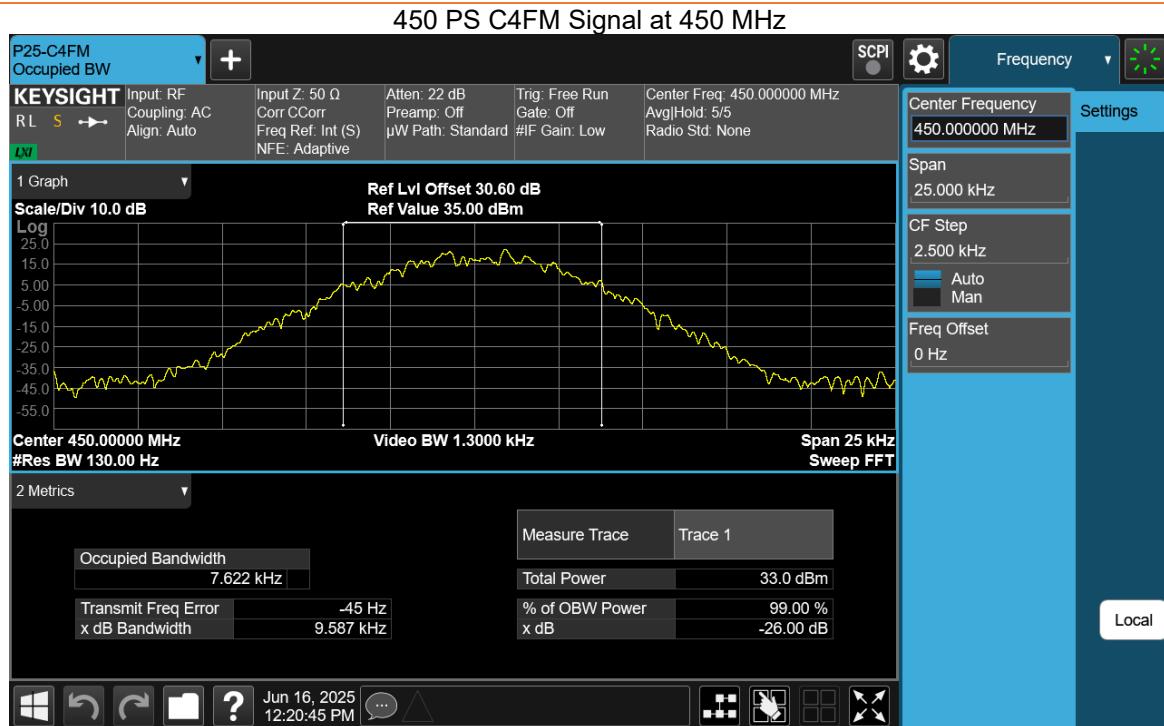

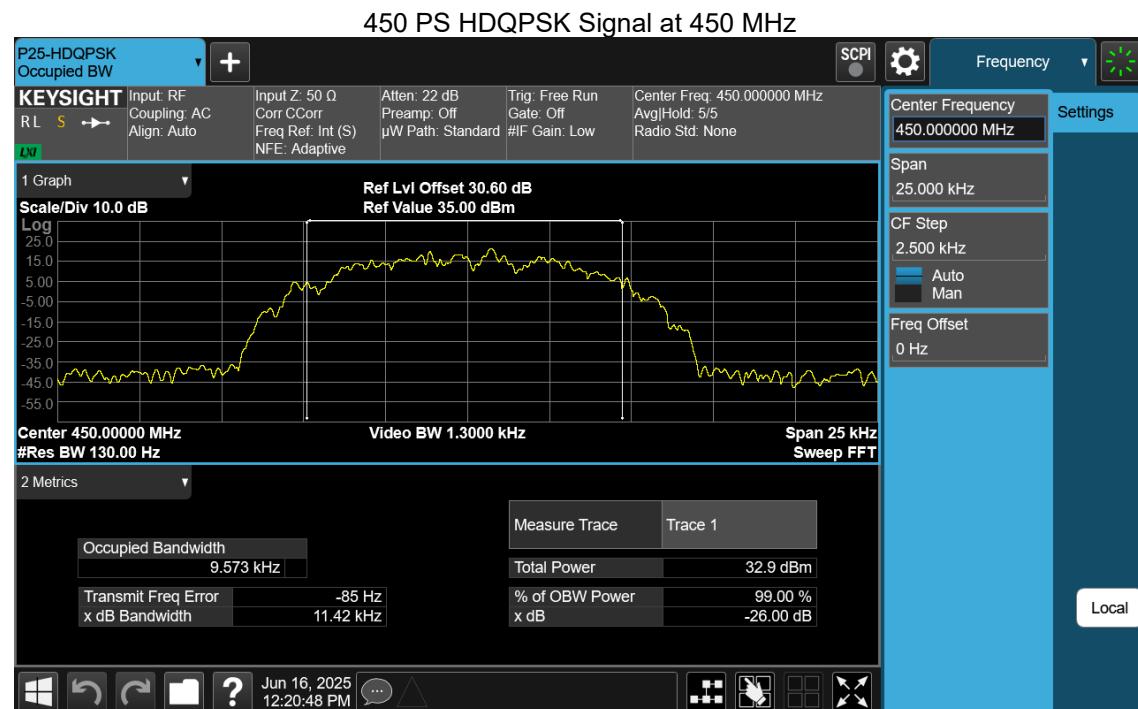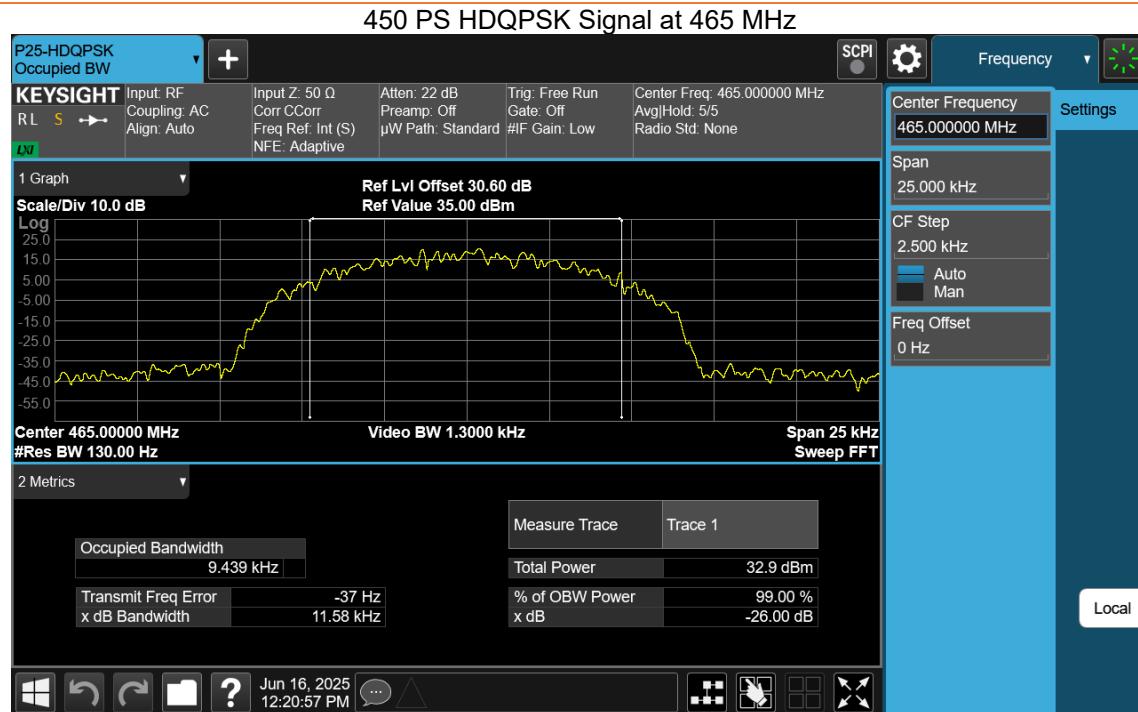


## Results – Occupied Bandwidth 800PS


800PS CQPSK Signal at 869 MHz

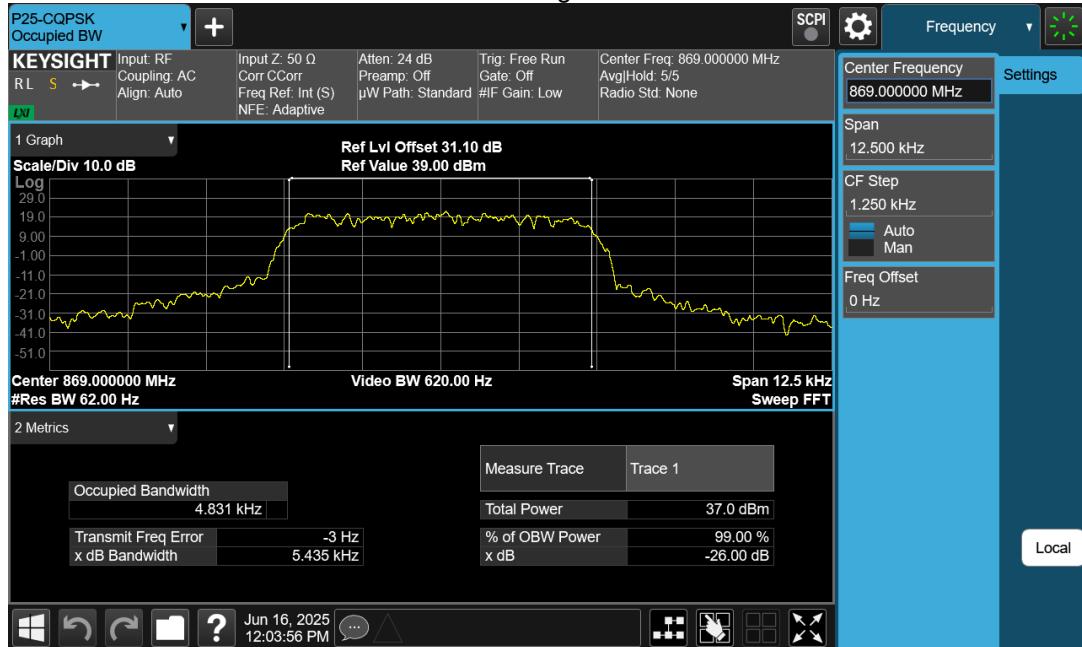

800PS CQPSK Signal at 860 MHz


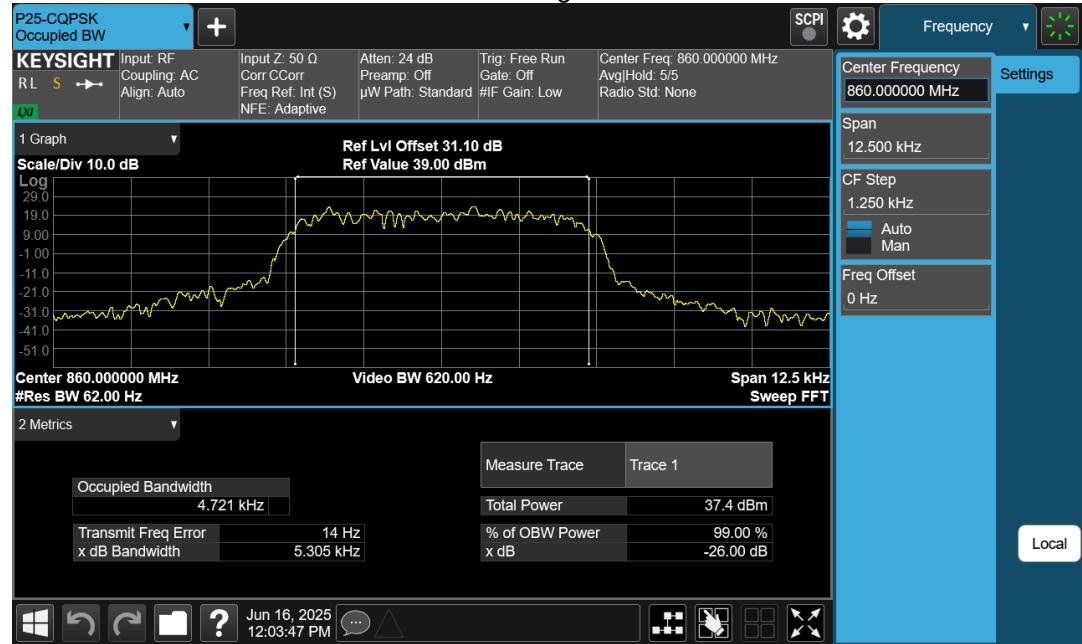






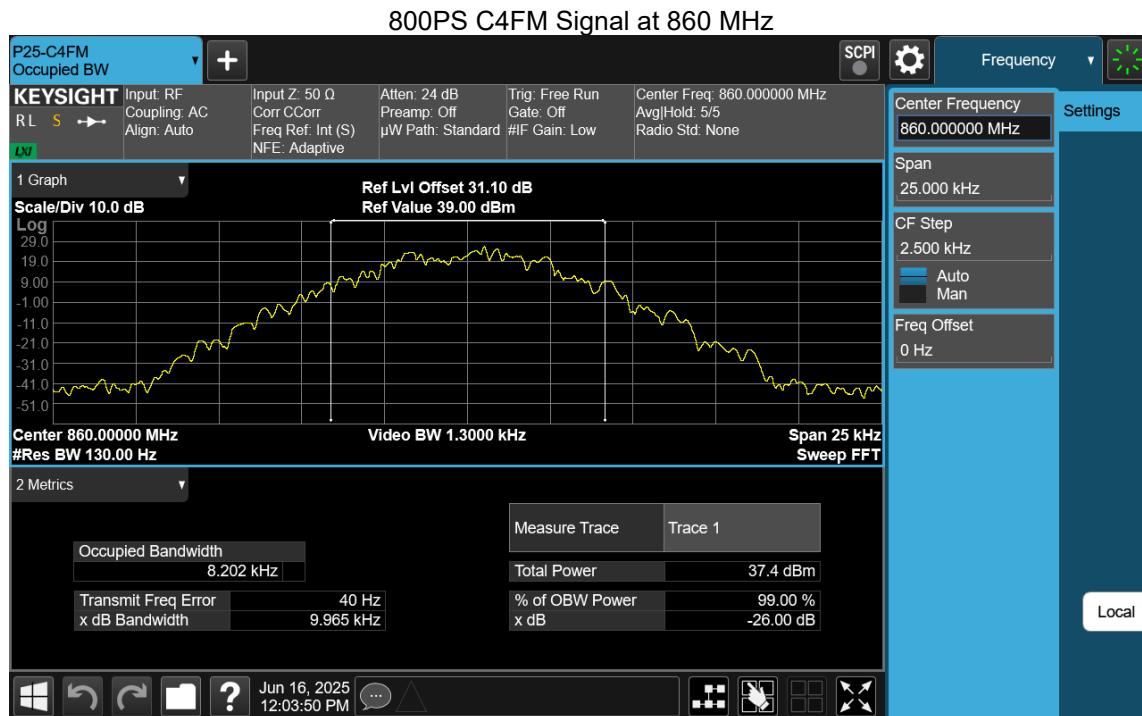


Prepared by: LabTest Certification Inc.  
 Date Issued: July 3, 2025  
 Project No.: 25-1205



Client: Avari Wireless Inc.  
 Report No.: 20.01.25-1205-1  
 Revision No.: Rev 0

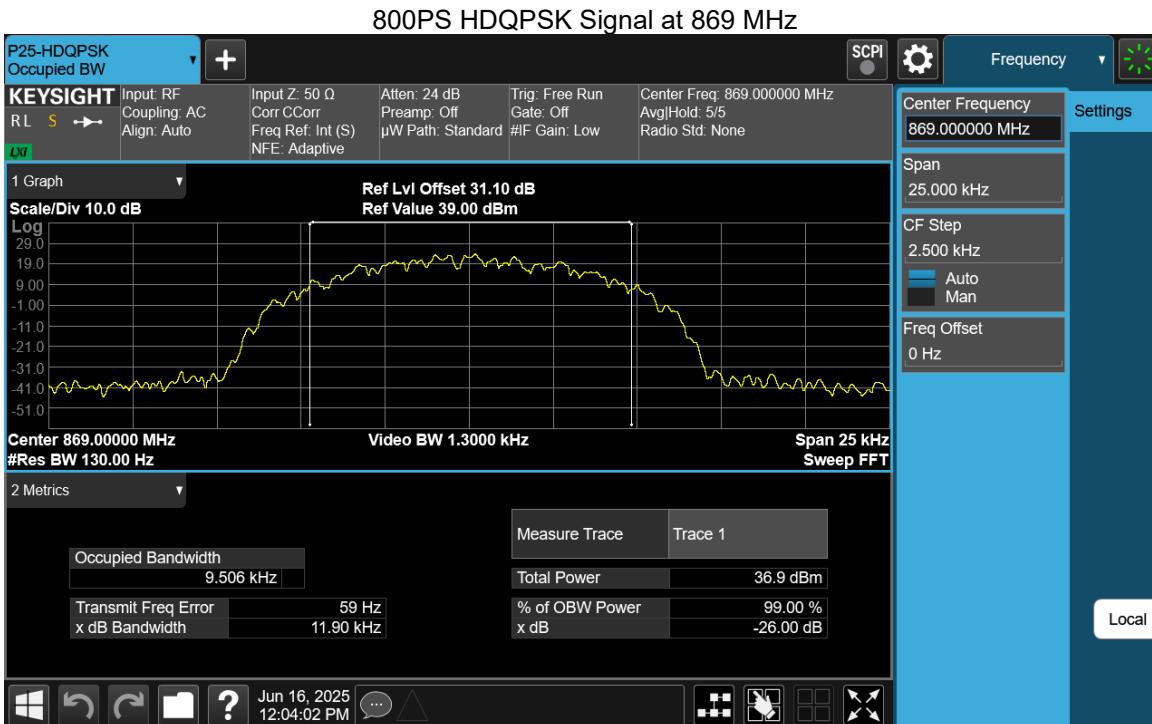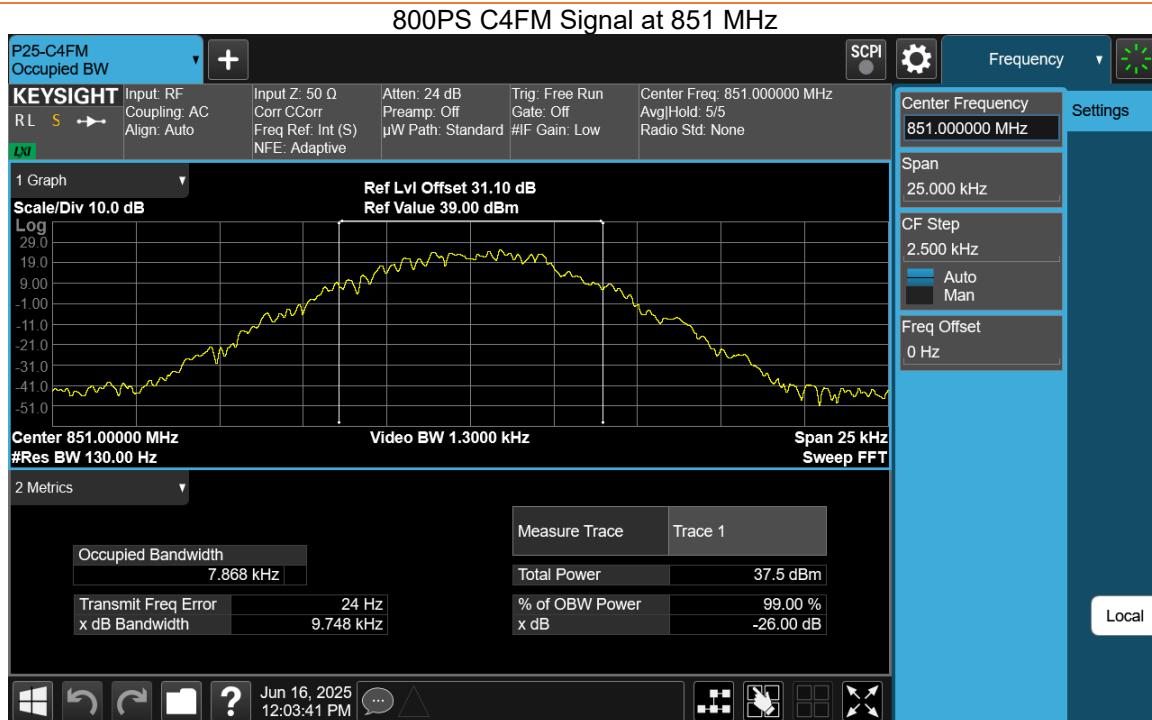

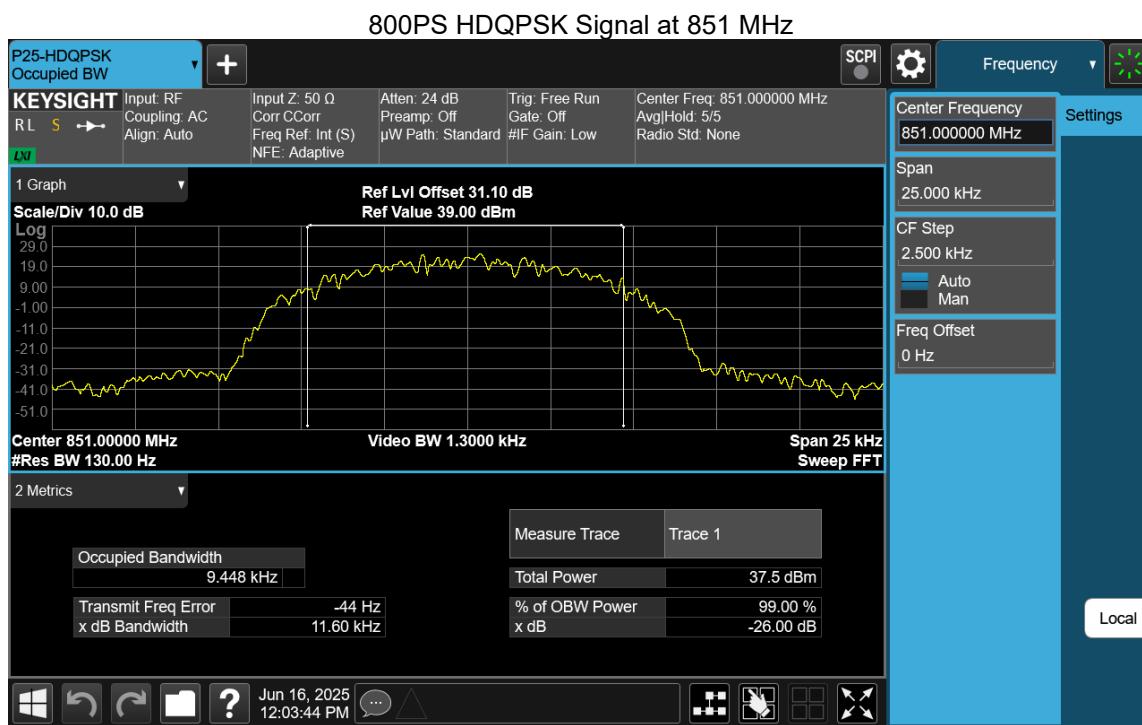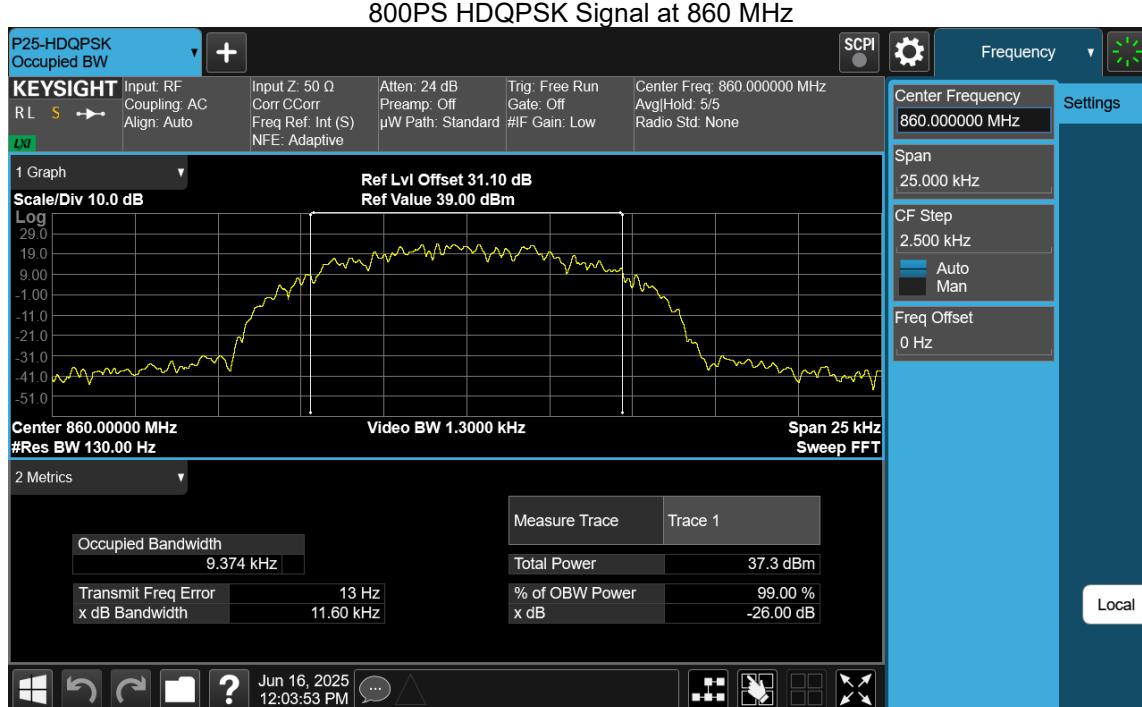



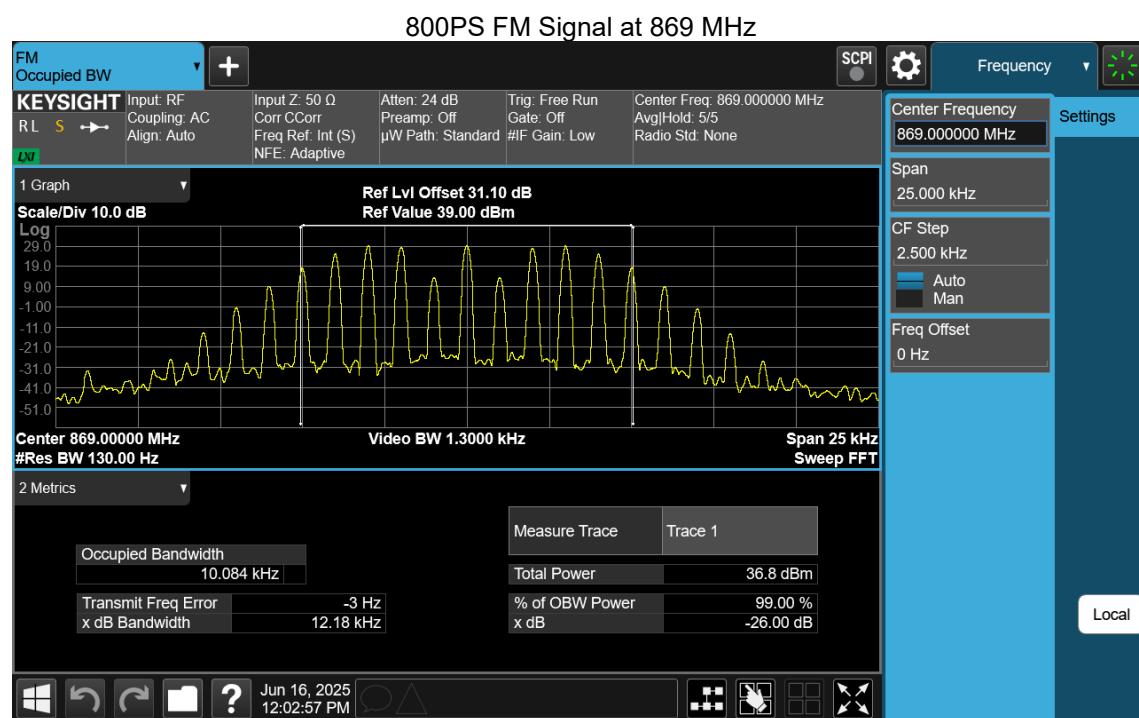

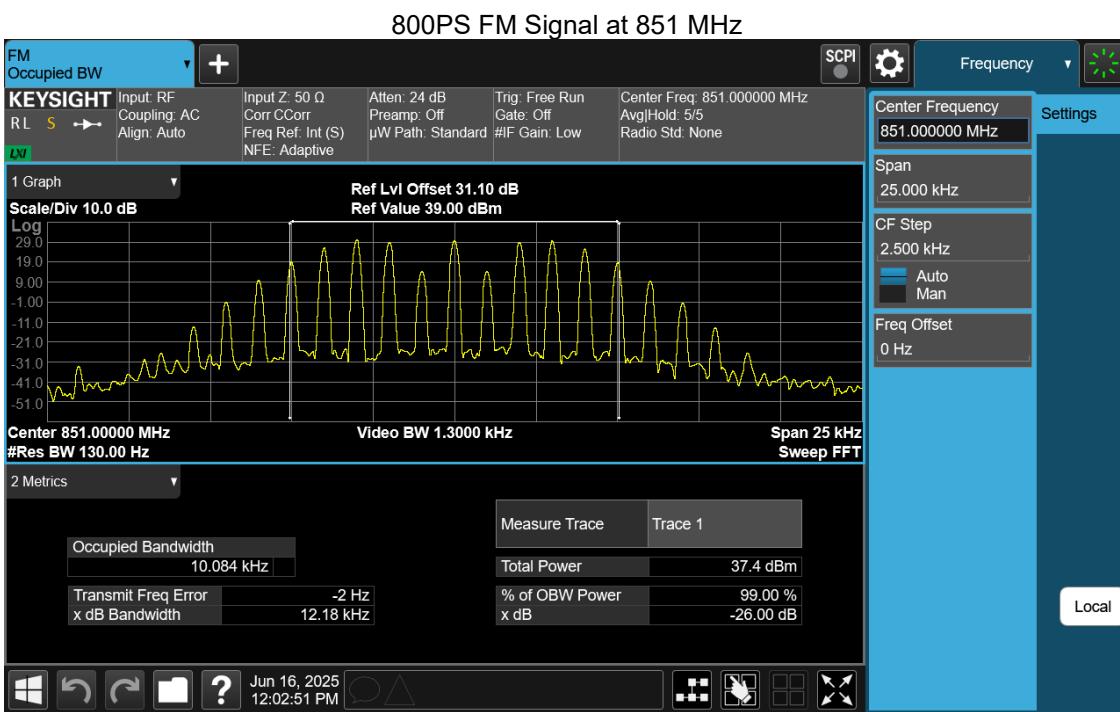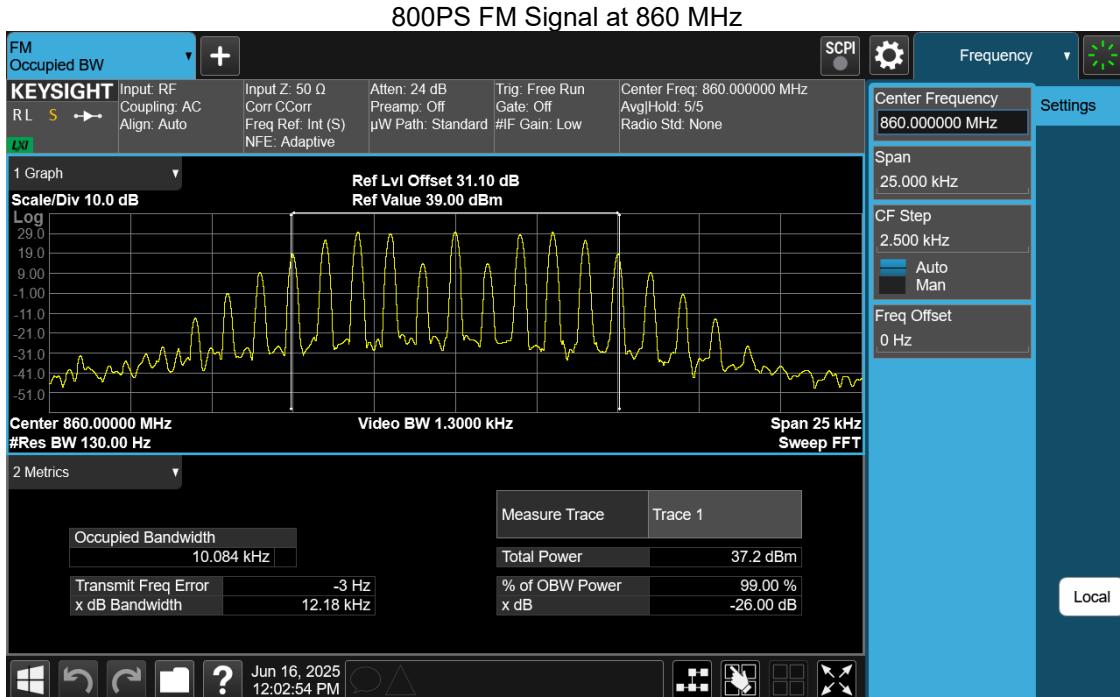

### 3.3 Out of Band Rejection

Governing Doc	RSS-119, Issue 12 2015, Amendment (April 1, 2022) RSS-Gen, Issue 5 2018 FCC Part 90	Room Temperature (°C)	20.5	
Test Procedure	ANSI C63.26-2015, Section 7.2.3.2 KDB 935210 D05, v01r04, Clause 3.3, 4.3	Relative Humidity (%)	38.6	
Test Location	Bench top, Richmond Lab	Barometric Pressure	101.8	
Test Engineer	Zara Vali	Date	August 20, 2024	
EUT Voltage	<input checked="" type="checkbox"/> +48VDC <input type="checkbox"/> 120VAC @ 60Hz			
Test Equipment Used	Manufacturer	Model	Serial Number	
Signal Generator	Keysight	N5172B-506	MY53050270	
Spectrum Analyzer	Keysight	N9020B-526	MY62153079	
Frequency Range:	<input checked="" type="checkbox"/> Product Passband $\pm 250\%$			
Detector:	<input checked="" type="checkbox"/> Peak			
RBW/VBW:	<input checked="" type="checkbox"/> 1 to 5% of the EUT passband / $\geq 3 \times \text{RBW}$			
Type of Facility:	<input checked="" type="checkbox"/> Tabletop			
Distance:	<input checked="" type="checkbox"/> Direct			
Compliant <input checked="" type="checkbox"/>	Non-Compliant <input type="checkbox"/>	Not Applicable <input type="checkbox"/>		

### Test setup



The procedure used was ANSI C63.26-2015. The signal booster was set to maximum gain. A swept CW signal was set to the range of  $\pm 250\%$  of the product pass band. The CW amplitude was set to 3 dB below the AGC threshold so that the ALC should not activate throughout the test.


After the max-hold sweep trace was completed, a marker was set to the peak amplitude, and a 20dB bandwidth was measured between two additional markers fall 20 dB from the peak.

The EUT was set to Operation Mode #1 with configuration Mode #1.






## Results - Out of Band Rejection (150PS)

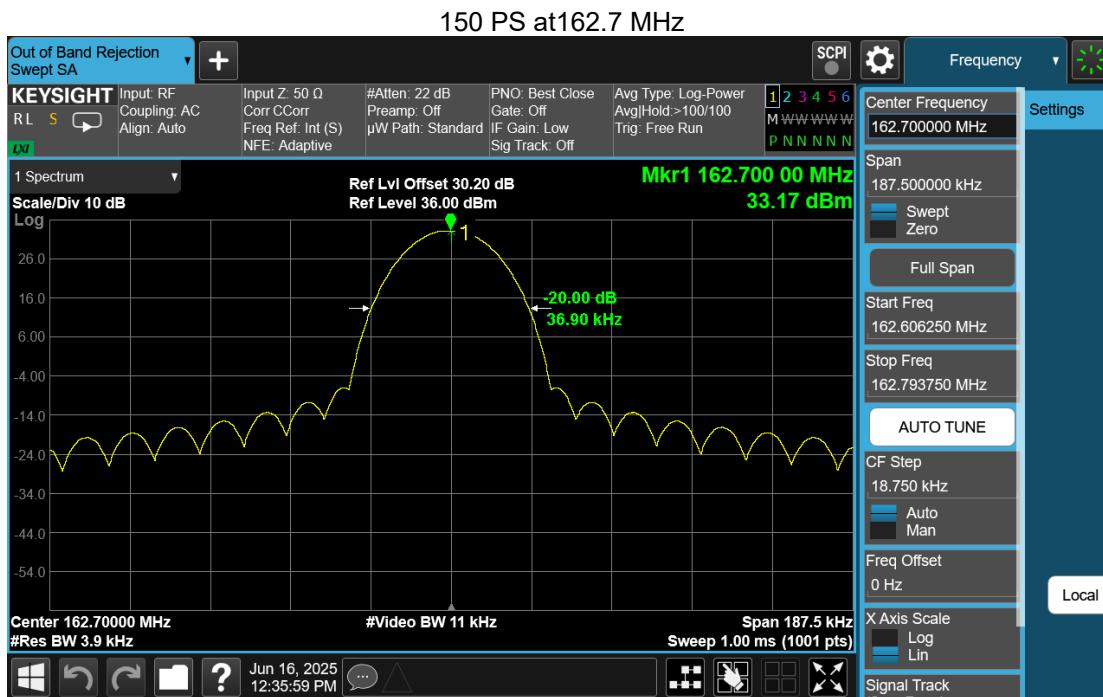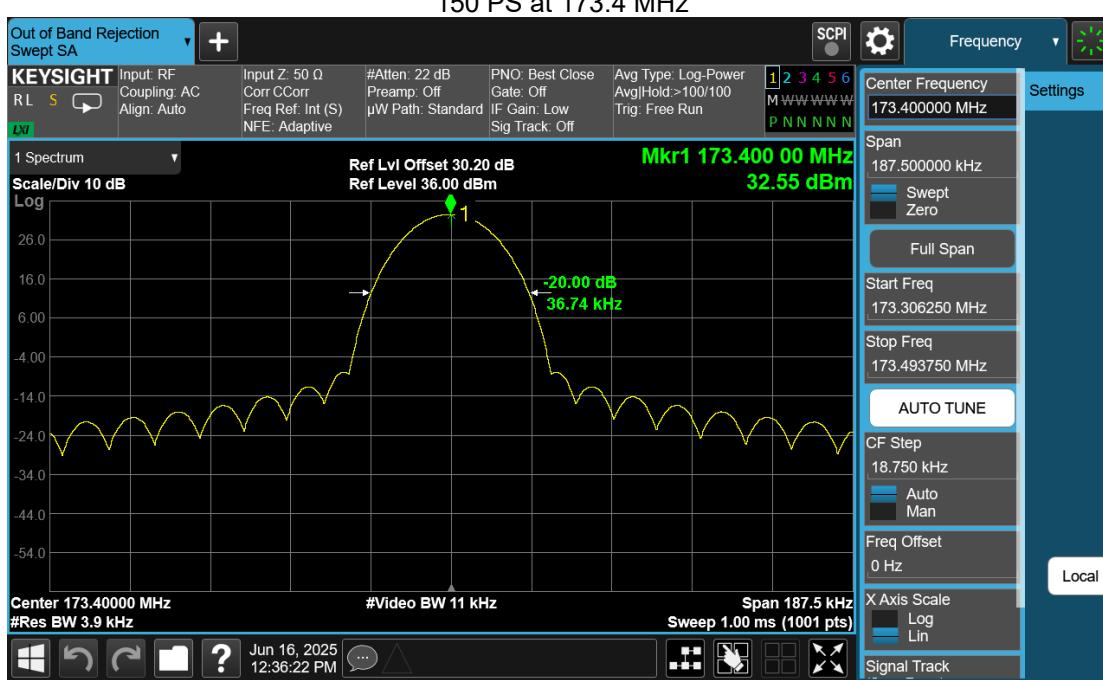


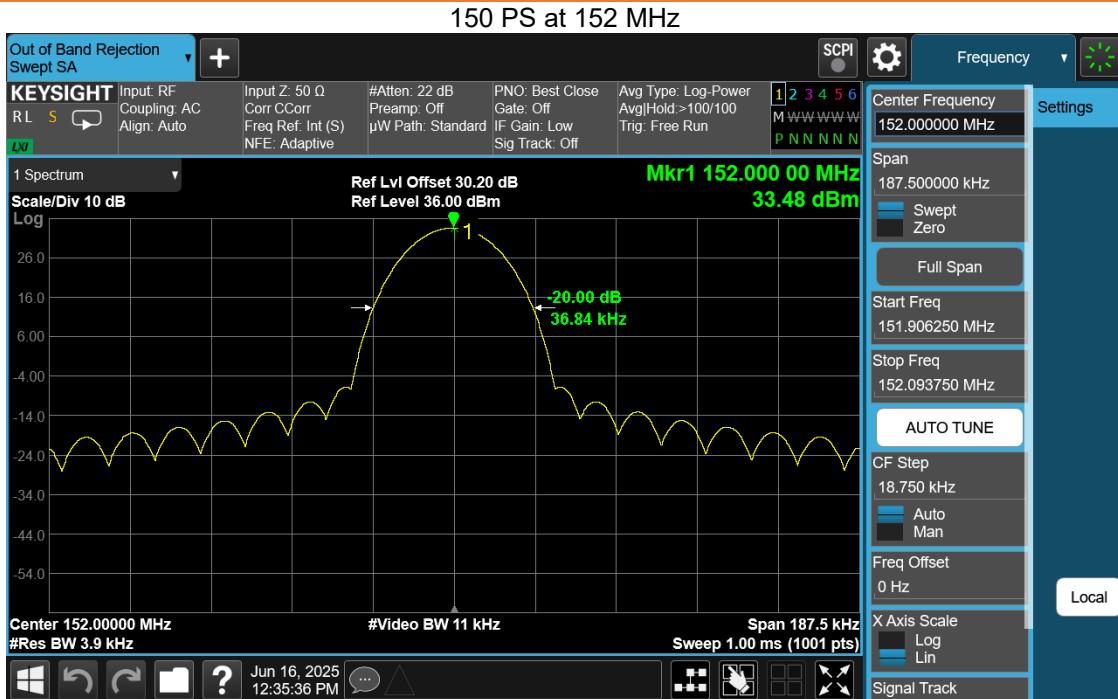


## Results - Out of Band Rejection (450 PS)

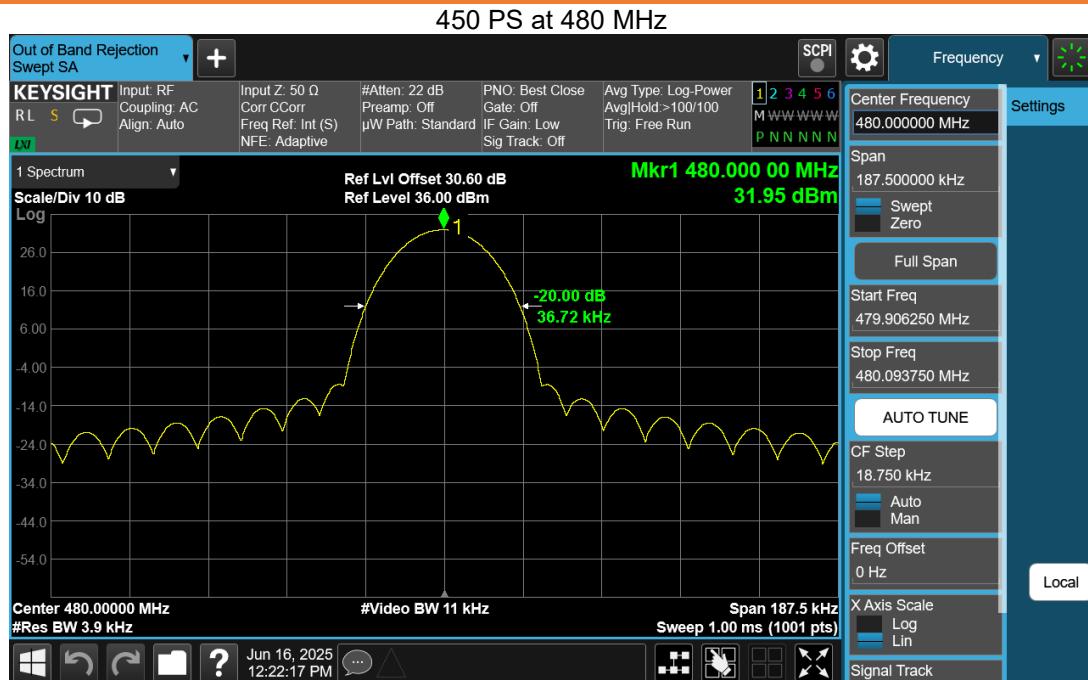

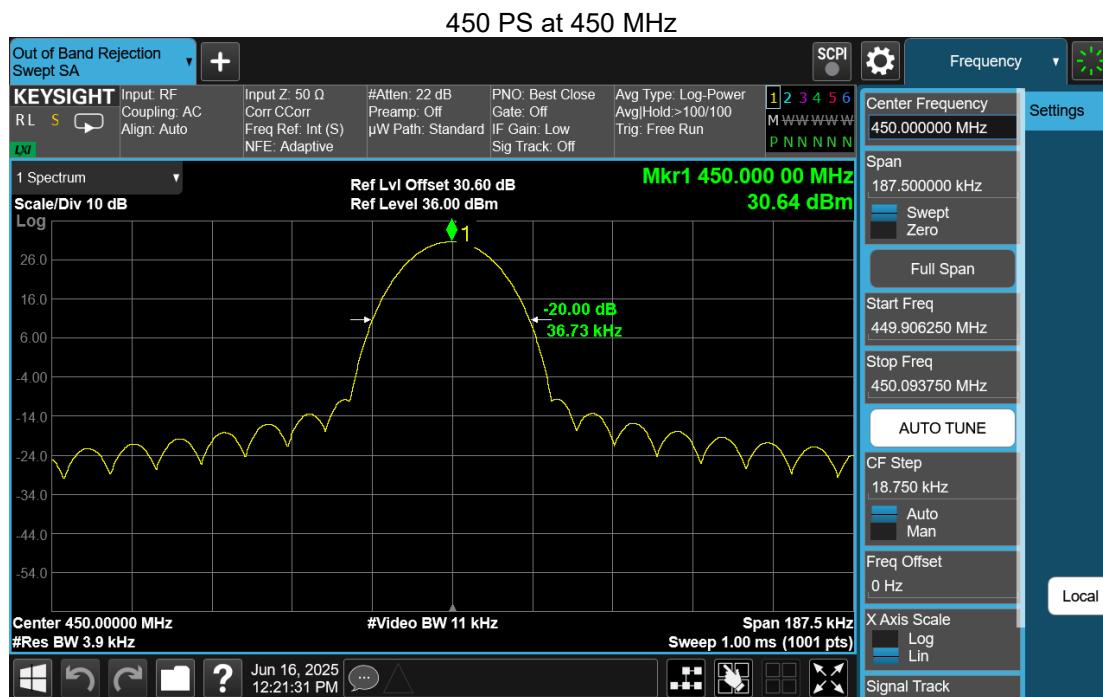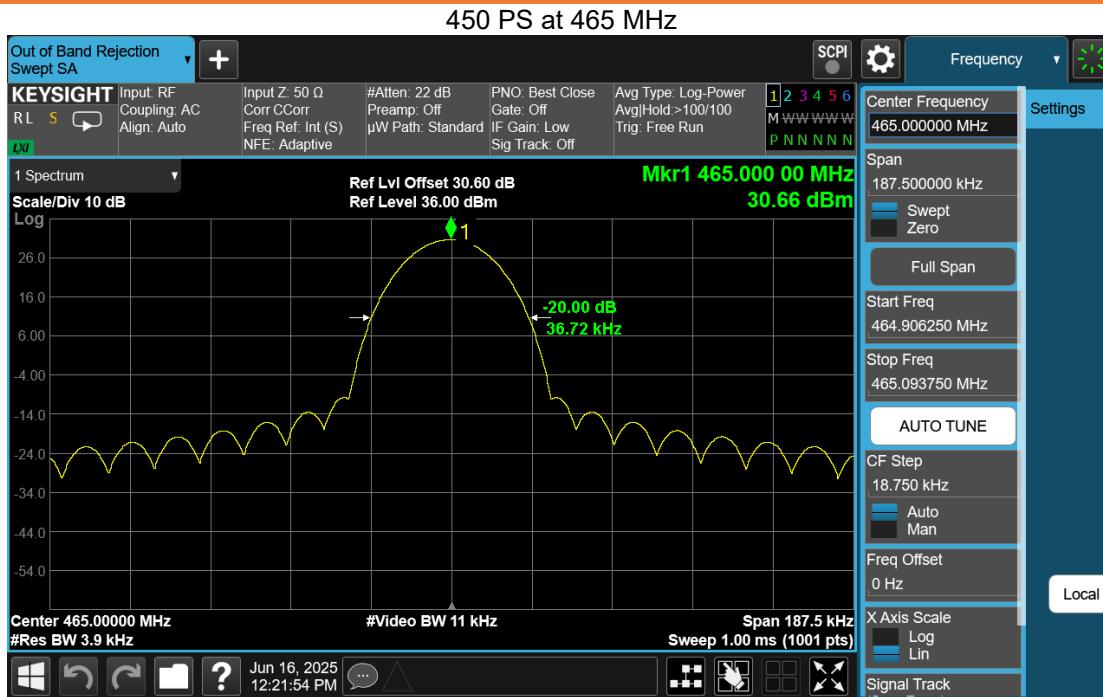


## Results - Out of Band Rejection (800PS)

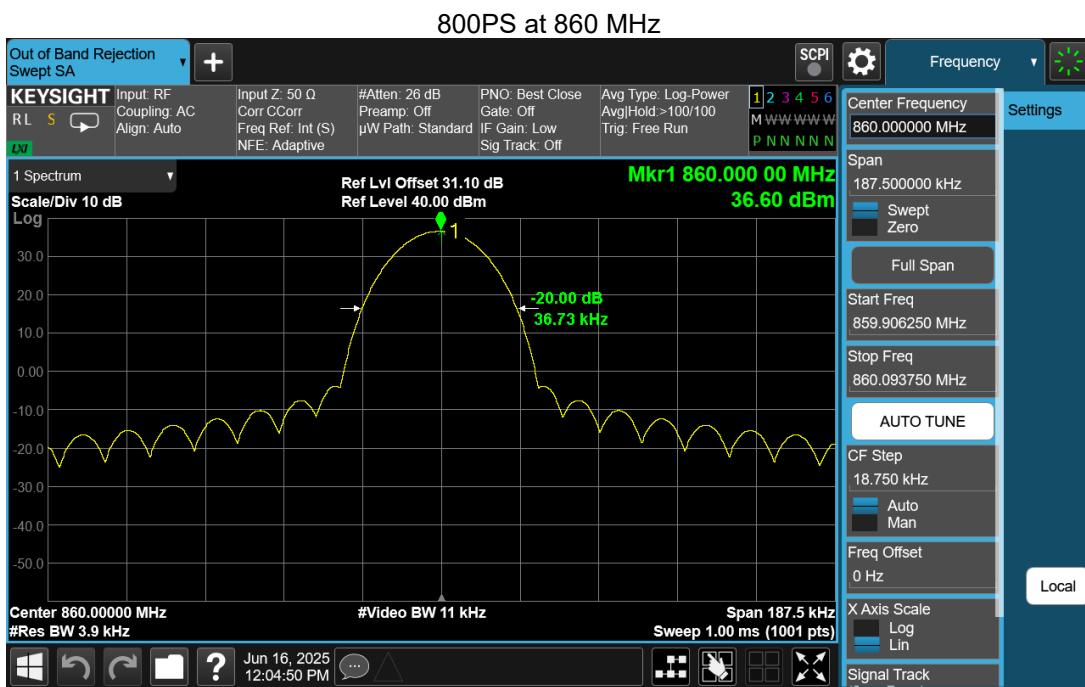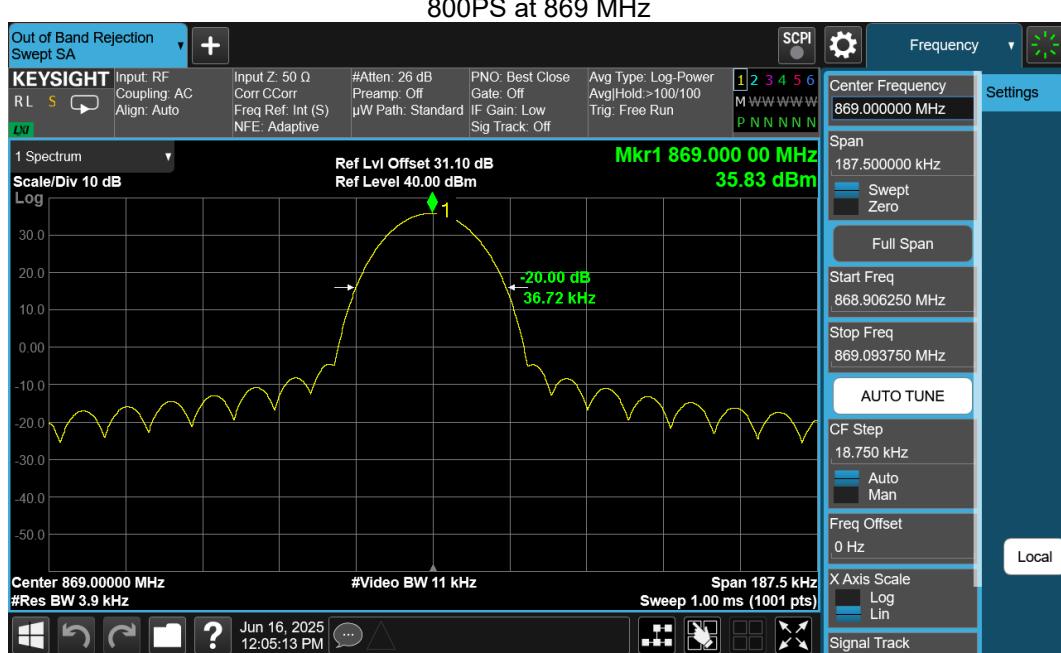

Prepared by: LabTest Certification Inc.  
Date Issued: July 3, 2025  
Project No.: 25-1205

Client: Avari Wireless Inc.  
Report No.: 20.01.25-1205-1  
Revision No.: Rev 0

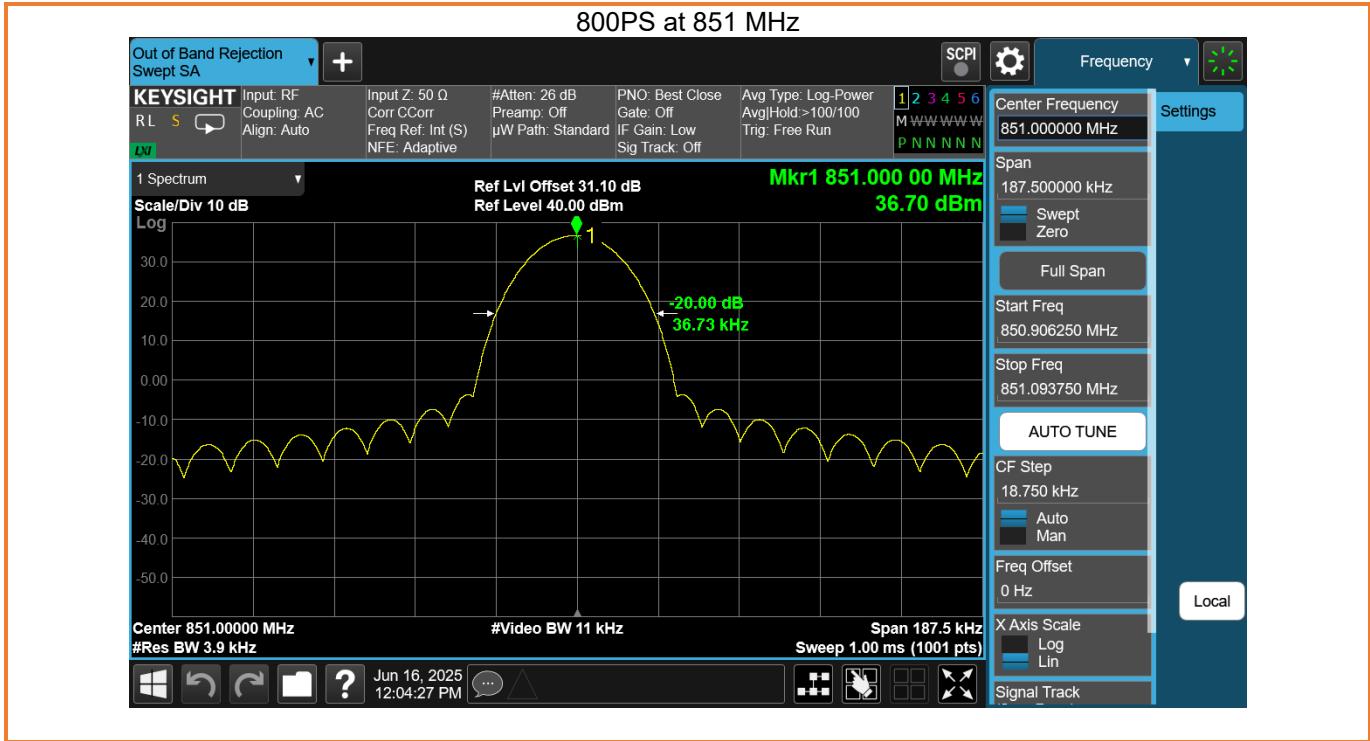

### 3.4 Input-Versus-Output Signal Comparison


Governing Doc	RSS-119, Issue 12 2015, Amendment (April 1, 2022) RSS-Gen, Issue 5 2018 FCC Part 90		Room Temperature (°C)	20.5	
Test Procedure	ANSI C63.26-2015, Section 7.2.3.3 KDB 935210 D05, v01r04, Clause 3.4, 4.4		Relative Humidity (%)	38.6	
Test Location	Bench top, Richmond Lab		Barometric Pressure (kPa)	101.8	
Test Engineer	Zara Vali		Date	June 16, 2025	
EUT Voltage	<input checked="" type="checkbox"/> +48VDC		<input type="checkbox"/> 120VAC @ 60Hz		
Test Equipment Used	Manufacturer	Model	Serial Number	Calibration date	Calibration due
Signal Generator	Keysight	N5172B-506	MY53050270	Dec 12, 2023	Dec 12, 2026
Spectrum Analyzer	Keysight	N9020B-526	MY62153079	Aug 1, 2023	Aug 1, 2025
Frequency Range:	<input checked="" type="checkbox"/> 152 MHz – 173.4 MHz <input checked="" type="checkbox"/> 450 MHz – 480 MHz <input checked="" type="checkbox"/> 851 MHz – 869 MHz				
Detector:	<input checked="" type="checkbox"/> Peak				
RBW/VBW:	<input checked="" type="checkbox"/> 100 Hz				
Type of Facility:	<input checked="" type="checkbox"/> Testbench				
Distance:	<input checked="" type="checkbox"/> direct connect				
Arrangement of EUT:	<input checked="" type="checkbox"/> Table-top only <input type="checkbox"/> Floor-standing only <input type="checkbox"/> Rack Mounted				
Signal of all types of modulation is contained within the emission mask.					
Compliant <input checked="" type="checkbox"/>	Non-Compliant <input type="checkbox"/>	Not Applicable <input type="checkbox"/>			

## Test setup



Spectrum Emission Mask is measured by connecting a Spectrum Analyzer to the RF output connector. The input power was adjusted to produce maximum output power on the antenna port. The reference level was measured with integrated BW of the designated channel BW. The emission was measured with RBW 100 Hz.

Mask types according to FCC § 90.210 Emission masks were applied to all measurements. The mask applied is specified in the title of each plot.

The EUT was set to **Operation Mode #1 with configuration Mode #1**.




## Results - Spectrum Emission Mask (150PS)

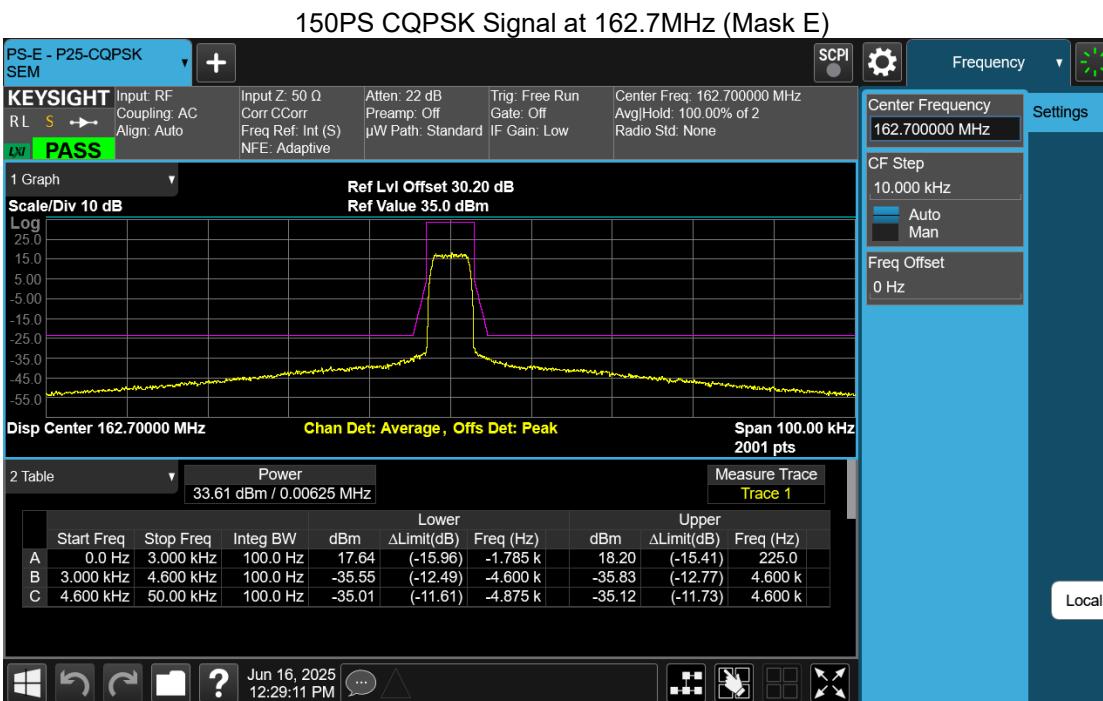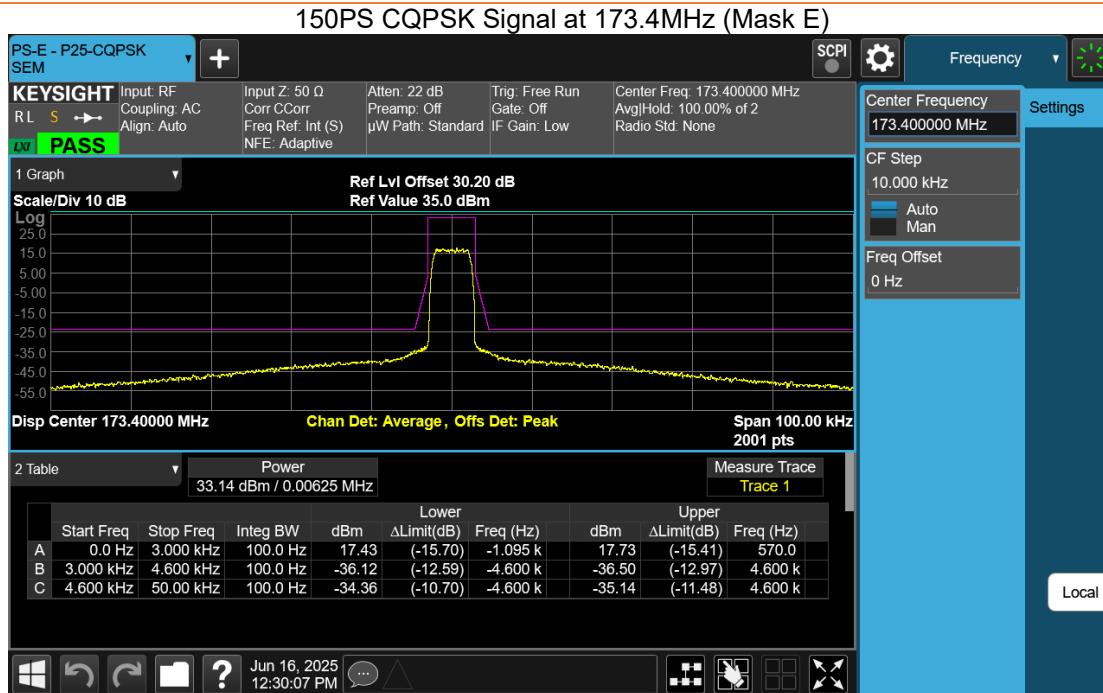



Prepared by: LabTest Certification Inc.  
Date Issued: July 3, 2025  
Project No.: 25-1205

Client: Avari Wireless Inc.  
Report No.: 20.01.25-1205-1  
Revision No.: Rev 0

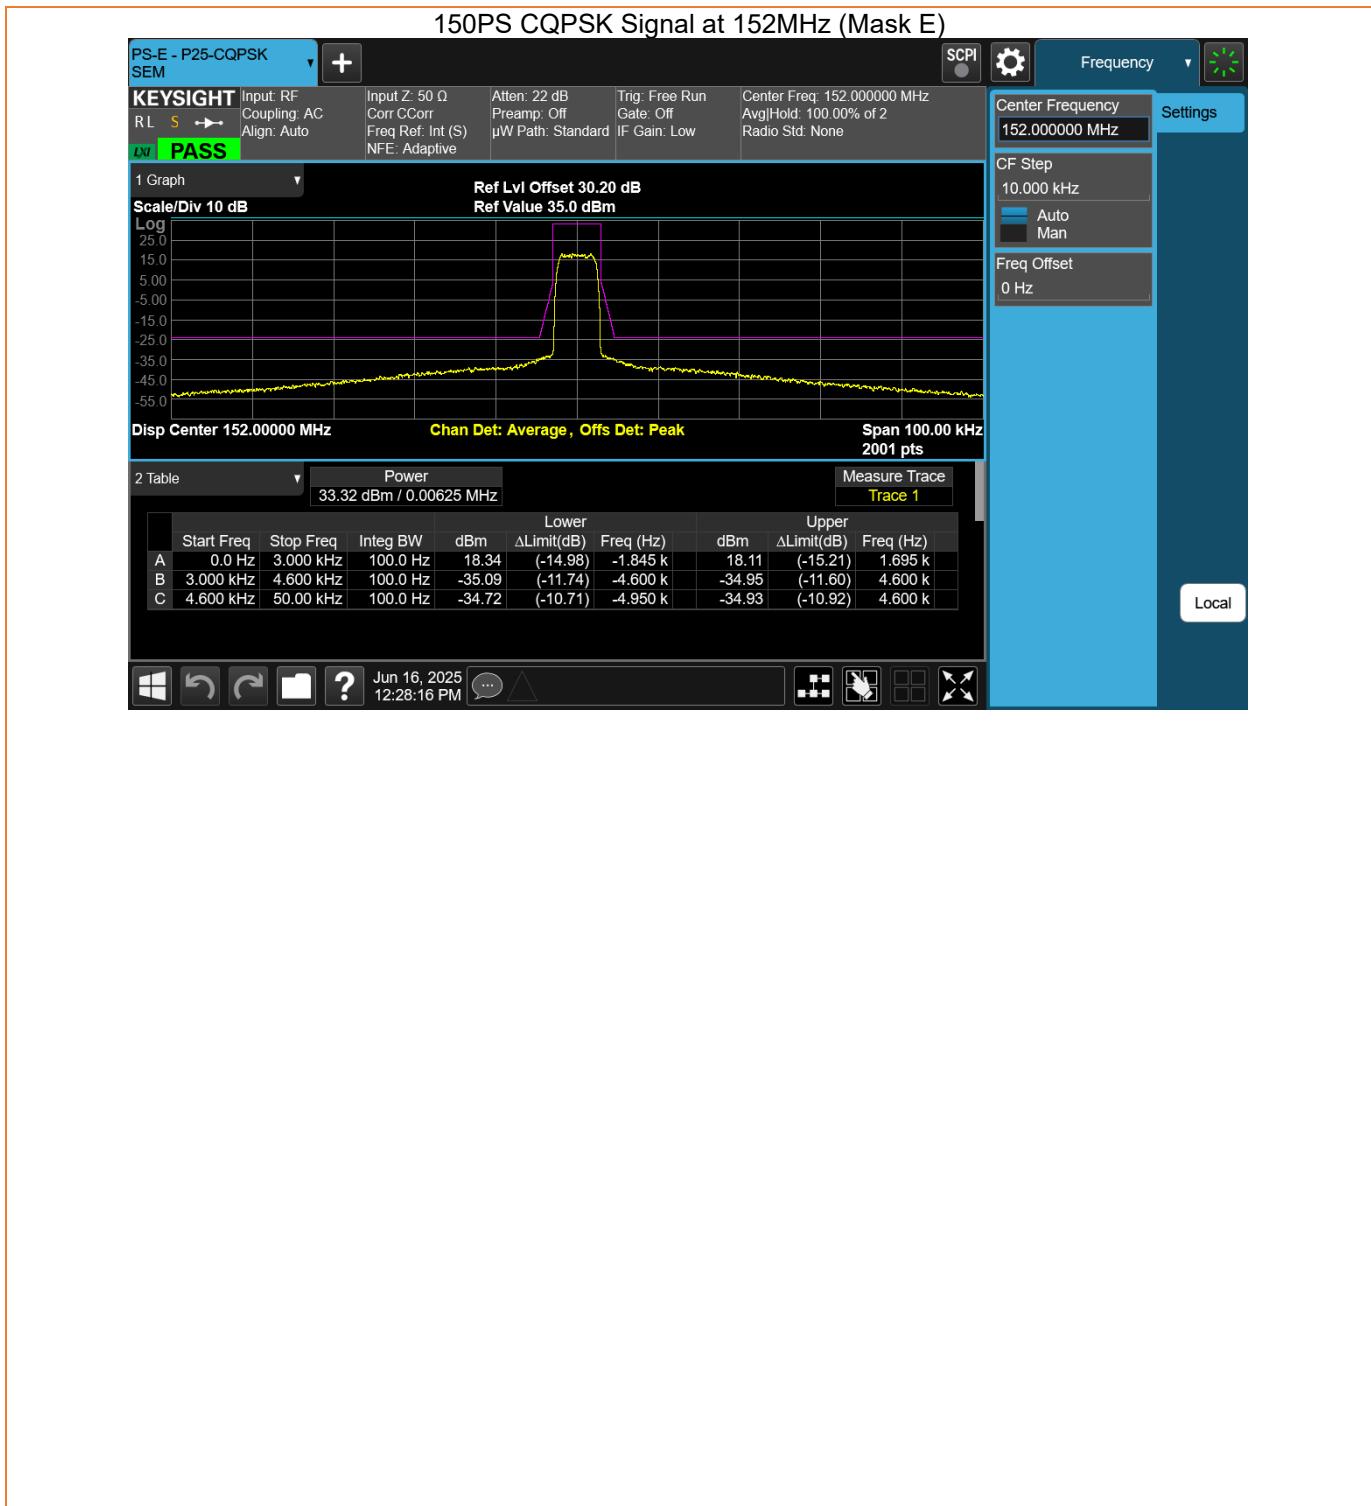

Prepared by: LabTest Certification Inc.  
 Date Issued: July 3, 2025  
 Project No.: 25-1205

Client: Avari Wireless Inc.  
 Report No.: 20.01.25-1205-1  
 Revision No.: Rev 0

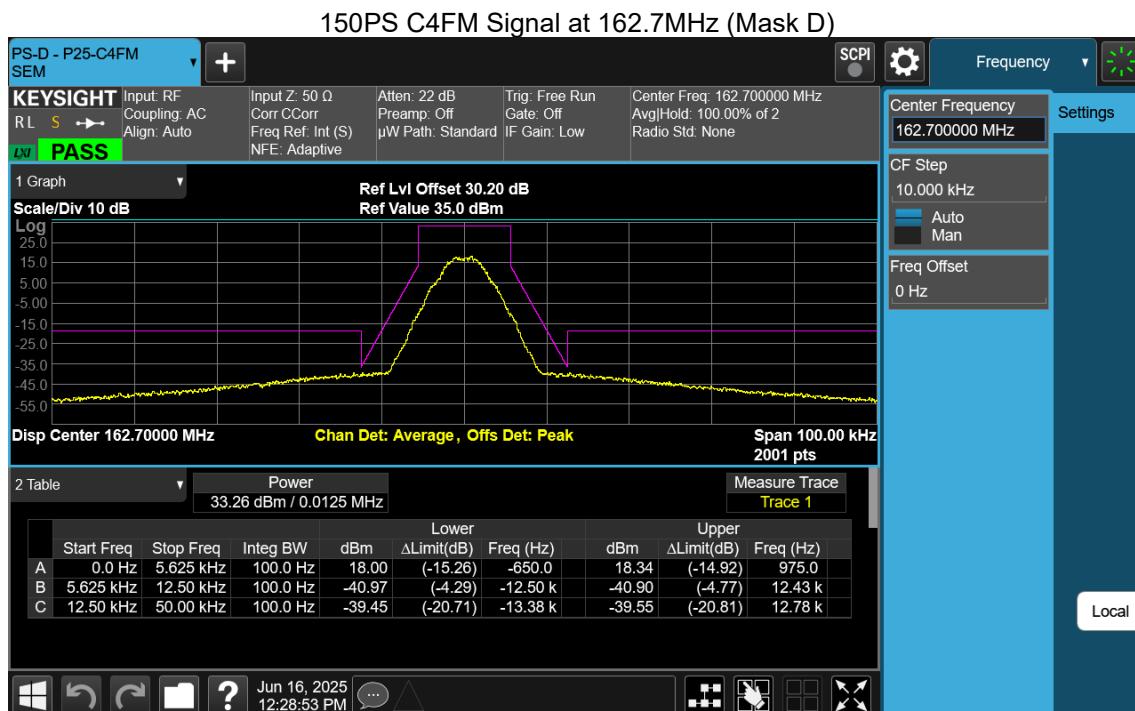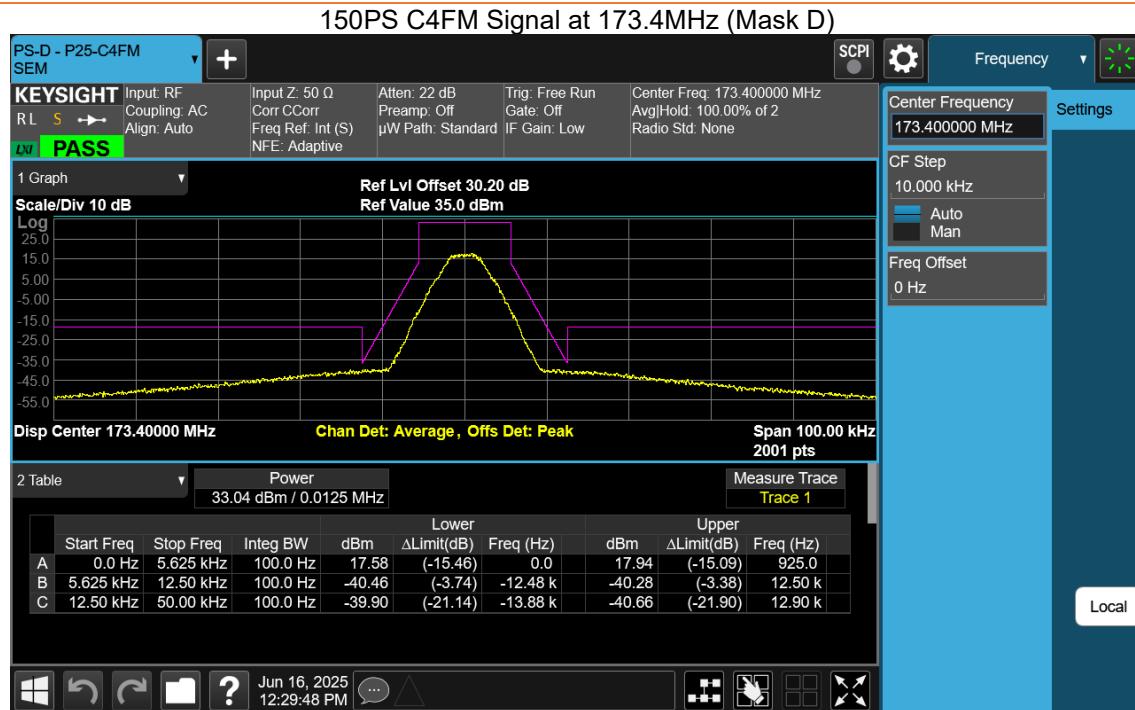



Prepared by: LabTest Certification Inc.  
 Date Issued: July 3, 2025  
 Project No.: 25-1205

Client: Avari Wireless Inc.  
 Report No.: 20.01.25-1205-1  
 Revision No.: Rev 0

