

Shenzhen Shenlianyu Electronics Co., Ltd

Product specification acknowledgement

CUSTOMER: Shenzhen Chimele Technology Co., Ltd

Product Name ofCustomer: _____

Product Mame ofOurs(Material) Watch-coil tank-shaped magnetic
piece KP27*3/16TS/outgoing line 15MM

Model: E8

APPROVED _____

APPROVED Deng Xiang **DRAWN** Lai Wei **DATE** 2019/10/16

Address: No. 3, Industrial Road 1, Songgang Xixi Community,
Baoan District, Shenzhen City


Telephone: 15112322462 Fax: 0755-29909524

pagination 1 of 5

REVISED RECORD

| | | | |
|----------------------|--|--------------------|--|
| Specification | | CISTOMEP/N: | |
| | | PARTNUMBER: | |

1.DIMENSIONS: mm

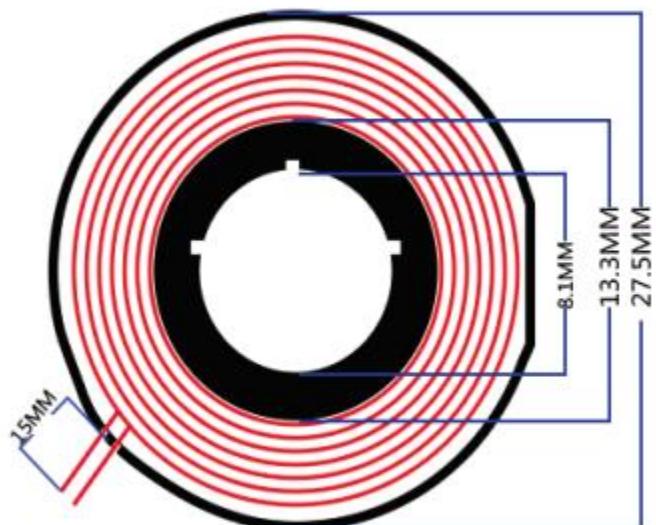

| APPROVED BY | CHECKED BY | PREPARED BY | DATE | PACE |
|-------------|------------|-------------|------------|------|
| | | Lai Wei | 2019/10/17 | |

| | | |
|----------------------|---------------------|-------|
| Specification | CUSTOMERP/N: | _____ |
| | PARTNUMBER: | |

5.WINDING DETAILS:

| Wdy.NO. | Start | Finish | Turns | Wire Dia | Wdg.TyepeSprad/lose | Wdg.Direction | Turns/Layer |
|---------|-------|--------|-------|----------|----------------------------------|-------------------------------------|--------------------|
| | S | F | 16TS | 0.05*75P | Double layer close around | Positive and negative around | 2layer/16TS |
| | | | | | | | |

6.ELECTRICAL CHARACTERISTICS:

| PARAMETERS | UNIN | LIMTI |
|----------------------------|------------|----------------|
| Inductance $I_s@100KHz/1v$ | uh | $12.2 \pm 5\%$ |
| Q @100KHz/1v | | 45Min |
| DCR @100KHz/1v | m Ω | 130Max |
| | | |
| | | |

| APPROVED BY | CHECKED BY | PREPARED BY | DATE | PAGE |
|-------------|------------|-------------|------------|--------|
| | | Lai Wei | 2019/10/17 | 4 of 5 |

| MATERIAL LIST | | | CUSTOMER P/N: | |
|--------------------------|---------------------|------------------|------------------|---------------------------------|
| | | | PARTNUMBER: | |
| NO. | Material name | Description | Manufacturer | Material |
| 1 | silk-covered wire | 0.05*75P | | |
| 2 | Lead-free tin strip | high temperature | | |
| 3 | magnetic sheet | diameter27.5MM | | ferrite. Manganese zinc.PC95 |
| 4 | glue | Resin glue | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| APPROVED BY | | CHECKED BY | PREPARED BY | PAGE |
| 承 认 | | 审 查 | 制作 | 日期 |
| | | 赖伟 | 2019/1017 | 页码 5 of 5 |