

承 认 书

SPECIFICATION FOR APPROVAL

客 户 名 称 : 深圳市高易电子有限公司

CUSTOMER`S NAME Shenzhen high easy Electronics Co., LTD

客 户 料 号 : EL.X.XQ00000015

CUSTOMER`S P/N

产 品 规 格 : Y. A11. 442

PRODUCT SPEC

制 作 日 期 : 2025年4月8日

ISSUE DATE

拟制 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY	客户承认 CUSTOMER APPROVE
李蓓	程杰	李博文	



东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO., LTD

ADD: 东莞市大朗镇富民中路533号4楼ADD:533 Fumin

Middle Road, Dalang Town, Dongguan City

TEL: 0769-82866410 FAX: 0769-82866409

SPECIFICATION FOR APPROVAL

[illegible]

SPECIFICATION FOR APPROVAL

技有限公司
CHNOLOGY CO., L
FOR APPROVAL
COMER'S P/N EL
DUCT SPEC


东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO., LTD

SPECIFICATION FOR APPROVAL

CUSTOMER	高易电子	CUSTOMER'S P/N	ELX.XQ00000015
ISSUE DATE	2025年4月8日	PRODUCT SPEC	Y. A11. 442

2.DIMENSION:

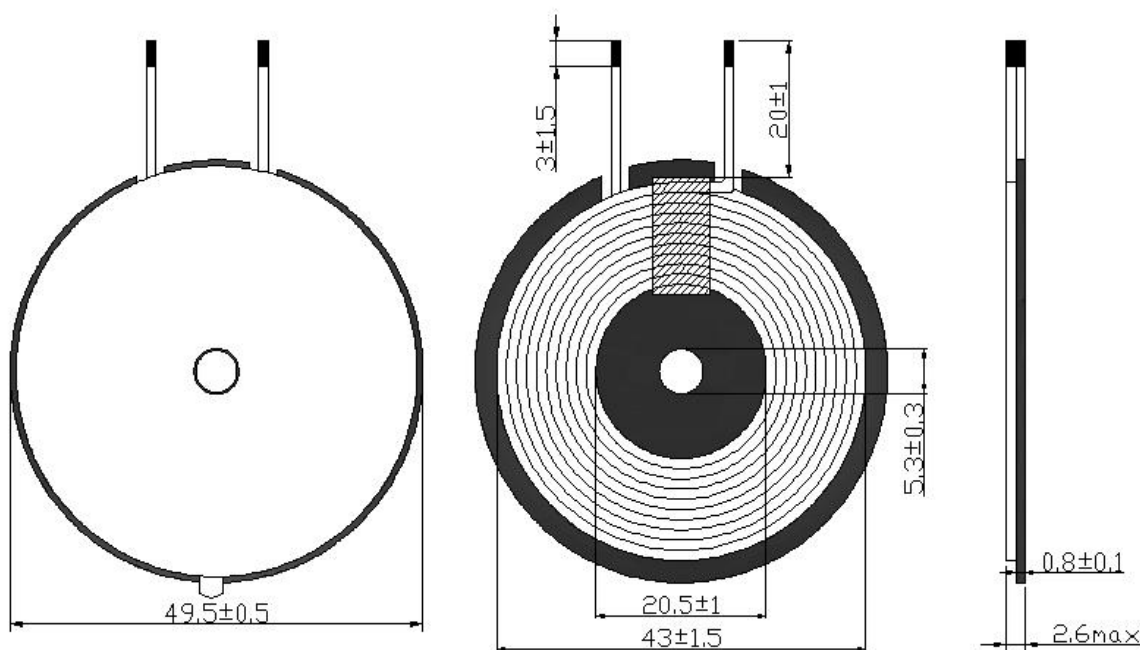

注:

1. 线圈之间需紧密绕线，间隙不得大于1/2线径；/The winding between the coils should be tightly wound, and the gap should not be greater than 1/2 wire diameter;
2. 线圈不得超出铁氧体磁片边缘；/The coil shall not exceed the edge of the ferrite disc;
3. 线圈外观整洁，且产品所用之部品符合环境规范要求：RoHS, HF; /The coil appearance is clean, and the parts used in the product meet the environmental specifications: RoHS, HF;
4. 高温胶带使用8mm宽度；/High temperature tape using 8mm width;

ISSUE BY	李蓓	CHECK BY	程杰	APPROVAL BY	李博文
----------	----	----------	----	-------------	-----


东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO., LTD

SPECIFICATION FOR APPROVAL

CUSTOMER	高易电子	CUSTOMER'S P/N	ELX.XQ00000015
ISSUE DATE	2025年4月8日	PRODUCT SPEC	Y. A11. 442

4.CIRCUIT DIAGRAM



" • " : POLARITY/极性

5.WINDING

NO	WINDING	WIRE	TURNS	TAPE	WINDING CONDITION
N1	S-F	Ø0.08*105P	10	/	CCW

6.CHARACTERISTIC

ITEM	MEASURED POINT	TECHNICAL DATA	TESTING CONDITION & INSTRUMENT
LS	S-F	6.5uH±10%	LCR1062 100KHz/1V AT 25℃±2℃
Q	S-F	60 Min	LCR1062 100KHz/1V AT 25℃±2℃
DCR	S-F	48mΩ Max	LCR1062 1KHz/0.3V AT 25℃±2℃


东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO.,LTD


SPECIFICATION FOR APPROVAL

CUSTOMER	高易电子	CUSTOMER'S P/N	ELX.XQ00000015
ISSUE DATE	2025年4月8日	PRODUCT SPEC	Y. A11. 442

7.THE PACKING WAY

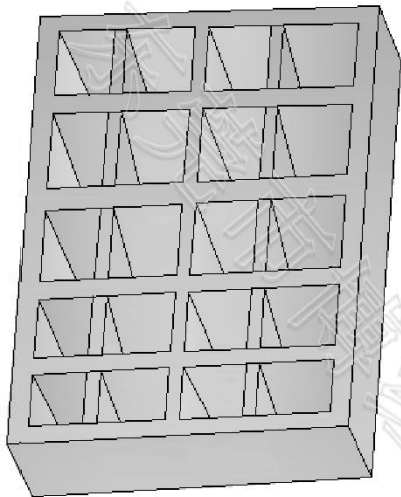

- 1. 珍珠棉规格: 355*235*65mm*20格
Pearl-cotton specification: 375*265*30mm*120格
- 2. 每格装15pcs, 每盘300pcs;
15pcs per box, 300pcs per plate;
- 3. 每箱装5盘;
Each box contains 5 trays.
- 4. 每箱合计: 1500pcs;
Total per box: 1500pcs;

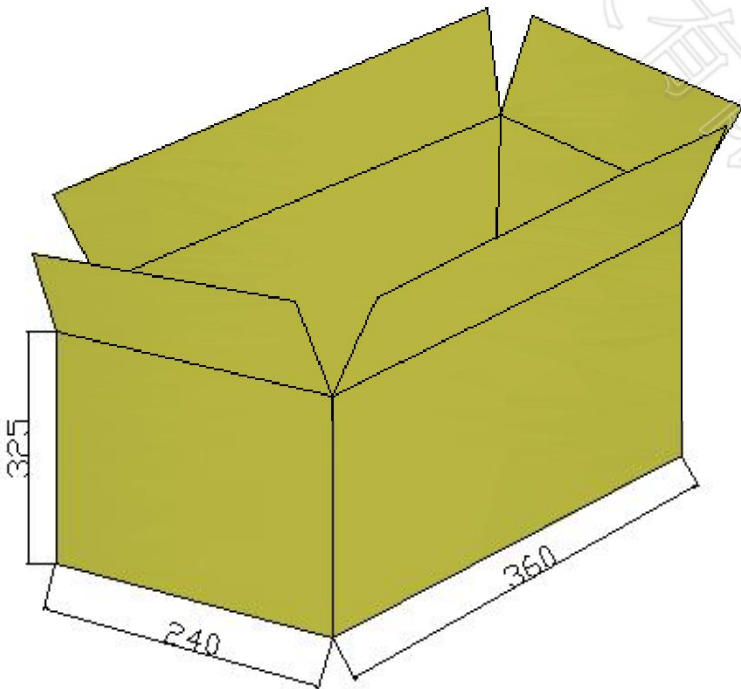

东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO., LTD

SPECIFICATION FOR APPROVAL

CUSTOMER	高易电子	CUSTOMER'S P/N	ELX.XQ00000015	
ISSUE DATE	2025年4月8日	PRODUCT SPEC	Y.A11.442	
备 忘 录				
序号	内 容 content	处理方法 handling method	签 名 signature	日 期 date
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				