

Accreditation:

Deutsche
Akkreditierungsstelle
D-PL-12155-01-04

FCC test firm accreditation expiration date: 2024-05-17
MRA US-EU, FCC designation number: DE0010
Test firm registration number: 997268
FCC Registration Number (FRN): 0032245045
BnetzA-CAB-02/21-02/6 Valid until 2023-11-26



Deutsche
Akkreditierungsstelle
D-PL-12155-01-03

Recognized until 2025-03-16 by the
Department of Innovation, Science and Economic Development Canada (ISED)
as a recognized testing laboratory
CAB identifier: DE0011
Company number: 3472A

Location of Testing:

Element Materials Technology Straubing GmbH

Tel.: +49 9421 56868-0

Fax: +49 9421 56868-100

Email: info.straubing@element.com

Gustav-Hertz-Straße 35

94315 Straubing, Germany

The technical accuracy is guaranteed through the quality management of
Element Materials Technology Straubing GmbH.

This document may be reproduced only in its entirety and without change.
The results contained in this document relate only to the item(s) tested

Table of contents

1	Summary of test results	6
2	Referenced publications	7
3	Equipment under test (EUT)	8
3.1	General information	8
3.2	Radio specifications	9
3.3	Photo documentation	9
4	Test configuration and mode of operation	10
4.1	Test configuration	10
4.2	Mode of operation	10
5	Test procedures	11
5.1	General specifications	11
5.2	AC power line conducted emission	11
5.3	Radiated emissions below 30 MHz	13
5.4	Radiated emissions from 30 MHz to 1 GHz	16
5.5	Radiated emissions above 1 GHz	19
5.6	Bandwidth measurements	22
5.7	Restricted bands of operation	23
6	Test results	24
6.1	AC power line conducted emissions 150 kHz to 30 MHz	25
6.2	Occupied bandwidth	31
6.3	Radiated emissions below 30 MHz	34
6.4	Radiated emissions from 30 MHz to 1 GHz	39
6.5	Radiated emissions from > 1 GHz	43
7	Equipment calibration status	47
8	Measurement uncertainties	48
9	Revision history	49

List of figures

Figure 1: Setup for AC power-line conducted emissions test from 150 kHz to 30 MHz	12
Figure 2: Setup for radiated emissions test below 30 MHz.....	15
Figure 3: Setup for radiated emissions test from 30 MHz to 1 GHz.....	18
Figure 4: Setup for radiated emissions test above 1 GHz.....	21
Figure 5: Chart of AC powerline conducted emissions on L1	27
Figure 6: Chart of AC powerline conducted emissions on N.....	28
Figure 7: Chart of AC powerline conducted emissions on L1	29
Figure 8: Chart of AC powerline conducted emissions on N.....	30
Figure 9: Chart of occupied bandwidth test, with tag	32
Figure 10: Chart of occupied bandwidth test, with tag	33
Figure 11: Chart of radiated emissions test below 30 MHz, EUT position Y, without tag, antenna in line	36
Figure 12: Chart of radiated emissions test below 30 MHz, EUT position Y, without tag, antenna in line	37
Figure 13: Chart of radiated emissions test from 30 MHz to 1 GHz, EUT position X, without tag, antenna vertical	41
Figure 14: Chart of radiated emissions test from 30 MHz to 1 GHz, EUT position Y, with tag, antenna vertical	42
Figure 15: Chart of radiated emissions pre-measurement from 1 GHz to 12.5 GHz, EUT position Z, with tag, antenna polarization horizontal	45
Figure 16: Chart of radiated emissions pre-measurement from 1 GHz to 12.5 GHz, EUT position Y, with tag, antenna polarization horizontal	46

List of tables

Table 1: EUT used for testing	10
Table 2: Support equipment used for testing	10
Table 3: Ports of EUT and appropriate cables	10
Table 4: Bandwidth and detector type for AC power-line conducted emissions test	11
Table 5: Sample calculation	12
Table 6: Recalculation factors for extrapolation	13
Table 7: Bandwidth and detector type for radiated emissions test below 30 MHz.....	13
Table 8: Sample calculation	14
Table 9: Bandwidth and detector type for radiated emissions test from 30 MHz to 1 GHz	16
Table 10: Sample calculation	16
Table 11: Sample calculation	19
Table 12: Bandwidth and trace settings for exploratory radiated emissions test above 1 GHz.....	19
Table 13: Bandwidth and detector type for final radiated emissions test above 1 GHz.....	20
Table 14: Limits for AC powerline conducted emissions according to § 15.207(a) and RSS-Gen, section 8.8	26
Table 15: Results of AC powerline conducted emissions on L1	27
Table 16: Results of AC powerline conducted emissions on N.....	28
Table 17: Results of AC powerline conducted emissions on L1	29
Table 18: Results of AC powerline conducted emissions on N.....	30
Table 19: Results of occupied bandwidth test, with tag	32
Table 20: Results of occupied bandwidth test, with tag	33
Table 21: General radiated emission limits up to 30 MHz according to §15.209.....	35
Table 22: General radiated emission limits up to 30 MHz according to section 8.9 of RSS Gen	35
Table 23: Final results of radiated emissions test below 30 MHz, EUT position Y, without tag, antenna in line according to § 15.209	36
Table 24: Final results of radiated emissions test below 30 MHz, EUT position Y, without tag, antenna in line according to RSS-210	37
Table 25: Final results of radiated emissions test below 30 MHz, EUT position Y, without tag, antenna in line according to § 15.209	37
Table 26: Final results of radiated emissions test below 30 MHz, EUT position Y, without tag, antenna in line according to RSS-210	38
Table 27: General radiated emission limits $\geq$ 30 MHz according to §15.209 and RSS-Gen	40
Table 28: Results of radiated emissions test from 30 MHz to 1 GHz, EUT position X, without tag, antenna vertical	41
Table 29: Results of radiated emissions test from 30 MHz to 1 GHz, EUT position Y, with tag, antenna vertical	42
Table 30: General radiated emission limits above 960 MHz according to §15.209 and RSS-Gen	44
Table 31: Results of emissions test from 1 GHz to 12.5 GHz, with tag	45
Table 32: Results of emissions test from 1 GHz to 12.5 GHz, with tag	46

1 Summary of test results

System type: RFID Reader

47 CFR part and section	Test	Equivalent to IC radio standard(s)	Result	Note(s)	Page
15.207(a)	AC power line conducted emissions 150 kHz to 30 MHz	RSS-Gen, section 8.8	Passed	2	25
---	Occupied bandwidth	RSS-Gen, section 6.7	Recorded	---	31
15.209(a)	Radiated emissions below 30 MHz	RSS-210 section 7.3	Passed	---	34
15.209(a)	Radiated emissions from 30 MHz to 1 GHz	RSS-210 section 7.3	Passed	---	39
15.209(a)	Radiated emissions from > 1 GHz	RSS-210 section 7.3	Passed	3	43

Note(s):

- 1 For information about EUT see clause 3.
- 2 Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.
- 3 Only applicable if the 10th harmonic of the intentional transmitter is beyond 1 GHz and the highest frequency of the unintentional part is ≥ 108 MHz (please see 47 CFR Part 15, § 15.33(a) and (b), and RSS-Gen, section 6.13.2).

Straubing, August 16, 2023



Tested by
Konrad Graßl
Department Manager Radio



Approved by
Christian Kiermeier
Reviewer

2 Referenced publications

<i>Publication</i>	<i>Title</i>
CFR 47 Part 2 October 2022	Code of Federal Regulations, Title 47 (Telecommunication), Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)
CFR 47 Part 15 October 2022	Code of Federal Regulations, Title 47 (Telecommunication), Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)
ANSI C63.10 June 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 174176 D01 June 3, 2015	AC power-line conducted emissions Frequently Asked Questions
RSS-Gen Issue 5 April 2018 Amendment 1 (March 2019) Amendment 2 (February 2021)	Spectrum Management and Telecommunications - Radio Standards Specification - General Requirements for Compliance of Radio Apparatus
RSS-210 Issue 10, December 2019 Amendment (April 2020)	Spectrum Management and Telecommunications Radio Standards Specification Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

3 Equipment under test (EUT)

All Information in this clause is declared by customer.

3.1 General information

Product type:	RFID reader / writer		
Model name:	SECUSTOS SQ80 K LEGIC		
Serial number(s):	Prototype		
Manufacturer:	Sesamsec GmbH		
Version:	Hardware:	Prod C	
	Software:	C/B1.50/NKD4.70/CONT1.26	
Short description:	EUT is a RFID reader / writer operating at the frequencies 125 kHz and 13.56 MHz. The EUT employs also a BLE module operating at 2.4 GHz. In this test report only RFID working at 125 kHz is in consideration.		
Additional modifications:	None		
FCC ID of EUT:	2BAACSQ80KLE		
IC registration number of EUT:	30098-SQ80KLE		
Power supply:	DC supply		
	Nominal voltage:	12 V	
Device type:	☐ Portable	☐ Mobile	☒ Fixed

3.2 Radio specifications

System type:	RFID Reader		
Application frequency band:	n/a		
Operating frequency:	125 kHz		
Number of RF channels	1		
Highest internal frequency:	2480 MHz (BLE)		
Modulation	ASK		
Antenna:	Type:	Magnetic loop	
	Inductance:	490 μ H $\pm$ 5%	
	Diameter of wire:	0.10 mm	
	Turns:	About 150 turns	
		Coil is fixed by using backed wire	
Connector:		Leadfree and RoHS conform	
		☐ external	☐ internal
		☐ temporary	☒ none (integral antenna)

3.3 Photo documentation

For external photos of the EUT see annex B, for internal ones see annex C.
Photos taken during testing including EUT positions can be found in annex A.

4 Test configuration and mode of operation

4.1 Test configuration

<i>Device</i>	<i>Type designation</i>	<i>Serial or inventory no.</i>	<i>Manufacturer</i>
RFID reader / writer	SECUSTOS SQ80 K LEGIC	Prototyp	Sesamsec GmbH

Table 1: EUT used for testing

<i>Device</i>	<i>Type designation</i>	<i>Serial or inventory no.</i>	<i>Manufacturer</i>
RFID-tag	125 kHz	---	Sesamsec GmbH
Laptop	Lifebook A531	E001053	FUJITSU
Power supply for laptop	AC adapter	E001053	FUJITSU
RS485 adapter	---	---	Sesamsec GmbH
Wiegand adapter	---	---	Sesamsec GmbH

Table 2: Support equipment used for testing

<i>Port</i>	<i>Classification</i>
4 pin connector	Signal/control for RS485 and DC supply
6 pin connector	Signal/control for Wiegand

Table 3: Ports of EUT and appropriate cables

4.2 Mode of operation

- The EUT was in continuous interrogation mode at 125 kHz.
- The integrated BLE was set in idle mode.
- The EUT was operated with RS-485 connection.
- The EUT was operated with Wiegand connection.

5 Test procedures

5.1 General specifications

5.1.1 Test setups

Tabletop devices are placed on a non-conductive table with a height of 0.8 m. In case of AC power-line conducted emissions test, the rear of the EUT is located 40 cm to the vertical wall of the RF-shielded (screened) room which is used as vertical conducting plane. For radiated emission measurements above 1 GHz, tabletop devices are placed at a height of 1.5 m above the floor using a support made of styrene placed on top of the non-conductive table.

Floor-standing devices are placed either directly on the reference ground-plane or on insulating material (see clause 6.2.3 of ANSI C63.10-2013 for more details).

All other surfaces of tabletop or floor-standing EUTs are at least 80 cm from any other grounded conducting surface. This includes the case or cases of one or more LISNs when performing an AC power-line conducted emissions test.

Radiated emission measurements of equipment that can be used in multiple orientations (e.g. portable or handheld devices) are performed with the EUT in each of three orthogonal axis positions.

5.2 AC power line conducted emission

AC power-line conducted emissions are measured according to clause 6.2 of ANSI C63.10 over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from all of the EUT current-carrying power input terminals that are directly (or indirectly via separate transformers or power supplies) connected to a public power network. The tests are performed in a shielded room.

If the EUT normally receives power from another device that in turn connects to the public utility ac power lines, measurements are made on that device with the EUT in operation to demonstrate that the device continues to comply with the appropriate limits while providing the EUT with power. If the EUT is operated only from internal or dedicated batteries, with no provisions for connection to the public utility ac power lines (600 VAC or less) to operate the EUT (such as an adapter), then ac power-line conducted measurements are not required.

For direct current (dc) powered devices where the ac power adapter is not supplied with the device, an “off-the-shelf” unmodified ac power adapter is used. If the device is supposed to be installed in a host (e.g., the device is a module or PC card), then it is tested in a typical compliant host.

Frequency (f)	Measurement receiver bandwidth	Step size	Detector type		
			Prescan	Prescan with FFT	Final scan
$150 \text{ kHz} \leq f < 30 \text{ MHz}$	9 kHz	$\leq 4.5 \text{ kHz}$	Peak, Average	Quasi-peak, Average	Quasi-peak, Average

Table 4: Bandwidth and detector type for AC power-line conducted emissions test

The AC power-line conducted emissions test is performed in the following steps:

- The EUT is arranged as tabletop or floor-standing equipment, as applicable, and connected to a line impedance stabilization network (LISN) with 50 μH / 50 Ω . If required, a second LISN of the same type and terminated by 50 Ω is used for peripheral devices. The EUT is switched on.

- b) The measurement equipment is connected to the LISN for the EUT and set-up according to the specifications of the test (see table 4). At the LISN, the neutral line is selected to be tested.
- c) The prescan is performed with both detectors activated at the same time. If the test receiver is capable of FFT analysis, it is used for prescan, but not for final scan.
- d) When the prescan is completed, maximum levels with less margin than 10 dB or exceeding the limit are determined and collected in a list.
- e) With the first frequency of the list selected, a frequency zoom over a range of ten times of the measurement receiver bandwidth around this frequency is performed. If the EUT has no significant drift in frequency, the frequency zoom can be skipped.
- f) For final scan, the emission level is measured and the maximum is recorded.
- g) Steps e) to f) are repeated for all other frequencies in the list. At least the six highest EUT emissions relative to the limit have to be recorded.
- h) Steps c) to g) are repeated for all current-carrying conductors of all of the power cords of EUT, i.e. all phase and (if used) neutral line(s).

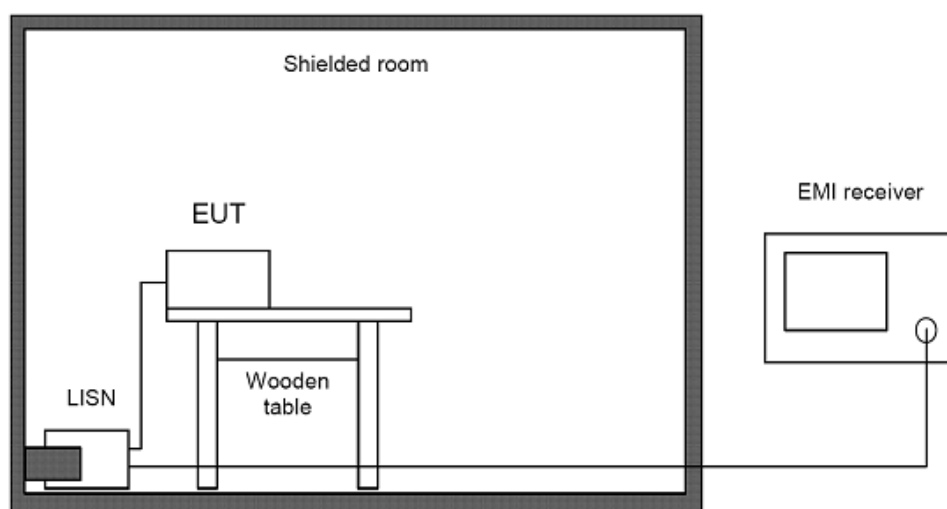


Figure 1: Setup for AC power-line conducted emissions test from 150 kHz to 30 MHz

Phase	Frequency (MHz)	Reading value (dB μ V)	AMN correction (dB)	Cable attenuation + 10 dB attenuator (dB)	Correction factor (Corr.) (dB)	Level (dB μ V/m)
L 1	10	10	0.6	10.9	11.5	21.5
N	10	10	1.0	10.9	11.9	21.9

Table 5: Sample calculation

Correction factor = Artificial mains network correction + Cable attenuation + 10 dB

Level = Reading value + Correction factor = 10 dB μ V + 11.5 dB = 21.5 dB μ V

Prescans are performed with all detectors activated at the same time. If the test receiver is capable of FFT analysis, it is used for prescans, but not for final scans. If no limit is specified for certain detectors, final scan measurement with these detectors may be omitted.

5.3 Radiated emissions below 30 MHz

Radiated emissions below 30 MHz are measured according to clause 6.4 of ANSI C63.10 using an inductive shielded loop antenna. As this antenna measures the magnetic field only, its antenna factors are converted to electric field strength values assuming a free space impedance of 377Ω as described in clause 4.3.1 of ANSI C63.10. This results in an additional correction of 51.53 dB.

According to clause 6.4.3 of ANSI C63.10, at frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements. In this case, the results are extrapolated to the specified distance by using a recalculation factor determined according to one of the methods described in clause 6.4.4 of ANSI C63.10, provided that the maximum dimension of the device is equal to or less than 0.625 times the wavelength at the frequency being measured. As the minimum wavelength is 10 meters corresponding to the maximum frequency of 30 MHz, this requirement is fulfilled if the maximum dimension of the device is equal to or less than 6.25 meters.

Unless otherwise stated, the recalculation factor is determined according to clause 6.4.4.2 “Extrapolation from the measurement of a single point” of ANSI C63.10:

$$\begin{aligned} d_{\text{near field}} &= 47.77 / f_{\text{MHz}}, \text{ or} \\ f_{\text{MHz}} &= 47.77 / d_{\text{near field}} \end{aligned}$$

The frequency f_{MHz} at which the near field distance is equal to the limit and/or test distance is important for selection of the right formula to determine the recalculation factor:

$$\begin{aligned} f_{\text{MHz}}(300 \text{ m}) &\approx 0.159 \text{ MHz} \\ f_{\text{MHz}}(30 \text{ m}) &\approx 1.592 \text{ MHz} \\ f_{\text{MHz}}(3 \text{ m}) &\approx 15.923 \text{ MHz} \end{aligned}$$

Based on the test distances for the general radiated emission limits as specified in §15.209 of 47 CFR Part 15 or RSS-Gen, the following formulas are used to determine the recalculation factor:

Frequency (f)	d_{limit}	d_{measure}	Formula for recalculation factor
9 kHz $\leq$ f $\leq$ 159 kHz 490 kHz < f $\leq$ 1.592 MHz	300 m 30 m	3 m	$-40 \log(d_{\text{limit}} / d_{\text{measure}})$
159 kHz < f $\leq$ 490 kHz 1.592 MHz < f $\leq$ 15.923 MHz	300 m 30 m	3 m	$-40 \log(d_{\text{near field}} / d_{\text{measure}}) - 20 \log(d_{\text{limit}} / d_{\text{near field}})$
f > 15.923 MHz	30 m	3 m	$-20 \log(d_{\text{limit}} / d_{\text{measure}})$

Table 6: Recalculation factors for extrapolation

The radiated measurements below 30 MHz are performed in a fully anechoic room (called “CDC”). The measurement distance is 3 meters. The emissions of the EUT are recorded with an EMI test receiver configured as described in table 7.

Frequency (f)	Measurement receiver bandwidth	Step size	Detector type
9 kHz $\leq$ f < 150 kHz	200 Hz	$\leq 100 \text{ Hz}$	Peak Quasi-peak Aerage
150 kHz $\leq$ f < 30 MHz	9 kHz	$\leq 4.5 \text{ kHz}$	Peak Quasi-peak Aerage

Table 7: Bandwidth and detector type for radiated emissions test below 30 MHz

<i>Frequency</i> (MHz)	<i>Reading value</i> (dBμV)	<i>Antenna correction</i> (dB/m)	<i>Cable attenuation</i> (dB)	<i>Correction factor (Corr.)</i> (dB)	<i>Level</i> (dBμV/m)
10	20.00	19.59	0.33	19.92	39.92

Table 8: Sample calculation

Correction factor = Antenna correction + Cable attenuation

Level = Reading value + Correction factor = 20 dBμV + 19.92 dB = 39.92 dBμV/m

Prescans are performed with all detectors activated at the same time. If the test receiver is capable of FFT analysis, it is used for prescans, but not for final scans. If no limit is specified for certain detectors, final scan measurement with these detectors may be omitted.

The radiated emissions test below 30 MHz is performed in the following steps:

5.3.1 Automatic test method

- The loop antenna is positioned with its plane perpendicular to the ground with the lowest height of the antenna 1 m above the ground.
- The EUT is placed in its standard position on a turntable capable of rotation through 360° in the horizontal plane and arranged as tabletop or floor-standing equipment, as applicable. The EUT is switched on.
- The measurement equipment is connected to the loop antenna and set-up according to the specifications of the test (see table 7).
- The EUT is turned to a position likely to get the maximum and the test antenna is rotated to detect the maximum of the fundamental in this EUT position.
- Then the EUT is rotated in a horizontal plane through 360° in steps of 20°. Starting at 0°, at each table position the spectrum for the full frequency range is recorded. If the emission at a certain frequency is higher than the levels already recorded, the current table position is noted as the maximum position.
- After the last prescan, the significant maximum emissions and their table positions are determined and collected in a list.
- With the test receiver set to the first frequency of the list, the EUT is rotated by ±180° around the table position found during prescans while measuring the emission level continuously. For final scan, the worst-case table position is set and the maximum emission level is recorded.
- Step g) is repeated for all other frequencies in the list.

If the EUT may be used in various positions, steps a) to h) are repeated in two other orthogonal positions.

5.3.2 Manual test method

- a) The loop antenna is positioned with its plane perpendicular to the ground with the lowest height of the antenna 1 m above the ground.
- b) The EUT is placed in its standard position on a turntable capable of rotation through 360° in the horizontal plane and arranged as tabletop or floor-standing equipment, as applicable. The EUT is switched on.
- c) The measurement equipment is connected to the loop antenna and set-up according to the specifications of the test (see table 7).
- d) The EUT is turned to a position likely to get the maximum and the test antenna is rotated to detect the maximum of the fundamental in this EUT position.
- e) Then the EUT is rotated in a horizontal plane through 360° continuously. The scan table method in receiver mode of the measurement instrument is used for pre-measurements. The max hold function is used.
- f) After the last prescan, the significant maximum emissions are determined and collected in a list.
- g) Final scan: the test receiver is set in the bargraph max hold function and is set to the first frequency of the list, the EUT is rotated by 360° while measuring the emission level continuously. The worst-case table position and the maximum emission level is recorded.
- h) Step g) is repeated for all other frequencies in the list.

If the EUT may be used in various positions, steps a) to h) are repeated in two other orthogonal positions.

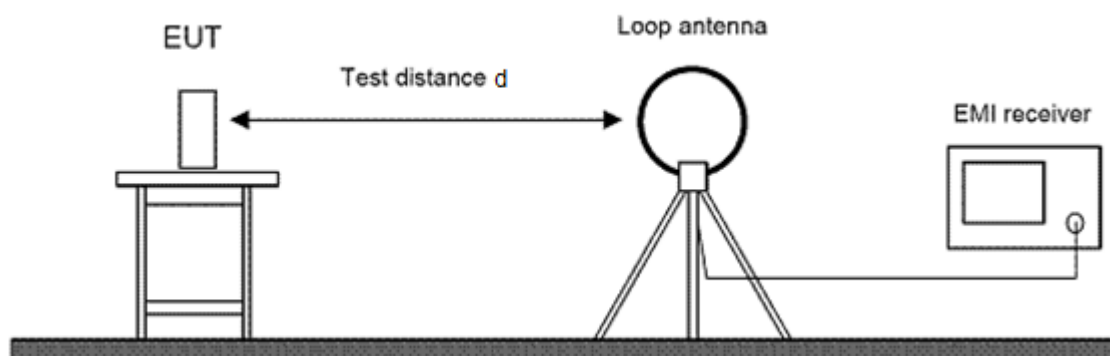


Figure 2: Setup for radiated emissions test below 30 MHz

5.4 Radiated emissions from 30 MHz to 1 GHz

Radiated emissions in the frequency range 30 MHz to 1 GHz are measured according to clause 6.5 of ANSI C63.10 using a semi-anechoic chamber (SAC) with a ground plane on the floor. The measurement distance is 3 meters. The emissions of the EUT are recorded with an EMI test receiver configured as described in table 9.

<i>Frequency (f)</i>	<i>Measurement receiver bandwidth</i>	<i>Step size</i>	<i>Detector type</i>		
			<i>Prescan</i>	<i>Prescan with FFT</i>	<i>Final scan</i>
30 MHz ≤ f ≤ 1 GHz	120 kHz	≤ 60 kHz	Peak	Quasi-peak	Quasi-peak

Table 9: Bandwidth and detector type for radiated emissions test from 30 MHz to 1 GHz

<i>Frequency</i> (MHz)	<i>Reading value</i> (dBμV)	<i>Antenna correction</i> (dB/m)	<i>Cable attenuation</i> (dB)	<i>Correction factor (Corr.)</i> (dB)	<i>Level</i> (dBμV/m)
100	30.00	11.71	1.06	12.77	42.77

Table 10: Sample calculation

Correction factor = Antenna correction + Cable attenuation

Level = Reading value + Correction factor = 30 dBμV + 12.77 dB = 42.77 dBμV/m

The measurement antenna is a combination of a biconical antenna and a logarithmic-periodic dipole array antenna. It is mounted on a support capable of allowing the antenna to be used in either horizontal or vertical polarization and in a height between 1 m and 4 m above the ground plane.

If the test receiver is capable of FFT analysis, it is used for prescans, but not for final scans.

The radiated emissions test from 30 MHz to 1 GHz is performed in the following steps:

5.4.1 Automatic test method

- a) The measurement antenna is oriented initially for vertical polarization.
- b) The EUT is placed in its standard position on a turntable capable of rotation through 360° in the horizontal plane and arranged as tabletop or floor-standing equipment, as applicable. The EUT is switched on.
- c) The measurement equipment is connected to the measurement antenna and set-up according to the specifications of the test (see table 9).
- d) The table position is set to 0°.
- e) The antenna height is set to 1 m.
- f) The spectrum for the full frequency range is recorded. If the emission at a certain frequency is higher than the levels already recorded, the polarization and height of the measurement antenna as well as the current table position are noted as the maximum position.
- g) The antenna height is increased to 4 m in steps of 50 cm. At each height, step f) is repeated.
- h) The polarization of the measurement antenna is changed to horizontal.
- i) The antenna height is decreased from 4 m to 1 m in steps of 50 cm. At each height, step f) is repeated.
- j) The EUT is rotated in a horizontal plane through 360° in steps of 20°. At each table position, steps e) to i) are repeated.
- k) After the last prescan, the significant maximum emissions with their polarizations and heights of the measurement antenna as well as their table positions are determined and collected in a list.
- l) With the test receiver set to the first frequency of the list, the measurement antenna is set to the polarization and height and the table is moved to the position as determined during prescans.
- m) The antenna is moved at a height from 1 m to 4 m and the EUT is rotated through 360° while measuring the emission level continuously.
- n) For final scan, the worst-case positions of antenna and table are set and the maximum emission level is recorded. At least, frequency and level of the six highest emissions relative to the limit have to be recorded. However, emissions more than 20 dB below the limit do not need to be reported.
- o) Steps l) to n) are repeated for all other frequencies in the list.

If the EUT may be used in various positions, steps a) to o) are repeated in two other orthogonal positions.

5.4.2 Manual test method

- a) The measurement antenna is oriented initially for vertical polarization.
- b) The EUT is placed in its standard position on a turntable capable of rotation through 360° in the horizontal plane and arranged as tabletop or floor-standing equipment, as applicable. The EUT is switched on.
- c) The measurement equipment is connected to the measurement antenna and set-up according to the specifications of the test (see table 9).
- d) The table position is set to 0°.
- e) The antenna height is set to 1 m.
- f) The spectrum for the full frequency range is recorded. The measurement is performed with peak detector and max hold.
- g) The antenna height is increased to 4 m in steps of 50 cm. At each height, step f) is repeated or the measurement is stopped after all heights were measured.
- h) The polarization of the measurement antenna is changed to horizontal.
- i) The antenna height is decreased from 4 m to 1 m in steps of 50 cm. At each height, step f) is repeated.
- j) The EUT is rotated in a horizontal plane through 360° continuously. At each table position, steps e) to i) are repeated.
- k) After the last prescan, the significant maximum emissions with their polarizations and heights of the measurement antenna are determined and collected in a list.
- l) Final scan: the test receiver is set in the bargraph max hold function and is set to the first frequency of the list, the EUT is rotated by 360° and the antenna is moved from 1 m to 4 m while measuring the emission level continuously. The worst-case table position and the maximum emission level is recorded.
- m) Step l) is repeated for all other frequencies in the list. At least, frequency and level of the six highest emissions relative to the limit have to be recorded. However, emissions more than 20 dB below the limit do not need to be reported.

If the EUT may be used in various positions, steps a) to o) are repeated in two other orthogonal positions.

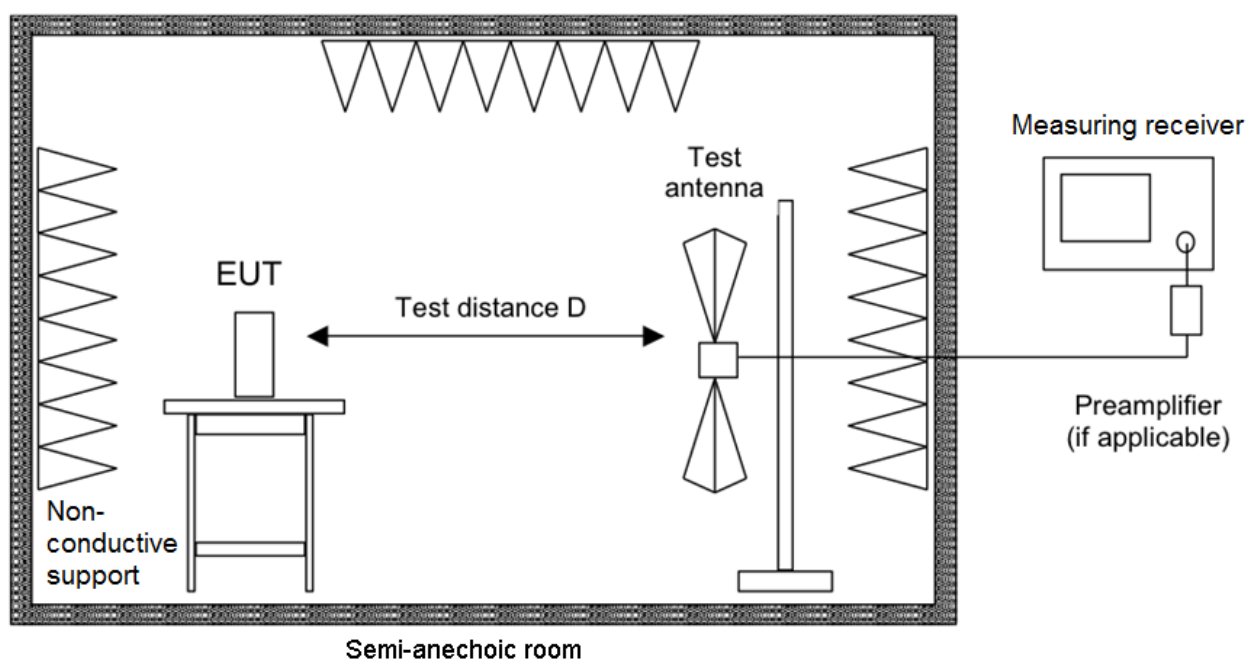


Figure 3: Setup for radiated emissions test from 30 MHz to 1 GHz

5.5 Radiated emissions above 1 GHz

Radiated emissions above 1 GHz are measured according to clause 6.6 of ANSI C63.10 by conducting exploratory and final radiated emission tests. According to clause 6.6.4.1 of ANSI C63.10, measurements may be performed at a distance closer than that specified in the requirements. However, an attempt shall be made to avoid making final measurements in the near field of both the measurement antenna and the EUT.

For measurement of radiated emissions above 1 GHz, horn antennas are used.

Test chamber	Frequency (MHz)	Reading value (dBμV)	Antenna correction (dB/m)	Correction pre-amplifier (dB)	Cable attenuation (dB)	Correction factor (Corr.) (dB)	Level (dBμV/m)
SAC3	2400	50.00	27.76	-47.91	5.24	-14.92	35.08
FS-SAC	2400	50.00	27.76	-34.57	3.51	-3.30	46.70

Table 11: Sample calculation

Correction factor = Antenna correction + Correction pre-amplifier + Cable attenuation

SAC3:

Level = Reading value + Correction factor = 50.00 dBμV - 14.92 dB/m = 35.08 dBμV/m

FS-SAC:

Level = Reading value + Correction factor = 50.00 dBμV - 3.30 dB/m = 46.70 dBμV/m

5.5.1 Exploratory radiated emissions measurements

Exploratory radiated emissions above 1 GHz are measured in a semi-anechoic chamber with RF absorbing material on the floor or a fully anechoic room. They are performed by moving the receiving antenna over all sides of the EUT at a closer distance (e.g. 0.5 or 1 m) while observing the display of the test receiver to find the emissions to be re-tested during final radiated emission measurements.

According to clause 5.3.3 of ANSI C63.10, when performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade of distance (inverse of linear distance for field-strength measurements). To simplify testing and documentation, the limits are increased accordingly instead of decreasing the results.

The emissions of the EUT are displayed and recorded with an EMI test receiver operating in the spectrum analyzer mode using the settings as described in table 12.

Frequency (f)	Resolution bandwidth	Video bandwidth	Sweep time	Trace detector(s)
f ≥ 1 GHz	1 MHz	3 MHz	AUTO	Max Peak, Average

Table 12: Bandwidth and trace settings for exploratory radiated emissions test above 1 GHz

If during exploratory radiated emissions measurements no levels to be re-tested are found, the final radiated emissions measurement may be omitted. In this case, the chart of the exploratory radiated emissions measurements has to be reported.

5.5.2 Final radiated emissions measurements

Final radiated emissions above 1 GHz are measured in the semi-anechoic chamber (SAC3) or Free space semi-anechoic chamber (FS-SAC) with RF absorbing material on the floor between measurement antenna and EUT. The measurement distance is 3 meters in the semi-anechoic chamber (SAC3) or 1.5 m in the Free space semi-anechoic chamber (FS-SAC). The emissions of the EUT are recorded with an EMI test receiver configured as described in table 13.

Frequency (f)	Measurement receiver bandwidth	Step size	Detector type	
			Prescan	Final scan
$f \geq 1 \text{ GHz}$	1 MHz	$\leq 500 \text{ kHz}$	Peak, Average	Peak, Average

Table 13: Bandwidth and detector type for final radiated emissions test above 1 GHz

Prescans are performed with both detectors activated at the same time. If the test receiver is capable of FFT analysis, it is used for prescans, but not for final scans.

The horn antenna is mounted on a support capable of allowing the antenna to be used in either horizontal or vertical polarization and to be moved in a scan height range between 1 m and the scan height upper range defined in clause 6.6.3.3 of ANSI C63.10. When the EUT is manipulated through three different orientations, the scan height upper range for the measurement antenna is limited to 2.5 m above the ground plane.or 0.5 m above the top of the EUT, whichever is higher. Otherwise, the scan height upper range is 4 m above the ground plane.

To keep the emission signal within the illumination area of the 3 dB beamwidth of the measurement antenna, the automatic tilt function of the antenna support device is used to point the antenna at an angle toward the source of the emission.

The final radiated emissions test above 1 GHz is performed in the following steps:

5.5.2.1 Automatic measurement method

- The measurement antenna is oriented initially for vertical polarization.
- The EUT is placed in its standard position on a turntable capable of rotation through 360° in the horizontal plane and arranged as tabletop or floor-standing equipment, as applicable. The EUT is switched on.
- The measurement equipment is connected to the measurement antenna and set-up according to the specifications of the test (see table 13).
- The table position is set to 0°.
- The antenna height is set to 1 m.
- The spectrum for the full frequency range is recorded. If the emission at a certain frequency is higher than the levels already recorded, the polarization and height of the measurement antenna as well as the current table position are noted as the maximum position.
- The antenna height is increased to the scan height upper range in steps of 50 cm. At each height, step f) is repeated.
- The polarization of the measurement antenna is changed to horizontal.
- The antenna height is decreased from the scan height upper range to 1 m in steps of 50 cm. At each height, step f) is repeated.
- The EUT is rotated in a horizontal plane through 360° in steps of 20°. At each table position, steps e) to i) are repeated.
- After the last prescan, the significant maximum emissions with their polarizations and heights of the measurement antenna as well as their table positions are determined and collected in a list.
- With the test receiver set to the first frequency of the list, the measurement antenna is set to the polarization and height and the table is moved to the position as determined during prescans.
- The antenna is moved from 1 m to 4 m around this height and the EUT is rotated through 360° around while measuring the emission level continuously.
- The worst-case positions of antenna and table and the maximum emission level are recorded.

- o) Steps l) to n) are repeated for all other frequencies in the list. At least, frequency and level of the six highest emissions relative to the limit have to be recorded. However, emissions more than 20 dB below the limit do not need to be reported.

If the EUT may be used in various positions, steps a) to o) are repeated in two other orthogonal positions.

5.5.2.2 Manual measurement method

- a) The measurement antenna is oriented initially for vertical polarization.
- b) The EUT is placed in its standard position on a turntable capable of rotation through 360° in the horizontal plane and arranged as tabletop or floor-standing equipment, as applicable. The EUT is switched on.
- c) The measurement equipment is connected to the measurement antenna and set-up according to the specifications of the test (see table 13).
- d) The table position is set to 0°.
- e) The antenna height is set to 1 m.
- f) The EUT is rotated in a horizontal plane through 360° The spectrum for the full frequency range is recorded using the peak detector.
- g) The antenna height is increased to the scan height upper range in steps of 50 cm. At each height, step f) is repeated.
- h) The polarization of the measurement antenna is changed to horizontal.
- i) The antenna height is decreased from the scan height upper range to 1 m in steps of 50 cm. At each height, step f) is repeated.
- j) After the last prescan, the significant maximum emissions with their polarizations are determined and collected in a list.
- k) For the final scan the test receiver is set to the first frequency of the list. By using the bargraph max hold function of the measurement receiver the emission in consideration is maximised by rotating the EUT in the horizontal plane through 360° and moving the antenna from 1 m to 4 m (2.5 m).
- l) The worst-case positions of antenna and table and the maximum emission level are recorded.
- m) Steps l) to n) are repeated for all other frequencies in the list. At least, frequency and level of the six highest emissions relative to the limit have to be recorded. However, emissions more than 20 dB below the limit do not need to be reported.

If the EUT may be used in various positions, steps a) to o) are repeated in two other orthogonal positions.

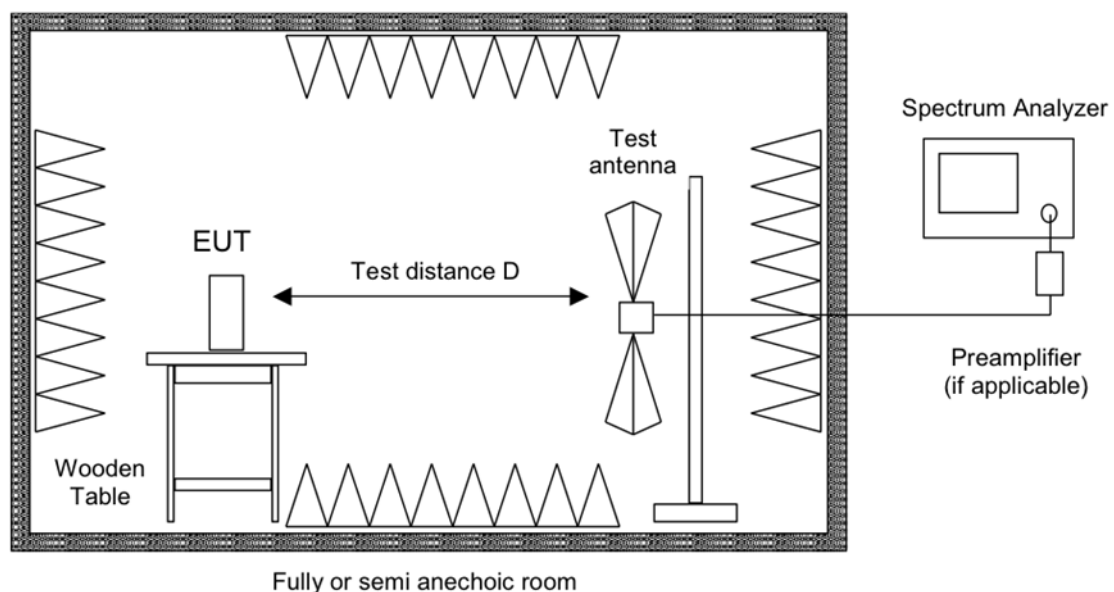


Figure 4: Setup for radiated emissions test above 1 GHz

5.6 Bandwidth measurements

5.6.1 99 % occupied bandwidth

According to section 6.7 of RSS-Gen, the occupied bandwidth (OBW) is defined as the 99 % emission bandwidth.

The span of the spectrum analyzer is set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.

The resolution bandwidth is in the range of 1 % to 5 % of the occupied bandwidth and the video bandwidth is not smaller than three times the resolution bandwidth. Video averaging is not permitted.

If possible, the detector of the spectrum analyzer is set to "Sample". However, if the device is not transmitting continuously, a peak, or peak hold is used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement).

To measure the 99 % emission bandwidth, the OBW function of the test receiver is used with the power bandwidth set to 99 %. This function indicates the lowest frequency (starting from the left side of the span) and the highest frequency (starting from the right side of the span) where 0.5% of the total sum is reached. The difference between the two frequencies is the 99 % occupied bandwidth.

5.7 Restricted bands of operation

The EUT was placed in a fully anechoic chamber and the testing was performed in accordance with ANSI C63.10 and 47 CFR Part 15, section 15.35. The measurement distance was 3 m. To find the closest margin of the spectrum to the limit mask adapted to the test distance the EUT was rotated by 360 degrees with detector of the test receiver set to peak. The loop antenna placed in a fixed height of 1 meter was rotated by 360 degrees to get the maximum of emission. In case of exceeding the limits the detector is switched to quasi peak for final testing in position of maximum emission.

6 Test results

This clause gives details about the test results as collected in the summary of test results on page 6.

For information about measurement uncertainties see page 48.

The climatic conditions are recorded during the tests. It is ensured that the climatic conditions are within the following ranges:

Ambient temperature	Ambient humidity	Ambient pressure
15°C to 35°C	30 % to 75 %	86 kPa to 106 kPa

6.1 AC power line conducted emissions 150 kHz to 30 MHz

Section(s) in 47 CFR Part 15:	Requirement(s):	15.207(a)
	Reference(s):	ANSI C63.10, clause 6.2
Section(s) in RSS:	Requirement(s):	RSS-Gen, section 8.8
	Reference(s):	ANSI C63.10, clause 6.2

Performed by:	Konrad Graßl	Date of test:	July 4, 2023
Result:	☒ Test passed	☐ Test not passed	

6.1.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
Shielded room	P92007	Siemens Matsushita	E00107
EMI test receiver	ESR 7	Rohde & Schwarz	E01549
Artificial mains network	ESH2-Z5	Rohde & Schwarz	E00004
Attenuator (10 dB)	50FHB-010-10	JFW Industries	E00471
Cable set shielded room	RG 223/U RG 223/U	AME HF-Technik AME HF-Technik	E00741 E00804
Test software	EMC32-(M)EB, V10.60.20	Rohde & Schwarz	E00777, E00778 or E01073

6.1.2 Limits

According to §15.207(a):

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H / 50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

According to §15.207(c):

Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

According to RSS-Gen, section 8.8:

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in of the following table, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in the following table shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

Table 14: Limits for AC powerline conducted emissions according to § 15.207(a) and RSS-Gen, section 8.8

*Decreases with the logarithm of the frequency

6.1.3 Test procedure

AC power line conducted emissions are measured using the test procedure as described in clause 5.2.

6.1.4 Test results

Note(s):

1. The test was performed at 120 V and 60 Hz.

6.1.4.1 RS-485

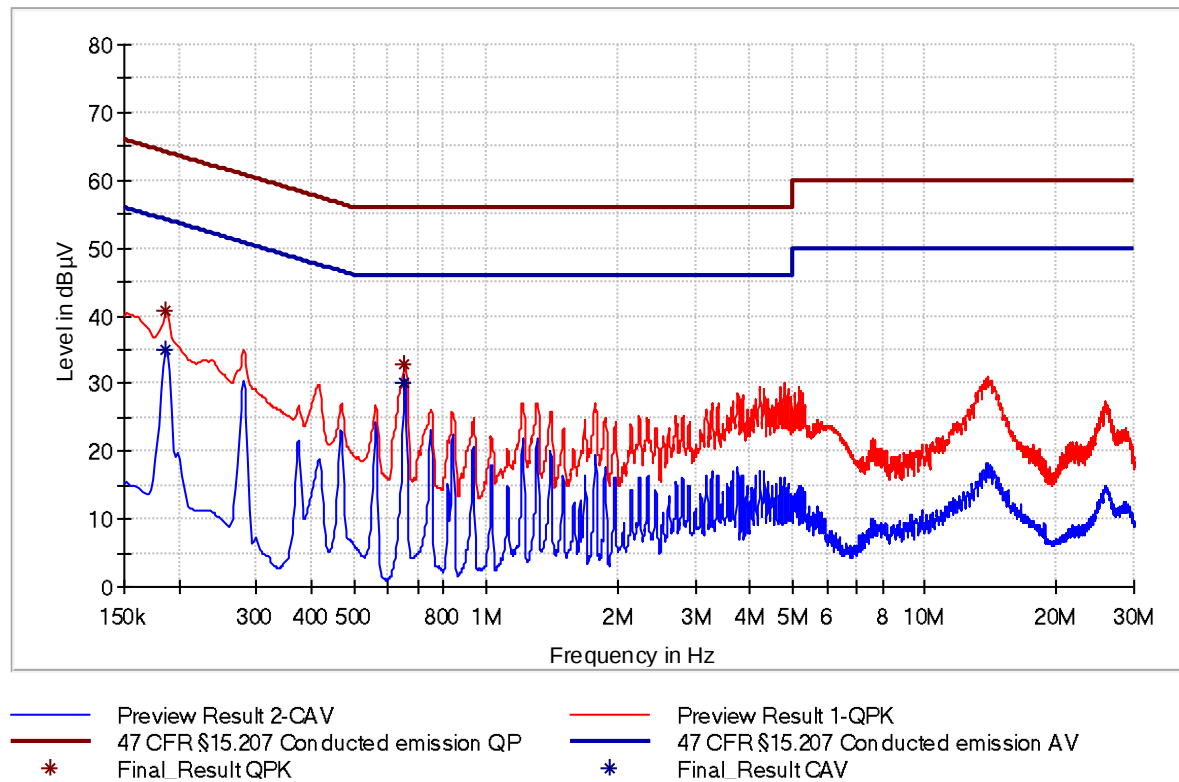


Figure 5: Chart of AC powerline conducted emissions on L1

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)
0.186000	40.91	---	64.21	23.30	1000.0	9.000	L1	GND	10.1
0.186000	---	35.02	54.21	19.19	1000.0	9.000	L1	GND	10.1
0.651750	32.97	---	56.00	23.03	1000.0	9.000	L1	GND	10.1
0.654000	---	30.14	46.00	15.86	1000.0	9.000	L1	GND	10.1

Table 15: Results of AC powerline conducted emissions on L1

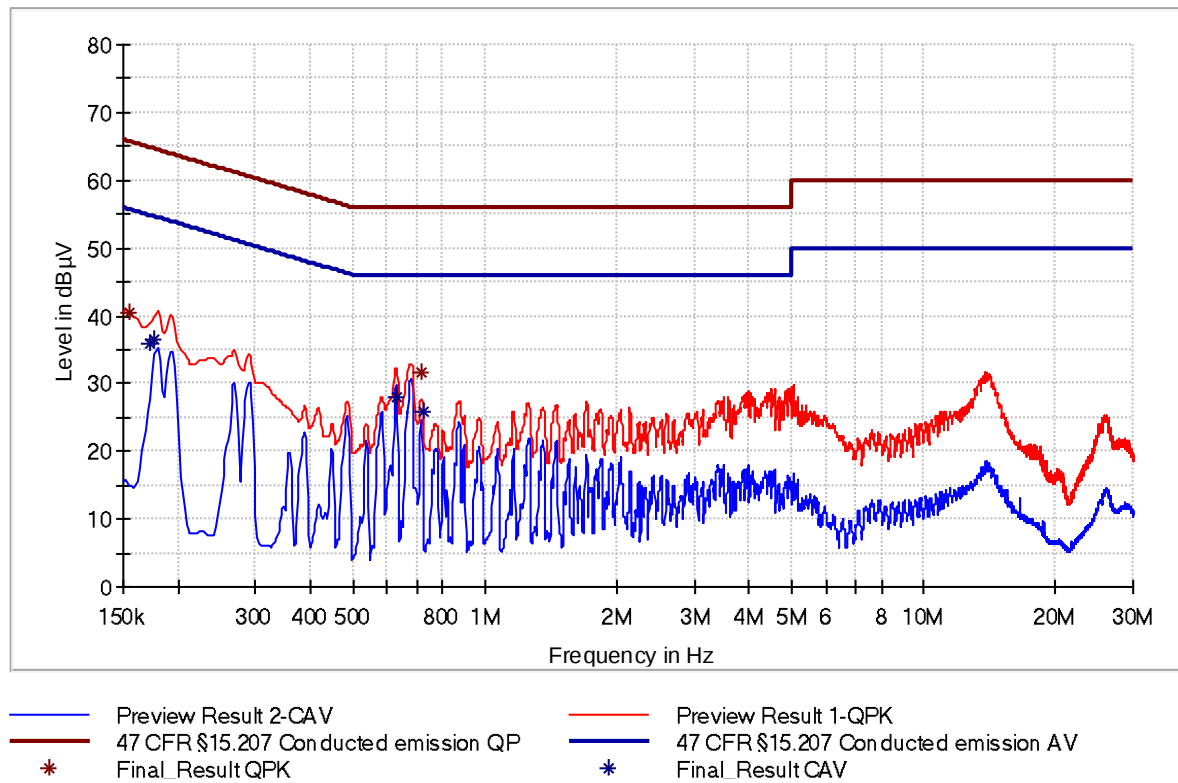


Figure 6: Chart of AC powerline conducted emissions on N

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)
0.154500	40.46	---	65.75	25.29	1000.0	9.000	N	GND	10.1
0.172500	---	35.95	54.84	18.89	1000.0	9.000	N	GND	10.1
0.177000	---	36.59	54.63	18.04	1000.0	9.000	N	GND	10.1
0.627000	---	28.03	46.00	17.97	1000.0	9.000	N	GND	10.2
0.719250	31.69	---	56.00	24.31	1000.0	9.000	N	GND	10.2
0.723750	---	25.77	46.00	20.23	1000.0	9.000	N	GND	10.2

Table 16: Results of AC powerline conducted emissions on N

6.1.4.2 Wiegand

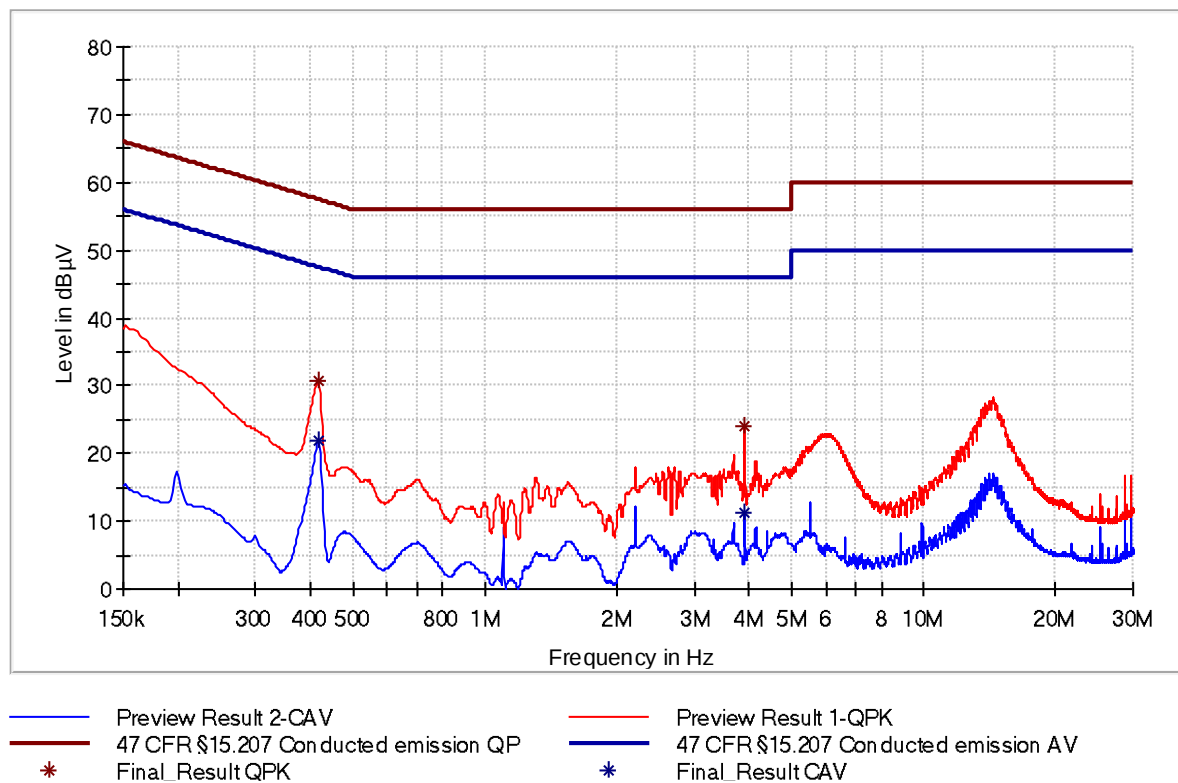


Figure 7: Chart of AC powerline conducted emissions on L1

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)
0.417750	30.67	---	57.49	26.82	1000.0	9.000	L1	GND	10.1
0.417750	---	22.04	47.49	25.45	1000.0	9.000	L1	GND	10.1
3.914250	23.94	---	56.00	32.06	1000.0	9.000	L1	GND	10.5
3.914250	---	11.28	46.00	34.72	1000.0	9.000	L1	GND	10.5

Table 17: Results of AC powerline conducted emissions on L1

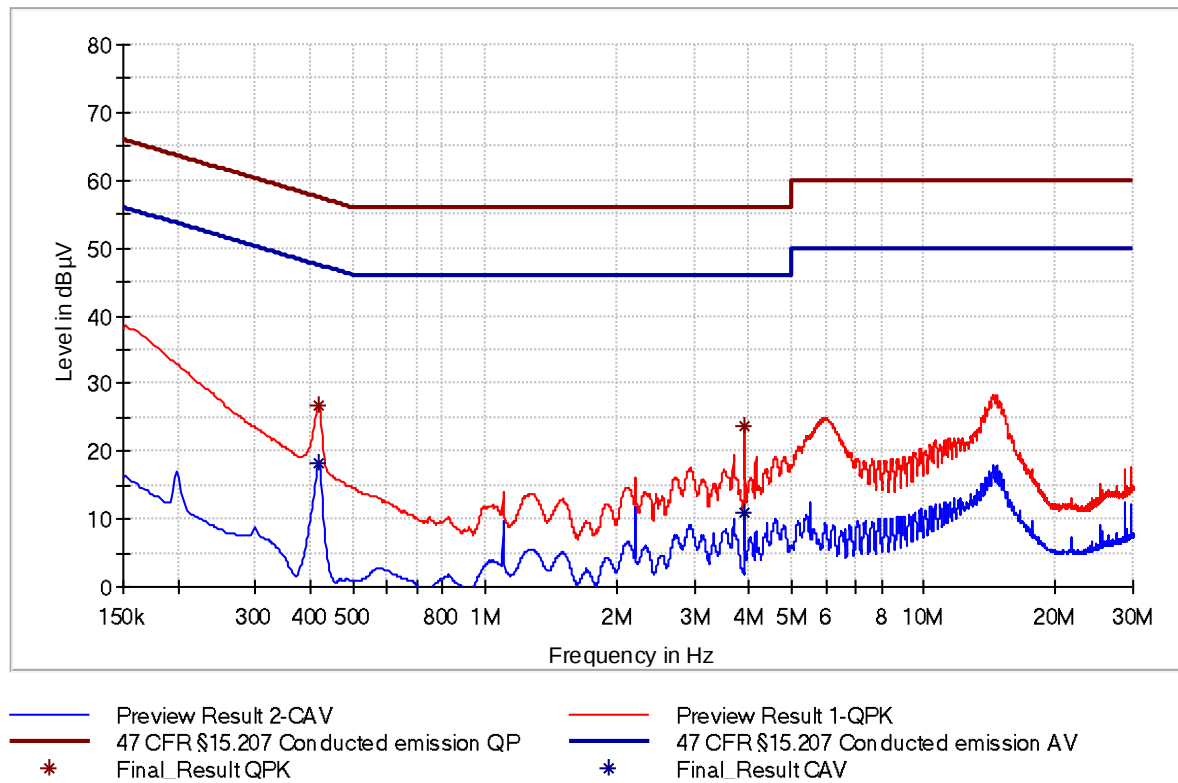


Figure 8: Chart of AC powerline conducted emissions on N

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)
0.417750	26.73	---	57.49	30.76	1000.0	9.000	N	GND	10.2
0.420000	---	18.11	47.45	29.34	1000.0	9.000	N	GND	10.2
3.914250	23.86	---	56.00	32.14	1000.0	9.000	N	GND	10.6
3.914250	---	10.82	46.00	35.18	1000.0	9.000	N	GND	10.6

Table 18: Results of AC powerline conducted emissions on N

6.2 Occupied bandwidth

Section(s) in RSS:

Requirement(s):

RSS-Gen, section 6.7

Reference(s):

ANSI C63.10, clause 6.9

Performed by:	Konrad Graßl	Date of test:	July 12, 2023
Result:	☒ Test passed ☐ Test not passed		

6.2.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
EMI test receiver	ESW 44	Rohde & Schwarz	E00895
Field probe	RF-R 400-1	Langer EMV-Technik	E00270

6.2.2 Limits

According to RSS-Gen, section 6.7:

There is no limit specified, the occupied bandwidth has to be recorded and reported.

6.2.3 Test procedure

Occupied bandwidth is measured using the

- ☐ radiated measurement procedure with the analyzer settings as described in clause 5.6.1.
- ☒ conducted measurement procedure using a test fixture with the analyzer settings as described in clause 5.6.1.

6.2.4 Test results

Note(s):

1. Pre-measurements were performed to declare the worst-case which is documented below.

6.2.4.1 RS-485

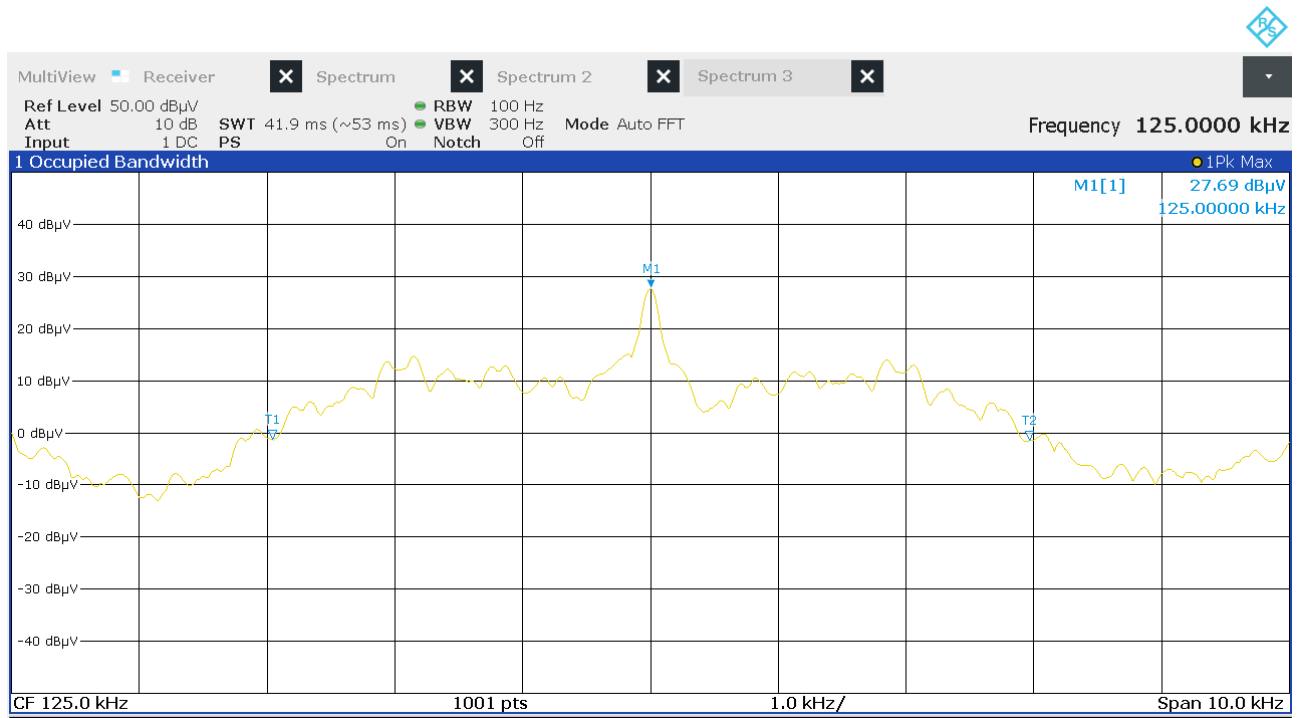


Figure 9: Chart of occupied bandwidth test, with tag

Occupied bandwidth (kHz)	Lower frequency (kHz)	Higher frequency (kHz)	Result
5.926	122.040	127.966	Recorded

Table 19: Results of occupied bandwidth test, with tag

6.2.4.2 Wiegand

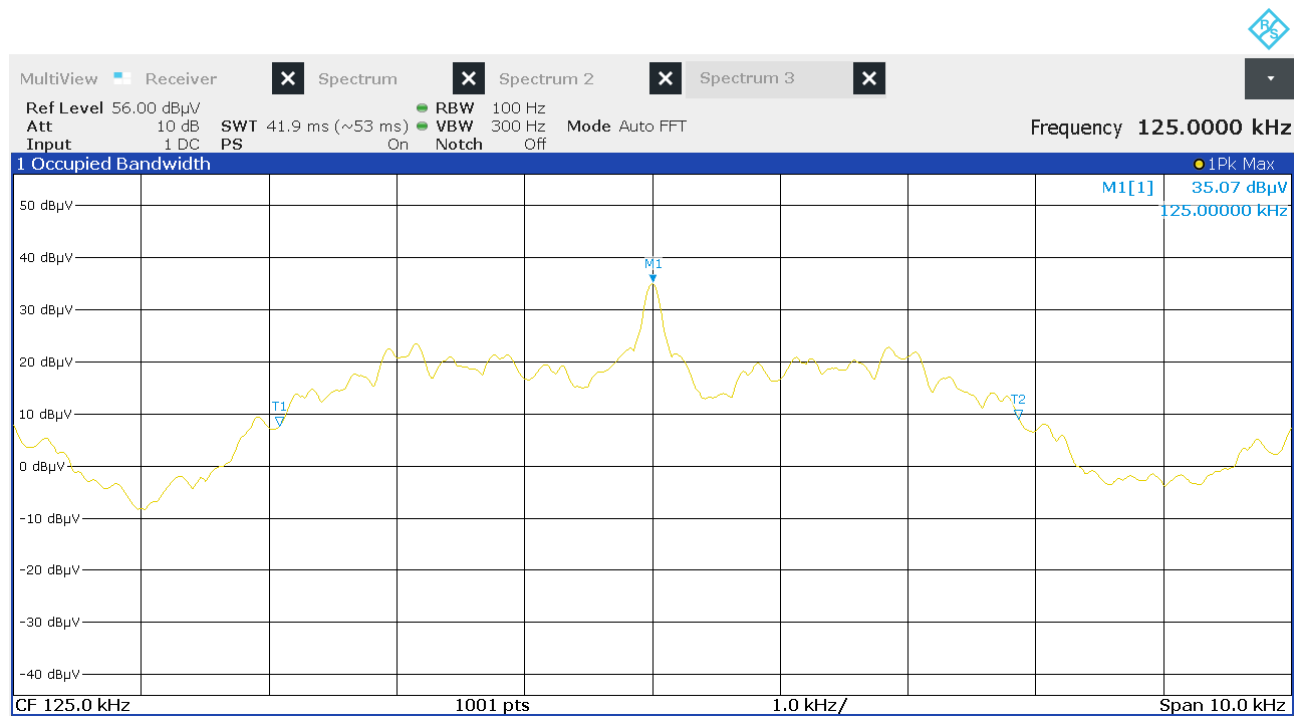


Figure 10: Chart of occupied bandwidth test, with tag

Occupied bandwidth (kHz)	Lower frequency (kHz)	Higher frequency (kHz)	Result
5.777	122.085	127.863	Recorded

Table 20: Results of occupied bandwidth test, with tag

6.3 Radiated emissions below 30 MHz

Section(s) in 47 CFR Part 15:	Requirement(s):	15.209(a)
	Reference(s):	ANSI C63.10, clause 6.4
Section(s) in RSS:	Requirement(s):	RSS-210, section 7.3
	Reference(s):	ANSI C63.10, clause 6.4

Performed by:	Konrad Graßl	Date of test:	June 20, 2023
---------------	--------------	---------------	---------------

Result:	☒ Test passed	☐ Test not passed
---------	---	--

6.3.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
Compact Diagnostic Chamber (CDC)	VK041.0174	Albatross Projects	E00026
EMI test receiver	ESW 44	Rohde & Schwarz	E00895
Loop antenna	HFH2-Z2	Rohde & Schwarz	E00060
Cable set CDC	RF cable(s)	Huber + Suhner AME HF-Technik AME HF-Technik Stabo	E00446 E00920 E00921 E01215

6.3.2 Limits

According to § 15.209(a):

Except as provided elsewhere in subpart 15.209 the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength		Measurement distance (m)
	($\mu\text{V/m}$)	($\text{dB}\mu\text{V/m}$)	
0.009 – 0.490	2400/F(kHz) (266.67 – 4.90)	48.52 – 13.80	300
0.490 – 1.705	24000/F(kHz) (48.98 – 14.08)	33.80 – 22.97	30
1.705 – 30	30	29.54	30

Table 21: General radiated emission limits up to 30 MHz according to §15.209

According to section 7.3 of RSS-210:

Transmitters whose wanted and unwanted emissions fall within the general field strength limits specified in RSS-Gen may operate licence-exempt in any of the frequency bands, other than the restricted frequency bands listed in RSS-Gen and the TV bands 54-72 MHz, 76-88 MHz, 174-216 MHz and 470-602 MHz, and shall be certified under RSS-210. Under no circumstances shall the level of any unwanted emissions exceed the level of the fundamental emissions.

Frequency (MHz)	Field strength		Measurement distance (m)
	($\mu\text{A/m}$)	($\text{dB}\mu\text{A/m}$)	
0.009 – 0.490	6.37/F(kHz) (0.708 – 0.013)	-2.999 – -37.721	300
0.490 – 1.705	63.7/F(kHz) (0.13 – 0.037)	-17.721 – -28.636	30
1.705 – 30	0.08	-21.94	30

Table 22: General radiated emission limits up to 30 MHz according to section 8.9 of RSS Gen

In case of measurements are performed at other distances than that specified in the requirements, the limits in the charts and tables reported with the test results are derived from the general radiated emission limits as listed in table 21 and Table 22, using the recalculation factor as described in clause 5.3.

6.3.3 Test procedure

The radiated emissions below 30 MHz are measured using the

- ☒ manual measurement procedure as described in clause 5.3.
- ☐ automatic measurement procedure as described in clause 5.3.

6.3.4 Test results

Test distance:	☒ 3 m		
Antenna alignment:	☒ in parallel	☒ in line	
EUT position:	☒ Position X	☒ Position Y	☒ Position Z

Note(s):

1. Pre-measurements were performed to declare the worst-case which is documented below.
2. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y - 51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-Gen limit as it has to 15.209(a) limit.

6.3.4.1 RS-485

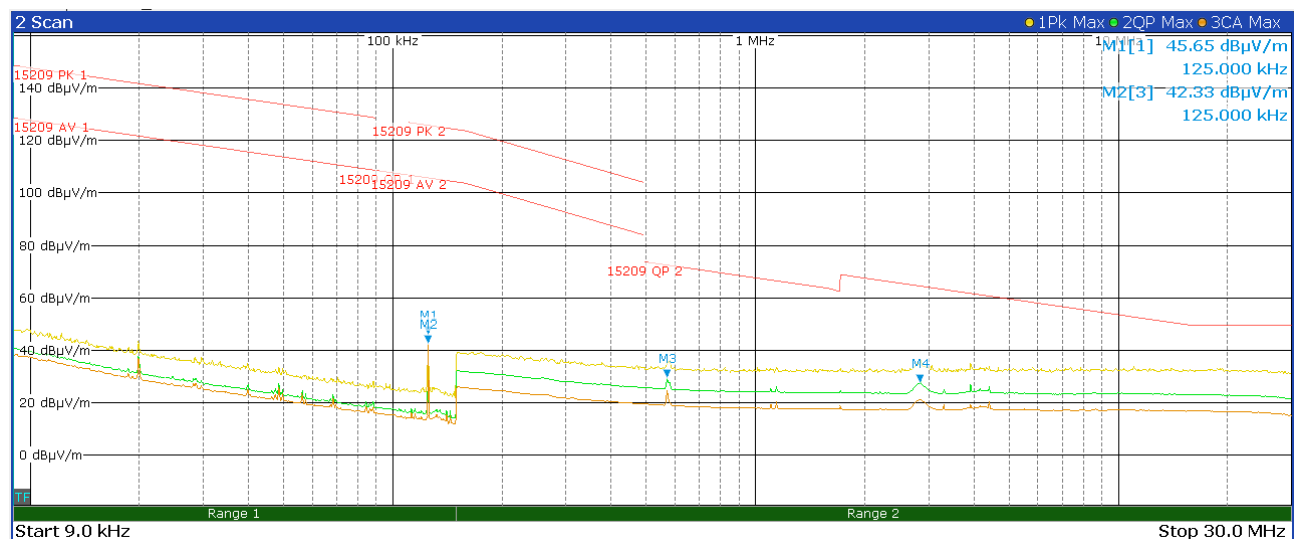


Figure 11: Chart of radiated emissions test below 30 MHz, EUT position Y, without tag, antenna in line

Frequency (MHz)	Field strength (dBμV/m at 3 m)	Det.	Calculated field strength (dBμV/m)	at dist. (m)	Limit (dBμV/m)	at dist. (m)	Margin (dB)	Azimuth (deg)	Corr. (dB/m)
0.125	45.8	Pk	-34.2	300	45.7	300	79.9	170	20.0
0.125	43.0	AV	-37.0	300	25.7	300	62.7	170	20.0

Table 23: Final results of radiated emissions test below 30 MHz, EUT position Y, without tag, antenna in line according to § 15.209

Frequency (MHz)	Field strength (dB μ A/m at 3 m)	Det.	Calculated field strength (dB μ A/m)	at dist. (m)	Limit (dB μ A/m)	at dist. (m)	Margin (dB)	Azimuth (deg)	Corr. (dB/m)
0.125	-5.7	Pk	-85.7	300	-5.8	300	79.9	170	-31.5
0.125	-8.5	AV	-88.5	300	-25.8	300	62.7	170	-31.5

Table 24: Final results of radiated emissions test below 30 MHz, EUT position Y, without tag, antenna in line according to RSS-210

6.3.4.2 Wiegand

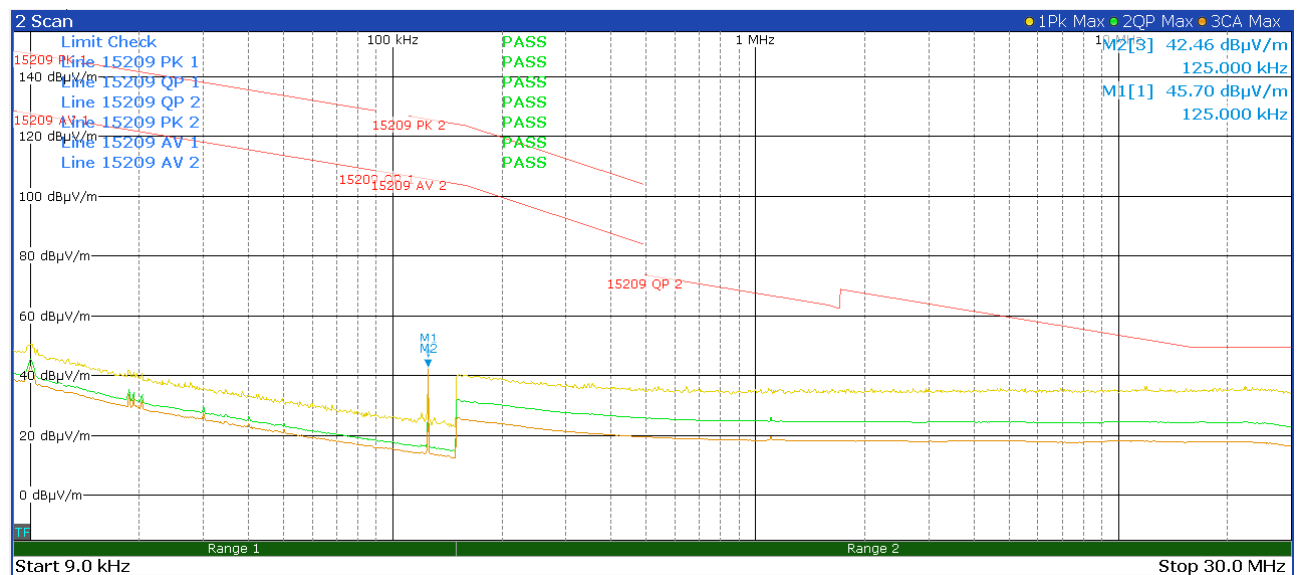


Figure 12: Chart of radiated emissions test below 30 MHz, EUT position Y, without tag, antenna in line

Frequency (MHz)	Field strength (dB μ V/m at 3 m)	Det.	Calculated field strength (dB μ V/m)	at dist. (m)	Limit (dB μ V/m)	at dist. (m)	Margin (dB)	Azimuth (deg)	Corr. (dB/m)
0.125	45.7	Pk	-34.3	300	45.7	300	80.0	270	20.0
0.125	42.5	AV	-37.5	300	25.7	300	63.2	270	20.0

Table 25: Final results of radiated emissions test below 30 MHz, EUT position Y, without tag, antenna in line according to § 15.209

<i>Frequency (MHz)</i>	<i>Field strength (dBμA/m at 3 m)</i>	<i>Det.</i>	<i>Calculated field strength (dBμA/m)</i>	<i>at dist. (m)</i>	<i>Limit (dBμA/m)</i>	<i>at dist. (m)</i>	<i>Margin (dB)</i>	<i>Azimuth (deg)</i>	<i>Corr. (dB/m)</i>
0.125	-5.8	Pk	-85.8	300	-5.8	300	80.0	270	-31.5
0.125	-9.0	AV	-89.0	300	-25.8	300	63.2	270	-31.5

Table 26: Final results of radiated emissions test below 30 MHz, EUT position Y, without tag, antenna in line according to RSS-210

6.4 Radiated emissions from 30 MHz to 1 GHz

Section(s) in 47 CFR Part 15:	Requirement(s):	15.209(a)
	Reference(s):	ANSI C63.10, clause 6.5
Section(s) in RSS:	Requirement(s):	RSS-210, section 7.3
	Reference(s):	ANSI C63.10, clause 6.5

Performed by:	Konrad Graßl	Date of test:	June 21, 2023
---------------	--------------	---------------	---------------

Result:	☒ Test passed	☐ Test not passed
---------	---	--

6.4.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
Semi-anechoic chamber (SAC)	SAC3	Albatross Projects	E00716
EMI test receiver	ESR 7	Rohde & Schwarz	E00739
TRILOG broadband antenna (SAC)	VULB 9162	Schwarzbeck	E00643
Cable set SAC	RF cable(s)	Huber + Suhner	E00755 E01033 E01034
Test software	EMC32-(M)EB, V10.60.20	Rohde & Schwarz	E00777, E00778 or E01073

6.4.2 Limits

According to § 15.209(a):

Except as provided elsewhere in subpart 15.209 the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

According to section 7.3 of RSS-210:

Transmitters whose wanted and unwanted emissions fall within the general field strength limits specified in RSS-Gen may operate licence-exempt in any of the frequency bands, other than the restricted frequency bands listed in RSS-Gen and the TV bands 54-72 MHz, 76-88 MHz, 174-216 MHz and 470-602 MHz, and shall be certified under RSS-210. Under no circumstances shall the level of any unwanted emissions exceed the level of the fundamental emissions.

<i>Frequency (MHz)</i>	<i>Field strength</i>		<i>Measurement distance (m)</i>
	<i>(μV/m)</i>	<i>(dBμV/m)</i>	
30 – 88	100	40.00	3
88 – 216	150	43.52	3
216 - 960	200	46.02	3
Above 960	500	53.98	3

Table 27: General radiated emission limits $\geq$ 30 MHz according to §15.209 and RSS-Gen

6.4.3 Test procedure

The radiated emissions from 30 MHz to 1 GHz are measured using the

- ☐ manual measurement procedure as described in clause 5.4.
- ☒ automatic measurement procedure as described in clause 5.4.

6.4.4 Test results

Test distance:	☒ 3 m		
Polarization:	☒ horizontal	☒ vertical	
EUT position:	☒ Position X	☒ Position Y	☒ Position Z

Note(s):

1. Pre-measurements were performed to declare the worst-case which is documented below.

6.4.4.1 RS-485

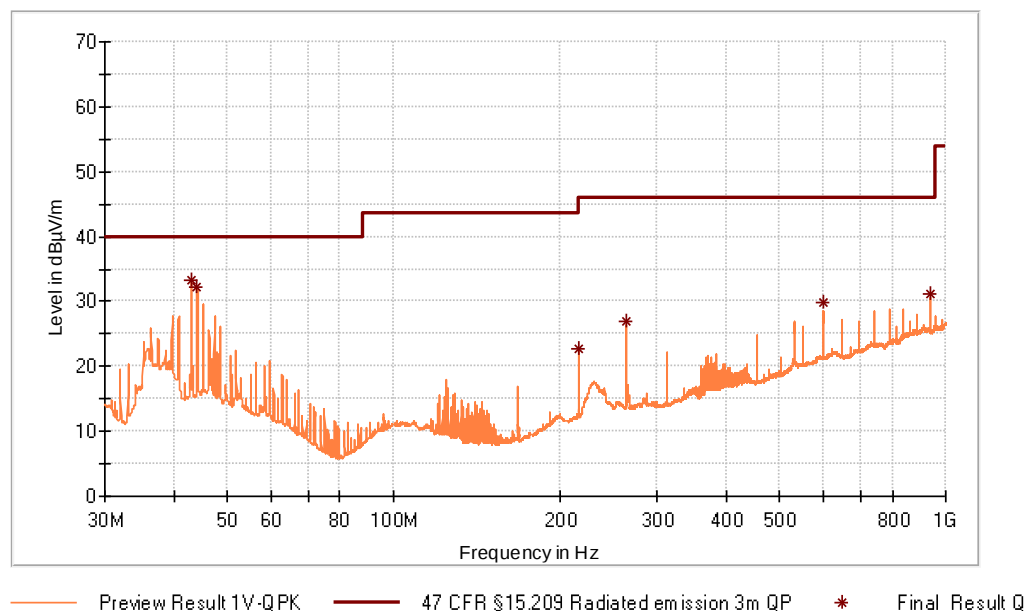


Figure 13: Chart of radiated emissions test from 30 MHz to 1 GHz, EUT position X, without tag, antenna vertical

Frequency (MHz)	Field strength (dBμV/m at 3 m)	Limit (dBμV/m at 3 m)	Margin (dB)	Height (cm)	Pol.	Azimuth (deg)	Corr. (dB/m)	Result
43.050000	33.32	40.00	6.68	100.0	V	291.0	14.2	Passed
44.130000	32.19	40.00	7.81	100.0	V	327.0	14.4	Passed
216.000000	22.84	43.50	20.66	100.0	V	85.0	12.7	Passed
264.000000	26.83	46.00	19.17	124.0	V	185.0	14.5	Passed
600.000000	29.92	46.00	16.08	100.0	V	136.0	21.7	Passed
936.000000	31.11	46.00	14.89	100.0	V	178.0	25.8	Passed

Table 28: Results of radiated emissions test from 30 MHz to 1 GHz, EUT position X, without tag, antenna vertical

6.4.4.2 Wiegand

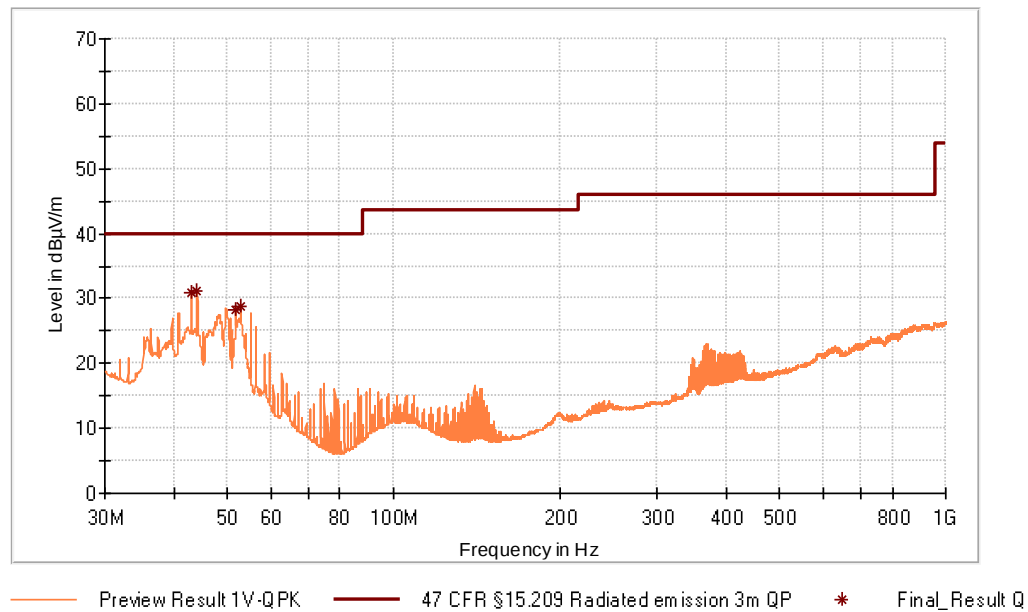


Figure 14: Chart of radiated emissions test from 30 MHz to 1 GHz, EUT position Y, with tag, antenna vertical

Frequency (MHz)	Field strength (dBμV/m at 3 m)	Limit (dBμV/m at 3 m)	Margin (dB)	Height (cm)	Pol.	Azimuth (deg)	Corr. (dB/m)	Result
43.050000	30.93	40.00	9.07	100.0	V	10.0	14.2	Passed
44.130000	31.18	40.00	8.82	100.0	V	1.0	14.4	Passed
51.840000	28.20	40.00	11.80	100.0	V	51.0	14.7	Passed
52.950000	28.80	40.00	11.20	100.0	V	337.0	14.6	Passed

Table 29: Results of radiated emissions test from 30 MHz to 1 GHz, EUT position Y, with tag, antenna vertical

6.5 Radiated emissions from > 1 GHz

Section(s) in 47 CFR Part 15:	Requirement(s):	15.209(a)
	Reference(s):	ANSI C63.10, clause 6.6
Section(s) in RSS:	Requirement(s):	RSS-210, section 7.3
	Reference(s):	ANSI C63.10, clause 6.6

Performed by:	Konrad Graßl	Date of test:	July 6, 2023
---------------	--------------	---------------	--------------

Result:	☒ Test passed	☐ Test not passed
---------	---	--

6.5.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
Free space semi-anechoic chamber (FS-SAC)	FS-SAC	ELEMENT STRAUBING	E00100
EMI test receiver	ESW 44	Rohde & Schwarz	E00895
Preamplifier (0.5 GHz - 18 GHz)	BBV 9718 B	Schwarzbeck	W01325
Horn antenna	BBHA 9120D	Schwarzbeck	W00053
Cable set FS-SAC	RF cable(s)	Teledyne Reynolds Huber + Suhner Teledyne Reynolds	E00435 E00307 E00433

6.5.2 Limits

According to § 15.209(a):

Except as provided elsewhere in subpart 15.209 the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

According to section 7.3 of RSS-210:

Transmitters whose wanted and unwanted emissions fall within the general field strength limits specified in RSS-Gen may operate licence-exempt in any of the frequency bands, other than the restricted frequency bands listed in RSS-Gen and the TV bands 54-72 MHz, 76-88 MHz, 174-216 MHz and 470-602 MHz, and shall be certified under RSS-210. Under no circumstances shall the level of any unwanted emissions exceed the level of the fundamental emissions.

Frequency (MHz)	Field strength		Measurement distance (m)
	($\mu\text{V/m}$)	(dB $\mu\text{V/m}$)	
Above 960	500	54	3

Table 30: General radiated emission limits above 960 MHz according to §15.209 and RSS-Gen

6.5.3 Test procedure

The emissions above 1 GHz are measured using the test procedure for radiated measurements as described in clause 5.5.

The radiated emissions above 1 GHz are measured using the

- ☒ manual measurement procedure as described in clause 5.5.
- ☐ automatic measurement procedure as described in clause 5.5.

6.5.4 Test results

Test distance:	Exploratory tests:	☐ 1 m	☐ 0.5 m
	Final tests:	☐ 3 m	☒ 1.5 m
EUT position:	☒ Position X	☒ Position Y	☒ Position Z

Note(s):

- 1 The measurements from 1 GHz to 17 GHz are made at a measurement distance of 1.5 m. However, the limit lines for these tests are referenced to the limit lines at a measurement distance of 3 m (Offset – 6 dB).
- 2 Pre-measurements were performed to declare the worst case which is documented below. The table results show the final measurements of the emissions detected in the pre-measurements which are shown in this test report.
- 3 According to clause 6.6.4.3, note 1 of ANSI C63.10, if the maximized peak measured value complies with the average limit, than it is unnecessary to perform an average measurement.

6.5.4.1 RS-485

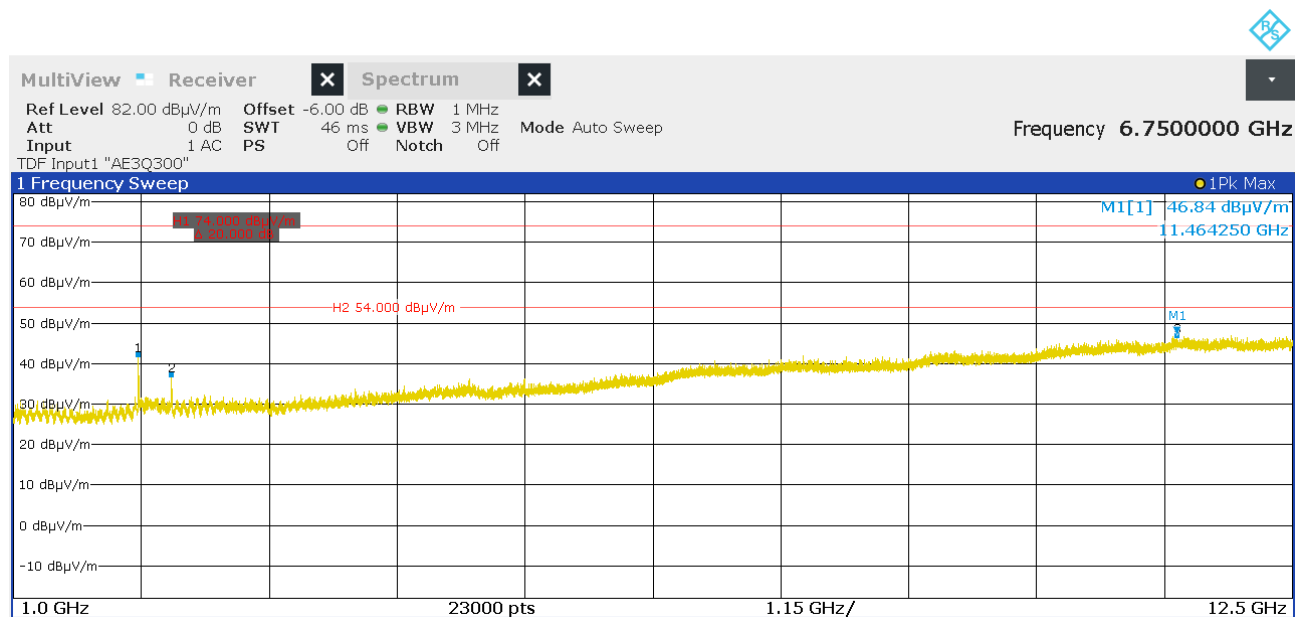


Figure 15: Chart of radiated emissions pre-measurement from 1 GHz to 12.5 GHz, EUT position Z, with tag, antenna polarization horizontal

Frequency (MHz)	EUT Pos.	Level (dBμV/m) at 3 m	Det.	Peak limit (dBμV/m) at 3 m	Margin (dB)	Average limit (dBμV/m) at 3 m	Margin (dB)	Height (cm)	Pol.	Azimuth (deg)	Corr. (dB/m)
2123.250	Z	43.7	Pk	74.0	30.3	54.0	10.3	140	H	52	-1.5
2420.750	Z	37.2	Pk	74.0	36.8	54.0	16.8	160	H	62	-2.0

Table 31: Results of emissions test from 1 GHz to 12.5 GHz, with tag

6.5.4.2 Wiegand

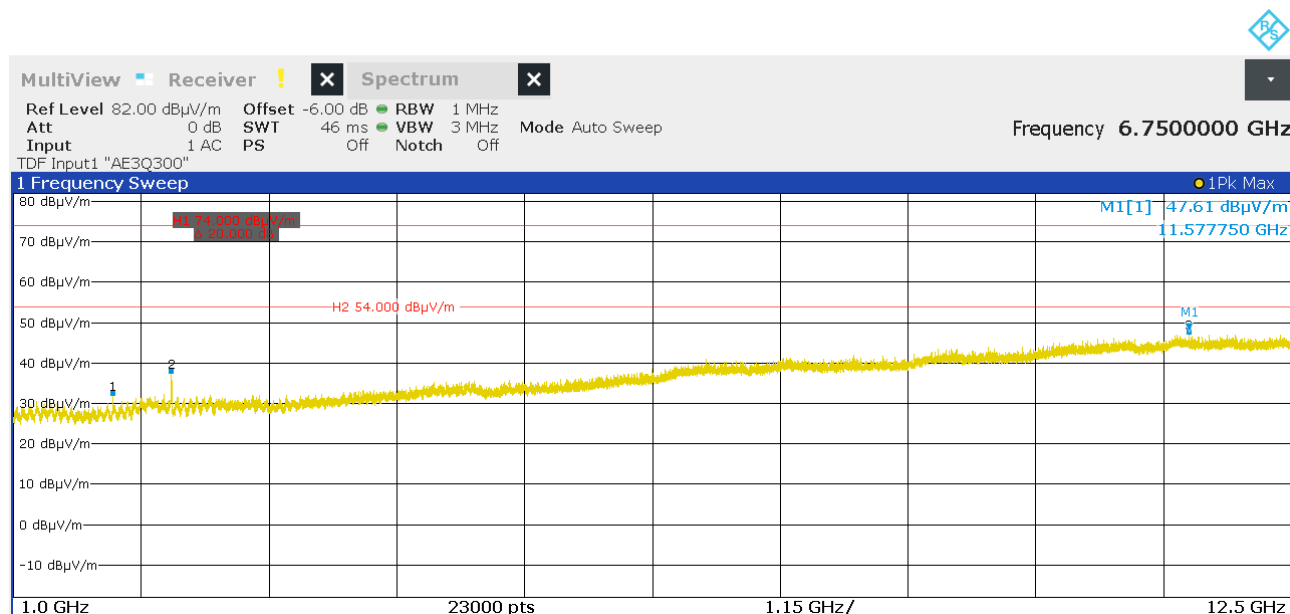


Figure 16: Chart of radiated emissions pre-measurement from 1 GHz to 12.5 GHz, EUT position Y, with tag, antenna polarization horizontal

Frequency (MHz)	EUT Pos.	Level (dBμV/m) at 3 m	Det.	Peak limit (dBμV/m) at 3 m	Margin (dB)	Average limit (dBμV/m) at 3 m	Margin (dB)	Height (cm)	Pol.	Azimuth (deg)	Corr. (dB/m)
2420.250	Y	37.2	Pk	74.0	36.8	54.0	16.8	160	H	52	-2.0

Table 32: Results of emissions test from 1 GHz to 12.5 GHz, with tag

7 Equipment calibration status

Description	Modell number	Serial number	Inventory number(s)	Last calibration	Next calibration
EMI test receiver	ESW44	101538	E00895	2022-08	2024-08
EMI test receiver	ESU26	100026	W00002	2022-06	2024-06
EMI test receiver	ESR7	101059	E00739	2022-08	2024-08
Preamplifier (1 GHz – 18 GHz)	BBV 9718 B	00032	W01325	2022-09	2023-10
Preamplifier (18 GHz – 40 GHz)	BBV 9721	43	W01350	2022-11	2023-11
Preamplifier (1 GHz - 18 GHz)	ALS05749	001	W01007	2023-03	2024-03
Loop antenna	HFH2-Z2	871398/0050	E00060	2021-10	2023-10
LISN	ESH2-Z5	881362/037	E00004	Note 1	
LISN	ESH2-Z5	893406/009	E00005	2021-10	2023-10
Field probe	RF-R 400-1	02-2030	E00270	Note 2	
TRILOG broadband antenna (SAC3)	VULB 9162	9162-041	E00643	2021-03	2024-03
Horn antenna	BBHA 9120D	9120D-592	W00053	2022-09	2025-09
Horn antenna	BBHA 9170	9170-332	W00055	2022-08	2023-08
Shielded room	P92007	B 83117 C 1109 T 211	E00107	N/A	
Compact diagnostic chamber (CDC)	VK041.0174	D62128-A502-A69-2-0006	E00026	N/A	
Semi-anechoic chamber (SAC) with floor absorbers	FS-SAC	---	E00100	2021-03	2024-03
Semi-anechoic chamber (SAC)	SAC3	C62128-A520-A643-x-0006	E00716	2021-03	2024-03
Cable set CDC	RG214/U	---	E00446	2023-01	2024-07
	LCF12-50J	---	E01215	2023-01	2024-07
	LMR400	1718020006	E00920	2023-01	2024-07
	RG214 Hiflex	171802007	E00921	2023-01	2024-07
Cable set anechoic chamber	262-0942-1500	005	E00435	2022-04	2023-10
	SF104EA/2x11PC 35-42/5m	11144/4EA	E00307	2023-01	2024-07
	262-0942-1500	003	E00433	2022-04	2023-10
Cable set of semi-anechoic chamber SAC3	SF104EA/11PC35 /11PC35/10000M M	501347/4EA	E00755	2023-01	2024-07
	SF104E/11PC35/1 1PC35/2000MM	507410/4E	E01035	2023-01	2024-07
	SF104E/11PC35/1 1PC35/2000MM	507411/4E	E01034	2023-01	2024-07

Note(s)

1. Only used for decoupling of support equipment.
2. Only used for relative measurements.

8 Measurement uncertainties

Description	Uncertainty	U_{Limit}	Note(s)	k=
AC power line conducted emission	± 3.0 dB	± 3.4 dB	2b), 3b)	2
Bandwidth tests	± 2.0 %	± 5 %	2a), 3a)	2
Radiated emissions				
from 9 kHz to 30 MHz	± 3.8 dB	± 4.0 dB	2b), 3b)	2
from 30 MHz to 1 GHz	± 6.1 dB	± 6.3 dB	2b), 3b)	2
from 1 GHz to 6 GHz	± 4.6 dB	± 5.2 dB	2b), 3b)	2
from 6 GHz to 18 GHz	± 5.0 dB	± 5.5 dB	2b), 3b)	2
from 18 GHz to 26.5 GHz	± 5.4 dB	± 6.0 dB	2b), 3c)	2
from 26.5 GHz to 40 GHz	± 6.2 dB	± 6.5 dB	2b), 3c)	2

Note(s):

- The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor k. For a confidence level of 95 % the coverage factor k is 2.
- The values of the measurement uncertainty as listed above are calculated according to
 - ETSI TR 100 028-1 V1.4.1 and ETSI TR 100 028-2 V1.4.1
 - CISPR 16-4-2:2011-06 + A1:2014-02 + A2:2018-08
- The limits for the measurement uncertainty as listed above are
 - derived from ETSI EN 300 328 V2.1.1
 - equal to U_{CISPR} taken from CISPR 16-4-2:2011-06 + A1:2014-02 + A2:2018-08
 - defined by the test laboratory
- Simple acceptance is applied as the decision rule while keeping the specified limits (U_{Limit}) for the expanded measurement uncertainty (i.e. Test Uncertainty Ratio $TUR \geq 1:1$). That means, compliance is based on the recorded level by the lab irrespective of the expanded measurement uncertainty value but with a limitation to it.
- All used test instruments as well as the test accessories are calibrated at regular intervals.

9 Revision history

<i>Revision</i>	<i>Date</i>	<i>Issued by</i>	<i>Description of modifications</i>
0	2023-08-16	Konrad Graßl	First edition

Template: RF_15.209_RSS-210_V1.8