

TEST REPORT

2/F., Garment Centre,
576 Castle Peak Road, Kowloon,
Hong Kong SAR, China.

Telephone: (852) 2173 8888
Facsimile: (852) 2785 5487
www.intertek.com

Report No.: 23031152HKG-001

Shanghai Shengda Corp.

Application For Certification
(Original Grant)**FCC ID: 2BAAT-795004**

Transceiver

Prepared and Checked by:**Approved by:**

Signed on File

Leung Chun Ning, Peter
Assistant EngineerWong Kwok Yeung, Kenneth
Assistant Manager
Date: June 13, 2023

TEST REPORT

GENERAL INFORMATION

Grantee:	Shanghai Shengda Corp.
Grantee Address:	16W 36TH ST, RM 603, New York NY 10018, U.S.A.
Manufacturer:	SHANGHAI SHENGDA INTERNATIONAL CO LTD.
FCC ID:	2BAAT-795004
FCC Model(s):	795004
Type of EUT:	Transceiver
Description of EUT:	Mini Travel Speaker
Brand Name:	OUTTEK
Serial Number:	Not Labelled
Sample Receipt Date:	March 24, 2023
Date of Test:	April 20, 2023 to May 05, 2023
Report Date:	June 13, 2023
Environmental Conditions:	Temperature: +10 to 40°C Relative Humidity: 10 to 90%
Conclusion:	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 Certification.

TEST REPORT**SUMMARY OF TEST RESULT**

Test Items	FCC Part 15 Section	Results
Transmitter Power Line Conducted Emissions	15.207	Complied
Radiated Emission	15.249, 15.209	Complied
Radiated Emission on the Bandedge		Complied
Radiated Emission in Restricted Bands	15.205	Complied

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2021 Edition

Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.

2. Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

TEST REPORT**TABLE OF CONTENTS**

1.0	GENERAL DESCRIPTION.....	5
1.1	Product Description	5
1.2	Related Submittal(s) Grants.....	5
1.3	Test Methodology	5
1.4	Test Facility.....	5
2.0	SYSTEM TEST CONFIGURATION.....	6
2.1	Justification	6
2.2	EUT Exercising Software.....	6
2.3	Special Accessories.....	6
2.4	Measurement Uncertainty.....	6
2.5	Support Equipment List and Description	6
3.0	EMISSION RESULTS	7
3.1	Field Strength Calculation	7
3.2	Radiated Emission Configuration Photograph.....	8
3.3	Radiated Emission Data	8
3.4	Conducted Emission Configuration Photograph	8
3.5	Conducted Emission Data	8
4.0	EQUIPMENT PHOTOGRAPHS.....	17
5.0	PRODUCT LABELLING	17
6.0	TECHNICAL SPECIFICATIONS	17
7.0	INSTRUCTION MANUAL	17
8.0	MISCELLANEOUS INFORMATION	18
8.1	Radiated Emission on the Bandedge	18
8.2	Discussion of Pulse Desensitization	23
8.3	Calculation of Average Factor	23
8.4	Emissions Test Procedures.....	24
8.5	Occupied Bandwidth	27
9.0	CONFIDENTIALITY REQUEST.....	29
10.0	EQUIPMENT LIST	29

TEST REPORT

1.0 GENERAL DESCRIPTION

1.1 Product Description

The Equipment Under Test (EUT), is a portable 2.4GHz BT and BLE Transceiver for a Bluetooth Mini Travel Speaker. For the BT mode, the sample supplied operated on 79 channels, normally at 2402 - 2480MHz. The channels are separated with 1MHz spacing. For the BLE mode, the sample supplied operated on 40 channels, normally at 2402 - 2480MHz. The channels are separated with 2MHz spacing.

The EUT is powered by 1 x 3.7V Lithium-ion battery. The speaker has 4 modes, the Bluetooth mode, the FM mode, the USB driver mode and the SD card mode. For the Bluetooth mode, after switching on the EUT, the EUT, the speaker can be paired up with a smartphone and will be used to play different sound based on the sound received from the paired smartphone. For the USB driver mode and the SD card mode, the speaker can be used to play different sound based on the sound received from the USB or the SD card inserted into the speaker. For the FM mode, the speaker can be used to play radio broadcasting based on the radio signal received.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: Descri.pdf.

1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

1.4 Test Facility

The 3m Chamber and conducted measurement facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been placed on file with the FCC.

TEST REPORT**2.0 SYSTEM TEST CONFIGURATION****2.1 Justification**

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by 3.7VDC (1 x 3.7V fully-charged Lithium-ion Battery).

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

The EUT exercise program (FCC Assist 1.0.2.2) used during radiated testing was designed to exercise the various system components in a manner similar to a typical use.

2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

2.4 Measurement Uncertainty

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044. For these excepted or not mentioned standards, Cl 4.2.2 of ILAC-G8:09/2019 decision rules will be reference and guard band will be equal to our measurement uncertainty with 95% confidence level (k=2). In case, the measured value is within guard band region, undetermined decision will be used.

2.5 Support Equipment List and Description

Description	Remark
HP 820G1 Notebook	Provided by Intertek
18.8 cm Charging Cable	Provided by Applicant

TEST REPORT**3.0 EMISSION RESULTS**

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where FS = Field Strength in dB μ V/m

RA = Receiver Amplitude (including preamplifier) in dB μ V

AF = Antenna Factor in dB

CF = Cable Attenuation Factor in dB

AG = Amplifier Gain in dB

AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain.

An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where FS = Field Strength in dB μ V/m

RR = RA - AG - AV in dB μ V

LF = CF + AF in dB

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29.0 dB and average factor of 5.0 dB are subtracted, giving a field strength of 27.0 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V/m

AF = 7.4 dB

RR = 18.0 dB μ V

CF = 1.6 dB

LF = 9.0 dB

AG = 29.0 dB

AV = 5.0 dB

FS = RR + LF

FS = 18.0 + 9.0 = 27.0 dB μ V/m

Level in μ V/m = Common Antilogarithm [(27.0 dB μ V/m)/20] = 22.4 μ V/m

TEST REPORT**3.2 Radiated Emission Configuration Photograph**

The worst case in radiated emission was found at 14880 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: Setup Photos.pdf.

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 5.4 dB

3.4 Conducted Emission Configuration Photograph

The worst case in line-conducted emission was found at 0.1545 MHz

For electronic filing, the worst-case line-conducted configuration photographs are saved with filename: Setup Photos.pdf.

3.5 Conducted Emission Data


The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Pass by 8.3 dB

TEST REPORT

CONDUCTED EMISSION

Model: 795004
 Date of Test: April 21, 2023
 Worst-Case Operating Mode: Bluetooth Music and Light

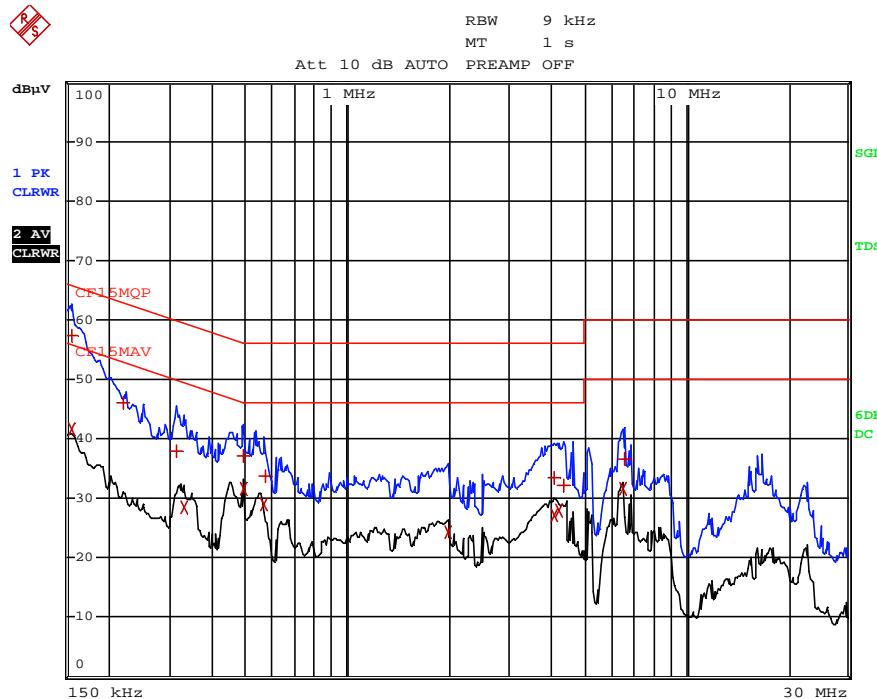

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	CF15MQP	Trace2:	CF15MAV	Trace3:	---
TRACE	FREQUENCY	LEVEL dBμV	DELTA	LIMIT dB	
1	Quasi Peak 154.5 kHz	57.44	L1	-8.30	
2	CISPR Average 154.5 kHz	41.47	N	-14.27	
1	Quasi Peak 222 kHz	46.05	N	-16.68	
1	Quasi Peak 312 kHz	37.80	L1	-22.11	
2	CISPR Average 330 kHz	28.59	L1	-20.85	
1	Quasi Peak 492 kHz	37.26	L1	-18.86	
2	CISPR Average 492 kHz	31.70	L1	-14.43	
2	CISPR Average 568.5 kHz	29.03	N	-16.97	
1	Quasi Peak 573 kHz	33.63	L1	-22.36	
2	CISPR Average 1.995 MHz	24.30	N	-21.69	
1	Quasi Peak 4.083 MHz	33.38	N	-22.61	
2	CISPR Average 4.0875 MHz	27.29	L1	-18.70	
2	CISPR Average 4.209 MHz	27.90	L1	-18.09	
1	Quasi Peak 4.3755 MHz	32.26	N	-23.73	
2	CISPR Average 6.5175 MHz	31.59	L1	-18.40	
1	Quasi Peak 6.5625 MHz	36.67	N	-23.33	

Note: Measurement Uncertainty is $\pm 4.2\text{dB}$ at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 795004
 Date of Test: May 04, 2023
 Worst-Case Operating Mode: Transmitting (Bluetooth)

Table 1

Pursuant to FCC Part 15 Section 15.249 Requirement

Lowest Channel

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2402.000	67.3	33	29.4	63.7	94.0	-30.3
H	4804.000	41.7	33	34.9	43.6	54.0	-10.4
V	7206.000	37.4	33	37.9	42.3	54.0	-11.7
H	9608.000	27.8	33	40.4	35.2	54.0	-18.8
V	12010.000	32.3	33	40.5	39.8	54.0	-14.2
H	14412.000	37.7	33	40.0	44.7	54.0	-9.3

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2402.000	79.0	33	29.4	75.4	114.0	-38.6
H	4804.000	50.8	33	34.9	52.7	74.0	-21.3
V	7206.000	46.5	33	37.9	51.4	74.0	-22.6
H	9608.000	36.9	33	40.4	44.3	74.0	-29.7
V	12010.000	41.5	33	40.5	49.0	74.0	-25.0
H	14412.000	46.8	33	40.0	53.8	74.0	-20.2

Notes:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 795004
 Date of Test: May 04, 2023
 Worst-Case Operating Mode: Transmitting (Bluetooth)

Table 2

Pursuant to FCC Part 15 Section 15.249 Requirement

Middle Channel

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2440.000	66.4	33	29.4	62.8	94.0	-31.2
V	4880.000	39.5	33	34.9	41.4	54.0	-12.6
H	7320.000	30.7	33	37.9	35.6	54.0	-18.4
H	9760.000	32.6	33	40.4	40.0	54.0	-14.0
V	12200.000	38.0	33	40.5	45.5	54.0	-8.5
H	14640.000	42.8	33	38.4	48.2	54.0	-5.8

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2440.000	78.5	33	29.4	74.9	114.0	-39.1
V	4880.000	49.0	33	34.9	50.9	74.0	-23.1
H	7320.000	40.2	33	37.9	45.1	74.0	-28.9
H	9760.000	42.1	33	40.4	49.5	74.0	-24.5
V	12200.000	47.5	33	40.5	55.0	74.0	-19.0
H	14640.000	52.2	33	38.4	57.6	74.0	-16.4

Notes:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 795004
 Date of Test: May 04, 2023
 Worst-Case Operating Mode: Transmitting (Bluetooth)

Table 3

Pursuant to FCC Part 15 Section 15.249 Requirement

Highest Channel

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2480.000	66.6	33	29.4	63.0	94.0	-31.0
H	4960.000	37.4	33	34.9	39.3	54.0	-14.7
H	7440.000	31.0	33	37.9	35.9	54.0	-18.1
H	9920.000	31.8	33	40.4	39.2	54.0	-14.8
H	12400.000	36.7	33	40.5	44.2	54.0	-9.8
H	14880.000	43.2	33	38.4	48.6	54.0	-5.4

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2480.000	78.2	33	29.4	74.6	114.0	-39.4
H	4960.000	47.8	33	34.9	49.7	74.0	-24.3
H	7440.000	41.4	33	37.9	46.3	74.0	-27.7
H	9920.000	42.2	33	40.4	49.6	74.0	-24.4
H	12400.000	47.0	33	40.5	54.5	74.0	-19.5
H	14880.000	53.5	33	38.4	58.9	74.0	-15.1

Notes:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 795004
 Date of Test: May 04, 2023
 Worst-Case Operating Mode: Transmitting (BLE 1M)

Table 4

Pursuant to FCC Part 15 Section 15.249 Requirement

Lowest Channel

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2402.000	74.6	33	29.4	71.0	94.0	-23.0
V	4804.000	32.0	33	34.9	33.9	54.0	-20.1
H	7206.000	21.7	33	37.9	26.6	54.0	-27.4
H	9608.000	23.4	33	40.4	30.8	54.0	-23.2
V	12010.000	30.2	33	40.5	37.7	54.0	-16.3
V	14412.000	37.3	33	40.0	44.3	54.0	-9.7

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2402.000	92.4	33	29.4	88.8	114.0	-25.2
V	4804.000	49.0	33	34.9	50.9	74.0	-23.1
H	7206.000	38.8	33	37.9	43.7	74.0	-30.3
H	9608.000	40.5	33	40.4	47.9	74.0	-26.1
V	12010.000	47.3	33	40.5	54.8	74.0	-19.2
V	14412.000	54.3	33	40.0	61.3	74.0	-12.7

Notes:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 795004
 Date of Test: May 04, 2023
 Worst-Case Operating Mode: Transmitting (BLE 1M)

Table 5

Pursuant to FCC Part 15 Section 15.249 Requirement

Middle Channel

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2440.000	77.5	33	29.4	73.9	94.0	-20.1
H	4880.000	31.6	33	34.9	33.5	54.0	-20.5
H	7320.000	25.2	33	37.9	30.1	54.0	-23.9
H	9760.000	27.4	33	40.4	34.8	54.0	-19.2
V	12200.000	32.0	33	40.5	39.5	54.0	-14.5
V	14640.000	36.7	33	38.4	42.1	54.0	-11.9

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2440.000	94.5	33	29.4	90.9	114.0	-23.1
H	4880.000	48.3	33	34.9	50.2	74.0	-23.8
H	7320.000	41.9	33	37.9	46.8	74.0	-27.2
H	9760.000	44.2	33	40.4	51.6	74.0	-22.4
V	12200.000	48.8	33	40.5	56.3	74.0	-17.7
V	14640.000	53.5	33	38.4	58.9	74.0	-15.1

Notes:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 795004
 Date of Test: May 04, 2023
 Worst-Case Operating Mode: Transmitting (BLE 1M)

Table 6

Pursuant to FCC Part 15 Section 15.249 Requirement

Highest Channel

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2480.000	77.4	33	29.4	73.8	94.0	-20.2
H	4960.000	33.0	33	34.9	34.9	54.0	-19.1
V	7440.000	27.7	33	37.9	32.6	54.0	-21.4
H	9920.000	29.9	33	40.4	37.3	54.0	-16.7
V	12400.000	35.1	33	40.5	42.6	54.0	-11.4
H	14880.000	41.0	33	38.4	46.4	54.0	-7.6

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2480.000	95.4	33	29.4	91.8	114.0	-22.2
H	4960.000	46.5	33	34.9	48.4	74.0	-25.6
V	7440.000	41.3	33	37.9	46.2	74.0	-27.8
H	9920.000	43.5	33	40.4	50.9	74.0	-23.1
V	12400.000	48.7	33	40.5	56.2	74.0	-17.8
H	14880.000	54.5	33	38.4	59.9	74.0	-14.1

Notes:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT**RADIATED EMISSIONS**

Model: 795004
Date of Test: May 05, 2023
Worst-Case Operating Mode: Transmitting

Table 7

Pursuant to FCC Part 15 Section 15.249 Requirement

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	30.849	27.9	16	10.0	21.9	40.0	-18.1
V	71.953	23.6	16	7.0	14.6	40.0	-25.4
V	95.960	23.6	16	12.0	19.6	43.5	-23.9
H	276.016	17.7	16	22.0	23.7	46.0	-22.3
H	281.958	19.0	16	22.0	25.0	46.0	-21.0
V	288.020	18.2	16	22.0	24.2	46.0	-21.8

Notes:

1. Quasi-Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

4.0 EQUIPMENT PHOTOGRAPHS

For electronic filing, the photographs are saved with filename: External Photos.pdf and Internal Photos.pdf.

5.0 PRODUCT LABELLING

For electronic filing, the FCC ID label artwork and the label location are saved with filename: Label.pdf.

6.0 TECHNICAL SPECIFICATIONS

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: Block.pdf and Circuit.pdf respectively.

7.0 INSTRUCTION MANUAL

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: Manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

TEST REPORT**8.0 MISCELLANEOUS INFORMATION**

The miscellaneous information includes details of the test procedure and measured bandwidth.



8.1 Radiated Emission on the Bandedge

From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.10 (2013) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of Part 15.249(d).

TEST REPORT

PEAK MEASUREMENT (Bluetooth)

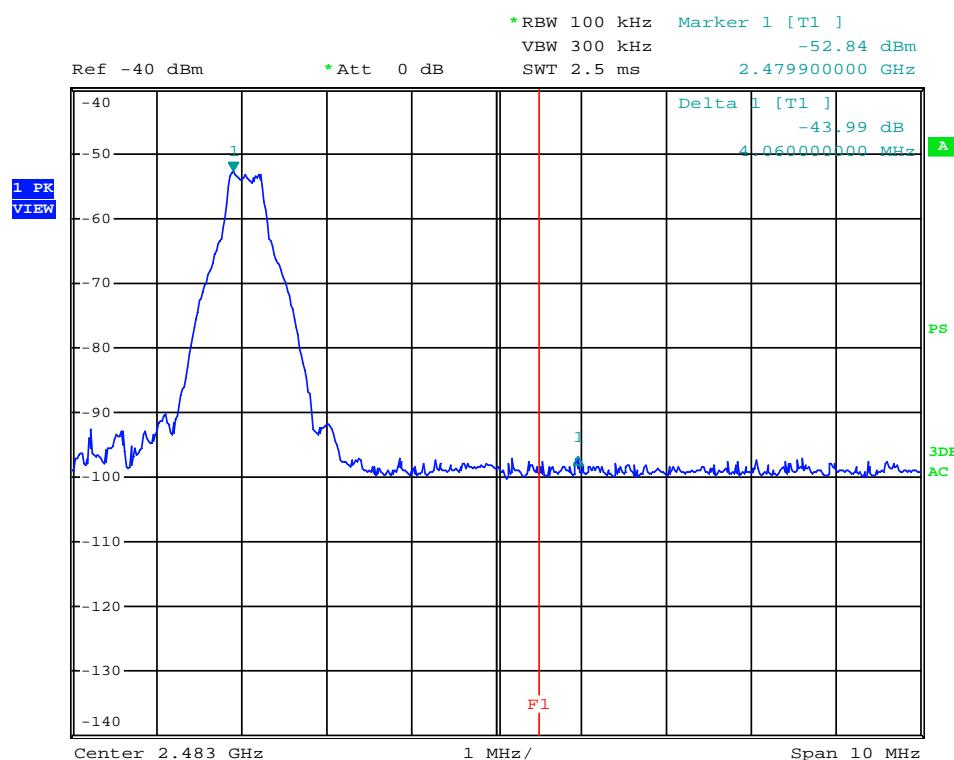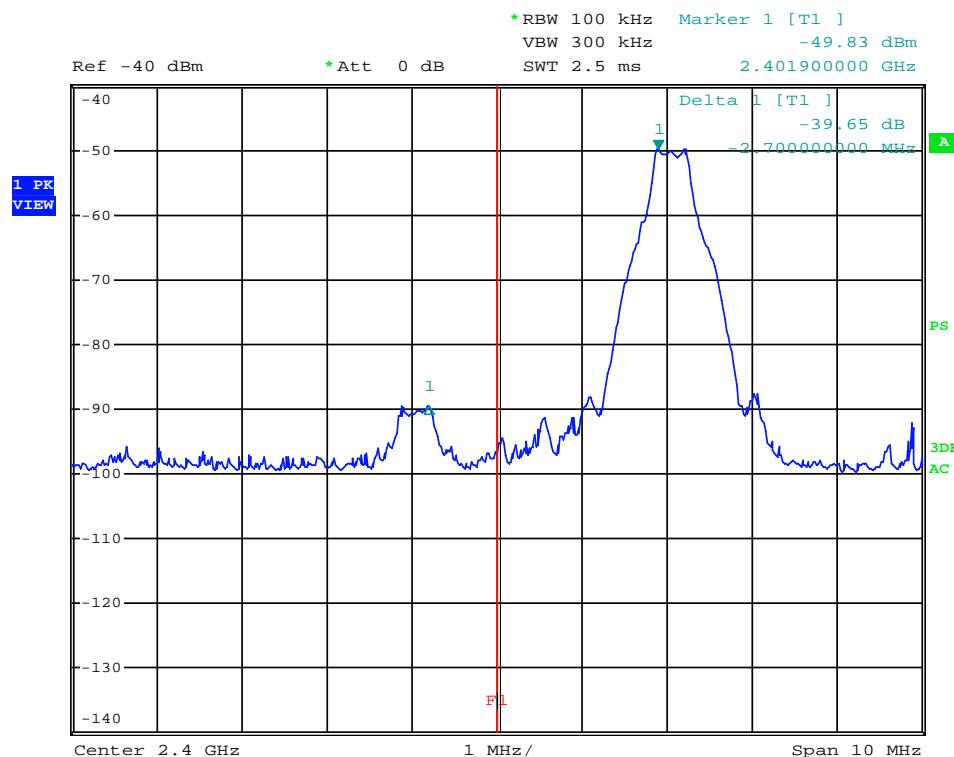

TEST REPORT**PEAK MEASUREMENT (Bluetooth)**

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower Bandedge

Peak Resultant Field Strength = Fundamental Emissions (Peak Value) – delta from the plot

$$\begin{aligned} &= 75.4 \text{ dB}\mu\text{V/m} - 39.7 \text{ dB} \\ &= 35.7 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant Field Strength = Fundamental Emissions (Average Value) – delta from the plot

$$\begin{aligned} &= 63.7 \text{ dB}\mu\text{V/m} - 39.7 \text{ dB} \\ &= 24.0 \text{ dB}\mu\text{V/m} \end{aligned}$$

Upper Bandedge

Peak Resultant Field Strength = Fundamental Emissions (Peak Value) – delta from the plot

$$\begin{aligned} &= 74.6 \text{ dB}\mu\text{V/m} - 44.0 \text{ dB} \\ &= 30.6 \text{ dB}\mu\text{V/m} \end{aligned}$$



Average Resultant Field Strength = Fundamental Emissions (Average Value) – delta from the plot

$$\begin{aligned} &= 63.0 \text{ dB}\mu\text{V/m} - 44.0 \text{ dB} \\ &= 19.0 \text{ dB}\mu\text{V/m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dB μ V/m (Peak Limit) and 54 dB μ V/m (Average Limit).

TEST REPORT

PEAK MEASUREMENT (BLE 1M)

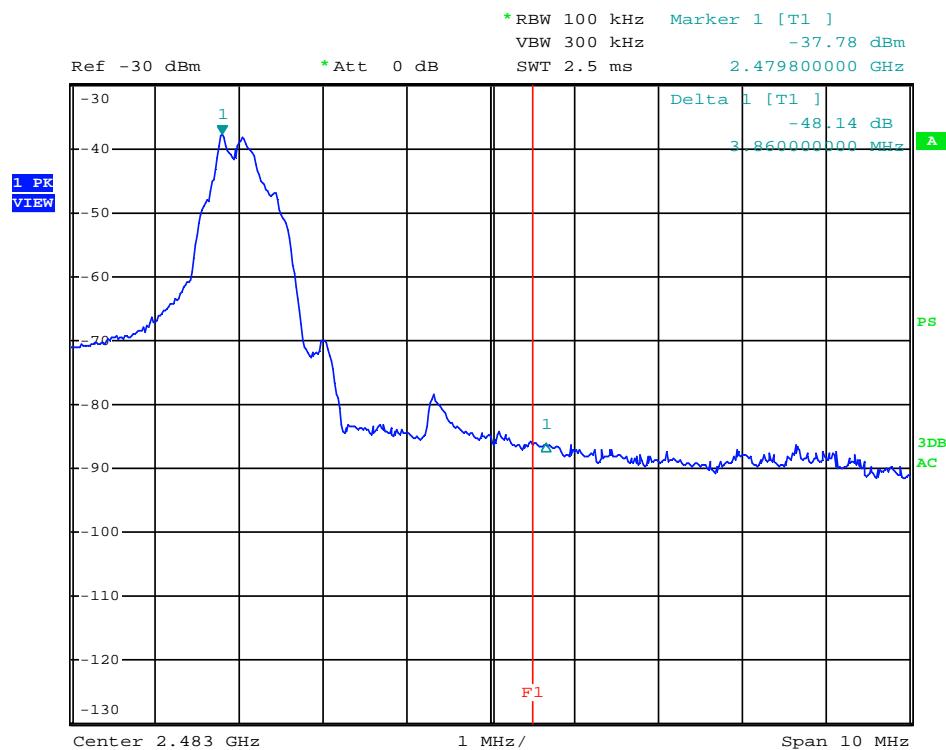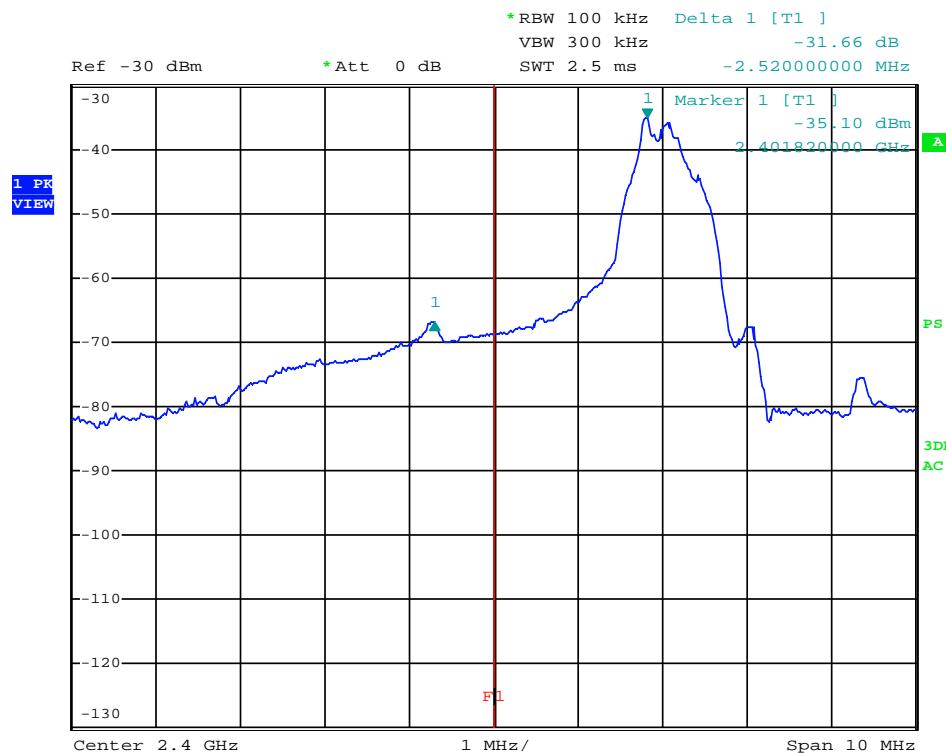

TEST REPORT**PEAK MEASUREMENT (BLE 1M)**

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower Bandedge

Peak Resultant Field Strength = Fundamental Emissions (Peak Value) – delta from the plot

$$\begin{aligned} &= 88.8 \text{ dB}\mu\text{V/m} - 31.7 \text{ dB} \\ &= 57.1 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant Field Strength = Fundamental Emissions (Average Value) – delta from the plot

$$\begin{aligned} &= 71.0 \text{ dB}\mu\text{V/m} - 31.7 \text{ dB} \\ &= 39.3 \text{ dB}\mu\text{V/m} \end{aligned}$$

Upper Bandedge

Peak Resultant Field Strength = Fundamental Emissions (Peak Value) – delta from the plot

$$\begin{aligned} &= 91.8 \text{ dB}\mu\text{V/m} - 48.1 \text{ dB} \\ &= 43.7 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant Field Strength = Fundamental Emissions (Average Value) – delta from the plot

$$\begin{aligned} &= 73.8 \text{ dB}\mu\text{V/m} - 48.1 \text{ dB} \\ &= 25.7 \text{ dB}\mu\text{V/m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dB μ V/m (Peak Limit) and 54 dB μ V/m (Average Limit).

TEST REPORT**8.2 Discussion of Pulse Desensitization**

Pulse desensitivity is not applicable for this device. The effective period (Teff) is approximately $625\mu\text{s}$ for a digital “1” bit which illustrated on technical specification, with a resolution bandwidth (3dB) of 3MHz, so the pulse desensitivity factor is 0dB.

8.3 Calculation of Average Factor

Not Applicable

TEST REPORT**8.4 Emissions Test Procedures**

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz.

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10 (2013).



The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.

TEST REPORT

8.4.1 Radiated Emission Test Setup


The figure below shows the test setup, which is utilized to make these measurements.

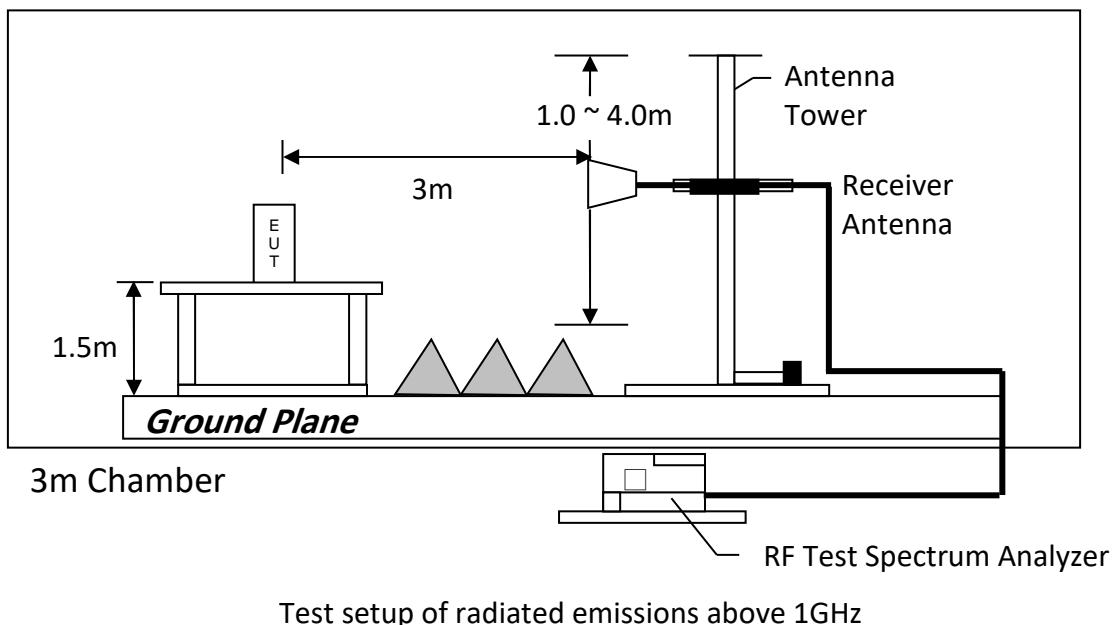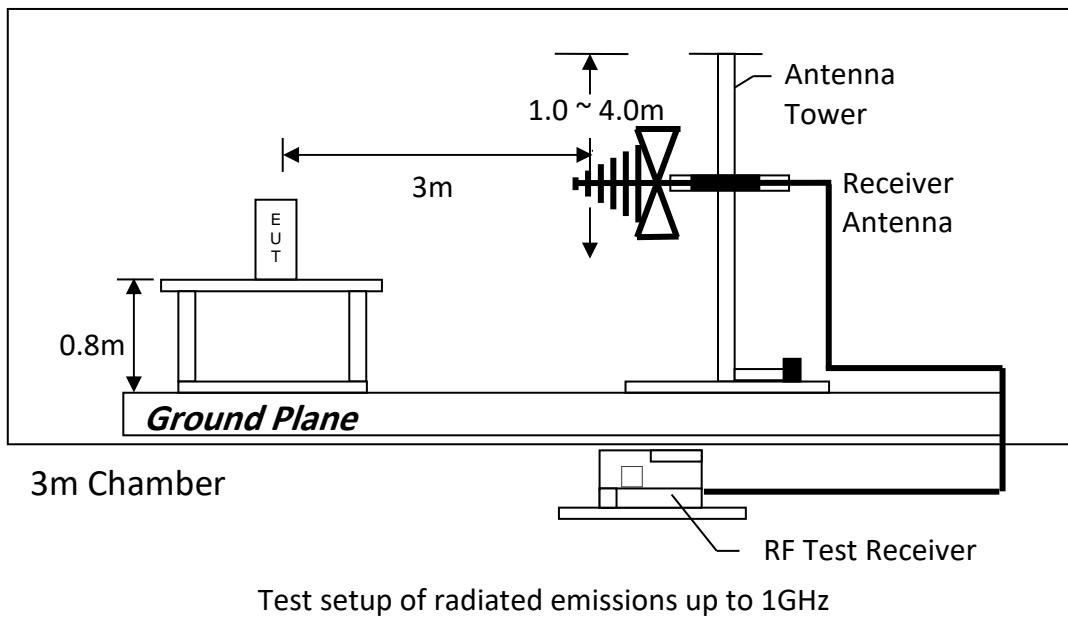

TEST REPORT**8.4.2 Conducted Emission Test Procedures**

For tabletop equipment, the EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table. For floor-standing equipment, the EUT and all cables were insulated, if required, from the ground plane by up to 12 mm of insulating material. The EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

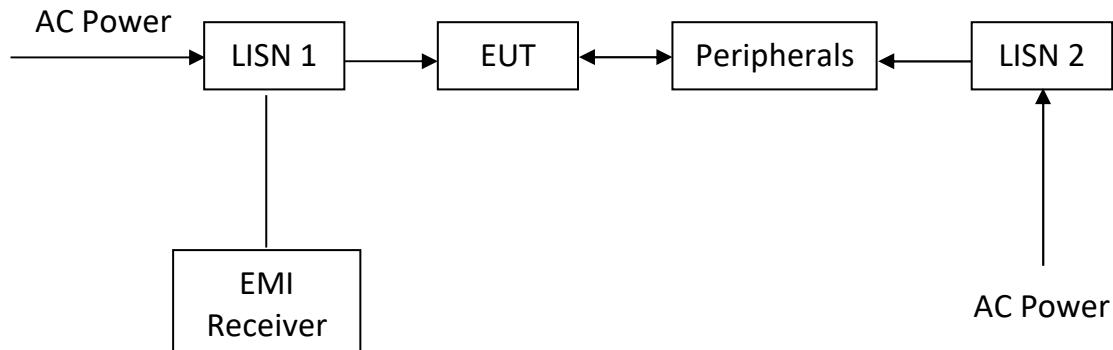8.4.3 Conducted Emission Test Setup


TEST REPORT

8.5 Occupied Bandwidth

Occupied Bandwidth Results: (Bluetooth)

Bluetooth (MHz)	Occupied Bandwidth (kHz)
Low Channel: 2402	860
Middle Channel: 2440	860
High Channel: 2480	840

The worst case is shown as below:

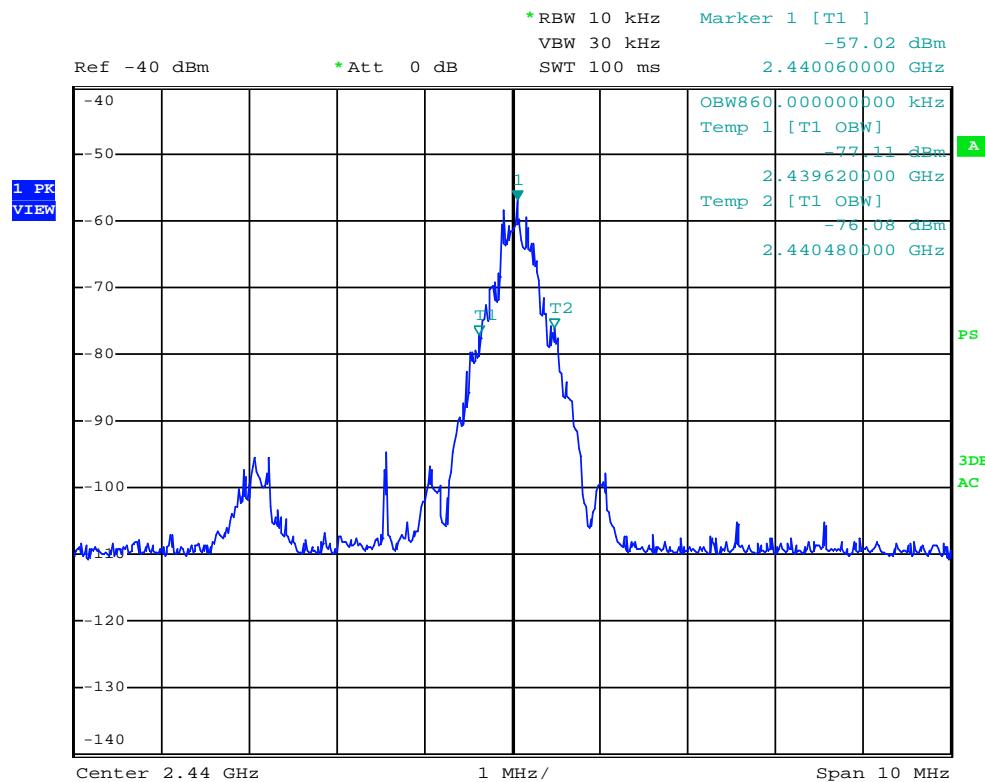


TEST REPORT

8.5 Occupied Bandwidth

Occupied Bandwidth Results: (BLE 1M)

Bluetooth (MHz)	Occupied Bandwidth (kHz)
Low Channel: 2402	1060
Middle Channel: 2440	1060
High Channel: 2480	1060

The worst case is shown as below:

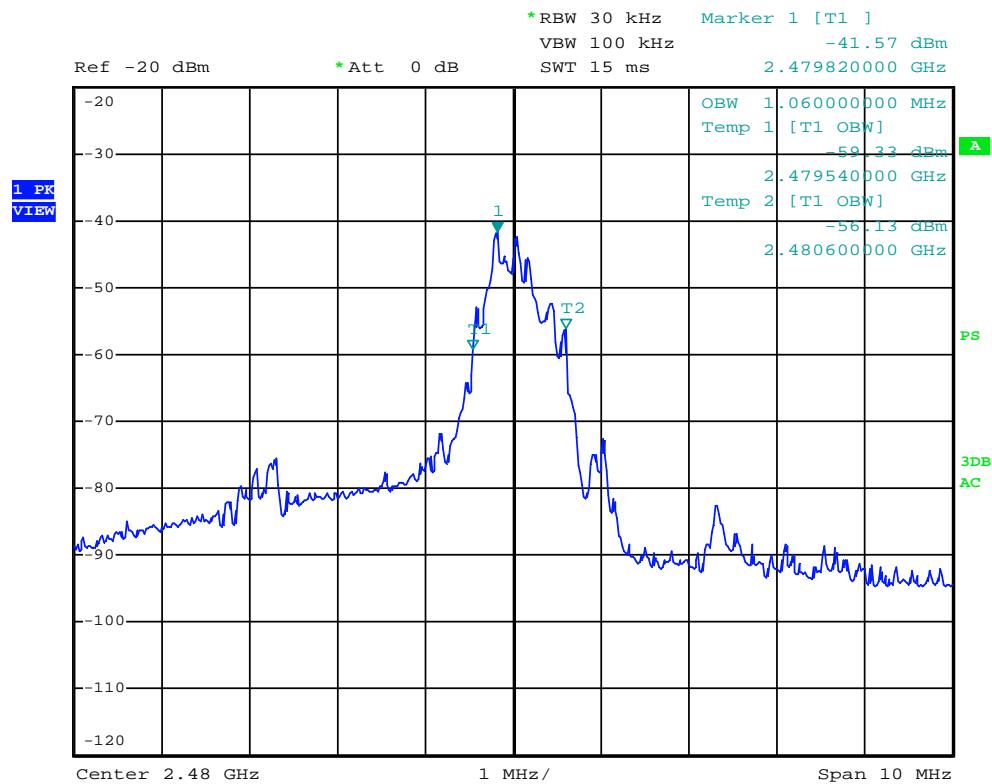

TEST REPORT

9.0 CONFIDENTIALITY REQUEST

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: Request.pdf.

10.0 EQUIPMENT LIST

1) Radiated Emissions Test & Bandedge Measurement & OBW Measurement

Equipment	Signal and Spectrum Analyzer (10Hz to 40GHz)	Biconical Antenna (30MHz to 300MHz)	EMI Test Receiver 7GHz
Registration No.	EW-3016	EW-3242	EW-3603
Manufacturer	ROHDE SCHWARZ	EMCO	ROHDE SCHWARZ
Model No.	FSV40	3110C	ESR7
Calibration Date	December 13, 2022	May 26, 2021	December 06, 2022
Calibration Due Date	December 13, 2023	May 26, 2023	December 06, 2023

Equipment	Log Periodic Antenna	Double Ridged Guide Antenna	Active Loop H-field (9kHz to 30MHz)
Registration No.	EW-3243	EW-1133	EW-3302
Manufacturer	EMCO	EMCO	EMCO
Model No.	3148B	3115	6502
Calibration Date	June 03, 2021	May 26, 2021	September 08, 2022
Calibration Due Date	June 30, 2023	May 26, 2023	September 08, 2023

Equipment	RF Preamplifier (9kHz to 6000MHz)	2.4GHz Notch Filter	14m Double Shield RF Cable (9kHz - 6GHz)
Registration No.	EW-3006b	EW-3435	EW-2376
Manufacturer	SCHWARZBECK	MICROWAVE	RADIALL
Model No.	BBV9718	N0324413	n m/br56/bnc m 14m
Calibration Date	February 15, 2022	June 16, 2022	January 26, 2022
Calibration Due Date	May 15, 2023	June 16, 2023	July 26, 2023

Equipment	RF Cable 14m (1GHz to 26.5GHz)	14m Double Shield RF Cable (20MHz to 6GHz)	Pyramidal Horn Antenna
Registration No.	EW-2781	EW-2074	EW-0905
Manufacturer	GREATBILLION	RADIALL	EMCO
Model No.	SMA m/SHF5MPU /SMA m ra14m,26G	N(m)-RG142-BNC(m) L=14M	3160-09
Calibration Date	November 24, 2021	December 10, 2021	July 20, 2021
Calibration Due Date	July 24, 2023	June 10, 2023	May 20, 2023

TEST REPORT

2) Conducted Emissions Test

Equipment	5m RF Cable (40GHz)	Artificial Mains Network	EMI Test Receiver (9kHz to 26.5GHz)
Registration No.	EW-2701	EW-2874	EW-3156
Manufacturer	RADIALL	ROHDE SCHWARZ	ROHDE SCHWARZ
Model No.	Sma m-m 5m 40G	ENV-216	ESR26
Calibration Date	November 24, 2021	January 24, 2022	September 26, 2022
Calibration Due Date	May 24, 2023	July 24, 2023	September 26, 2023

3) Control Software for Radiated Emission

Software Information	
Software Name	EMC32
Manufacturer	ROHDE SCHWARZ
Software version	10.50.40

END OF TEST REPORT