

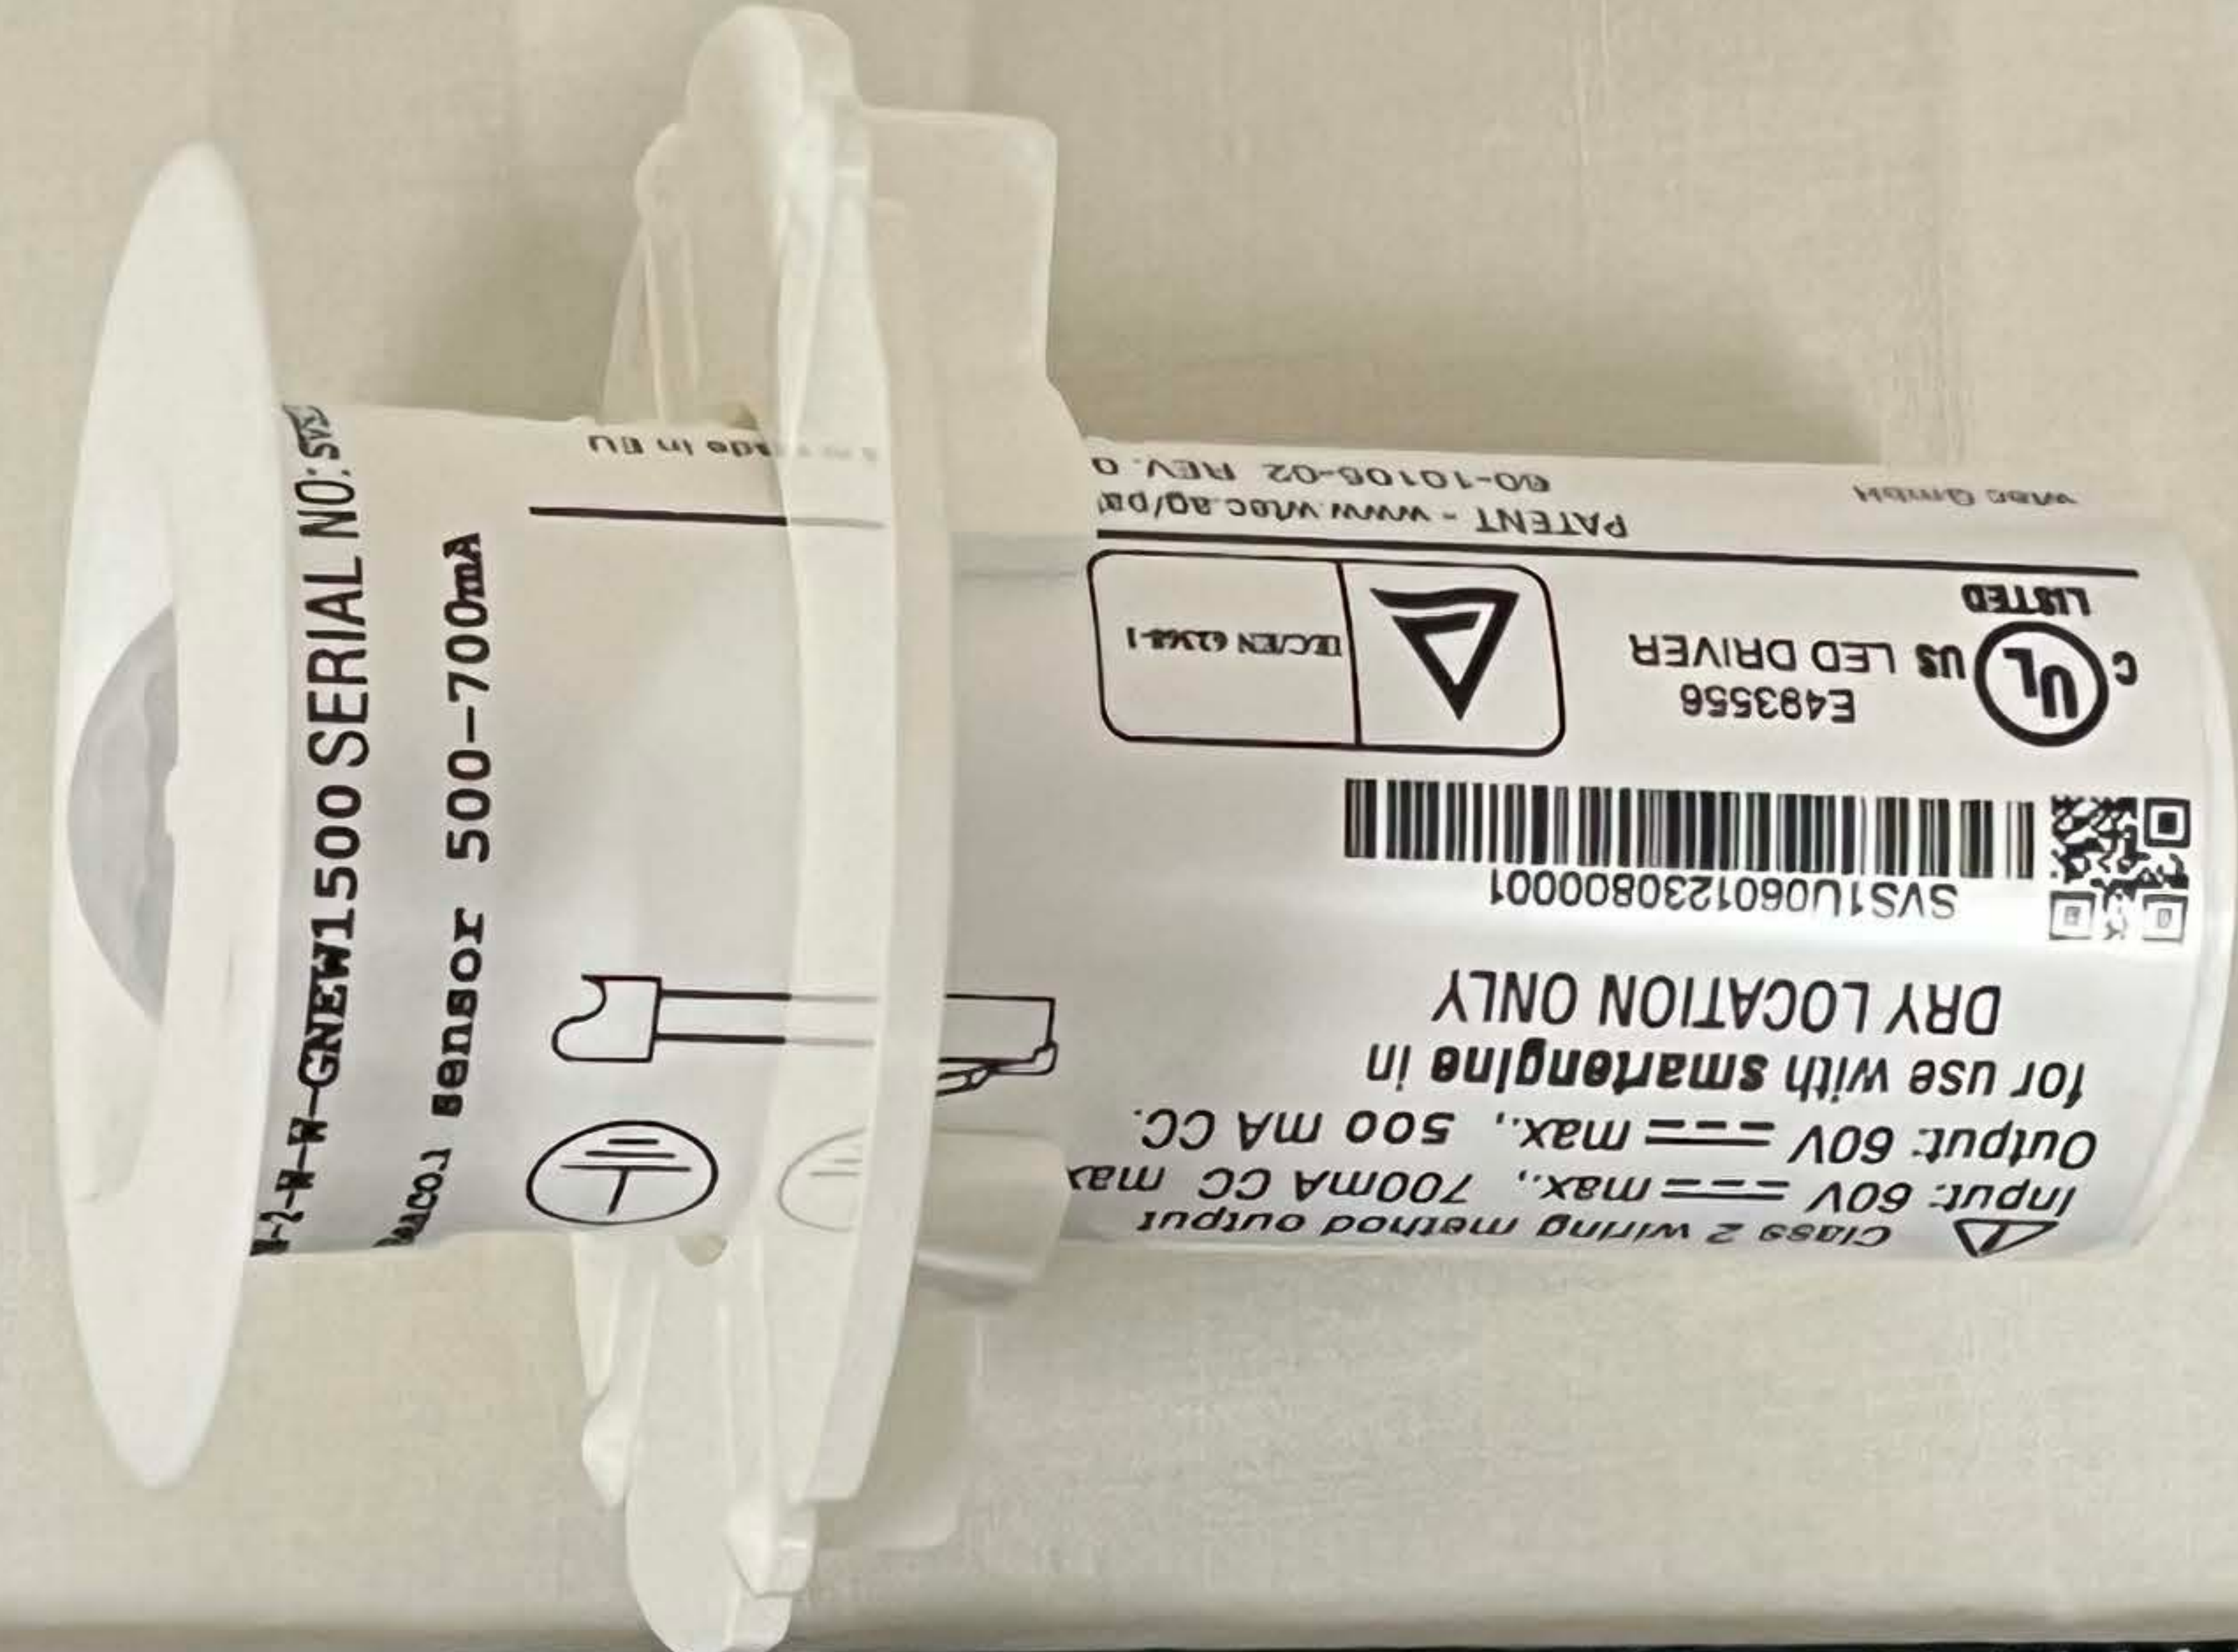


PMN: SSEN-2-W-W



Class 2 wiring method output
Input: 60V == max., 700mA CC max.
Output: 60V == max., 500 mA CC.
for use with *smartenging* in
DRY LOCATION ONLY
SVS1U0601230800001
E493556
us LED DRIVER
LISTED
PATENT - www.wmac.ag/dal
60-10100-02 REV. 0
www.wmac.ag
made in EU
Micro sensor 500-700mA
P1-R-GNEW1500 SERIAL NO: 505

PMN: SSEN-2-W-W



PMN: SSEN-2-W-W



PMN: SSEN-2-W-W

