



RF Test Report

For

Applicant Name: Shenzhen Fusion Aurora Technology Co., Ltd
Address: L25, 4th Floor, Lianhui Building, Longhua Street, Longhua District, Shenzhen
EUT Name: Carplay Android Box
Brand Name: N/A
Model Number: R801, R802, R803, R805, R806, R811, R812, R813, R815, R816
Series Model Number: Refer to section 2

Issued By

Company Name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Report Number: BTF230612R00302
Test Standards: 47 CFR Part 15.247

Test Conclusion: Pass
FCC ID: 2BAF2-R801
Test Date: 2023-05-20 to 2023-05-30
Date of Issue: 2023-06-12

Prepared By:

Elma.Yang

Date:

elma.yang / Project Engineer
2023-06-12

Approved By:

Ryan.CJ

Date:

Ryan.CJ / EMC Manager
2023-06-12

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2023-06-12	Original
<i>Note: Once the revision has been made, then previous versions reports are invalid.</i>		

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS-----	5
1.1. Description of Standards and Results -----	5
2. GENERAL INFORMATION -----	6
2.1. Description of Device (EUT)-----	6
2.2. Accessories of Device (EUT) -----	7
2.3. Tested Supporting System Details -----	7
2.4. Block Diagram of connection between EUT and simulators -----	7
2.5. Test Mode Description -----	7
2.6. Test Conditions -----	8
2.7. Test Facility-----	8
2.8. Measurement Uncertainty-----	8
2.9. Test Equipment List-----	8
3. MAXIMUM PEAK OUTPUT POWER -----	14
3.1. Limit -----	14
3.2. Test Procedure -----	14
3.3. Test Setup-----	14
3.4. Test Result -----	14
4. BANDWIDTH -----	15
4.1. Limit -----	15
4.2. Test Procedure -----	15
4.3. Test Result -----	15
5. CARRIER FREQUENCY SEPARATION-----	25
5.1. Limit -----	25
5.2. Test Procedure -----	25
5.3. Test Result -----	25
6. NUMBER OF HOPPING CHANNEL -----	28
6.1. Limit -----	28
6.2. Test Procedure -----	28
6.3. Test Result -----	28
7. DWELL TIME -----	30
7.1. Test limit -----	30
7.2. Test Procedure -----	30
7.3. Test Result -----	30
8. RADIATED EMISSIONS -----	47
8.1. Limit -----	47
8.2. Block Diagram of Test setup-----	48
8.3. Test Procedure -----	49
8.4. Test Result -----	50
9. BAND EDGE COMPLIANCE -----	65
9.1. Block Diagram of Test Setup -----	65
9.2. Limit -----	65
9.3. Test Procedure -----	65
9.4. Test Result -----	65
10. POWER LINE CONDUCTED EMISSIONS-----	72
10.1. Block Diagram of Test Setup -----	72
10.2. Limit -----	72

10.3.	Test Procedure	72
10.4.	Test Result	74
11.	ANTENNA REQUIREMENTS	76
11.1.	Limit	76
11.2.	Result	76
12.	TEST SETUP PHOTO	77
12.1.	Photo of Radiated Emission test	77
12.2.	Photo of Conducted Emission test	78

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215 ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10 :2013	P
Antenna requirement	FCC Part 15: 15.203	P

Note: 1. P is an abbreviation for Pass.

2. F is an abbreviation for Fail.

3. N/A is an abbreviation for Not Applicable.

4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT Name : Carplay Android Box
Model No. : R801, R802, R803, R805, R806, R811, R812, R813, R815, R816
DIFF. : There is no difference except the name of the model. All tests are made with the R801 model.
Power supply : DC 5V from adapter

Radio Technology : Bluetooth V5.0 EDR

Operation frequency : 2402-2480MHz
Channel No. : 79 Channels
Channel spacing : 1MHz
Modulation type : GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna Type : Internal antenna, Maximum Gain is 1.0dBi.
Antenna information is provided by applicant.

Software version : V1.0

Hardware version : V1.0

Connector cable loss : N/A

Intend use environment : Residential, commercial and light industrial environment

2.2. Accessories of Device (EUT)

Accessories : /

Manufacturer : /


Model : /

Ratings : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
1.	--	--	--	--	--

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Tested mode, channel information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
$\pi/4$ DQPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
8DPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

2.7. Test Facility

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130
FCC Registration Number:	518915
Designation Number:	CN1330

2.8. Measurement Uncertainty

Measurement	Value
Occupied Channel Bandwidth	69 KHz
RF output power, conducted	0.87 dB
Power Spectral Density, conducted	0.69 dB
Unwanted Emissions, conducted	0.94 dB
All emissions, radiated(<1GHz)	4.12 dB
All emissions, radiated(>1GHz)	4.16 dB
Temperature	0.82 °C
Humidity	4.1 %

2.9. Test Equipment List

Conducted Emission at AC power line

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

Page 8 of 79

BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	00953	2022-11-24	2023-11-23
Coaxial Switcher	SCHWARZBECK	CX210	CX210	2022-11-24	2023-11-23
V-LISN	SCHWARZBECK	NSLK 8127	01073	2022-11-24	2023-11-23
LISN	AFJ	LS16/110VAC	16010020076	2023-02-23	2024-02-22
EMI Receiver	ROHDE&SCHWARZ	ESCI3	101422	2022-11-24	2023-11-23

Occupied Bandwidth

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Maximum Conducted Output Power

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Channel Separation

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

Page 9 of 79

BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Number of Hopping Frequencies

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Dwell Time

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated	Dongguan Tongmen	etm-6050c	20211026123	2022-11-24	2023-11-23

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

Page 10 of 79

BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Power Supply	Electronic Technology Co., LTD				
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Emissions in non-restricted frequency bands

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Band edge emissions (Radiated)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022-11-24	2023-11-23

POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

Emissions in restricted frequency bands (below 1GHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMAM-10m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMAM-1m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESC17	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

Emissions in restricted frequency bands (above 1GHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMAM-1	21101566	2022-11-24	2023-11-23

		0m			
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit


Please refer section15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

3.3. Test Setup



3.4. Test Result

Mode	Freq(MHz)	PK Output Power(dBm)	Limit(dBm)	Result
GFSK	2402	2.45	21	Pass
	2441	3.53	21	Pass
	2480	3.06	21	Pass
$\pi/4$ DQPSK	2402	3.40	30	Pass
	2441	2.64	30	Pass
	2480	2.74	30	Pass
8DPSK	2402	3.49	30	Pass
	2441	3.32	30	Pass
	2480	3.08	30	Pass

4. BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


4.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


4.3. Test Result

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant 1	0.933	1.03	/	Pass
NVNT	1-DH1	2441	Ant 1	0.925	1.042	/	Pass
NVNT	1-DH1	2480	Ant 1	0.957	1.034	/	Pass
NVNT	2-DH1	2402	Ant 1	1.173	1.282	/	Pass
NVNT	2-DH1	2441	Ant 1	1.169	1.3	/	Pass
NVNT	2-DH1	2480	Ant 1	1.175	1.296	/	Pass
NVNT	3-DH1	2402	Ant1	1.155	1.274	/	Pass
NVNT	3-DH1	2441	Ant1	1.153	1.272	/	Pass
NVNT	3-DH1	2480	Ant1	1.147	1.288	/	Pass


OBW NVNT 1-DH1 2402MHz Ant1

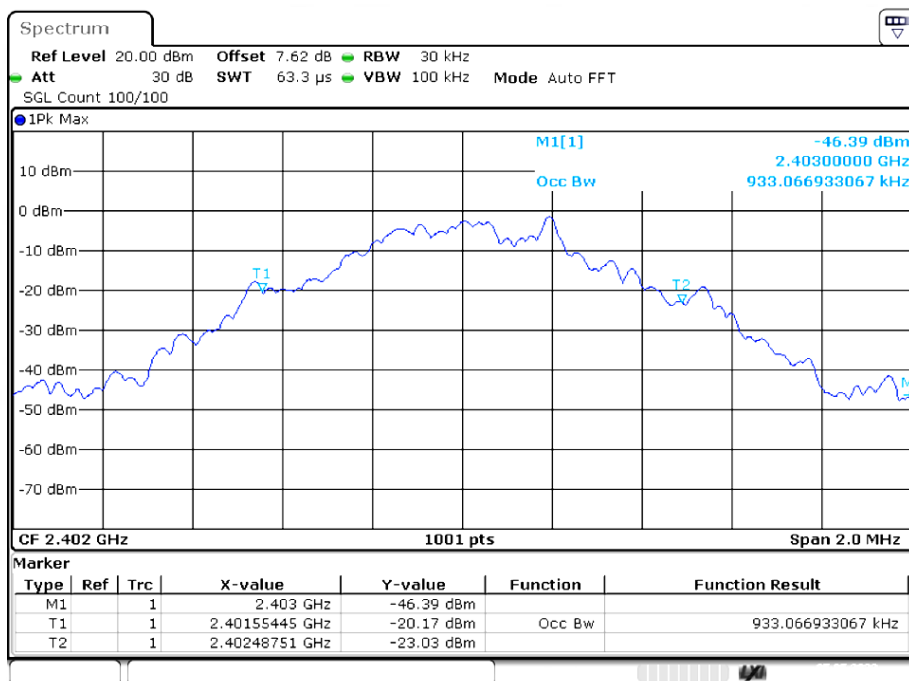


-20 dB BW NVNT 1-DH1 2402MHz Ant1

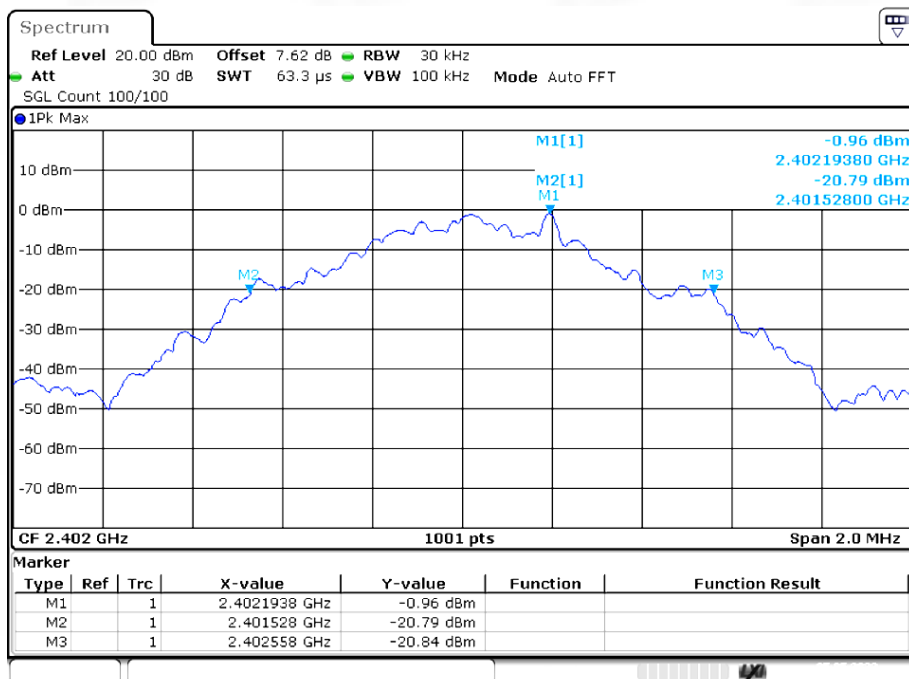


OBW NVNT 1-DH1 2441MHz Ant1

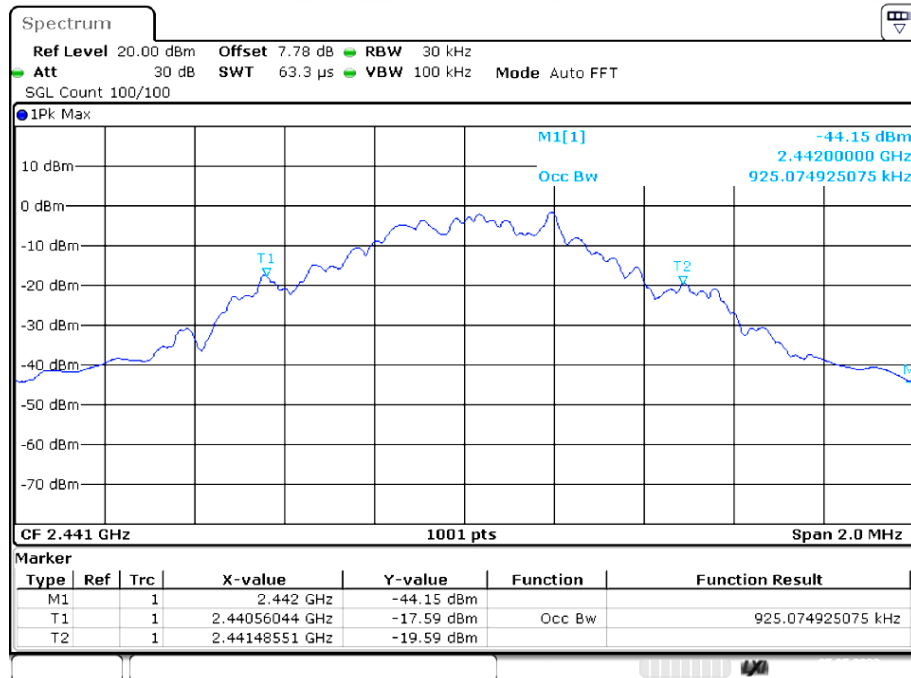


-20 dB BW NVNT 1-DH1 2441MHz Ant1

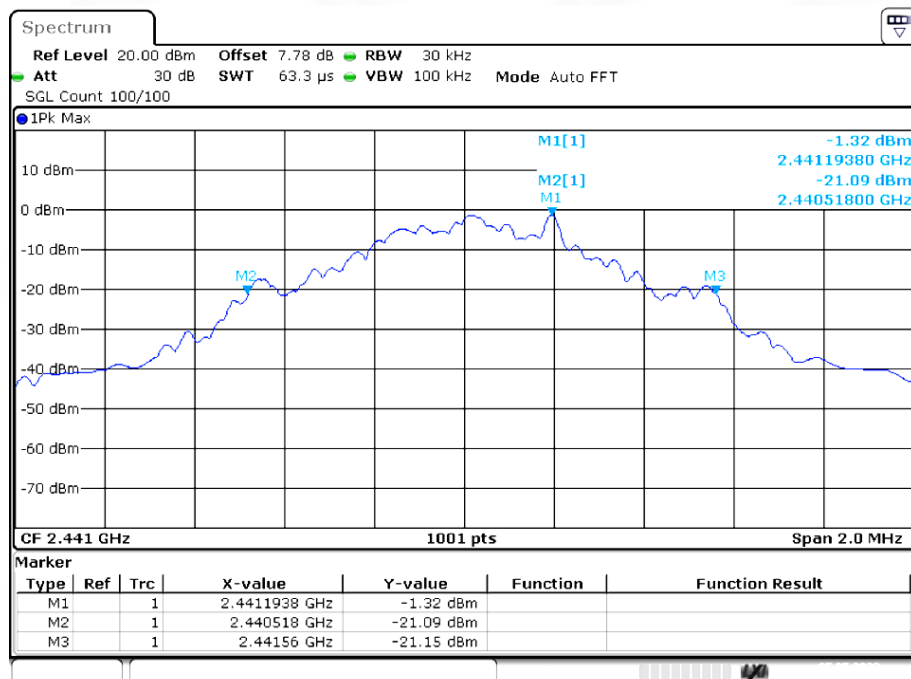


OBW NVNT 1-DH1 2480MHz Ant1

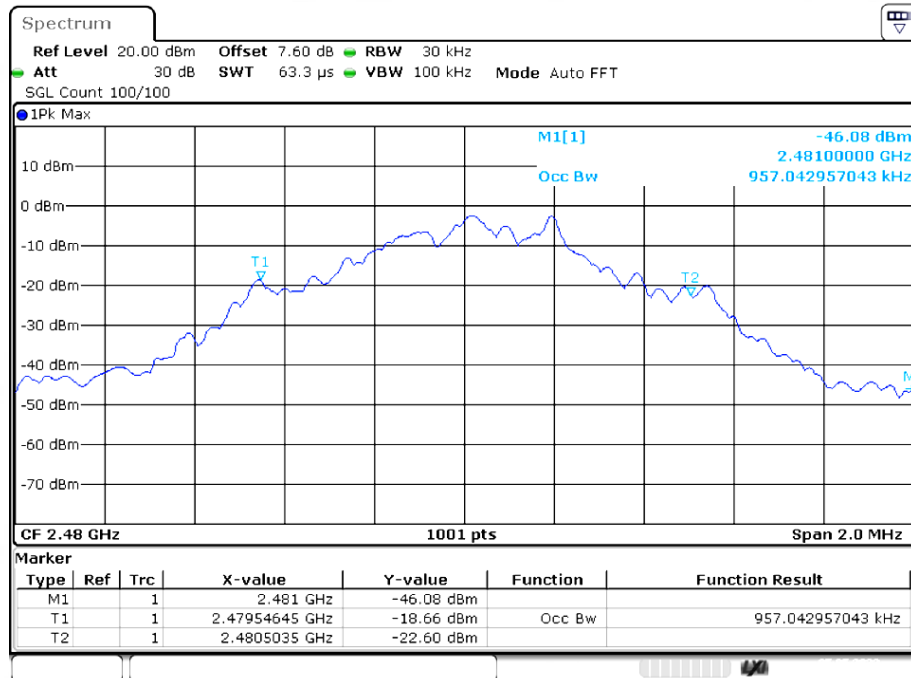


-20 dB BW NVNT 1-DH1 2480MHz Ant1

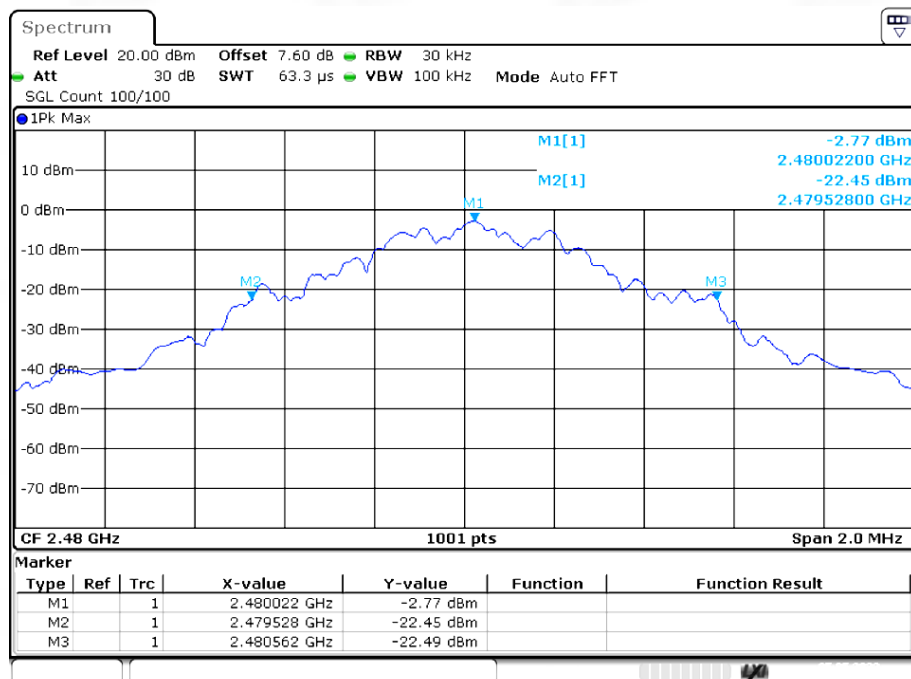


OBW NVNT 2-DH1 2402MHz Ant1

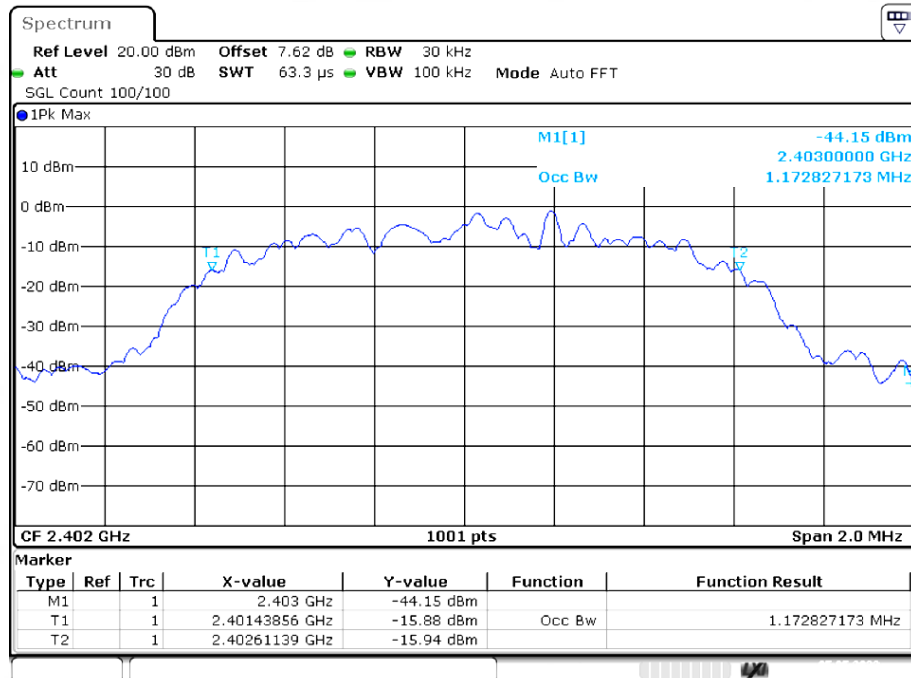


-20 dB BW NVNT 2-DH1 2402MHz Ant1

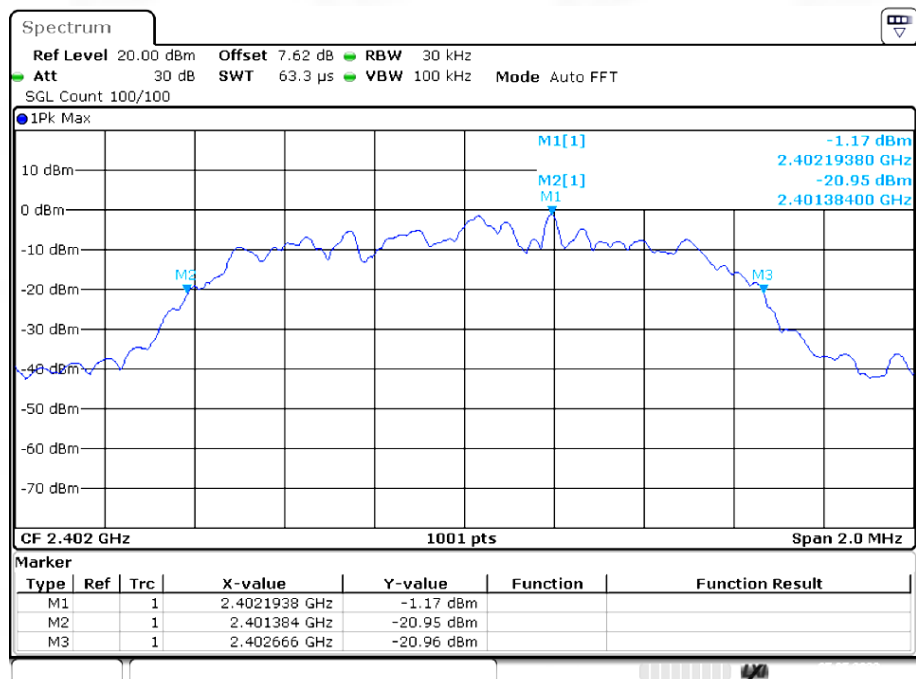


OBW NVNT 2-DH1 2441MHz Ant1

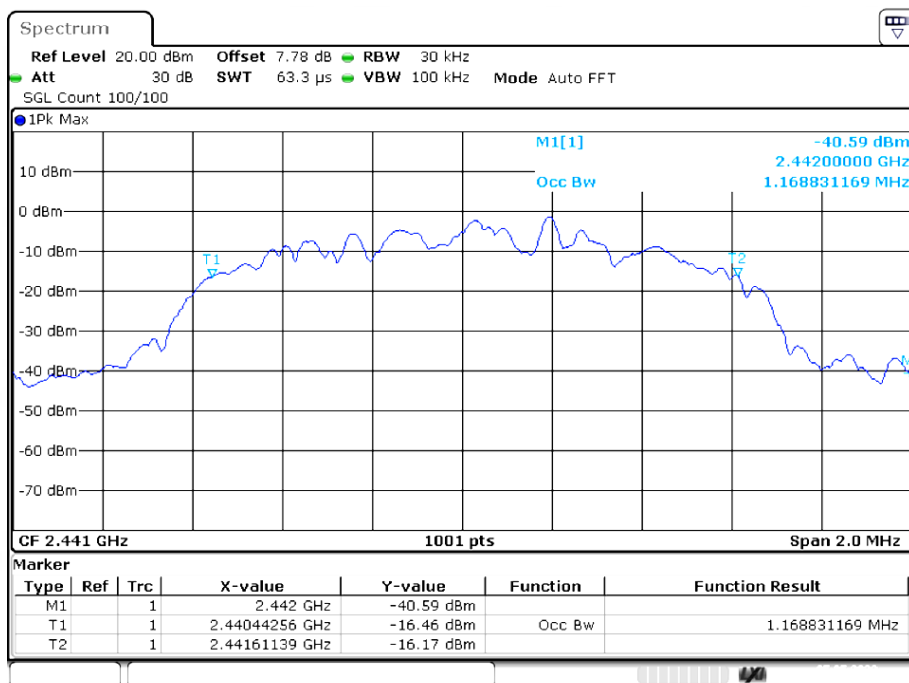


-20 dB BW NVNT 2-DH1 2441MHz Ant1

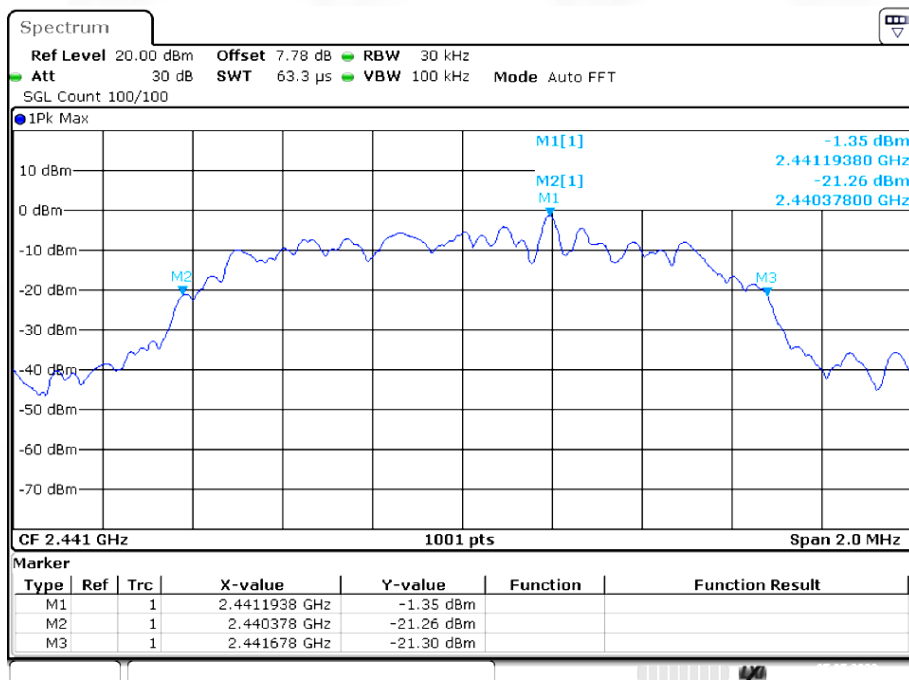


OBW NVNT 2-DH1 2480MHz Ant1

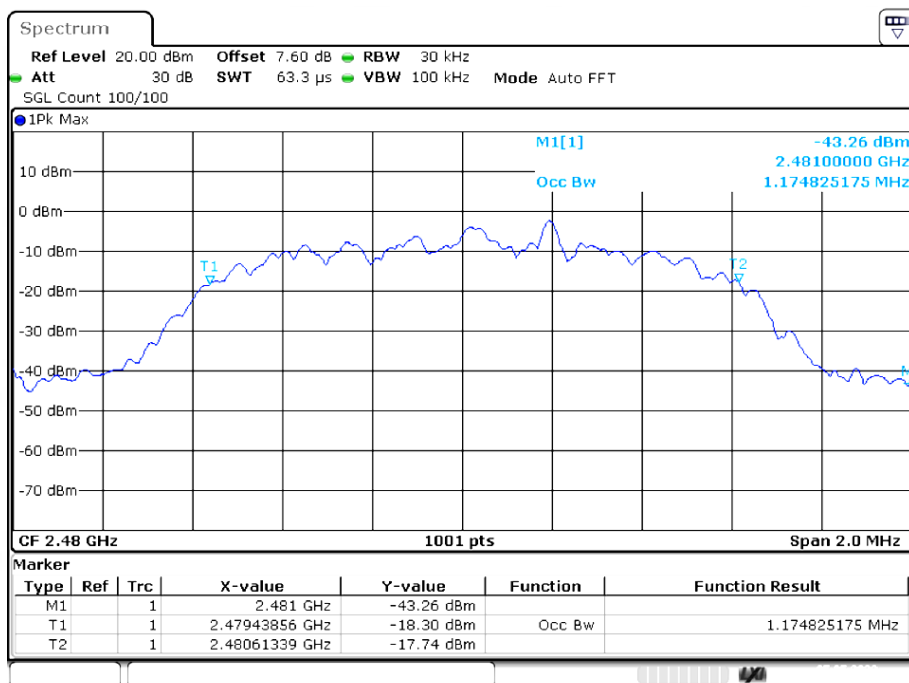


-20 dB BW NVNT 2-DH1 2480MHz Ant1

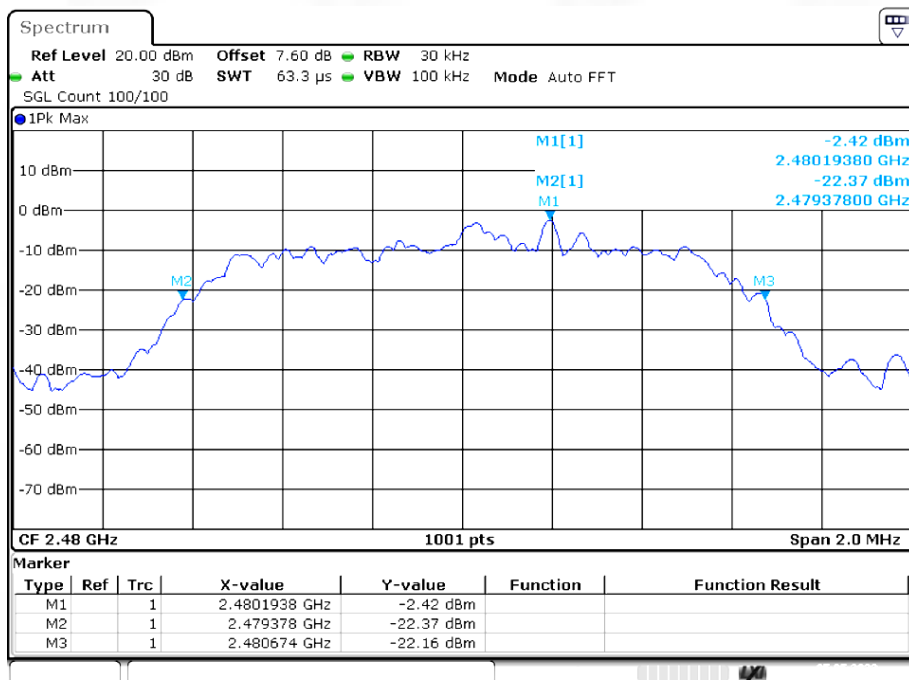


OBW NVNT 3-DH1 2402MHz Ant1

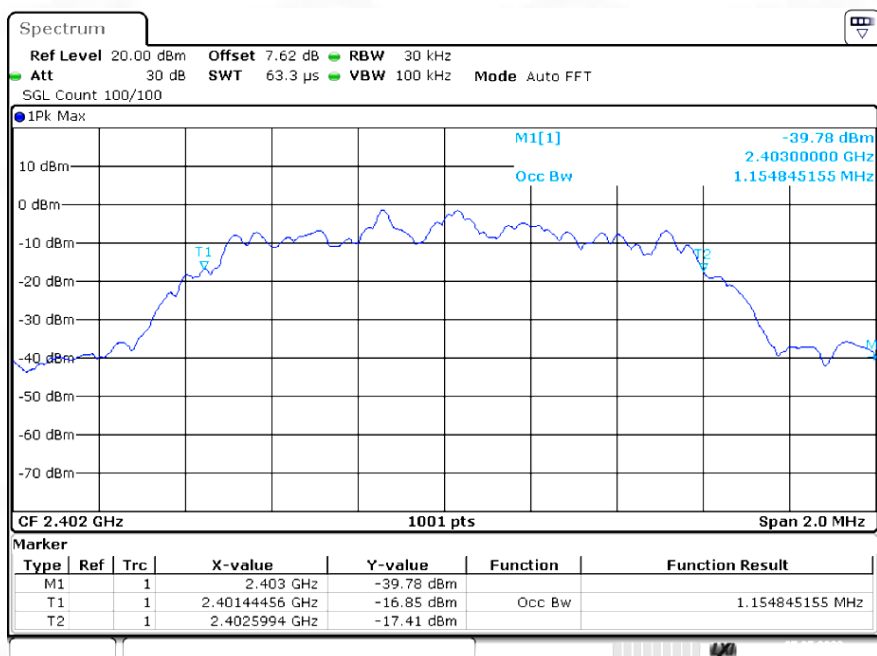


-20 dB BW NVNT 3-DH1 2402MHz Ant1

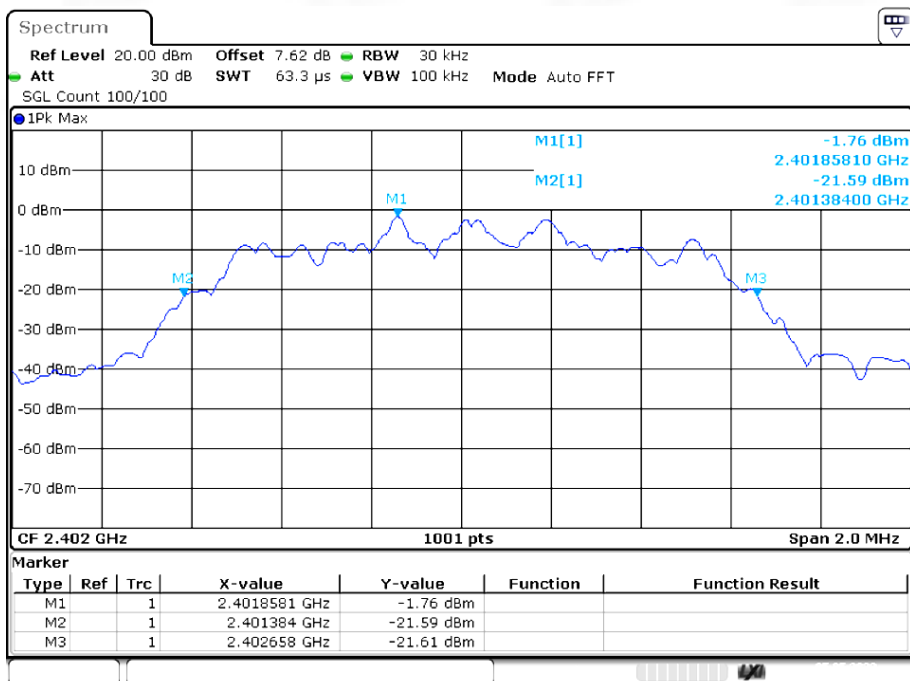


OBW NVNT 3-DH1 2441MHz Ant1

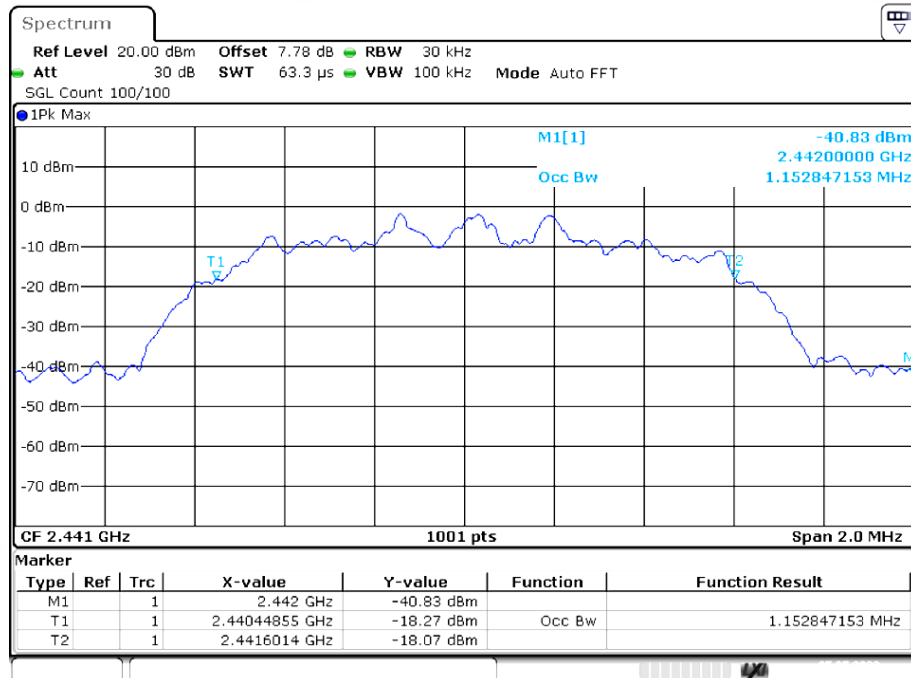


-20 dB BW NVNT 3-DH1 2441MHz Ant1

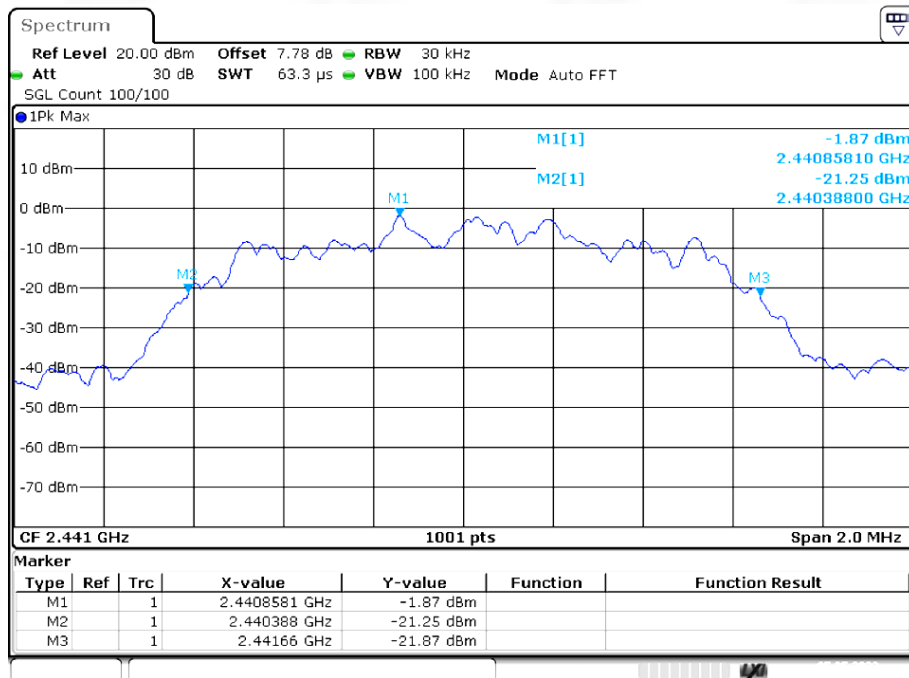

OBW NVNT 3-DH1 2480MHz Ant1

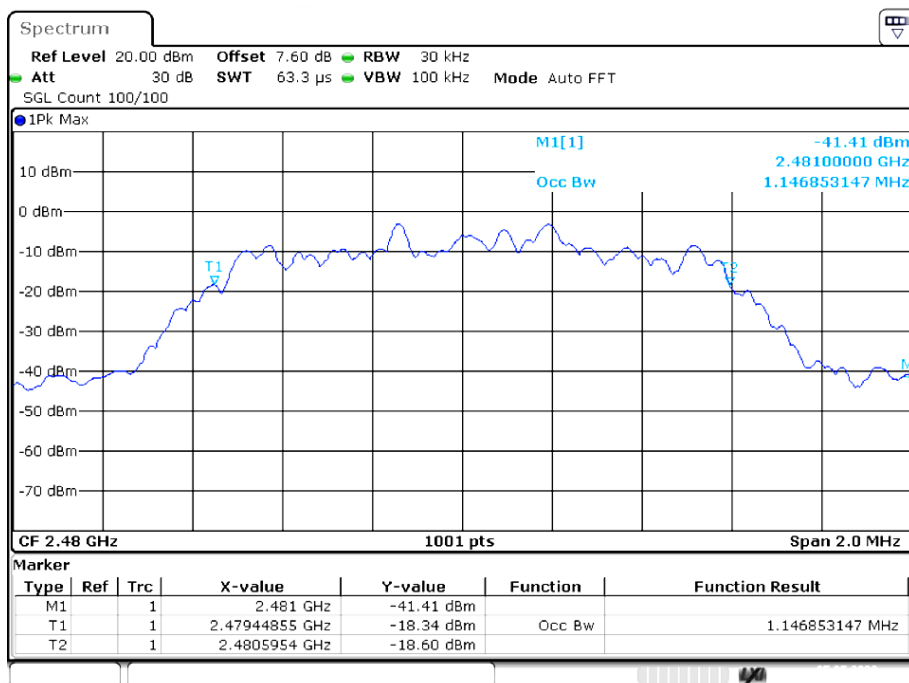

-20 dB BW NVNT 3-DH1 2480MHz Ant1

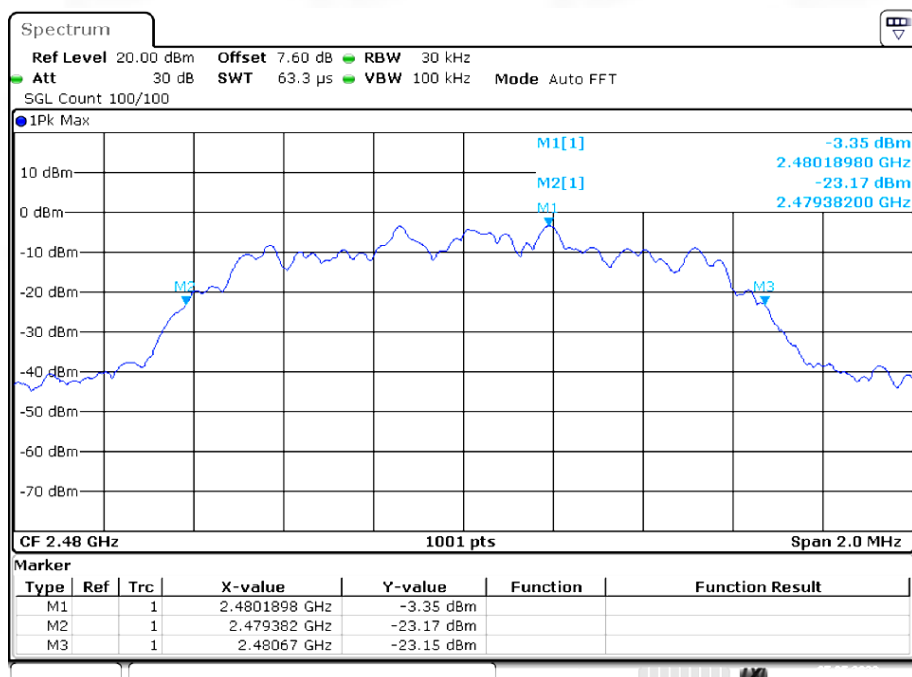

5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.


5.3. Test Result

Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	2441.024	2442.031	1.007	1	Pass
NVNT	2-DH1	2440.854	2441.858	1.004	0.025	Pass
NVNT	3-DH1	2440.856	2441.856	1	0.848	Pass


CFS NVNT 1-DH1 2441MHz Ant1

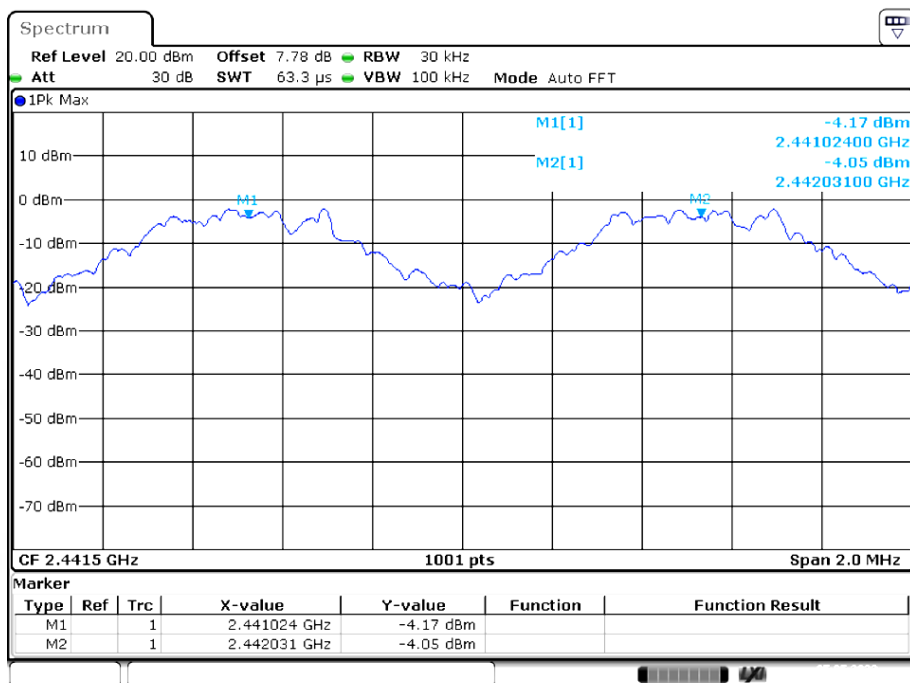

CFS NVNT 2-DH1 2441MHz Ant1

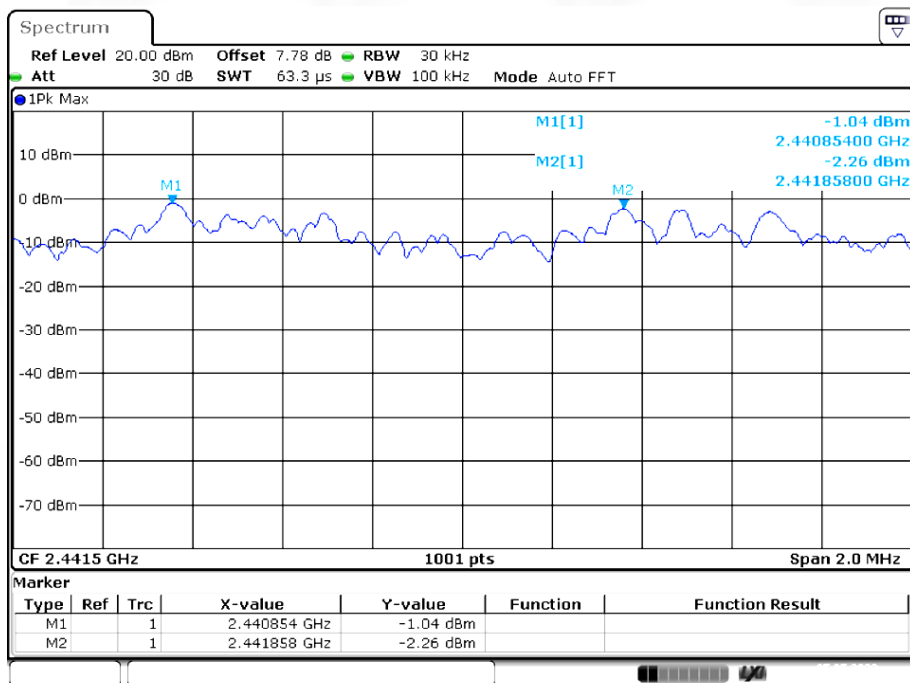

CFS NVNT 3-DH1 2441MHz Ant1

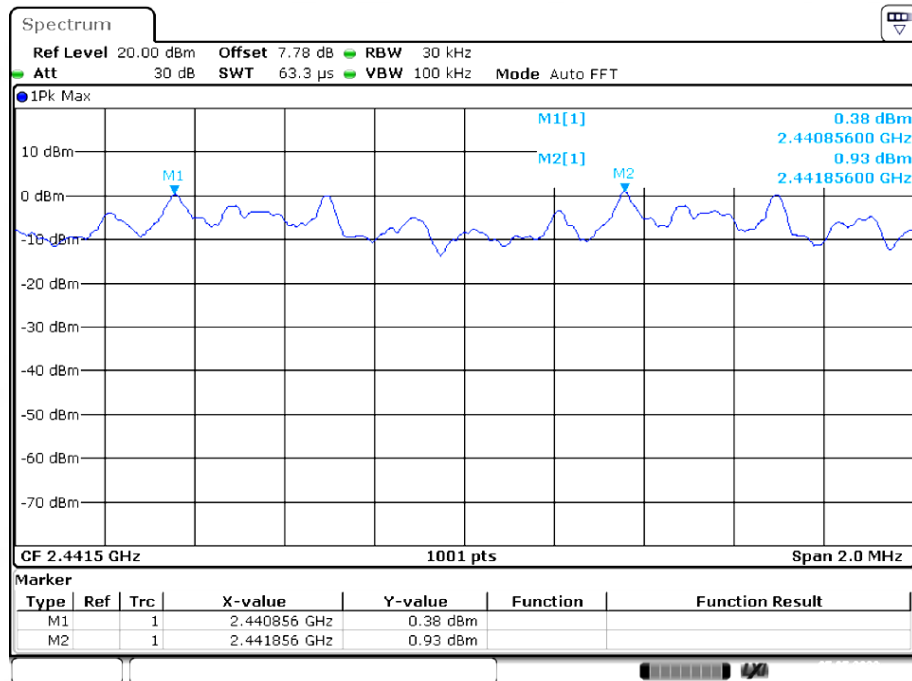

6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.


6.3. Test Result

Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass
NVNT	3-DH1	79	15	Pass


Hopping No. NVNT 1-DH1 2441MHz Ant1

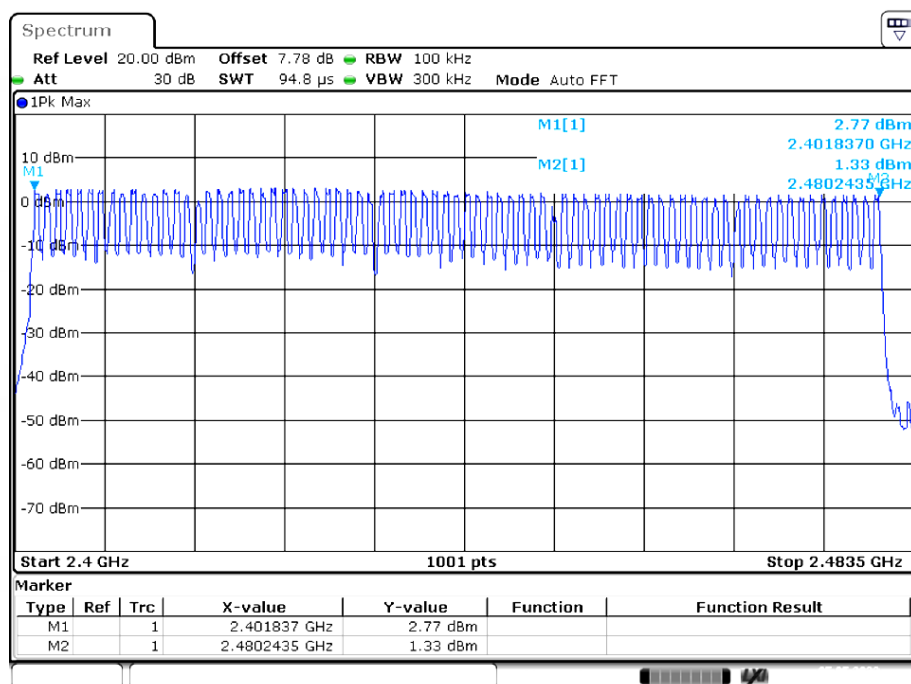

Hopping No. NVNT 2-DH1 2441MHz Ant1

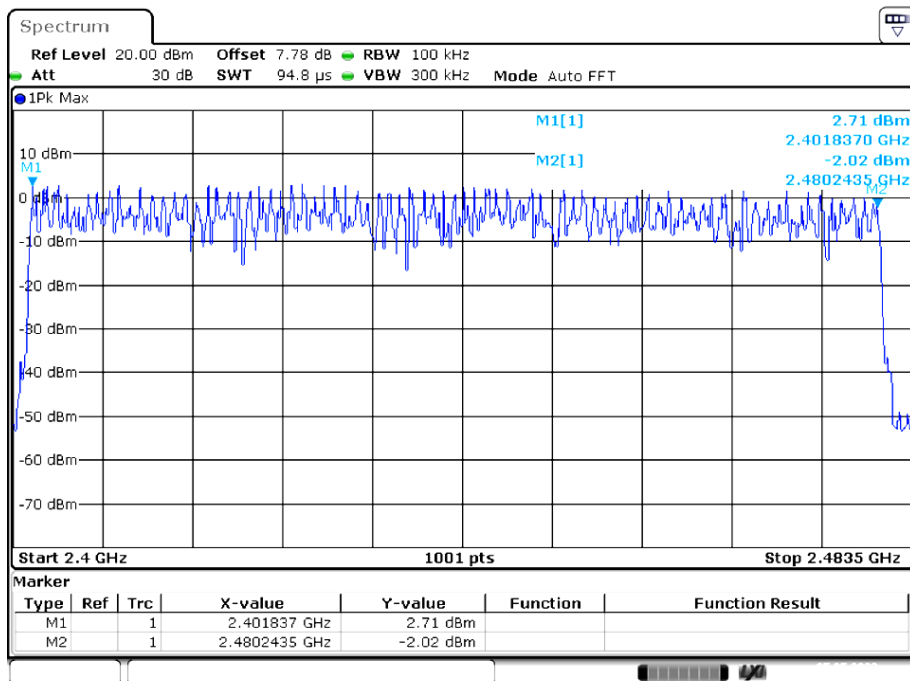

Hopping No. NVNT 3-DH1 2441MHz Ant1

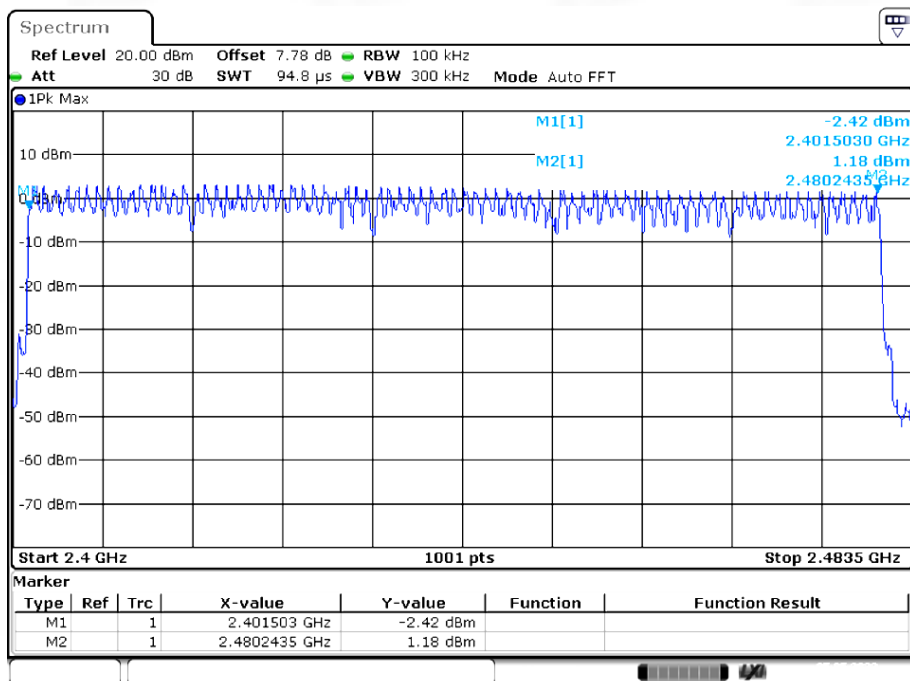

7. DWELL TIME

7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

7.3. Test Result


PASS.

Detailed information please see the following page.


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2402	Ant1	0.395	126.400	319	31600	400	Pass
NVNT	1-DH1	2441	Ant1	0.395	126.400	318	31600	400	Pass
NVNT	1-DH1	2480	Ant1	0.394	126.080	318	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.65	264.000	165	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.899	309.227	106	31600	400	Pass
NVNT	2-DH1	2402	Ant1	0.405	129.600	317	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.404	129.280	319	31600	400	Pass
NVNT	2-DH1	2480	Ant1	0.405	129.600	320	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.656	264.960	158	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.904	309.760	101	31600	400	Pass
NVNT	3-DH1	2402	Ant1	0.405	129.600	318	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.404	129.280	318	31600	400	Pass
NVNT	3-DH1	2480	Ant1	0.404	129.280	318	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.655	264.800	158	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.906	309.973	112	31600	400	Pass

Remark: Dwell Time = Pulse Time * Burst Count


Dwell NVNT 1-DH1 2402MHz Ant1 One Burst

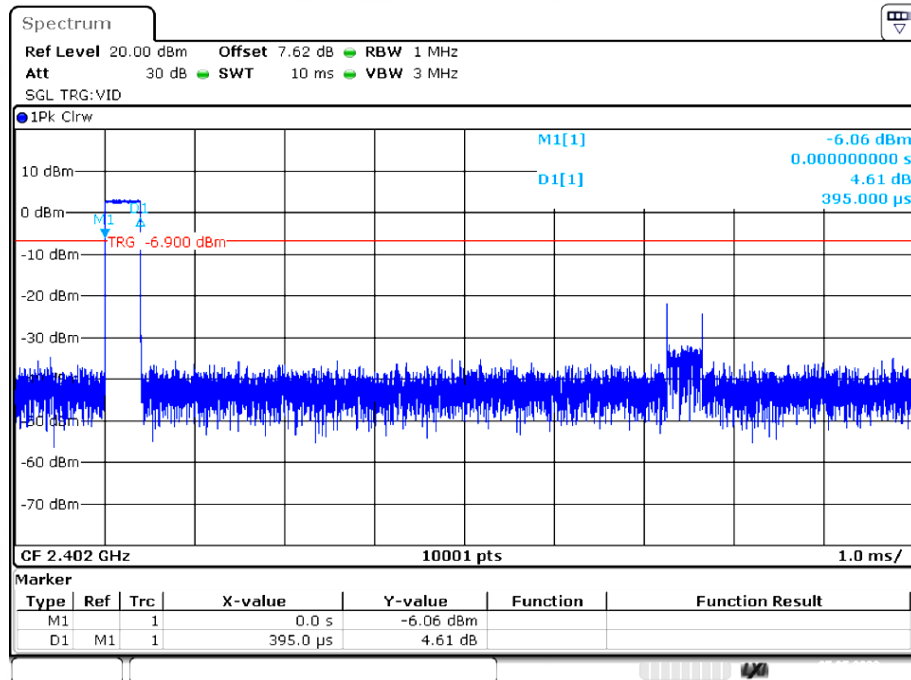


Dwell NVNT 1-DH1 2402MHz Ant1 Accumulated

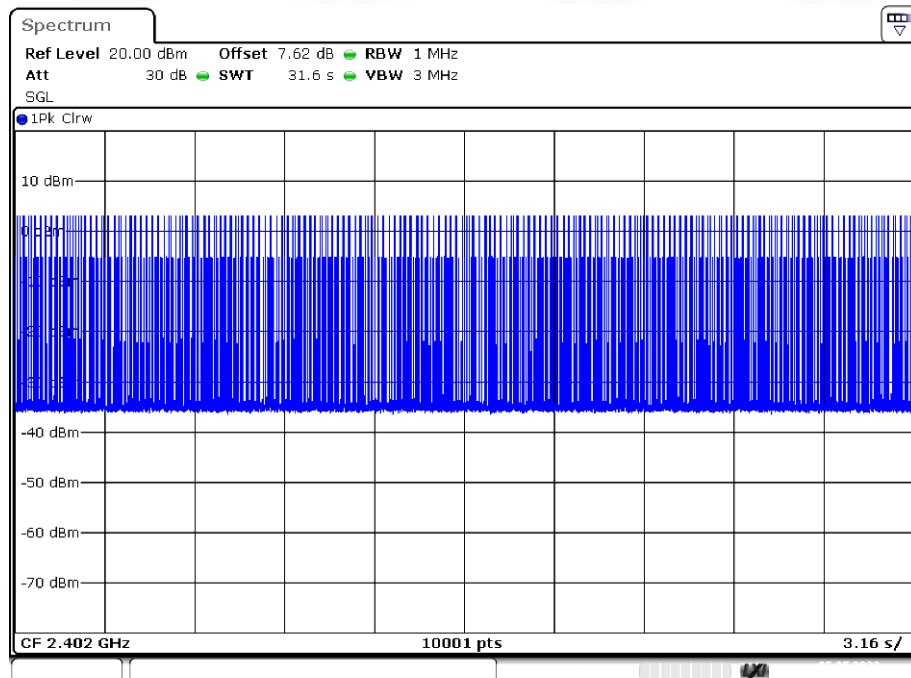


Dwell NVNT 1-DH1 2441MHz Ant1 One Burst

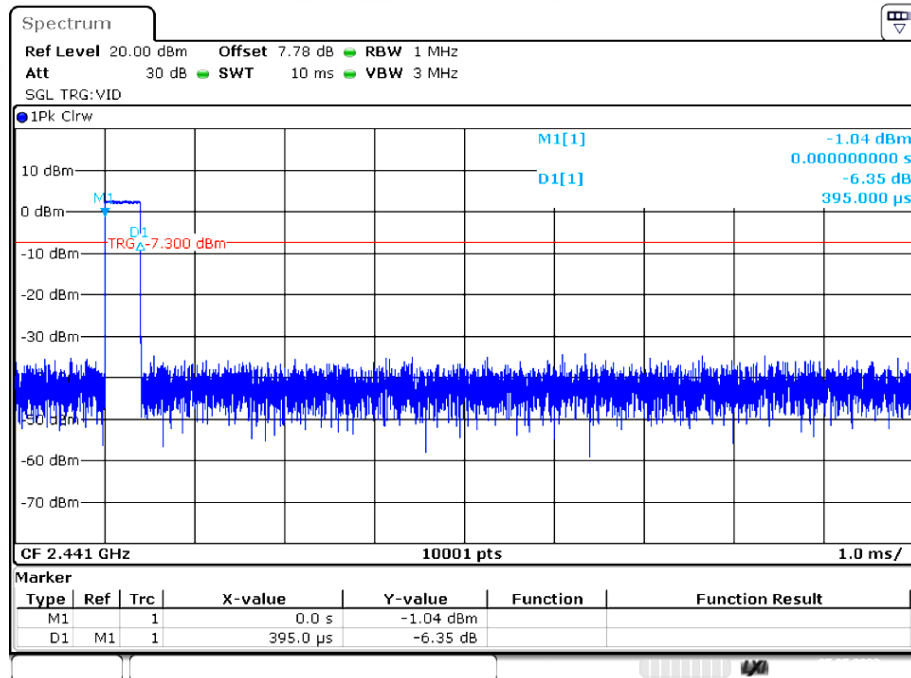


Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

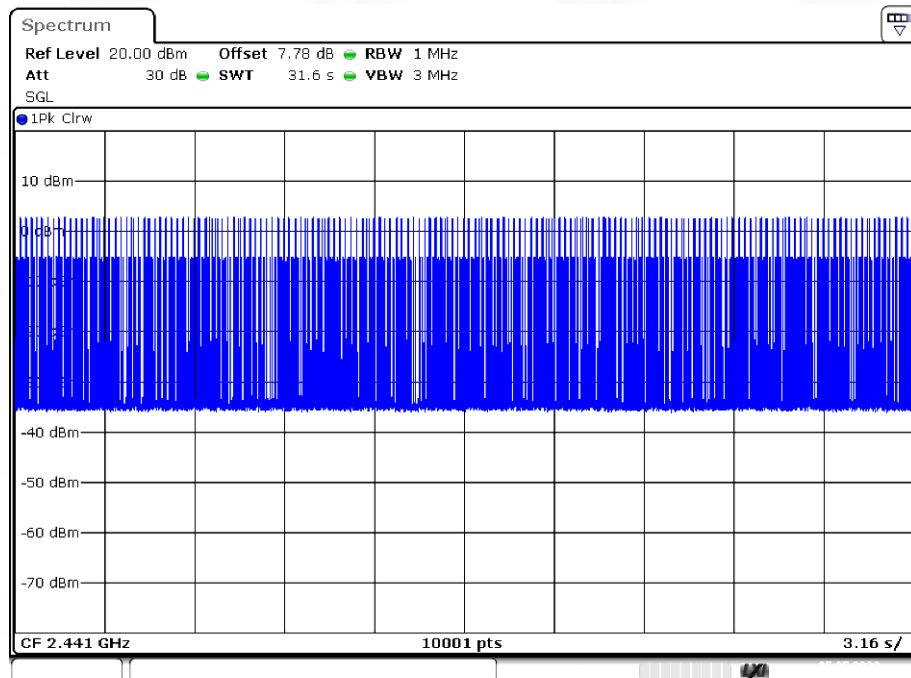


Dwell NVNT 1-DH1 2480MHz Ant1 One Burst

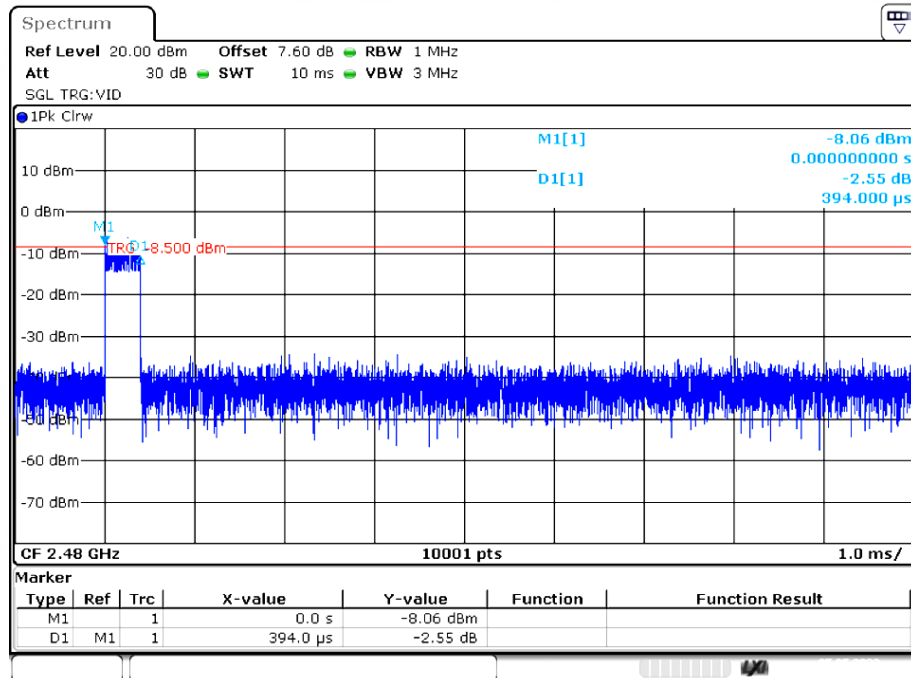


Dwell NVNT 1-DH1 2480MHz Ant1 Accumulated

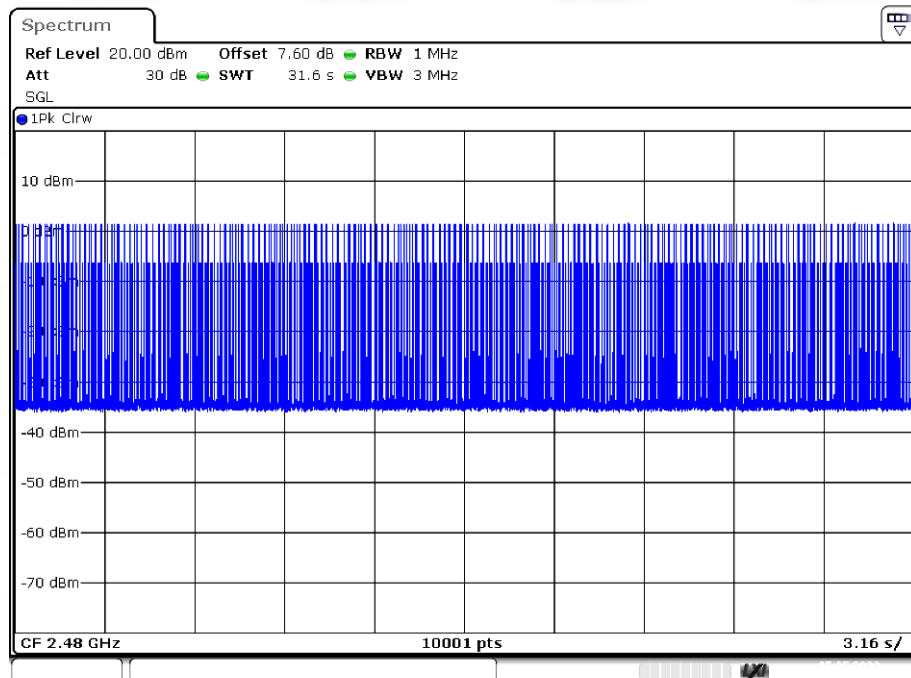


Dwell NVNT 1-DH3 2441MHz Ant1 One Burst

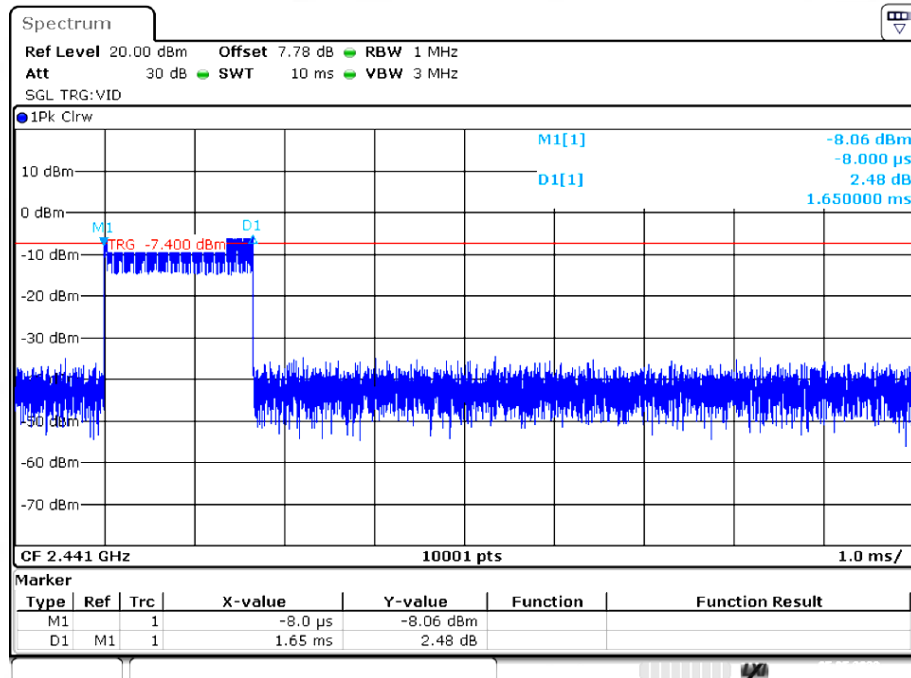


Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

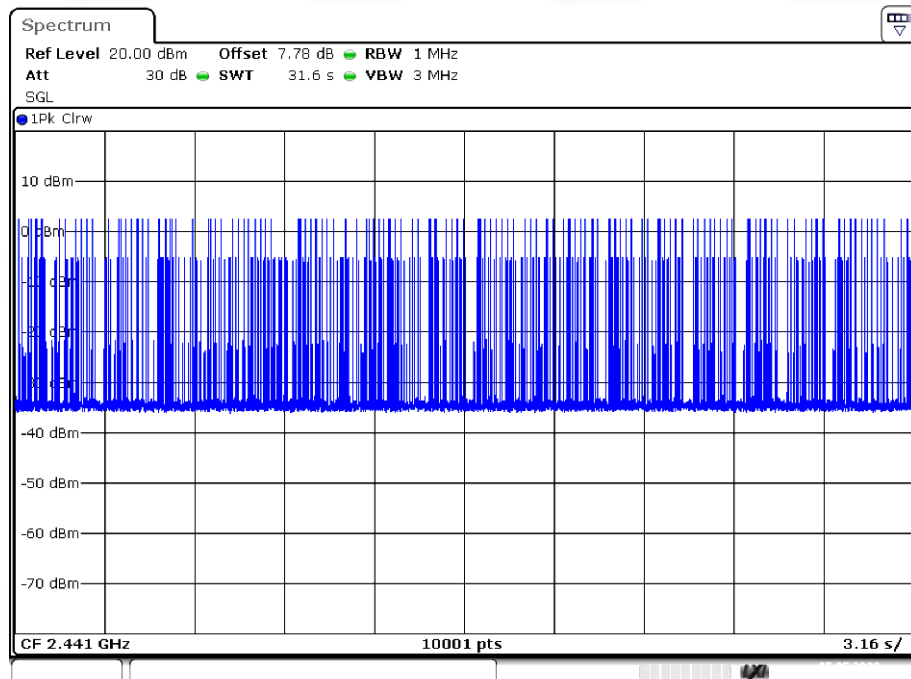


Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

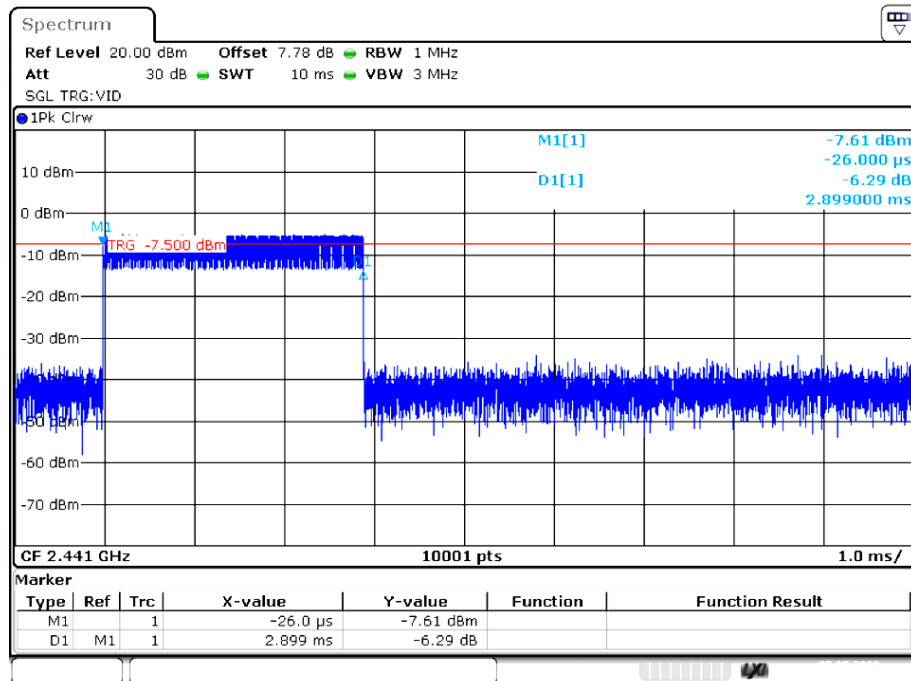


Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

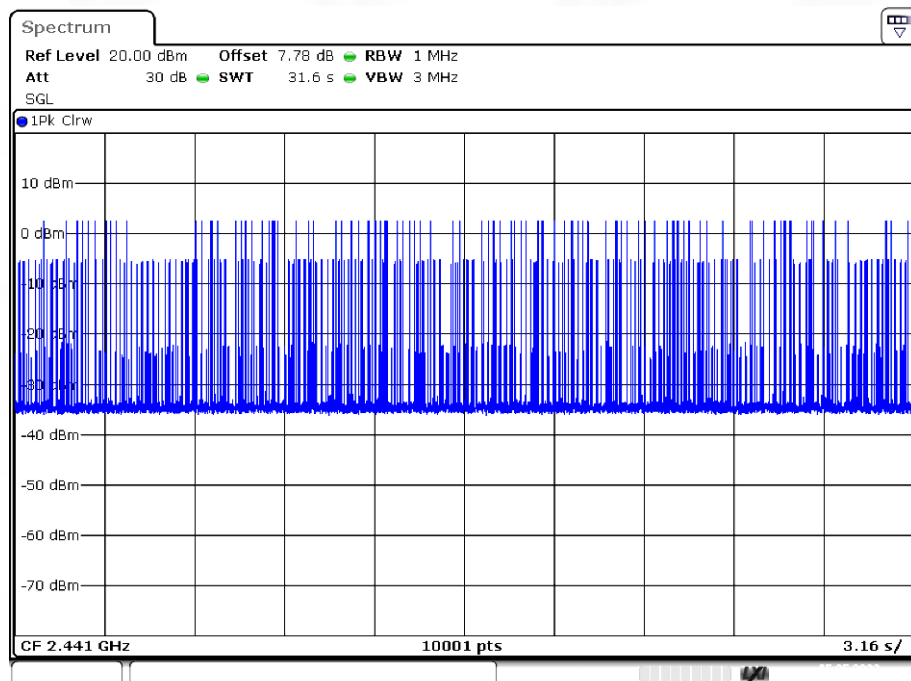


Dwell NVNT 2-DH1 2402MHz Ant1 One Burst

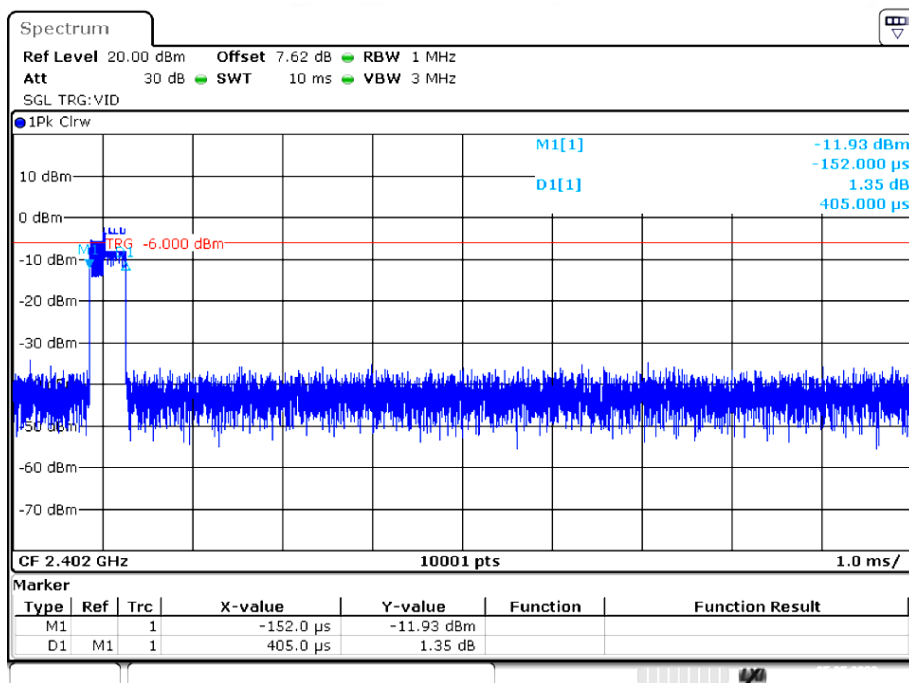


Dwell NVNT 2-DH1 2402MHz Ant1 Accumulated

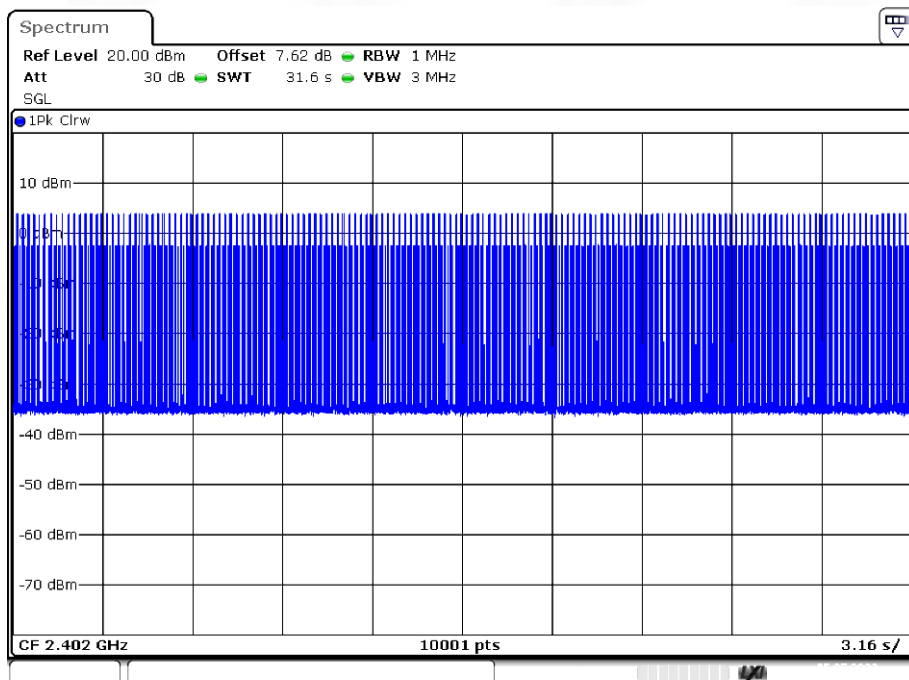


Dwell NVNT 2-DH1 2441MHz Ant1 One Burst

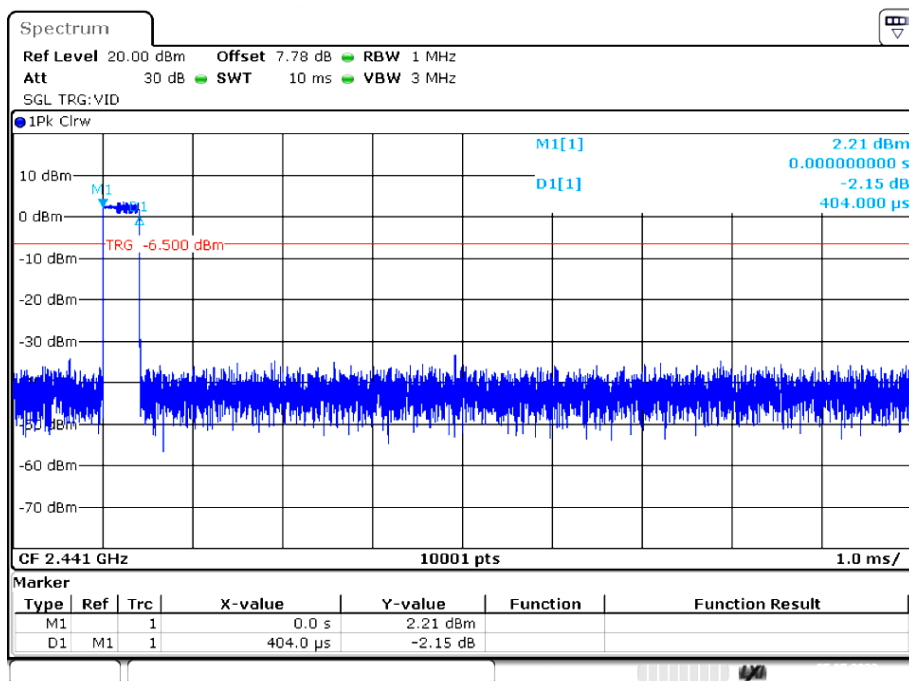


Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

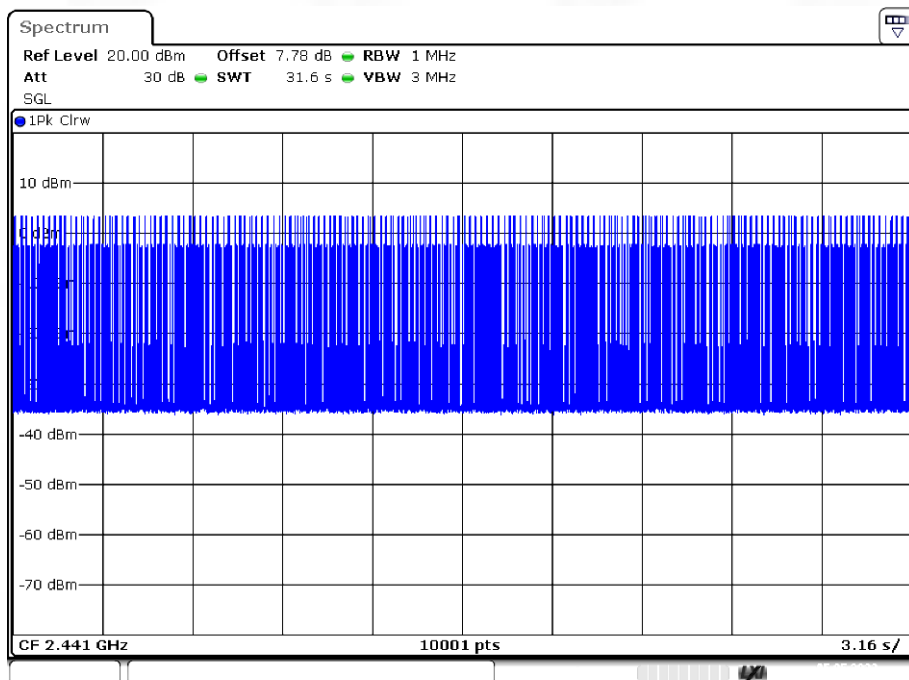


Dwell NVNT 2-DH1 2480MHz Ant1 One Burst

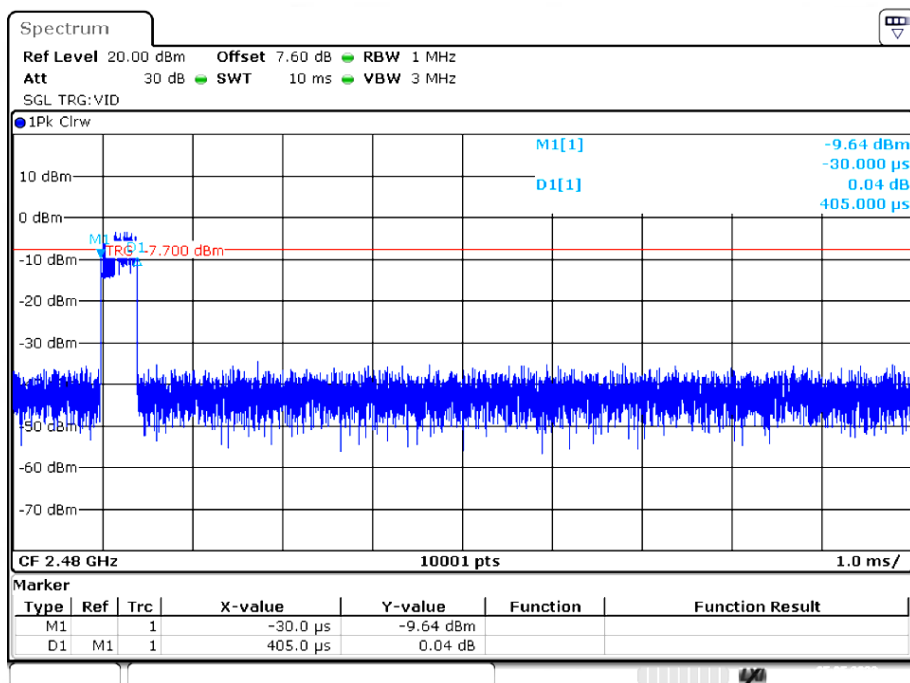

Dwell NVNT 2-DH1 2480MHz Ant1 Accumulated

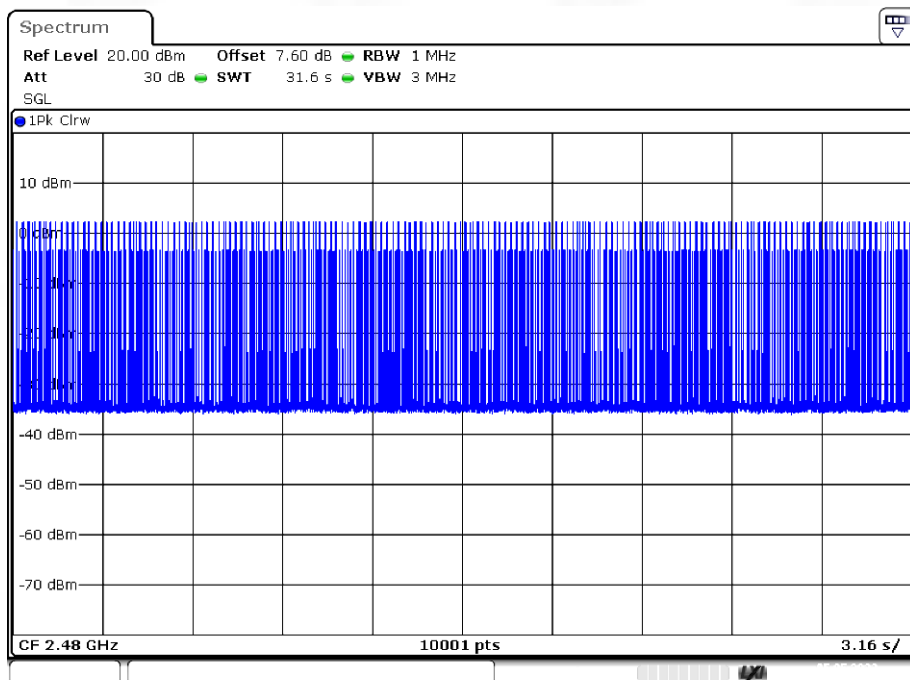

Dwell NVNT 2-DH3 2441MHz Ant1 One Burst

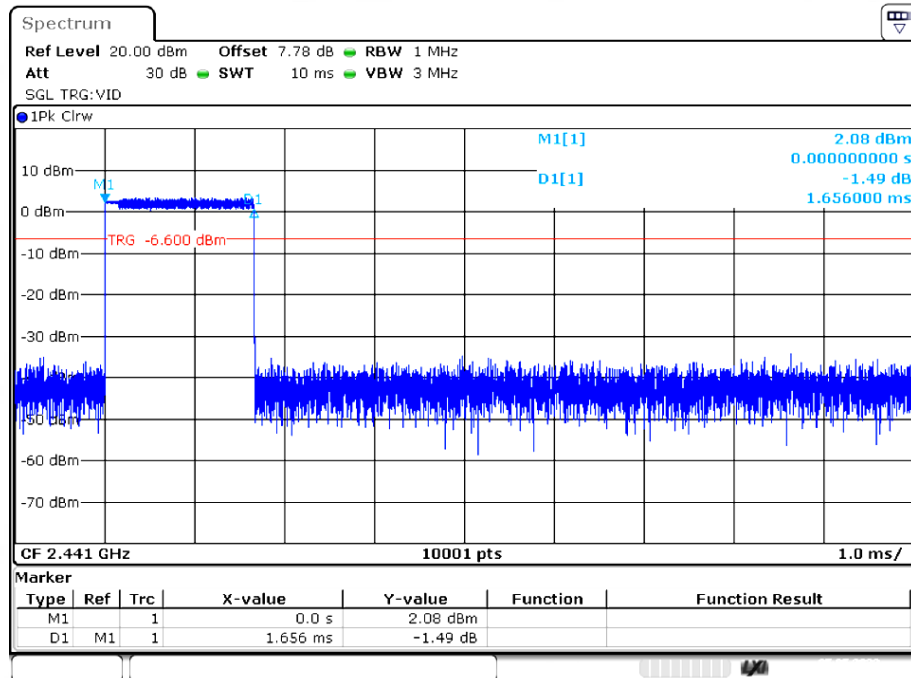

Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

