



TEST REPORT

FCC ID:2BAG3MS1901

Report Number..... : ZKT-230220L0873E-3

Date of Test..... : March 3, 2023 to March 7, 2023

Date of issue..... : March 10, 2023

Total number of pages..... : 95

Test Result..... : PASS

Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : EVELAB INSIGHT (SINGAPORE) PTE. LTD.

Address : 80 Robinson Road #02-00 Singapore 068898

Manufacturer's name : Xiamen MeituEve Technology Co., Ltd.

Address : Room 568, No.942, Tonglong 2nd Road, Gaoxin District (Xiang'an) Industries, Xiamen, China

Test specification:

FCC CFR Title 47 Part 15 Subpart C Section 15.407
ANSI C63.10:2013Standard..... : KDB 789033 D02 v01r02
RSS-247 Issue 2
RSS-Gen Issue 5

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No..... : TRF-EL-113_V0**Test Report Form(s) Originator..... : ZKT Testing****Master TRF : Dated: 2020-01-06**

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : **MeituEve M**

Trademark : EveLab Insight

Model/Type reference..... : MS1901

Ratings..... : DC 12V/5A by adapter



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature).....: Alen He

Reviewer (name + signature).....: Joe Liu

Approved (name + signature).....: Lake Xie





Table of Contents	Page
1. VERSION	5
2.SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
4.EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULT:	15
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 APPLICABLE STANDARD	17
4.2.2 CONFORMANCE LIMIT	17
4.2.3 MEASURING INSTRUMENTS	17
4.2.4 TEST CONFIGURATION	18
4.2.5 TEST PROCEDURE	19
4.2.6 TEST RESULT	20
5.POWER SPECTRAL DENSITY TEST	26
5.1 APPLIED PROCEDURES / LIMIT	26
5.2 TEST PROCEDURE	27
5.3 DEVIATION FROM STANDARD	27
5.4 TEST SETUP	27
5.5 EUT OPERATION CONDITIONS	27
5.6 TEST RESULTS	28
6. 26DB & 6DB &99% EMISSION BANDWIDTH	39
6.1 APPLIED PROCEDURES / LIMIT	39
6.2 TEST PROCEDURE	39
6.3 EUT OPERATION CONDITIONS	39
6.4 TEST RESULTS	40
7.MAXIMUM CONDUCTED OUTPUT POWER	56



Table of Contents	Page
7.1 PPLIED PROCEDURES / LIMIT	56
7.2 TEST PROCEDURE	56
7.3 DEVIATION FROM STANDARD	57
7.4 TEST SETUP	57
7.5 EUT OPERATION CONDITIONS	57
7.6 TEST RESULTS	58
8.OUT OF BAND EMISSIONS	59
8.1 APPLICABLE STANDARD	59
8.2 TEST PROCEDURE	59
8.3 DEVIATION FROM STANDARD	59
8.4 TEST SETUP	59
8.5 EUT OPERATION CONDITIONS	60
8.6 TEST RESULTS	60
9.SPURIOUS RF CONDUCTED EMISSIONS	70
9.1 CONFORMANCE LIMIT	70
9.2 MEASURING INSTRUMENTS	70
9.3 TEST SETUP	70
9.4 TEST PROCEDURE	70
9.5 TEST RESULTS	70
10.FREQUENCY STABILITY MEASUREMENT	83
10.1 LIMIT	83
10.2 TEST PROCEDURES	83
10.3 TEST SETUP LAYOUT	83
10.4 EUT OPERATION DURING TEST	83
10.5 TEST RESULTS	83
11.ANTENNA REQUIREMENT	94
12. TEST SETUP PHOTO	95
13. EUT CONSTRUCTIONAL DETAILS	95



1. VERSION

Report No.	Version	Description	Approved
ZKT-230220L0873E-3	Rev.01	Initial issue of report	March 10, 2023



2.SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407), Subpart E RSS-247 Issue 2			
Standard Section	Test Item	Judgment	Remark
FCC part 15.209(a), FCC part 15.407 (b)(1) FCC part 15.407 (b)(4) FCC part 15.407 (b)(8)	Spurious Radiated Emissions	PASS	
FCC part 15.207 RSS-Gen Section 8.8	Conducted Emission	PASS	
FCC part 15.407 (a)(12) RSS-247 Section 5.2(a) RSS-Gen Section 6.7	26 dB and 99% Emission Bandwidth	PASS	
FCC part 15.407(e)	6 dB bandwidth	PASS	
FCC part 15.407 (a)(1) FCC part 15.407 (a)(3) RSS-247 Section 5.4(d)	Maximum Conducted Output Power	PASS	
FCC part 15.407(b)(1) FCC part 15.407(b)(4) RSS-247 Section 5.5	Band Edge	PASS	
FCC part 15.407 (a)(1) FCC part 15.407 (a)(3) RSS-247 Section 5.2(b)	Power Spectral Density	PASS	
2.1051, FCC part 15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
FCC part 15.203 RSS-Gen Section 6.8	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

Designation Number: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	3m camber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
3	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
4	Conducted Adjacent channel power	U=1.38dB
5	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	Occupied Bandwidth	U=0.5dB
8	humidity uncertainty	U=5.3%
9	Temperature uncertainty	U=0.59℃
10	Radiated disturbance(30MHz-1000MHz)	U=4.8dB
11	Radiated disturbance(1GHz-6GHz)	U=4.9dB
12	Radiated disturbance(1GHz-18GHz)	U=5.0dB



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	MeituEve M	
Model No.:	MS1901	
Model Different.:	-	
Sample ID	ZKT-230220L0873E	
Hardware Version:	V1.0	
Software Version:	V1.0	
Sample(s) Status:	Engineer sample	
Product Description	IEEE 802.11 WLAN Mode Supported	☒ 802.11a/ac/n (20MHz channel bandwidth) ☒ 802.11ac/n (40MHz channel bandwidth) ☒ 802.11ac(80MHz channel bandwidth)
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n/ac(HT20/HT40):MCS0-MCS15; 802.11ac(VHT80):NSS1, MCS0-MCS9
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
	Operating Frequency Range	☒ 5180-5240MHz for 802.11a/n(HT20)/ac20; 5190-5230MHz for 802.11n(HT40)/ac40; 5210MHz for 802.11 ac80; ☒ 5745-5825MHz for 802.11a/n(HT20)/ac20; 5755-5795MHz for 802.11n(HT40)/ac40; 5775MHz for 802.11 ac80;
	Number of Channels	☒ 9 channels for 802.11a/n20/ac20 in the 5180-5240MHz band and 5745-5825MHz ; 4 channels for 802.11 n40/ac40 in the 5190-5230 MHz band and 5755-5795MHz; 1 channels for 802.11 ac80 in the 5210MHz band ; ☒ 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band; 2 channels for 802.11 n40/ac40 in the 5755-5795 MHz band; 1 channels for 802.11 ac80 in the 5775MHz band;
Channel List	Please refer to the Note 2.	
Antenna Type:	FPCB Antenna	
Antenna gain:	ANT. 1: 3.28dBi, ANT. 2: 3.28dBi	
Power supply:	DC 12V/5A by adapter	
SWITCHING POWER ADAPTER:	N/A	

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



802.11a/ac/n(20MHz) Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	149	5745	161	5805
40	5200	48	5240	153	5765	165	5825
				157	5785	-	-

802.11n/ac(40MHz) Frequency Channel

802.11n/ac(40MHz)Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	-	-	151	5755	-	-
46	5230	-	-	159	5795	-	-

802.11ac(80MHz) Frequency Channel

Channel	Frequency (MHz)
42	5210
155	5775

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test,the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Pretest Mode	Description
Mode 1	802.11a / n 20 / ac20 CH36/CH40/CH48/CH149/CH157/CH165
Mode 2	802.11n 40 / ac40 CH38/CH46/CH151/CH159
Mode 3	802.11 ac80 CH42/CH155

Conducted Emission	
Final Test Mode	Description
Mode 1	802.11a / n 20 / ac20 CH36/CH40/CH48/CH149/CH157/CH165
Mode 2	802.11n 40 / ac40 CH38/CH46/CH151/CH159
Mode 3	802.11 ac80 CH42/CH155

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a / n 20 CH36/CH40/CH48/CH149/CH157/CH165
Mode 2	802.11n 40 CH38/CH46/CH151/CH159
Mode 3	802.11 ac80 CH42/CH155

Note:


- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) 802.11n20/ac20 and 802.11n40/ac40 are tested, but only the worst data of 11n20 and 11n40 was reported.



Test Software	QRCT 3
Power level setup	<15dBm

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	MeituEve M	EveLab Insight	MS1901	N/A	EUT
A-1					

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS



Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	Oct. 28, 2022	Oct. 27, 2023
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSQ	100363	Oct. 28, 2022	Oct. 27, 2023
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESC17	101169	Oct. 28, 2022	Oct. 27, 2023
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	Nov. 02, 2022	Nov. 01, 2023
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	Nov. 01, 2022	Oct. 31, 2023
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	Oct. 28, 2022	Oct. 27, 2023
7	Loop Antenna	TESEQ	HLA6121	58357	Nov. 01, 2022	Oct. 31, 2023
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	Nov. 15, 2022	Nov. 14, 2023
9	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	Oct. 28, 2022	Oct. 27, 2023
10	Amplifier (500MHz-40GHz)	QUANJUDA	DLE-161	097	Oct. 28, 2022	Oct. 27, 2023
11	Test Cable	N/A	R-01	N/A	Oct. 28, 2022	Oct. 27, 2023
12	Test Cable	N/A	R-02	N/A	Oct. 28, 2022	Oct. 27, 2023
13	Test Cable	N/A	R-03	N/A	Oct. 28, 2022	Oct. 27, 2023
14	Test Cable	N/A	RF-01	N/A	Oct. 28, 2022	Oct. 27, 2023
15	Test Cable	N/A	RF-02	N/A	Oct. 28, 2022	Oct. 27, 2023
16	Test Cable	N/A	RF-03	N/A	Oct. 28, 2022	Oct. 27, 2023
17	ESG Signal Generator	Agilent	E4421B	N/A	Oct. 21, 2022	Oct. 20, 2023
18	Signal Generator	Agilent	N5182A	N/A	Oct. 21, 2022	Oct. 20, 2023
19	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	Nov. 15, 2022	Nov. 14, 2023
20	Wideband Radio Communication Test	R&S	CMW500	106504	Oct. 28, 2022	Oct. 27, 2023
21	RF Power Meter Test system	N/A	MW100-RPCB	N/A	Oct. 21, 2022	Oct. 20, 2023
22	D.C. Power Supply	LongWei	TPR-6405D	N/A	Oct. 21, 2022	Oct. 20, 2023
23	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
24	RF Software	MW	MTS8310	V2.0.0.0	\	\
25	Turntable	MF	MF-7802BS	N/A	\	\
26	Antenna tower	MF	MF-7802BS	N/A	\	\



Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Oct. 21, 2022	Oct. 20, 2023
2	LISN	CYBERTEK	EM5040A	E1850400149	Oct. 21, 2022	Oct. 20, 2023
3	Test Cable	N/A	C-01	N/A	Oct. 21, 2022	Oct. 20, 2023
4	Test Cable	N/A	C-02	N/A	Oct. 21, 2022	Oct. 20, 2023
5	Test Cable	N/A	C-03	N/A	Oct. 21, 2022	Oct. 20, 2023
6	EMI Test Receiver	R&S	ESCI3	101393	Oct. 28, 2022	Oct. 27, 2023
7	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	\	\



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

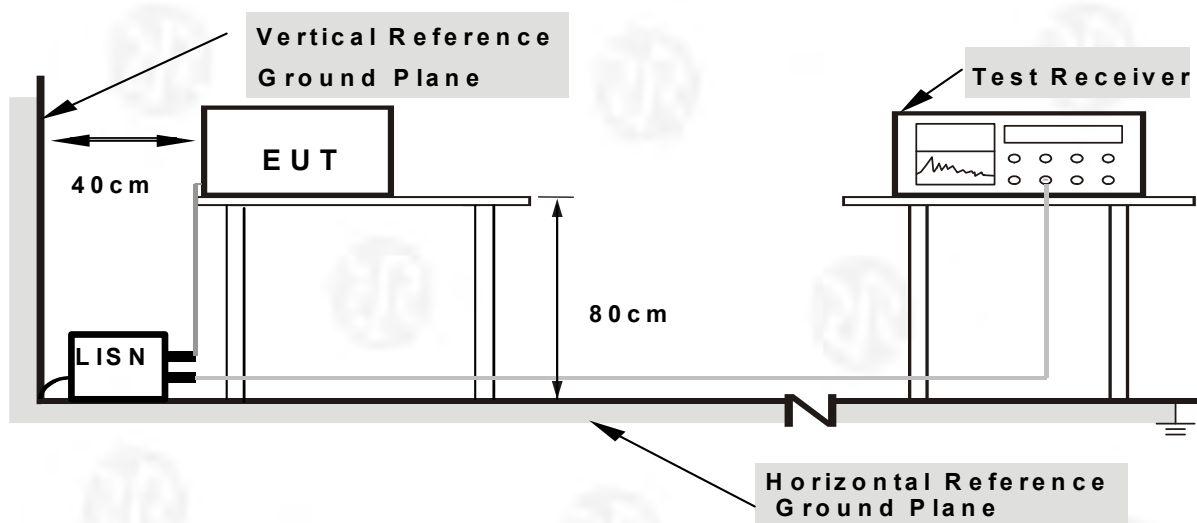

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The test mode is the Wi-Fi operating mode in the charging state, and the worst data of 802.11ac_5180MHz was reported.



4.1.6 TEST RESULT:

Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

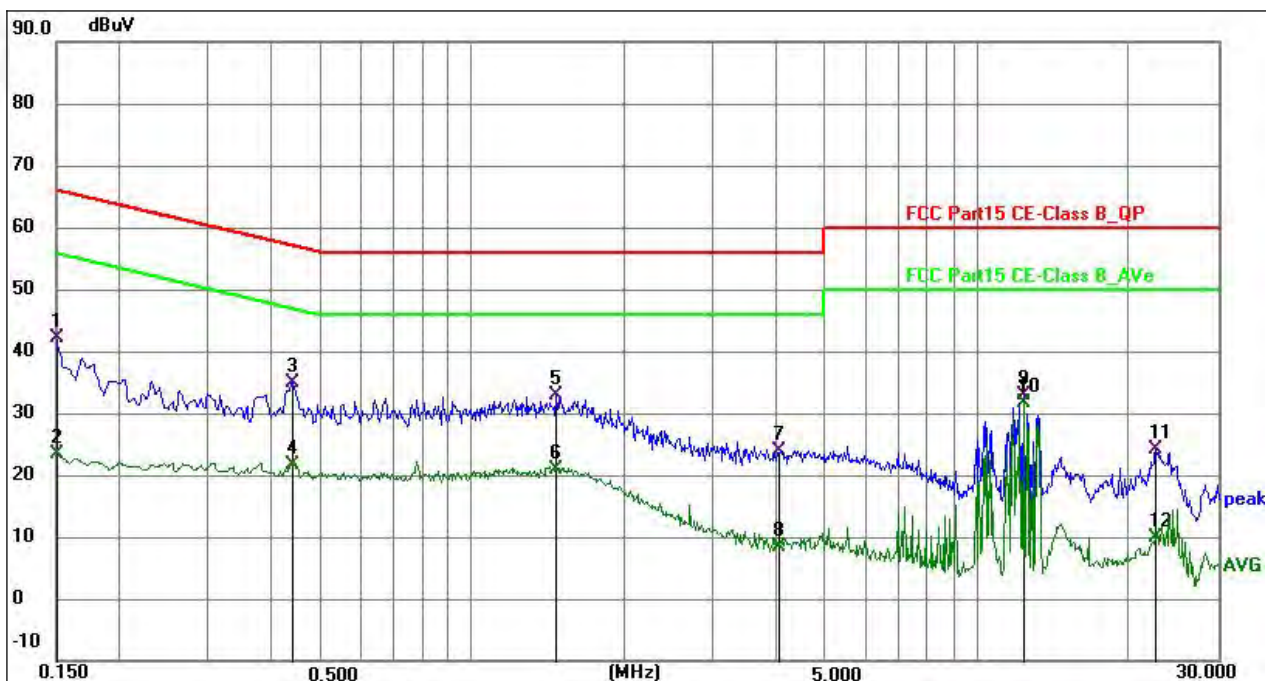


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	32.59	9.51	42.10	66.00	-23.90	QP	P	
2	0.1500	13.76	9.51	23.27	56.00	-32.73	AVG	P	
3	0.4380	24.98	10.02	35.00	57.10	-22.10	QP	P	
4	0.4380	11.58	10.02	21.60	47.10	-25.50	AVG	P	
5	1.4685	22.80	10.07	32.87	56.00	-23.13	QP	P	
6	1.4685	10.90	10.07	20.97	46.00	-25.03	AVG	P	
7	4.0739	13.86	10.09	23.95	56.00	-32.05	QP	P	
8	4.0739	-1.71	10.09	8.38	46.00	-37.62	AVG	P	
9	12.3540	22.77	10.19	32.96	60.00	-27.04	QP	P	
10 *	12.3540	21.44	10.19	31.63	50.00	-18.37	AVG	P	
11	22.5465	13.71	10.34	24.05	60.00	-35.95	QP	P	
12	22.5465	-0.55	10.34	9.79	50.00	-40.21	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

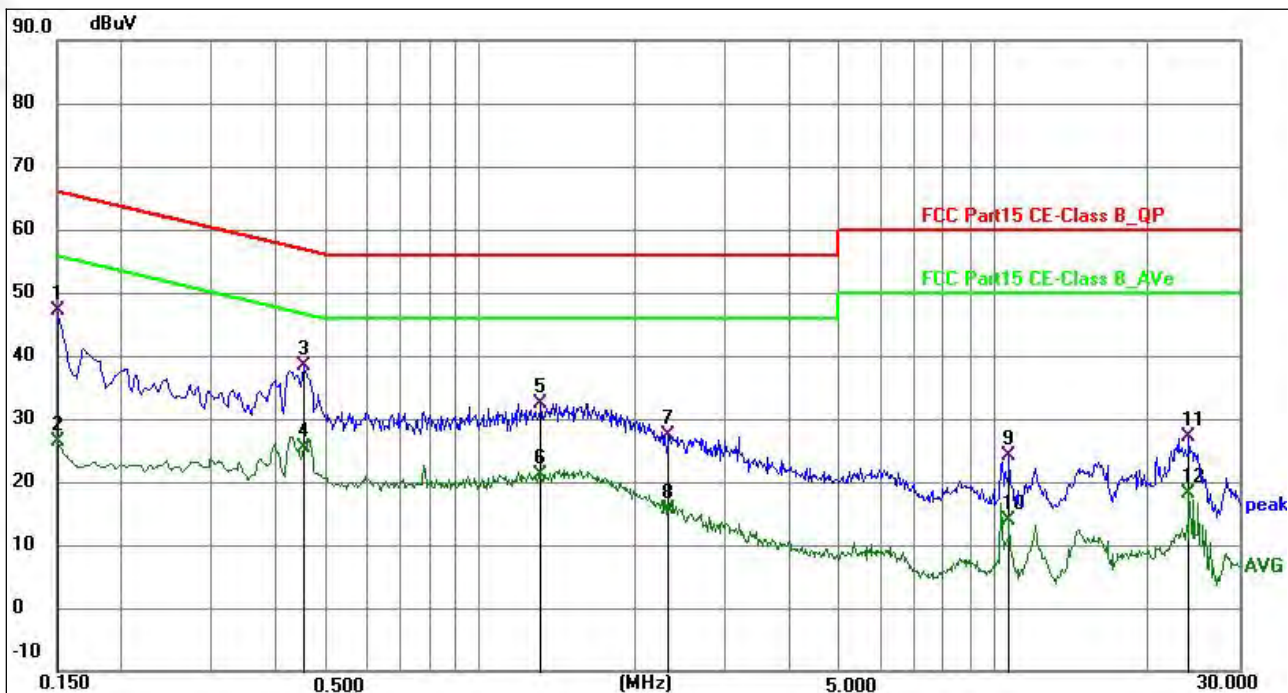

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	37.44	9.75	47.19	66.00	-18.81	QP	P	
2	0.1500	16.75	9.75	26.50	56.00	-29.50	AVG	P	
3 *	0.4515	28.29	10.04	38.33	56.85	-18.52	QP	P	
4	0.4515	15.27	10.04	25.31	46.85	-21.54	AVG	P	
5	1.3110	22.43	10.07	32.50	56.00	-23.50	QP	P	
6	1.3110	11.16	10.07	21.23	46.00	-24.77	AVG	P	
7	2.3235	17.20	10.07	27.27	56.00	-28.73	QP	P	
8	2.3235	5.46	10.07	15.53	46.00	-30.47	AVG	P	
9	10.7025	13.89	10.22	24.11	60.00	-35.89	QP	P	
10	10.7025	3.54	10.22	13.76	50.00	-36.24	AVG	P	
11	24.0090	16.68	10.37	27.05	60.00	-32.95	QP	P	
12	24.0090	7.85	10.37	18.22	50.00	-31.78	AVG	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

4.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.


4.2.3 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.




4.2.4 TEST CONFIGURATION

1. For radiated emissions below 30MHz

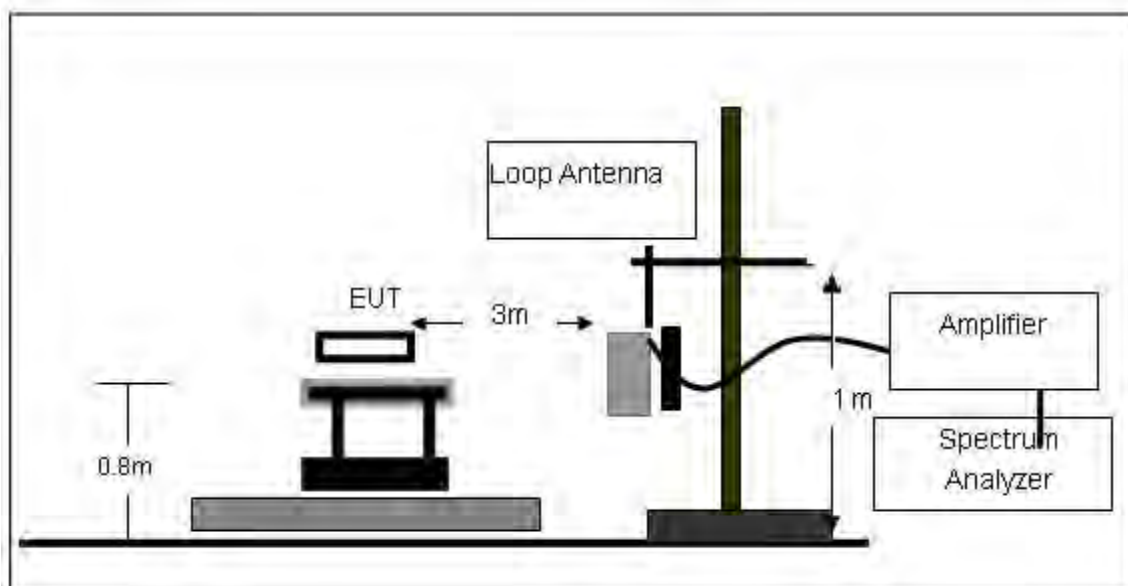


2. For radiated emissions from 30MHz to 1000MHz

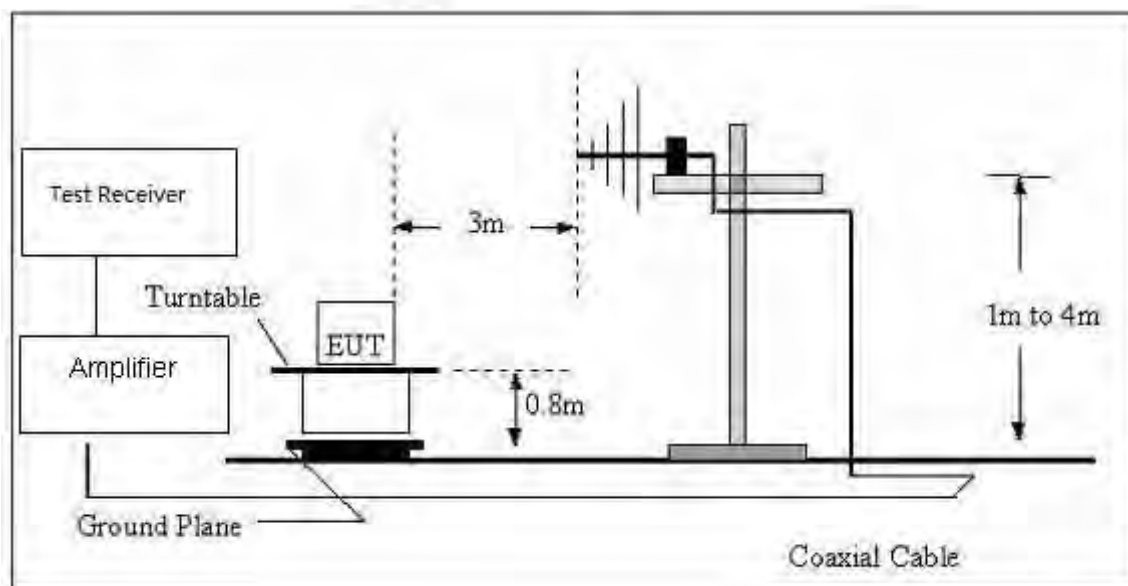



3. Radiated Emission Test-Up Frequency Above 1GHz

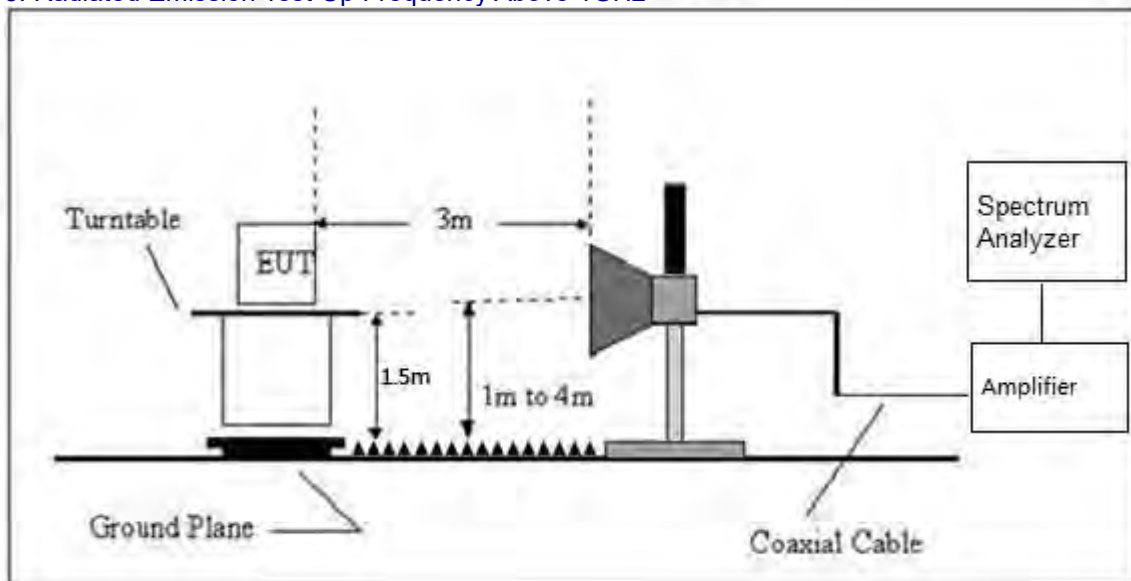

4.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.



- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

4.2.6 TEST RESULT


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

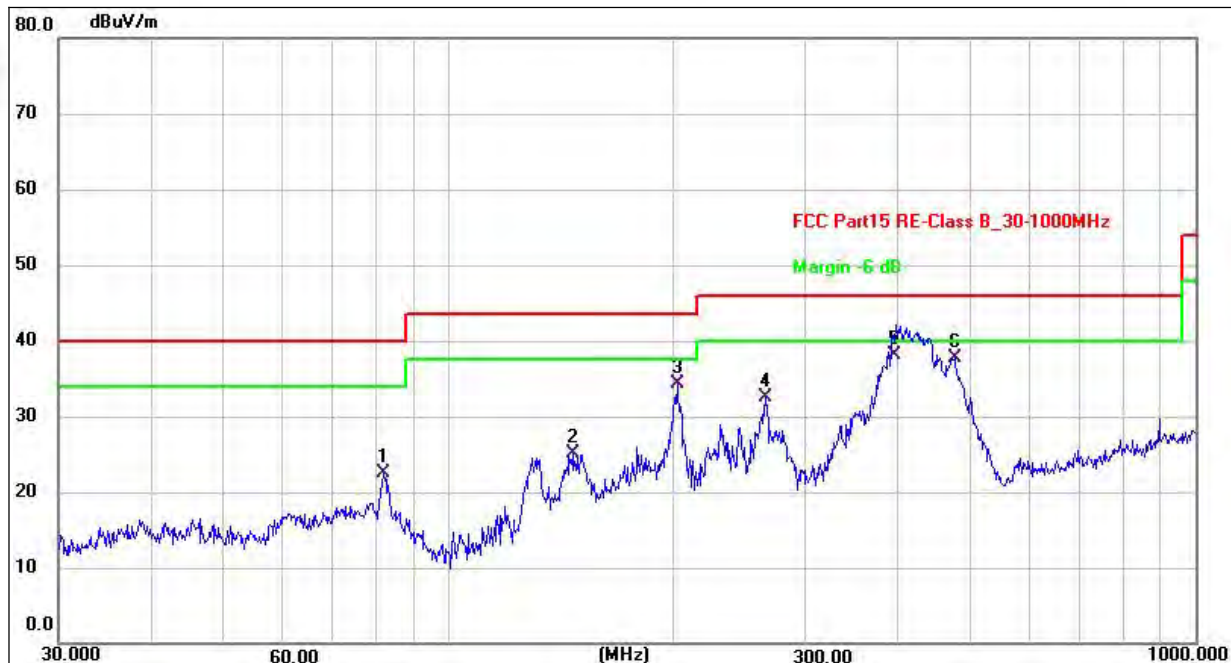

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	81.7833	35.97	-13.52	22.45	40.00	-17.55	QP	199	262	P	
2	146.3735	34.25	-9.12	25.13	43.50	-18.37	QP	199	12	P	
3	202.1005	46.42	-12.16	34.26	43.50	-9.24	QP	100	36	P	
4	265.6757	42.20	-9.60	32.60	46.00	-13.40	QP	100	56	P	
5 *	395.3215	44.30	-6.21	38.09	46.00	-7.91	QP	100	278	P	
6	475.4991	42.30	-4.58	37.72	46.00	-8.28	QP	199	352	P	



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	37.6798	35.84	-8.62	27.22	40.00	-12.78	QP	100	114	P	
2	71.5806	39.88	-11.44	28.44	40.00	-11.56	QP	100	124	P	
3	147.4036	38.35	-9.07	29.28	43.50	-14.22	QP	100	144	P	
4	204.2377	41.29	-12.08	29.21	43.50	-14.29	QP	100	328	P	
5	378.5843	46.75	-6.84	39.91	46.00	-6.09	QP	100	114	P	
6 *	475.4991	44.88	-4.58	40.30	46.00	-5.70	QP	100	11	P	

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11ac_5180MHz ANT. 1 and ANT. 2 Simultaneous emission mode



Between 1GHz – 40GHz

Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	5.2G TX- 802.11a		

Sub-band: 5180MHz~5240MHz 802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel: 5180MHz									
V	10360.00	38.65	30.45	8.77	38.66	55.63	74.00	-18.37	PK
V	10360.00	26.49	30.45	8.77	38.66	43.47	54.00	-10.53	AV
V	15540.00	38.84	30.44	9.31	38.55	56.26	74.00	-17.74	PK
V	15540.00	27.32	30.44	9.31	38.55	44.74	54.00	-9.26	AV
V	20720.00	36.14	30.72	9.45	38.69	53.56	74.00	-20.44	PK
V	20720.00	27.1	30.72	9.45	38.69	44.52	54.00	-9.48	AV
V	25900.00	39.36	30.65	9.99	38.57	57.27	74.00	-16.73	PK
V	25900.00	28.27	30.65	9.99	38.57	46.18	54.00	-7.82	AV
H	10360.00	41.76	30.45	8.77	38.66	58.74	74.00	-15.26	PK
H	10360.00	30.38	30.45	8.77	38.66	47.36	54.00	-6.64	AV
H	15540.00	39.83	30.44	9.31	38.55	57.25	74.00	-16.75	PK
H	15540.00	28.84	30.44	9.31	38.55	46.26	54.00	-7.74	AV
H	20720.00	39.95	30.72	9.45	38.69	57.37	74.00	-16.63	PK
H	20720.00	30.42	30.72	9.45	38.69	47.84	54.00	-6.16	AV
H	25900.00	38.72	30.65	9.99	38.57	56.63	74.00	-17.37	PK
H	25900.00	26.55	30.65	9.99	38.57	44.46	54.00	-9.54	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5200MHz									
V	10400.00	39.55	30.45	8.77	38.66	56.53	74.00	-17.47	PK
V	10400.00	27.54	30.45	8.77	38.66	44.52	54.00	-9.48	AV
V	15600.00	40.1	30.44	9.31	38.55	57.52	74.00	-16.48	PK
V	15600.00	28.22	30.44	9.31	38.55	45.64	54.00	-8.36	AV
V	20800.00	39.56	30.72	9.45	38.69	56.98	74.00	-17.02	PK
V	20800.00	28	30.72	9.45	38.69	45.42	54.00	-8.58	AV
V	26000.00	39.51	30.65	9.99	38.57	57.42	74.00	-16.58	PK
V	26000.00	28.27	30.65	9.99	38.57	46.18	54.00	-7.82	AV
H	10400.00	39.85	30.45	8.77	38.66	56.83	74.00	-17.17	PK
H	10400.00	27.9	30.45	8.77	38.66	44.88	54.00	-9.12	AV
H	15600.00	40.1	30.44	9.31	38.55	57.52	74.00	-16.48	PK
H	15600.00	28.03	30.44	9.31	38.55	45.45	54.00	-8.55	AV
H	20800.00	36.83	30.72	9.45	38.69	54.25	74.00	-19.75	PK
H	20800.00	26.42	30.72	9.45	38.69	43.84	54.00	-10.16	AV
H	26000.00	39.34	30.65	9.99	38.57	57.25	74.00	-16.75	PK
H	26000.00	28.93	30.65	9.99	38.57	46.84	54.00	-7.16	AV



Page 2 of 6

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	10480.00	40.66	30.45	8.77	38.66	57.64	74.00	-16.36	PK
V	10480.00	28.55	30.45	8.77	38.66	45.53	54.00	-8.47	AV
V	15720.00	38.99	30.44	9.31	38.55	56.41	74.00	-17.59	PK
V	15720.00	28.11	30.44	9.31	38.55	45.53	54.00	-8.47	AV
V	20960.00	38.84	30.72	9.45	38.69	56.26	74.00	-17.74	PK
V	20960.00	26.96	30.72	9.45	38.69	44.38	54.00	-9.62	AV
V	26200.00	39.62	30.65	9.99	38.57	57.53	74.00	-16.47	PK
V	26200.00	27.96	30.65	9.99	38.57	45.87	54.00	-8.13	AV
H	10480.00	38.56	30.45	8.77	38.66	55.54	74.00	-18.46	PK
H	10480.00	27.94	30.45	8.77	38.66	44.92	54.00	-9.08	AV
H	15720.00	41.22	30.44	9.31	38.55	58.64	74.00	-15.36	PK
H	15720.00	29.11	30.44	9.31	38.55	46.53	54.00	-7.47	AV
H	20960.00	39.94	30.72	9.45	38.69	57.36	74.00	-16.64	PK
H	20960.00	28.77	30.72	9.45	38.69	46.19	54.00	-7.81	AV
H	26200.00	40.25	30.65	9.99	38.57	58.16	74.00	-15.84	PK
H	26200.00	29.42	30.65	9.99	38.57	47.33	54.00	-6.67	AV

Sub-band: 5745MHz~5825MHz 802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5745MHz									
V	11490.00	39.39	30.45	8.77	38.66	56.37	74.00	-17.63	PK
V	11490.00	28.3	30.45	8.77	38.66	45.28	54.00	-8.72	AV
V	17235.00	39.11	30.44	9.31	38.55	56.53	74.00	-17.47	PK
V	17235.00	27.24	30.44	9.31	38.55	44.66	54.00	-9.34	AV
V	22980.00	38.11	30.72	9.45	38.69	55.53	74.00	-18.47	PK
V	22980.00	26.86	30.72	9.45	38.69	44.28	54.00	-9.72	AV
V	28725.00	37.38	30.65	9.99	38.57	55.29	74.00	-18.71	PK
V	28725.00	26.35	30.65	9.99	38.57	44.26	54.00	-9.74	AV
H	11490.00	38.27	30.45	8.77	38.66	55.25	74.00	-18.75	PK
H	11490.00	27.56	30.45	8.77	38.66	44.54	54.00	-9.46	AV
H	17235.00	39.21	30.44	9.31	38.55	56.63	74.00	-17.37	PK
H	17235.00	26.84	30.44	9.31	38.55	44.26	54.00	-9.74	AV
H	22980.00	37.91	30.72	9.45	38.69	55.33	74.00	-18.67	PK
H	22980.00	26.87	30.72	9.45	38.69	44.29	54.00	-9.71	AV
H	28725.00	37.47	30.65	9.99	38.57	55.38	74.00	-18.62	PK
H	28725.00	26.5	30.65	9.99	38.57	44.41	54.00	-9.59	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	39.4	30.45	8.77	38.66	56.38	74.00	-17.62	PK
V	11570.00	26.31	30.45	8.77	38.66	43.29	54.00	-10.71	AV
V	17335.00	37.96	30.44	9.31	38.55	55.38	74.00	-18.62	PK
V	17335.00	26.86	30.44	9.31	38.55	44.28	54.00	-9.72	AV
V	23140.00	38.96	30.72	9.45	38.69	56.38	74.00	-17.62	PK
V	23140.00	29.2	30.72	9.45	38.69	46.62	54.00	-7.38	AV
V	28925.00	39.46	30.65	9.99	38.57	57.37	74.00	-16.63	PK
V	28925.00	26.82	30.65	9.99	38.57	44.73	54.00	-9.27	AV
H	11570.00	37.77	30.45	8.77	38.66	54.75	74.00	-19.25	PK
H	11570.00	29.74	30.45	8.77	38.66	46.72	54.00	-7.28	AV
H	17335.00	39.36	30.44	9.31	38.55	56.78	74.00	-17.22	PK
H	17335.00	27.53	30.44	9.31	38.55	44.95	54.00	-9.05	AV
H	23140.00	40.32	30.72	9.45	38.69	57.74	74.00	-16.26	PK
H	23140.00	29.31	30.72	9.45	38.69	46.73	54.00	-7.27	AV
H	28925.00	38.72	30.65	9.99	38.57	56.63	74.00	-17.37	PK
H	28925.00	26.84	30.65	9.99	38.57	44.75	54.00	-9.25	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5825MHz									
V	11650.00	40.27	30.45	8.77	38.66	57.25	74.00	-16.75	PK
V	11650.00	27.55	30.45	8.77	38.66	44.53	54.00	-9.47	AV
V	17475.00	39.11	30.44	9.31	38.55	56.53	74.00	-17.47	PK
V	17475.00	29.11	30.44	9.31	38.55	46.53	54.00	-7.47	AV
V	23300.00	40.11	30.72	9.45	38.69	57.53	74.00	-16.47	PK
V	23300.00	29.03	30.72	9.45	38.69	46.45	54.00	-7.55	AV
V	29125.00	39.64	30.65	9.99	38.57	57.55	74.00	-16.45	PK
V	29125.00	27.52	30.65	9.99	38.57	45.43	54.00	-8.57	AV
H	11650.00	39.45	30.45	8.77	38.66	56.43	74.00	-17.57	PK
H	11650.00	28.45	30.45	8.77	38.66	45.43	54.00	-8.57	AV
H	17475.00	39.83	30.44	9.31	38.55	57.25	74.00	-16.75	PK
H	17475.00	27.92	30.44	9.31	38.55	45.34	54.00	-8.66	AV
H	23300.00	38	30.72	9.45	38.69	55.42	74.00	-18.58	PK
H	23300.00	25.91	30.72	9.45	38.69	43.33	54.00	-10.67	AV
H	29125.00	38.38	30.65	9.99	38.57	56.29	74.00	-17.71	PK
H	29125.00	26.28	30.65	9.99	38.57	44.19	54.00	-9.81	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The worst mode is 802.11a, only the worst data is recorded.
5. The test data shows ANT. 1 and ANT. 2 Simultaneous emission mode



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(3)

Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



5.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 12V
Test Mode :	TX		

Sub-band(5.2GHz): 5150-5250MHz

Mode	Frequency	ANT. 1 PSD (dBm/MHz)	ANT. 2 PSD (dBm/MHz)	Total PSD (dBm/MHz)	Limit (dBm/MHz)
802.11 a	5180 MHz	-15.79	-15.83	-12.8	11
	5200 MHz	-15.19	-15.65	-12.4	11
	5240 MHz	-15.05	-17.22	-12.99	11
802.11 ac20	5180 MHz	-15.89	-15.07	-12.45	11
	5200 MHz	-18.32	-16.07	-14.04	11
	5240 MHz	-14.89	-16.74	-12.71	11
802.11 n20	5180 MHz	-8.38	-7.37	-4.84	11
	5200 MHz	-10.07	-10.57	-7.3	11
	5240 MHz	-8.72	-9.84	-6.23	11
802.11 n40	5190 MHz	-22.38	-24.31	-20.23	11
	5230 MHz	-24.13	-23.91	-21.01	11
802.11 ac40	5190 MHz	-22.51	-23.39	-19.92	11
	5230 MHz	-21.67	-21.84	-18.74	11
802.11 ac80	5210 MHz	-28.36	-29.79	-26.01	11

Sub-band(5.8GHz): 5725-5850MHz

Mode	Frequency	ANT. 1 PSD (dBm/500kHz)	ANT. 2 PSD (dBm/500kHz)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)
802.11 a	5745 MHz	-17.34	-17.81	-14.56	30
	5785 MHz	-17.76	-17.31	-14.52	30
	5825 MHz	-17.71	-18.02	-14.85	30
802.11 ac20	5745 MHz	-20.13	-16.77	-15.12	30
	5785 MHz	-18.73	-20.66	-16.58	30
	5825 MHz	-20.84	-20.5	-17.66	30
802.11 n20	5745 MHz	-12.52	-12.77	-9.63	30
	5785 MHz	-12.35	-11.81	-9.06	30
	5825 MHz	-12.62	-10.39	-8.35	30
802.11 n40	5755 MHz	-25.48	-26.31	-22.86	30
	5795 MHz	-27.59	-24.65	-22.87	30
802.11 ac40	5755 MHz	-28.49	-26.48	-24.36	30
	5795 MHz	-24.34	-26.51	-22.28	30
802.11 ac80	5775 MHz	-30.32	-31.05	-27.66	30



5.2GHz Power Spectrum Density

802.11a on channel 36 ANT. 1



802.11a on channel 36 ANT. 2



802.11a on channel 40 ANT. 1



802.11a on channel 40 ANT. 2



802.11a on channel 48 ANT. 1



802.11a on channel 48 ANT. 2





802.11ac20 on channel 36 ANT. 1



802.11ac20 on channel 36 ANT. 2



802.11ac20 on channel 40 ANT. 1



802.11ac20 on channel 40 ANT. 2



802.11ac20 on channel 48 ANT. 1



802.11ac20 on channel 48 ANT. 2





802.11n20 on channel 36 ANT. 1



802.11n20 on channel 36 ANT. 2



802.11n20 on channel 40 ANT. 1



802.11n20 on channel 40 ANT. 2



802.11n20 on channel 48 ANT. 1



802.11n20 on channel 48 ANT. 2





802.11n40 on channel 38 ANT. 1



802.11n40 on channel 38 ANT. 2



802.11n40 on channel 46 ANT. 1



802.11n40 on channel 46 ANT. 2





802.11ac40 on channel 38 ANT. 1



802.11ac40 on channel 38 ANT. 2




802.11ac40 on channel 46 ANT. 1



802.11ac40 on channel 46 ANT. 2



802.11ac80 on channel 42 ANT. 1

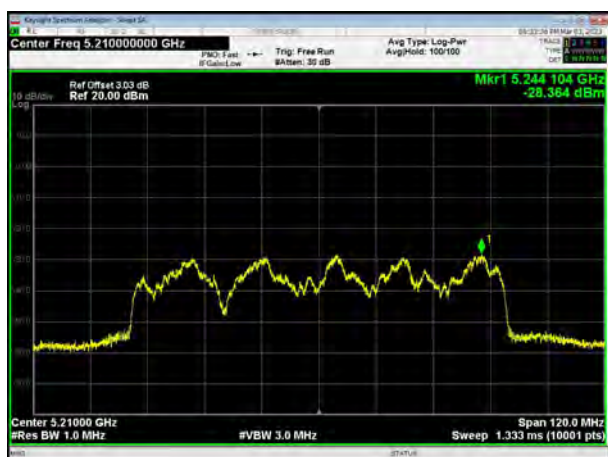

802.11ac80 on channel 42 ANT. 2





5.8GHz Power Spectrum Density

802.11a on channel 149 ANT. 1



802.11a on channel 149 ANT. 2



802.11a on channel 157 ANT. 1



802.11a on channel 157 ANT. 2



802.11a on channel 165 ANT. 1



802.11a on channel 165 ANT. 2





802.11ac20 on channel 149 ANT. 1



802.11ac20 on channel 149 ANT. 2



802.11ac20 on channel 157 ANT. 1



802.11ac20 on channel 157 ANT. 2



802.11ac20 on channel 165 ANT. 1



802.11ac20 on channel 165 ANT. 2





802.11n20 on channel 149 ANT. 1



802.11n20 on channel 149 ANT. 2



802.11n20 on channel 157 ANT. 1



802.11n20 on channel 157 ANT. 2



802.11n20 on channel 165 ANT. 1



802.11n20 on channel 165 ANT. 2





802.11n40 on channel 151 ANT. 1



802.11n40 on channel 151 ANT. 2



802.11n40 on channel 159 ANT. 1



802.11n40 on channel 159 ANT. 2





802.11ac40 on channel 151 ANT. 1



802.11ac40 on channel 151 ANT. 2



802.11ac40 on channel 159 ANT. 1



802.11ac40 on channel 159 ANT. 2



802.11ac80 on channel 155 ANT. 1



802.11ac80 on channel 155 ANT. 2





6. 26DB & 6DB & 99% EMISSION BANDWIDTH

6.1 APPLIED PROCEDURES / LIMIT

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

6.2 TEST PROCEDURE

- Set RBW = 100KHz.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The following procedure shall be used for measuring (99 %) power bandwidth:

- Set center frequency to the nominal EUT channel center frequency.
- Set span = 1.5 times to 5.0 times the OBW.
- Set RBW = 1 % to 5 % of the OBW
- Set VBW $\geq 3 \cdot$ RBW
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- Use the 99 % power bandwidth function of the instrument (if available).
- If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.



6.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



6.4 TEST RESULTS

Temperature :	26 ℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX		

Sub-band(5.2GHz): 5150-5250MHz

Mode	Frequency	-26dB Bandwidth		99% Bandwidth		Limit (kHz)
		ANT. 1 (MHz)	ANT. 2 (MHz)	ANT. 1 (MHz)	ANT. 2 (MHz)	
802.11 a	5180 MHz	21.564	21.385	16.689	16.631	500
	5200 MHz	21.369	20.88	16.711	16.637	500
	5240 MHz	21.018	20.66	16.686	16.634	500
802.11 ac20	5180 MHz	22.093	22.733	17.860	17.867	500
	5200 MHz	22.509	22.689	17.904	17.853	500
	5240 MHz	22.632	22.11	17.892	17.877	500
802.11 n20	5180 MHz	22.444	22.738	17.770	17.750	500
	5200 MHz	22.408	23.259	17.776	17.779	500
	5240 MHz	22.158	23.469	17.775	17.768	500
802.11 n40	5190 MHz	43.134	42.461	36.349	36.376	500
	5230 MHz	41.861	41.569	36.297	36.310	500
802.11 ac40	5190 MHz	42.66	42.299	36.301	36.295	500
	5230 MHz	41.88	42.686	36.344	36.282	500
802.11 ac80	5210 MHz	85.028	84.565	75.966	75.933	500

Sub-band(5.8GH): 5725-5850MHz

Mode	Frequency	-6dB Bandwidth		99% Bandwidth		Limit (kHz)
		ANT. 1 (MHz)	ANT. 2 (MHz)	ANT. 1 (MHz)	ANT. 2 (MHz)	
802.11 a	5745 MHz	16.486	16.448	16.526	16.504	500
	5785 MHz	16.483	16.431	16.499	16.51	500
	5825 MHz	16.45	16.416	16.503	16.485	500
802.11 ac20	5745 MHz	17.7	17.654	17.74	17.711	500
	5785 MHz	17.683	17.711	17.721	17.719	500
	5825 MHz	17.683	17.652	17.728	17.705	500
802.11 n20	5745 MHz	15.735	15.58	17.654	17.682	500
	5785 MHz	15.638	15.421	17.657	17.672	500
	5825 MHz	15.08	15.401	17.628	17.626	500
802.11 n40	5755 MHz	36.379	36.34	36.44	36.433	500
	5795 MHz	36.364	36.348	36.379	36.398	500
802.11 ac40	5755 MHz	36.354	36.382	36.458	36.398	500
	5795 MHz	36.375	36.322	36.384	36.31	500
802.11 ac80	5775 MHz	76.37	76.344	76.152	76.167	500



5.2GHz Bandwidth

802.11a on channel 36 ANT. 1



802.11a on channel 36 ANT. 2



802.11a on channel 40 ANT. 1



802.11a on channel 40 ANT. 2



802.11a on channel 48 ANT. 1



802.11a on channel 48 ANT. 2





802.11ac20 on channel 36 ANT. 1



802.11ac20 on channel 36 ANT. 2



802.11ac20 on channel 40 ANT. 1



802.11ac20 on channel 40 ANT. 2



802.11ac20 on channel 48 ANT. 1



802.11ac20 on channel 48 ANT. 2





802.11n20 on channel 36 ANT. 1



802.11n20 on channel 36 ANT. 2



802.11n20 on channel 40 ANT. 1



802.11n20 on channel 40 ANT. 2



802.11n20 on channel 48 ANT. 1



802.11n20 on channel 48 ANT. 2





802.11n40 on channel 38 ANT. 1



802.11n40 on channel 38 ANT. 2



802.11n40 on channel 46 ANT. 1



802.11n40 on channel 46 ANT. 2





802.11ac40 on channel 38 ANT. 1



802.11ac40 on channel 38 ANT. 2



802.11ac40 on channel 46 ANT. 1



802.11ac40 on channel 46 ANT. 2



802.11ac80 on channel 42 ANT. 1



802.11ac80 on channel 42 ANT. 2





5.8GHz 99% Bandwidth

802.11a on channel 149 ANT. 1




802.11a on channel 149 ANT. 2




802.11a on channel 157 ANT. 1



802.11a on channel 157 ANT. 2

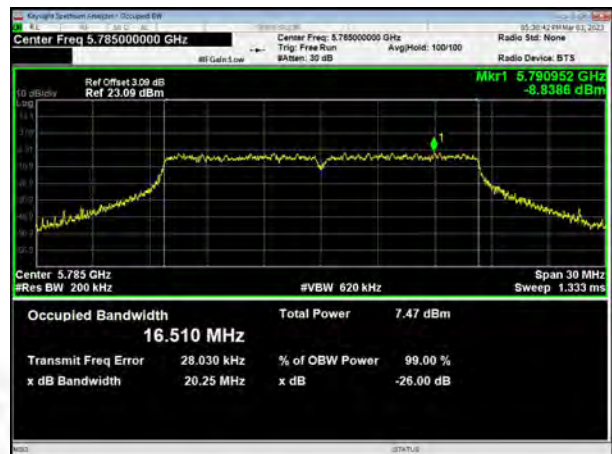

802.11a on channel 165 ANT. 1

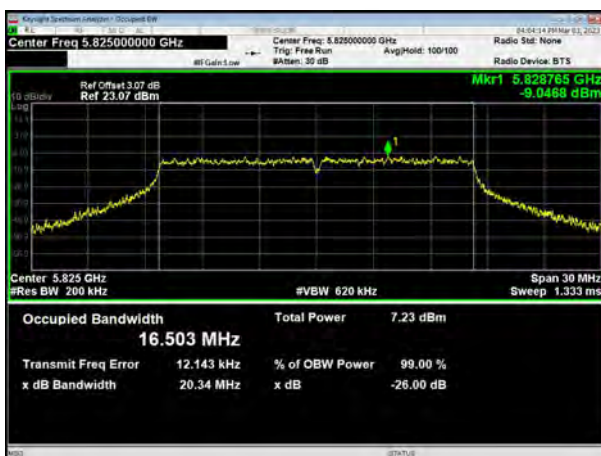


802.11a on channel 165 ANT. 2






802.11ac20 on channel 149 ANT. 1

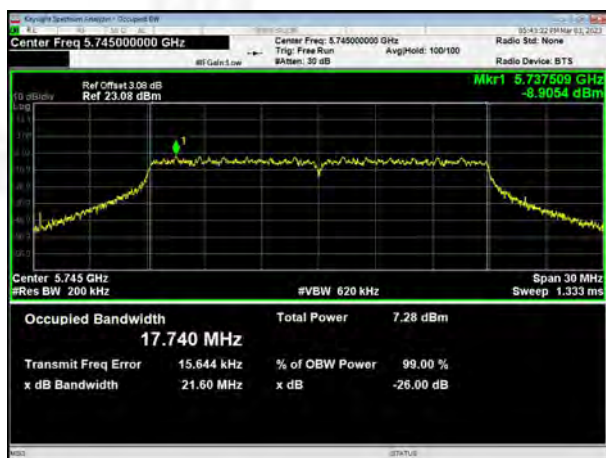

802.11ac20 on channel 149 ANT. 2




802.11ac20 on channel 157 ANT. 1

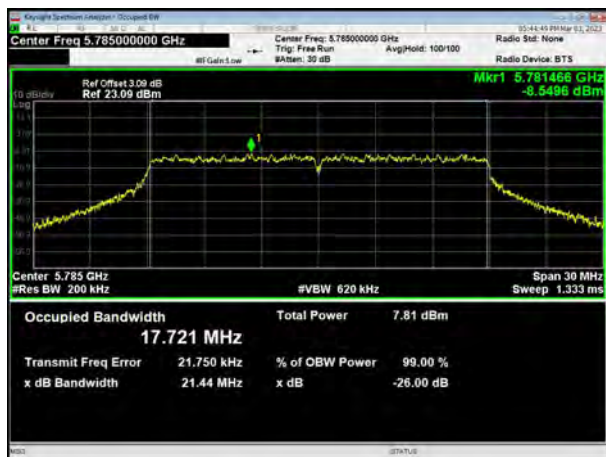

802.11ac20 on channel 157 ANT. 2



802.11ac20 on channel 165 ANT. 1

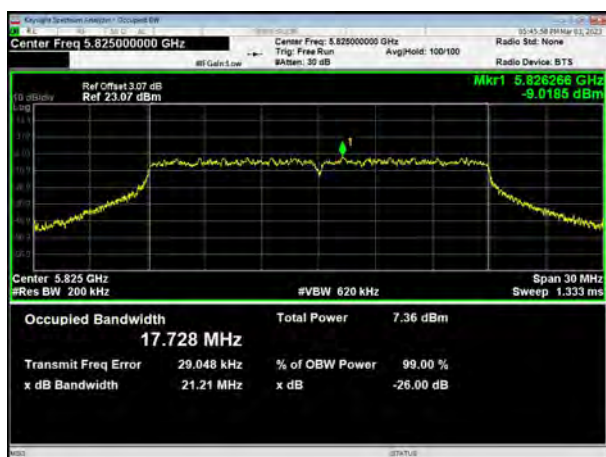


802.11ac20 on channel 165 ANT. 2







802.11n20 on channel 149 ANT. 1

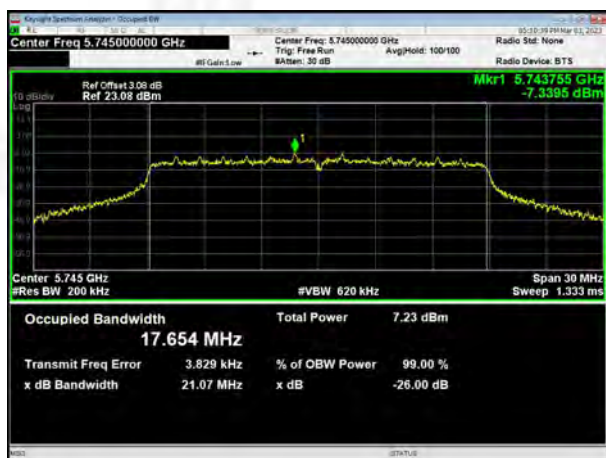

802.11n20 on channel 149 ANT. 2

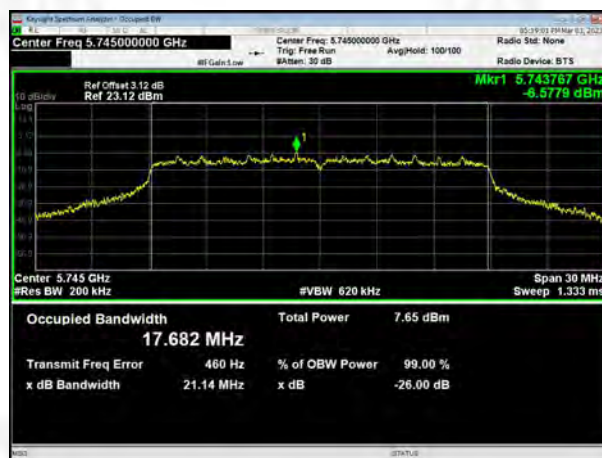

802.11n20 on channel 157 ANT. 1

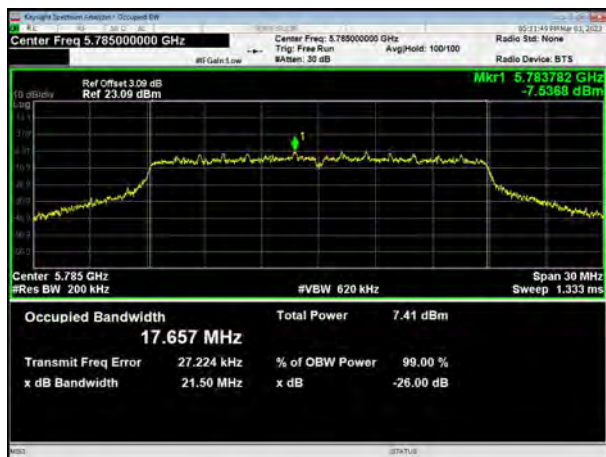

802.11n20 on channel 157 ANT. 2



802.11n20 on channel 165 ANT. 1



802.11n20 on channel 165 ANT. 2





802.11n40 on channel 151 ANT. 1



802.11n40 on channel 151 ANT. 2



802.11n40 on channel 159 ANT. 1



802.11n40 on channel 159 ANT. 2






802.11ac40 on channel 151 ANT. 1



802.11ac40 on channel 151 ANT. 2



802.11ac40 on channel 159 ANT. 1

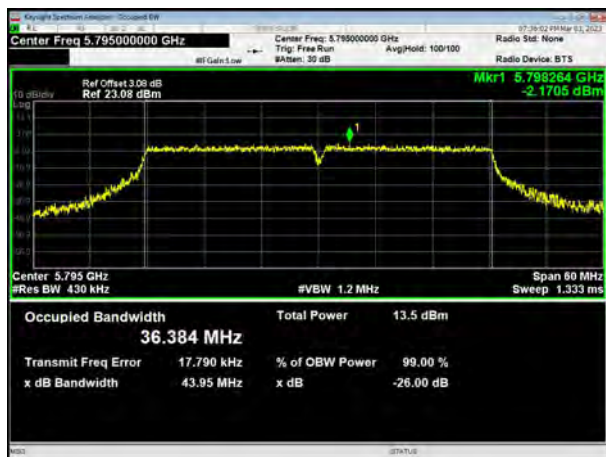

802.11ac40 on channel 159 ANT. 2



802.11ac80 on channel 155 ANT. 1



802.11ac80 on channel 155 ANT. 2





5.8GHz -6 dB Bandwidth


802.11a on channel 149 ANT. 1



802.11a on channel 149 ANT. 2



802.11a on channel 157 ANT. 1

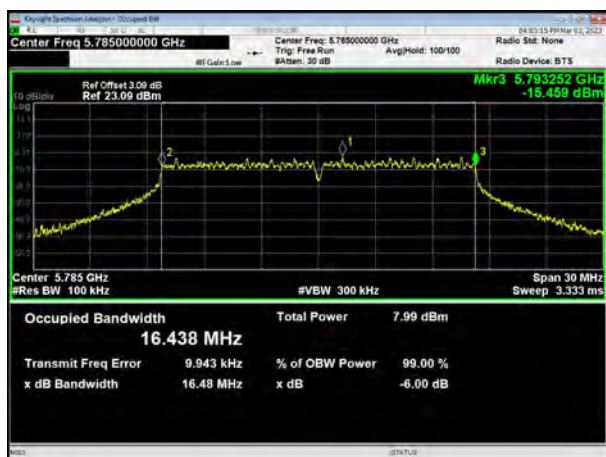

802.11a on channel 157 ANT. 2



802.11a on channel 165 ANT. 1



802.11a on channel 165 ANT. 2





802.11ac20 on channel 149 ANT. 1



802.11ac20 on channel 149 ANT. 2



802.11ac20 on channel 157 ANT. 1



802.11ac20 on channel 157 ANT. 2



802.11ac20 on channel 165 ANT. 1



802.11ac20 on channel 165 ANT. 2





802.11n20 on channel 149 ANT. 1



802.11n20 on channel 149 ANT. 2



802.11n20 on channel 157 ANT. 1



802.11n20 on channel 157 ANT. 2



802.11n20 on channel 165 ANT. 1



802.11n20 on channel 165 ANT. 2





802.11n40 on channel 151 ANT. 1



802.11n40 on channel 151 ANT. 2



802.11n40 on channel 159 ANT. 1



802.11n40 on channel 159 ANT. 2





802.11ac40 on channel 151 ANT. 1



802.11ac40 on channel 151 ANT. 2



802.11ac40 on channel 159 ANT. 1



802.11ac40 on channel 159 ANT. 2



802.11ac80 on channel 155 ANT. 1



802.11ac80 on channel 155 ANT. 2





7. MAXIMUM CONDUCTED OUTPUT POWER

7.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

7.2 TEST PROCEDURE

The EUT was directly connected to the Power meter

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.



(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULTS

Temperature :	26 ℃	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 12V
Test Mode :	TX		

Sub-band(5.2GHz): 5150-5250MHz

Mode	Frequency	ANT. 1 Power (dBm)	ANT. 2 Power (dBm)	Total Power (dBm)	Limit (dBm/MHz)
802.11 a	5180 MHz	6.17	6.54	9.37	23.98
	5200 MHz	5.62	5.69	8.67	23.98
	5240 MHz	5.03	5.58	8.32	23.98
802.11 ac20	5180 MHz	5.9	6.26	9.09	23.98
	5200 MHz	5.57	5.59	8.59	23.98
	5240 MHz	4.6	5.28	7.96	23.98
802.11 n20	5180 MHz	6.95	7.04	10.01	23.98
	5200 MHz	6.58	6.2	9.4	23.98
	5240 MHz	6.05	6.21	9.14	23.98
802.11 n40	5190 MHz	5.34	5.6	8.48	23.98
	5230 MHz	4.78	5.42	8.12	23.98
802.11 ac40	5190 MHz	5.36	5.61	8.5	23.98
	5230 MHz	4.95	5.4	8.19	23.98
802.11 ac80	5210 MHz	4.63	4.67	7.66	23.98

Sub-band(5.8GHz): 5725-5850MHz

Mode	Frequency	ANT. 1 Power (dBm)	ANT. 2 Power (dBm)	Total Power (dBm)	Limit (dBm/MHz)
802.11 a	5745 MHz	5.83	5.55	8.7	30
	5785 MHz	5.75	5.2	8.49	30
	5825 MHz	5.35	5.53	8.45	30
802.11 ac20	5745 MHz	5.31	5.27	8.3	30
	5785 MHz	5.4	4.82	8.13	30
	5825 MHz	5.04	5.35	8.21	30
802.11 n20	5745 MHz	6.38	6.16	9.28	30
	5785 MHz	6.36	5.85	9.12	30
	5825 MHz	6.16	6.26	9.22	30
802.11 n40	5755 MHz	5.08	4.9	8	30
	5795 MHz	5.09	4.57	7.85	30
802.11 ac40	5755 MHz	4.92	5.16	8.05	30
	5795 MHz	5.1	4.69	7.91	30
802.11 ac80	5775 MHz	4.61	4.16	7.4	30



8.OUT OF BAND EMISSIONS

8.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

8.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP





8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 12V

Sub-band(5.2GHz): 5150-5250MHz

Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
11a	5180	ANT. 1	-44.41	-27	Pass
11a	5240	ANT. 1	-45.99	-27	Pass
11a	5180	ANT. 2	-45.52	-27	Pass
11a	5240	ANT. 2	-45.66	-27	Pass
11ac20	5180	ANT. 1	-42.69	-27	Pass
11ac20	5240	ANT. 1	-45.76	-27	Pass
11ac20	5180	ANT. 2	-43.68	-27	Pass
11ac20	5240	ANT. 2	-45.68	-27	Pass
11n20	5180	ANT. 1	-43.33	-27	Pass
11n20	5240	ANT. 1	-46.53	-27	Pass
11n20	5180	ANT. 2	-41.2	-27	Pass
11n20	5240	ANT. 2	-45.91	-27	Pass
11n40	5190	ANT. 1	-40.07	-27	Pass
11n40	5230	ANT. 1	-46.02	-27	Pass
11n40	5190	ANT. 2	-40.66	-27	Pass
11n40	5230	ANT. 2	-46.15	-27	Pass
11ac40	5190	ANT. 1	-40.98	-27	Pass
11ac40	5230	ANT. 1	-46.13	-27	Pass
11ac40	5190	ANT. 2	-38.22	-27	Pass
11ac40	5230	ANT. 2	-46.42	-27	Pass




Sub-band(5.8GHz): 5725-5850MHz

Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
11a	5745	ANT. 1	-43.62	-17	Pass
11a	5825	ANT. 1	-45.51	-17	Pass
11a	5745	ANT. 2	-41.93	-17	Pass
11a	5825	ANT. 2	-45.06	-17	Pass
11ac20	5745	ANT. 1	-42.11	-17	Pass
11ac20	5825	ANT. 1	-43.53	-17	Pass
11ac20	5745	ANT. 2	-42.57	-17	Pass
11ac20	5825	ANT. 2	-39.04	-17	Pass
11n20	5745	ANT. 1	-40.33	-17	Pass
11n20	5825	ANT. 1	-45.39	-17	Pass
11n20	5745	ANT. 2	-43.35	-17	Pass
11n20	5825	ANT. 2	-38.84	-17	Pass
11n40	5755	ANT. 1	-35.43	-17	Pass
11n40	5795	ANT. 1	-44.01	-17	Pass
11n40	5755	ANT. 2	-37.08	-17	Pass
11n40	5795	ANT. 2	-42.81	-17	Pass
11ac40	5755	ANT. 1	-36.64	-17	Pass
11ac40	5795	ANT. 1	-40.51	-17	Pass
11ac40	5755	ANT. 2	-38.88	-17	Pass
11ac40	5795	ANT. 2	-40.74	-17	Pass




5.2GHz Band Edge


802.11a Left Side, ANT. 1

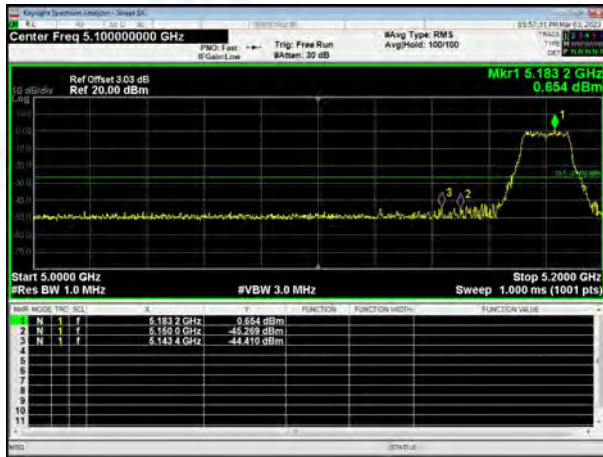


802.11a Right Side, ANT. 1

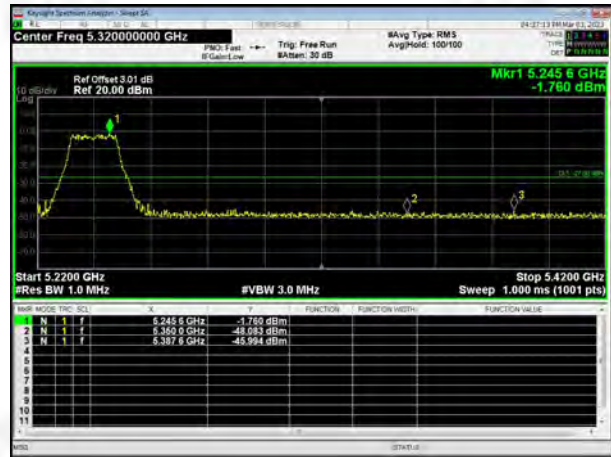


802.11a Left Side, ANT. 2

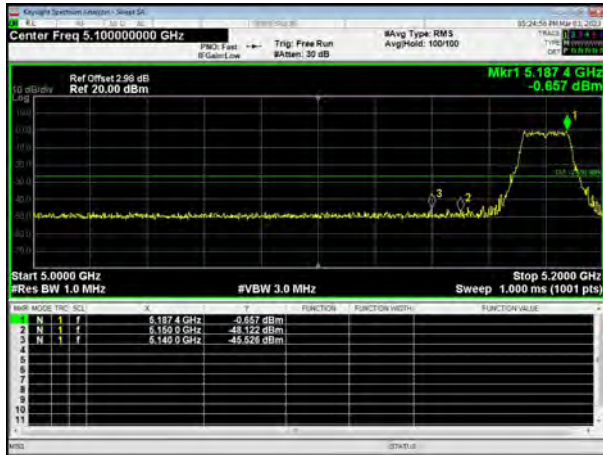


802.11a Right Side, ANT. 2

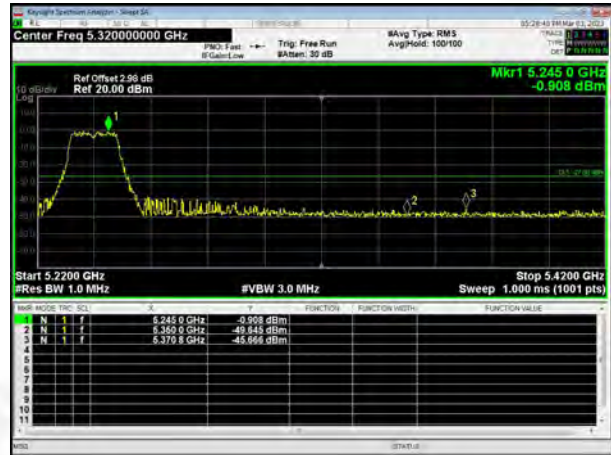

802.11ac20 Left Side, ANT. 1

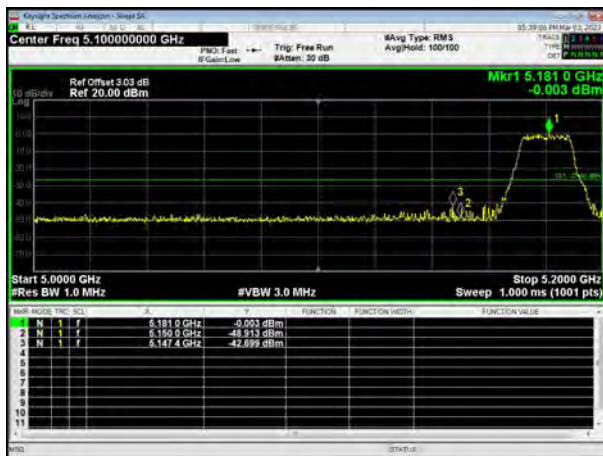


802.11ac20 Right Side, ANT. 1

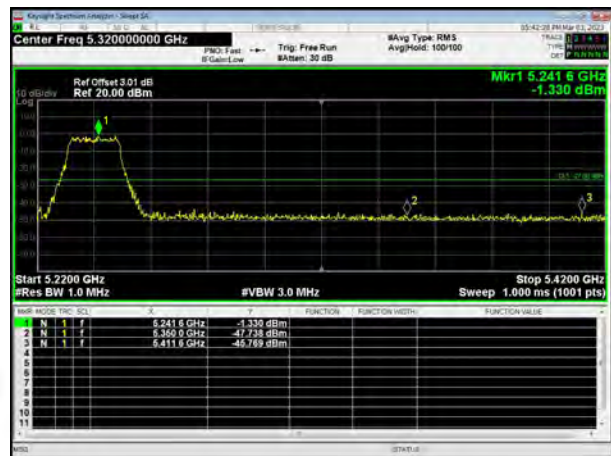





802.11ac20 Right Side, ANT. 2

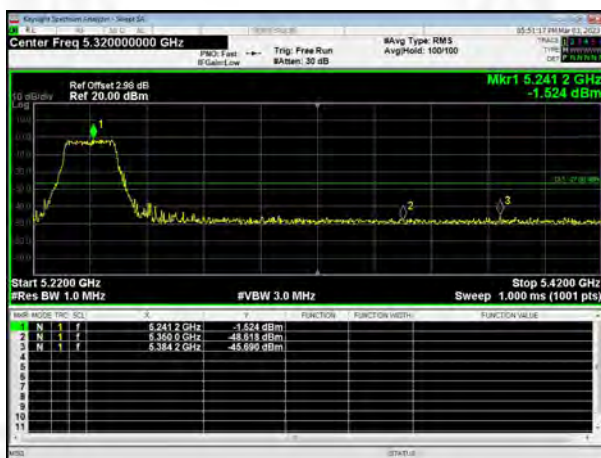

802.11n20 Right Side, ANT. 1

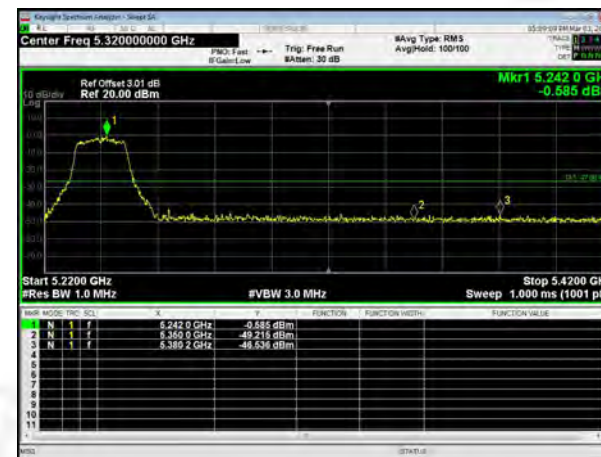


802.11n20 Right Side, ANT. 2

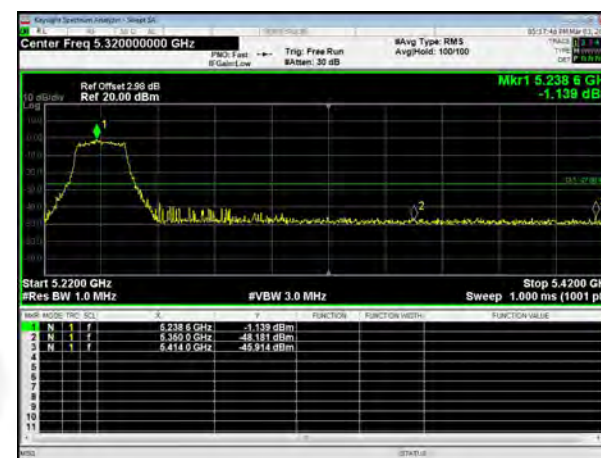





802.11n40 Left Side, ANT. 1

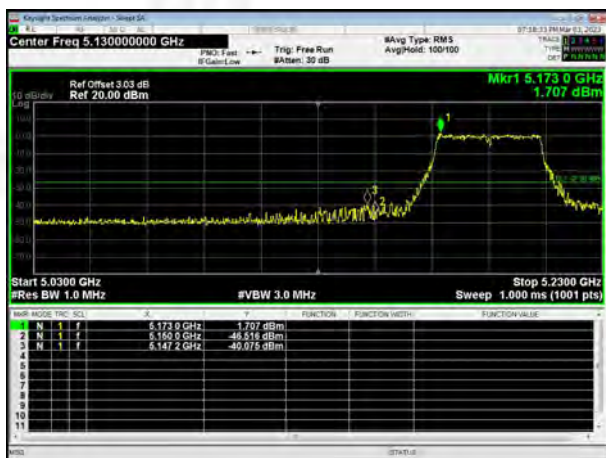


802.11n40 Right Side, ANT. 1

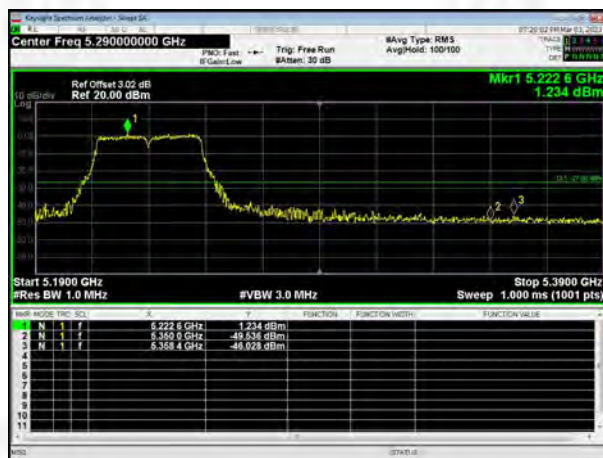


802.11n40 Left Side, ANT. 2

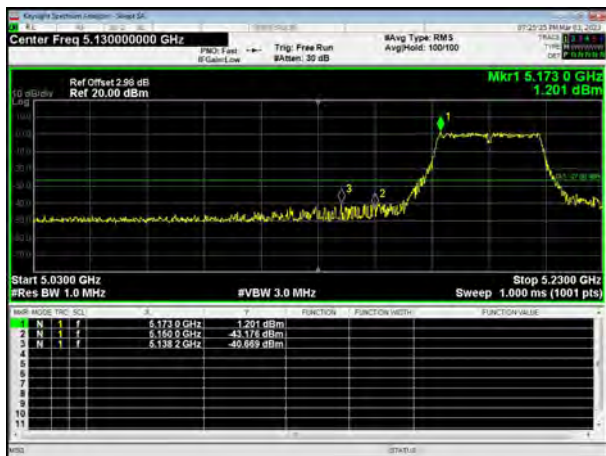

802.11n40 Right Side, ANT. 2

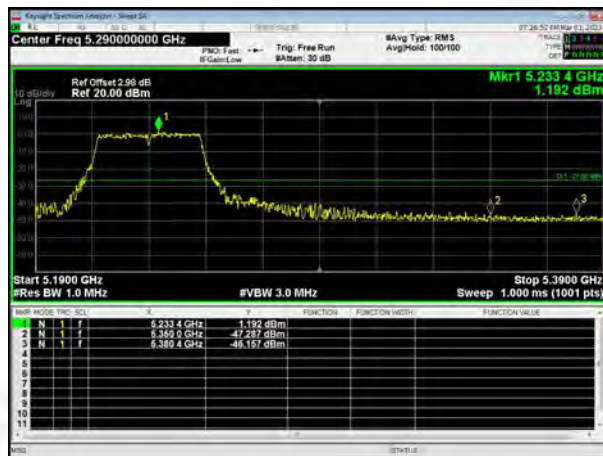

802.11ac40 Left Side, ANT. 1

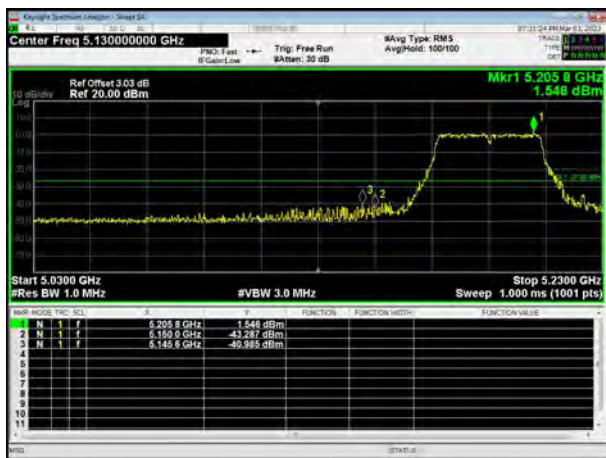


802.11ac40 Right Side, ANT. 1





802.11ac40 Left Side, ANT. 2

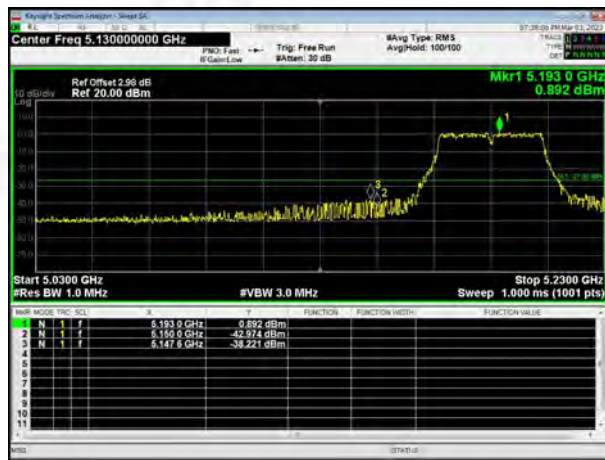

802.11ac40 Right Side, ANT. 2






5.8GHz Band Edge


802.11a Left Side, ANT. 1



802.11a Right Side, ANT. 1

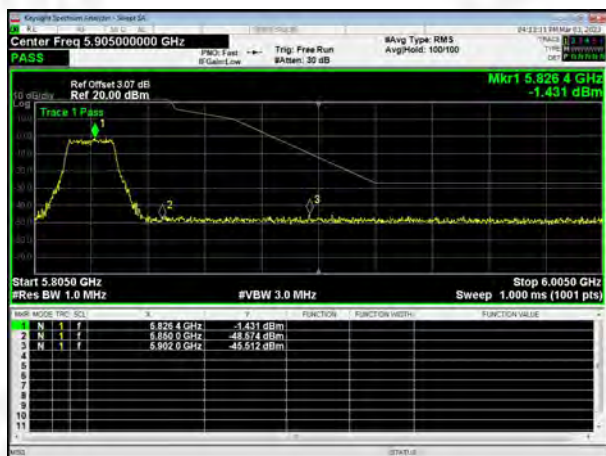


802.11a Left Side, ANT. 2

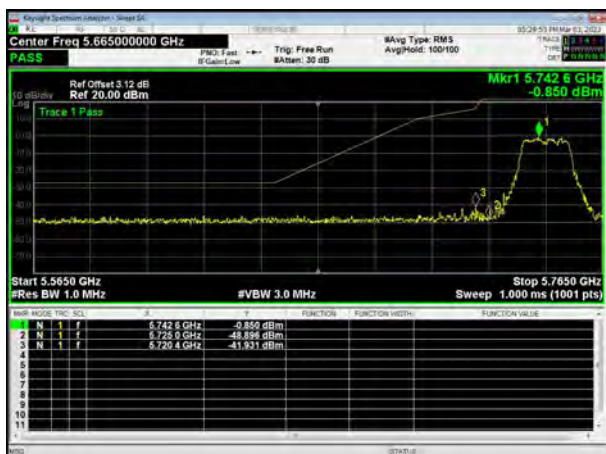


802.11a Right Side, ANT. 2



802.11ac20 Left Side, ANT. 1

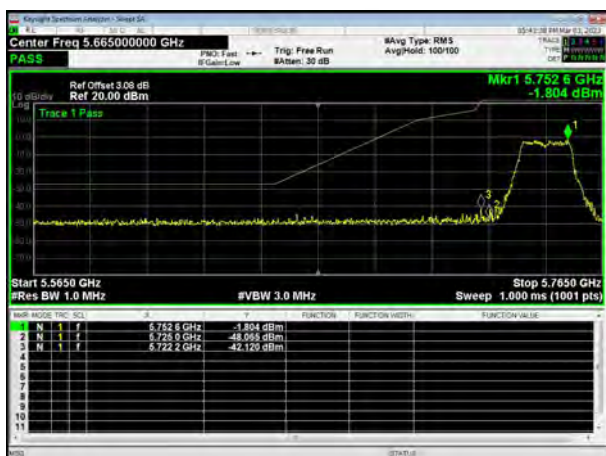

802.11ac20 Right Side, ANT. 1

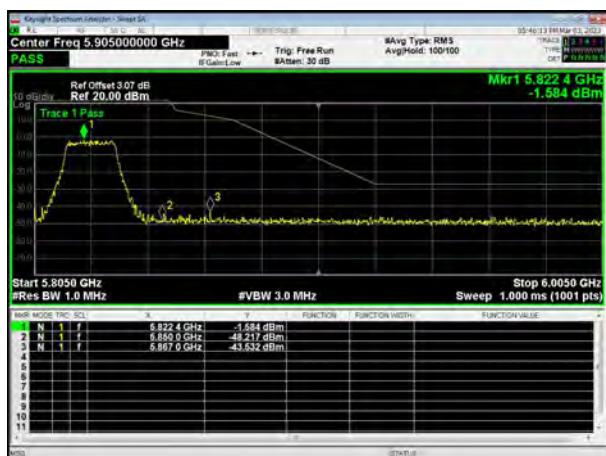




802.11ac20 Right Side, ANT. 2



802.11n20 Right Side, ANT. 1



802.11n20 Right Side, ANT. 2

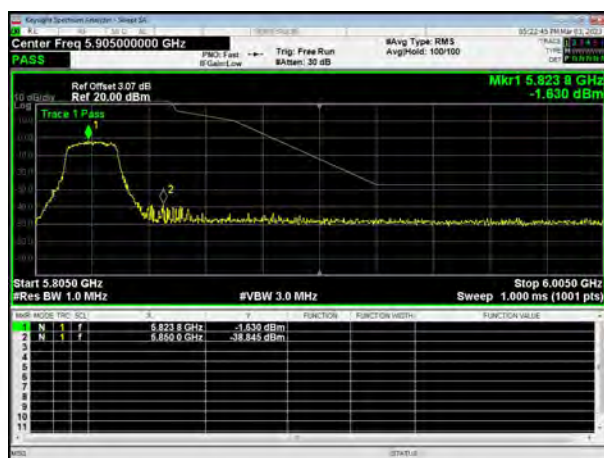



802.11n40 Left Side, ANT. 1



802.11n40 Right Side, ANT. 1



802.11n40 Left Side, ANT. 2



802.11n40 Right Side, ANT. 2



802.11ac40 Left Side, ANT. 1



802.11ac40 Right Side, ANT. 1





802.11ac40 Left Side, ANT. 2



802.11ac40 Right Side, ANT. 2





9.SPURIOUS RF CONDUCTED EMISSIONS

9.1 CONFORMANCE LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

9.2 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.

9.3 TEST SETUP



9.4 TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 30MHz to 26.5GHz.

9.5 TEST RESULTS

Remark: The measurement frequency range is from 30MHz to the 5th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.



Sub-band(5.2GHz): 5150-5250MHz

Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
11a	5180	Ant1	-34.53	-27	Pass
11a	5200	Ant1	-33.19	-27	Pass
11a	5240	Ant1	-33.59	-27	Pass
11a	5180	Ant2	-34.46	-27	Pass
11a	5200	Ant2	-33.97	-27	Pass
11a	5240	Ant2	-34.22	-27	Pass
11ac20	5180	Ant1	-34.27	-27	Pass
11ac20	5200	Ant1	-34.21	-27	Pass
11ac20	5240	Ant1	-34.21	-27	Pass
11ac20	5180	Ant2	-33.35	-27	Pass
11ac20	5200	Ant2	-33.39	-27	Pass
11ac20	5240	Ant2	-33.76	-27	Pass
11n20	5180	Ant1	-33.9	-27	Pass
11n20	5200	Ant1	-34.14	-27	Pass
11n20	5240	Ant1	-34.12	-27	Pass
11n20	5180	Ant2	-34.44	-27	Pass
11n20	5200	Ant2	-34.26	-27	Pass
11n20	5240	Ant2	-34.61	-27	Pass
11n40	5190	Ant1	-34.54	-27	Pass
11n40	5230	Ant1	-34.22	-27	Pass
11n40	5190	Ant2	-34.39	-27	Pass
11n40	5230	Ant2	-34.46	-27	Pass
11ac40	5190	Ant1	-33.54	-27	Pass
11ac40	5230	Ant1	-34	-27	Pass
11ac40	5190	Ant2	-34.28	-27	Pass
11ac40	5230	Ant2	-33.33	-27	Pass
11ac80	5210	Ant1	-33.34	-27	Pass
11ac80	5210	Ant2	-33.65	-27	Pass




Sub-band(5.8GHz): 5725-5850MHz

Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
11a	5745	Ant1	-33.83	-27	Pass
11a	5785	Ant1	-34.4	-27	Pass
11a	5825	Ant1	-33.78	-27	Pass
11a	5745	Ant2	-34.21	-27	Pass
11a	5785	Ant2	-34.2	-27	Pass
11a	5825	Ant2	-34.26	-27	Pass
11ac20	5745	Ant1	-33.84	-27	Pass
11ac20	5785	Ant1	-33.55	-27	Pass
11ac20	5825	Ant1	-33.5	-27	Pass
11ac20	5745	Ant2	-33.93	-27	Pass
11ac20	5785	Ant2	-33.22	-27	Pass
11ac20	5825	Ant2	-34.09	-27	Pass
11n20	5745	Ant1	-34.09	-27	Pass
11n20	5785	Ant1	-33.83	-27	Pass
11n20	5825	Ant1	-34.19	-27	Pass
11n20	5745	Ant2	-33.09	-27	Pass
11n20	5785	Ant2	-33.99	-27	Pass
11n20	5825	Ant2	-34.61	-27	Pass
11n40	5755	Ant1	-34.48	-27	Pass
11n40	5795	Ant1	-33.92	-27	Pass
11n40	5755	Ant2	-34.2	-27	Pass
11n40	5795	Ant2	-33.28	-27	Pass
11ac40	5755	Ant1	-34.12	-27	Pass
11ac40	5795	Ant1	-33.47	-27	Pass
11ac40	5755	Ant2	-33.96	-27	Pass
11ac40	5795	Ant2	-34.02	-27	Pass
11ac80	5775	Ant1	-33.59	-27	Pass
11ac80	5775	Ant2	-33.96	-27	Pass




5.2GHz Spurious Emission


802.11a on channel 36 ANT. 1

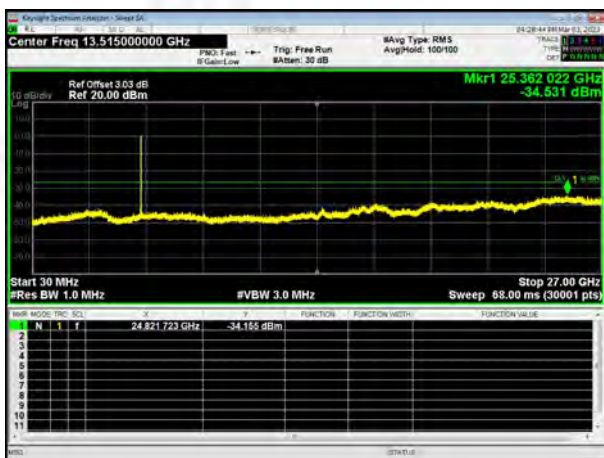


802.11a on channel 36 ANT. 2

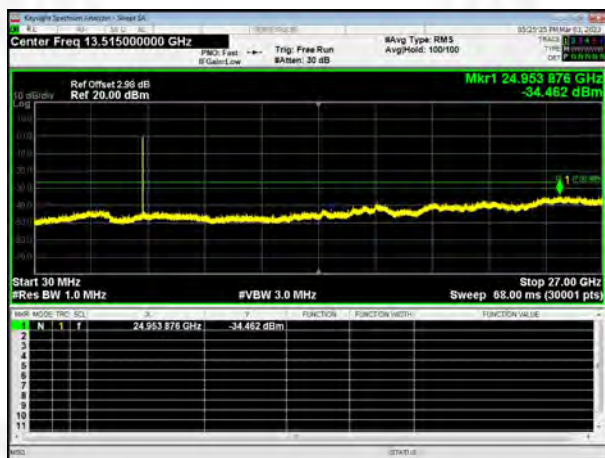


802.11a on channel 40 ANT. 1

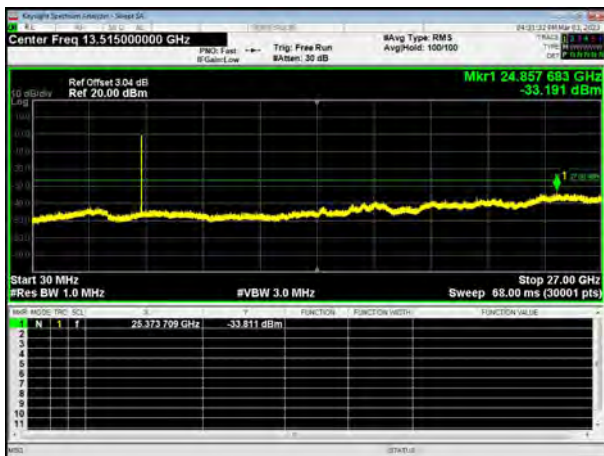


802.11a on channel 40 ANT. 2

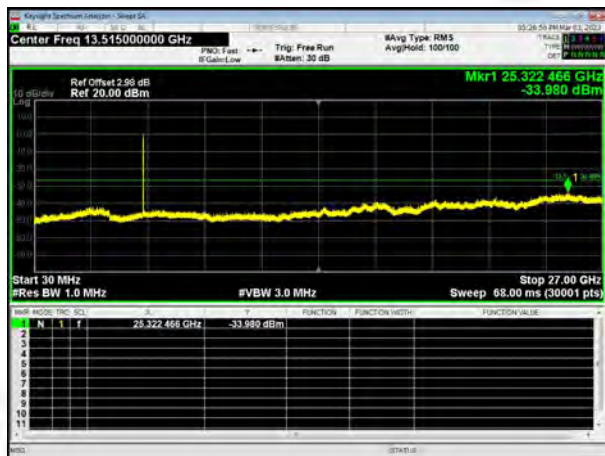

802.11a on channel 48 ANT. 1

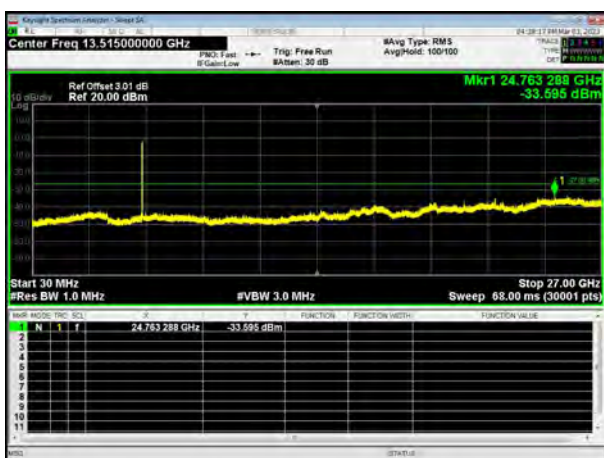


802.11a on channel 48 ANT. 2

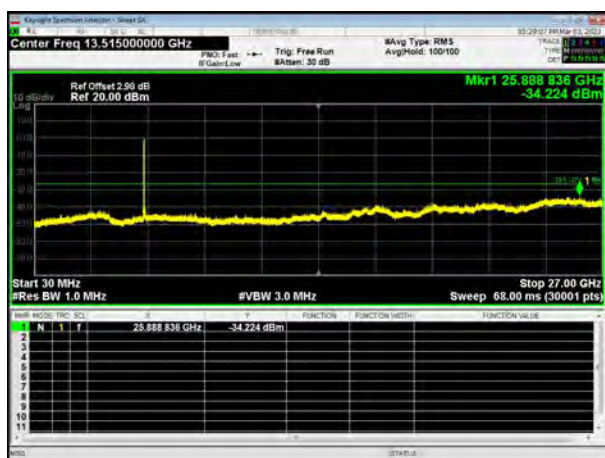





802.11ac20 on channel 36 ANT. 2

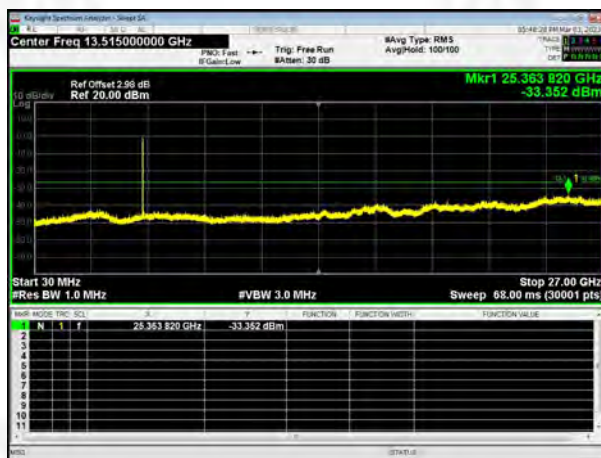

802.11ac20 on channel 40 ANT. 2

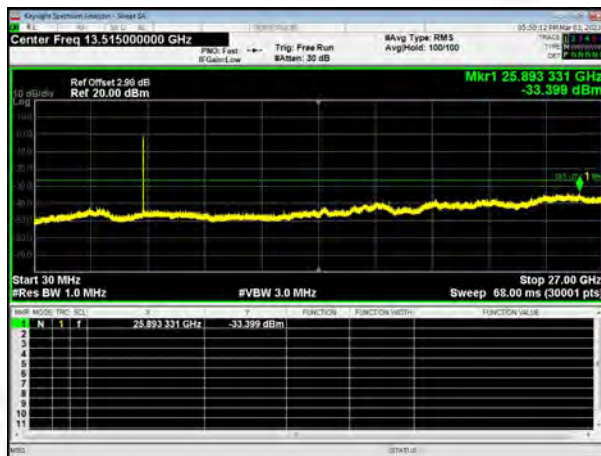


802.11ac20 on channel 48 ANT. 2

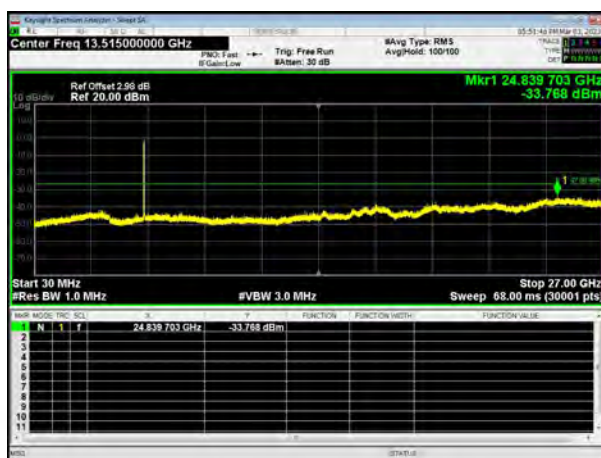





802.11n20 on channel 36 ANT. 1

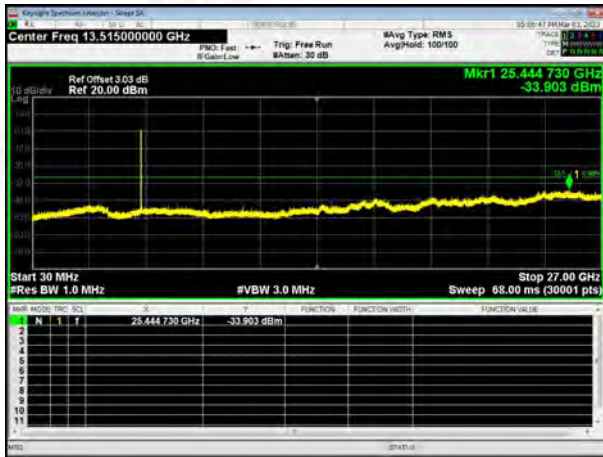


802.11n20 on channel 36 ANT. 2

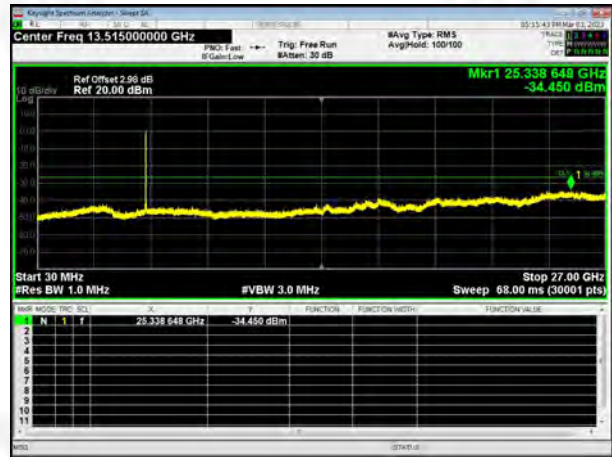


802.11n20 on channel 40 ANT. 1

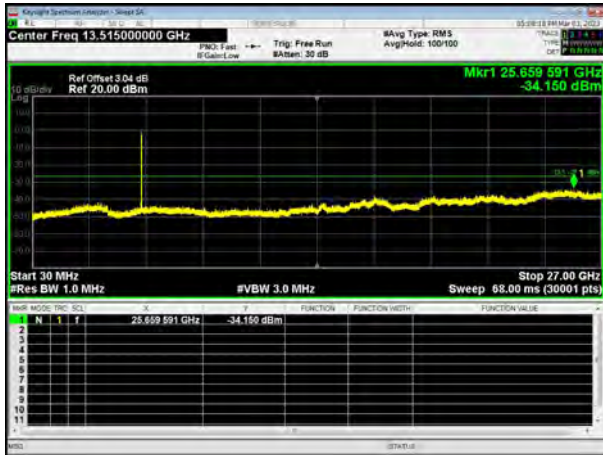


802.11n20 on channel 40 ANT. 2

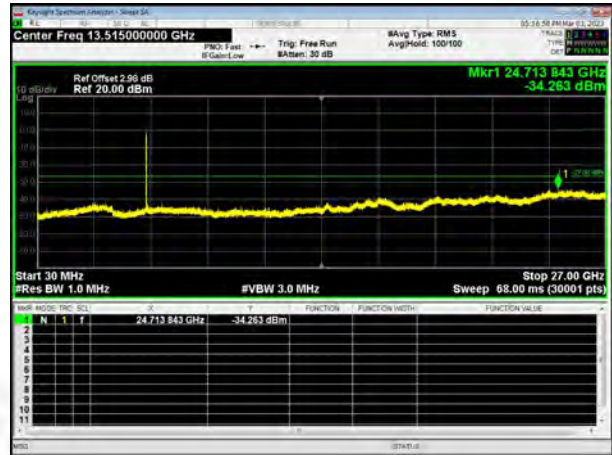

802.11n20 on channel 48 ANT. 1

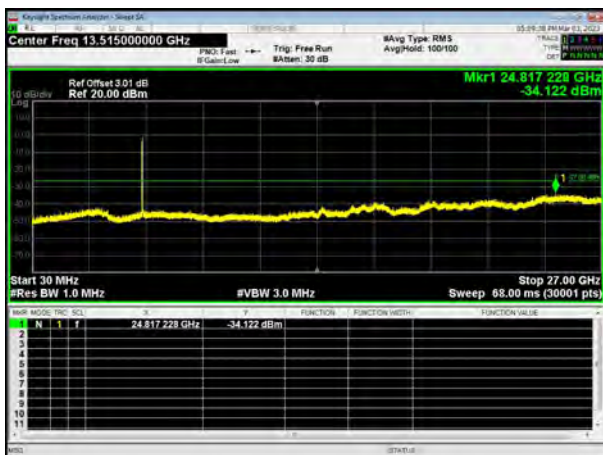


802.11n20 on channel 48 ANT. 2

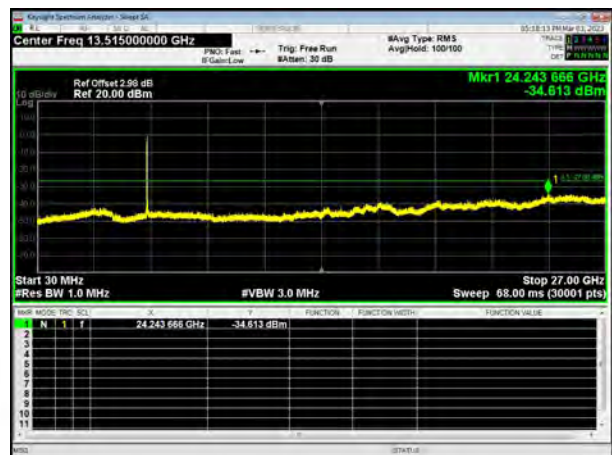





802.11n40 on channel 38 ANT. 1

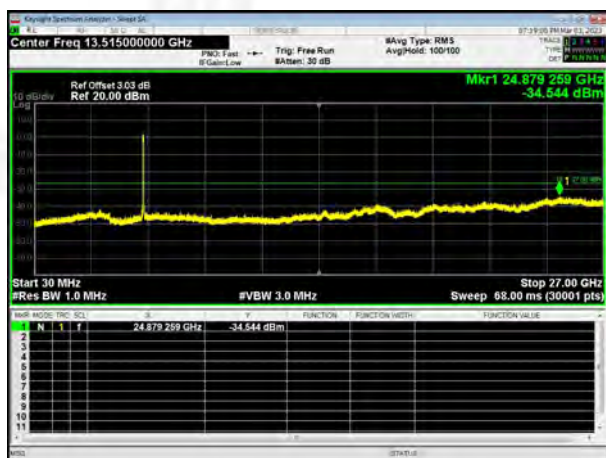


802.11n40 on channel 38 ANT. 2

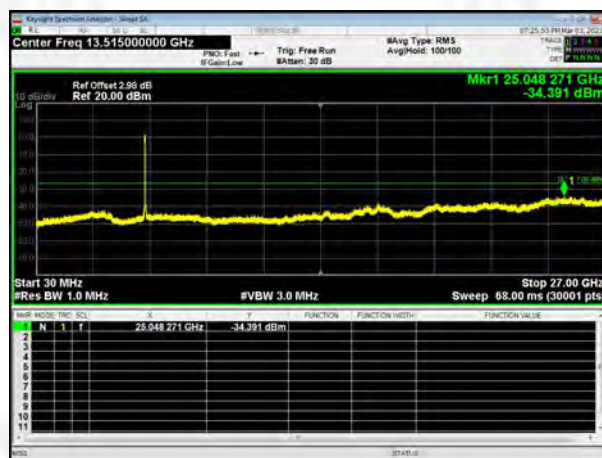

802.11n40 on channel 46 ANT. 1

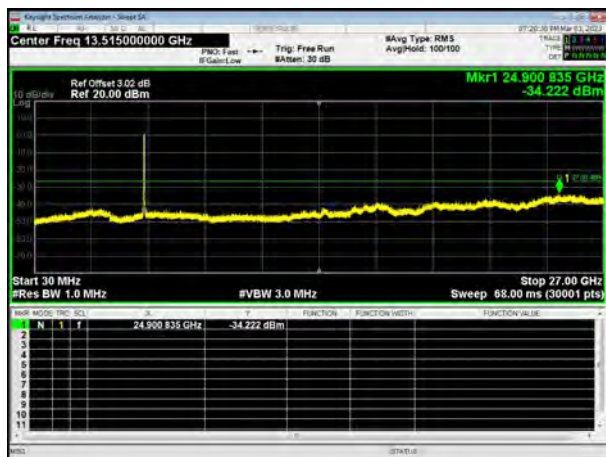


802.11n40 on channel 46 ANT. 2

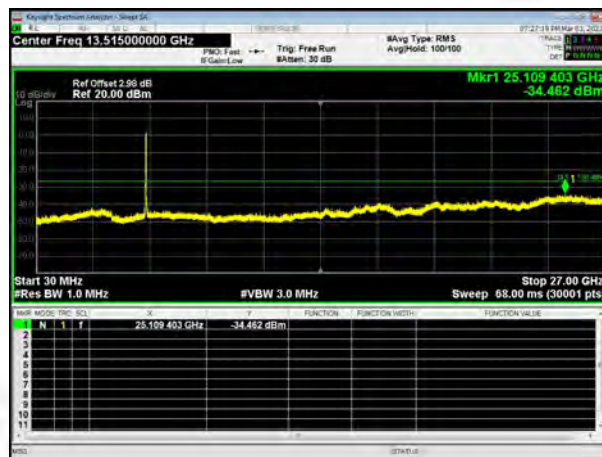





802.11ac40 on channel 38 ANT. 1

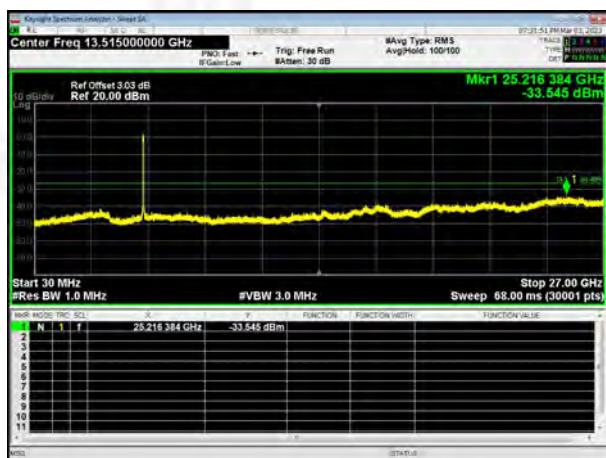


802.11ac40 on channel 38 ANT. 2

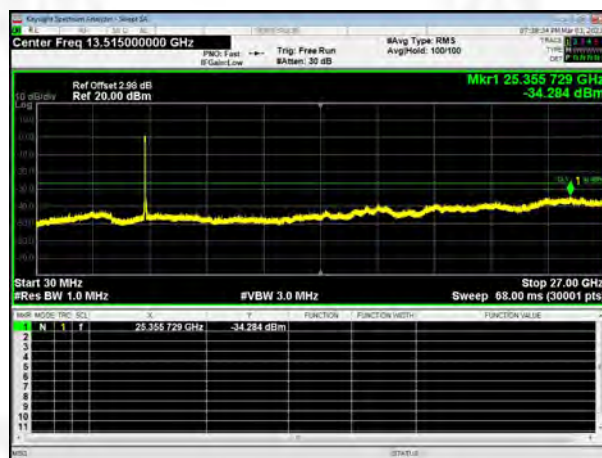


802.11ac40 on channel 46 ANT. 1

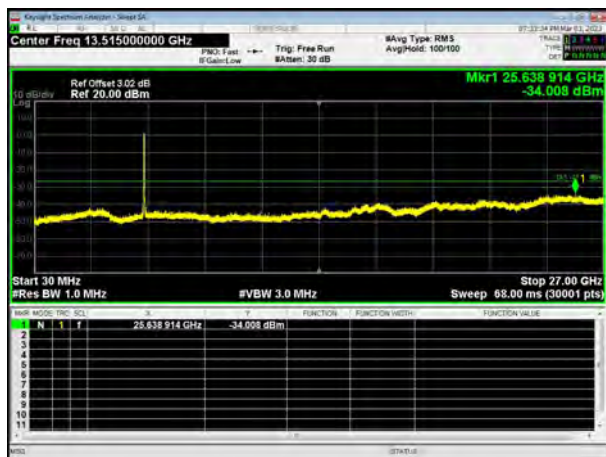


802.11ac40 on channel 46 ANT. 2

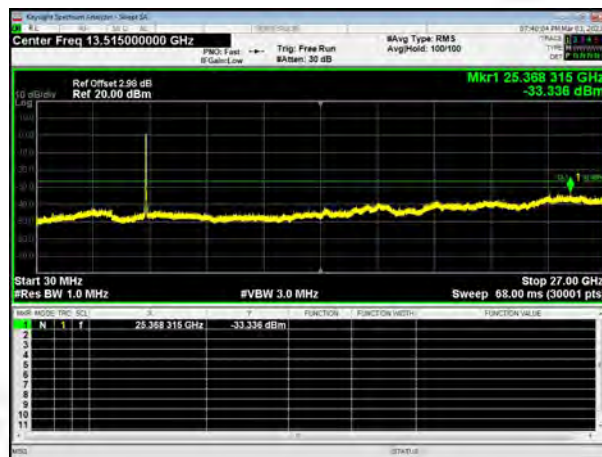

802.11ac80 on channel 42 ANT. 1

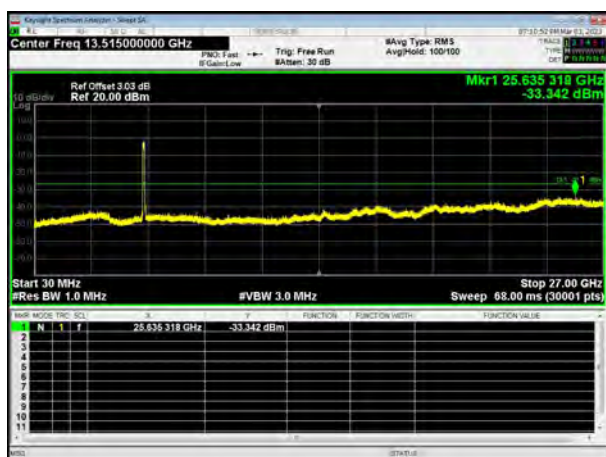


802.11ac80 on channel 42 ANT. 2

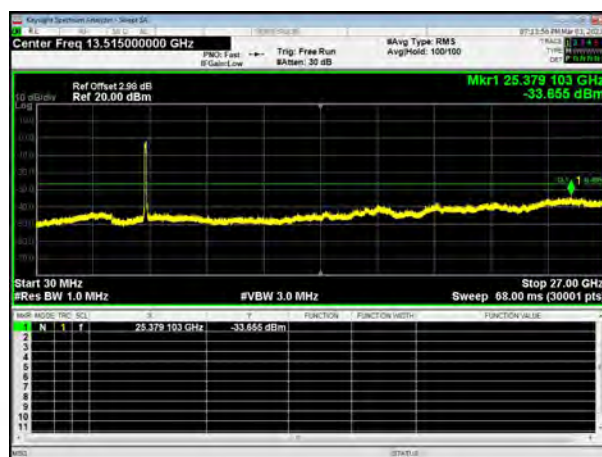




5.8GHz Spurious Emission


802.11a on channel 149 ANT. 1

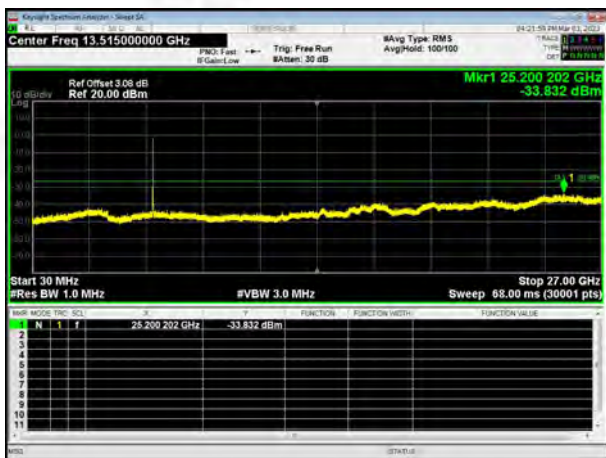


802.11a on channel 149 ANT. 2

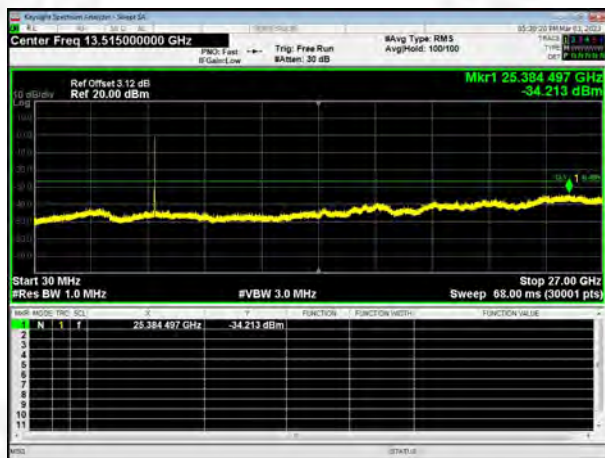


802.11a on channel 157 ANT. 1

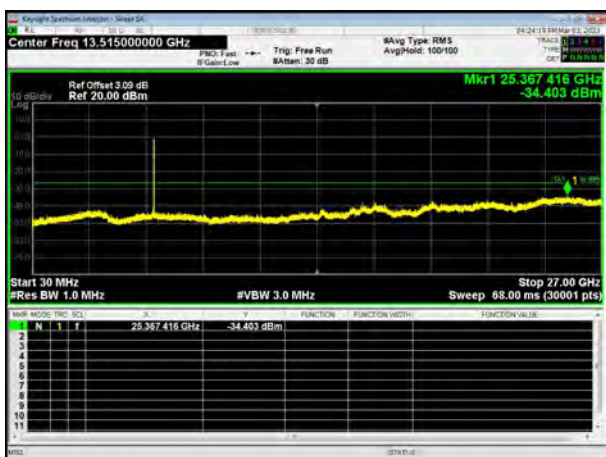


802.11a on channel 157 ANT. 2

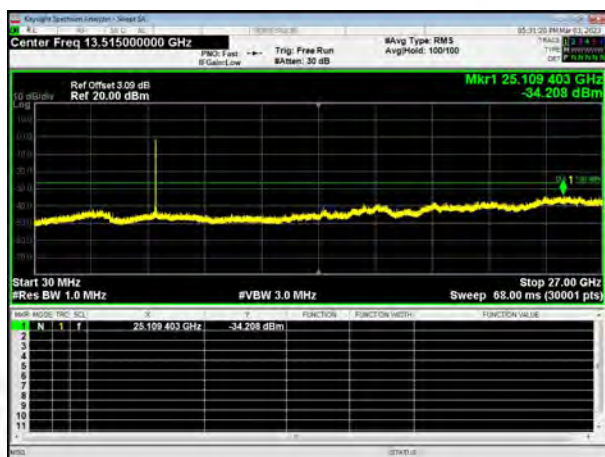

802.11a on channel 165 ANT. 1

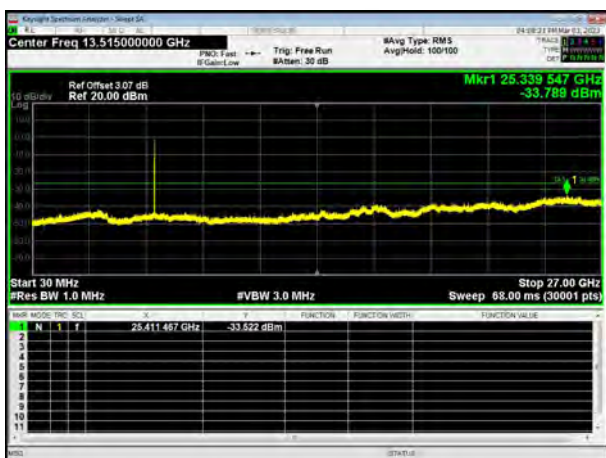


802.11a on channel 165 ANT. 2

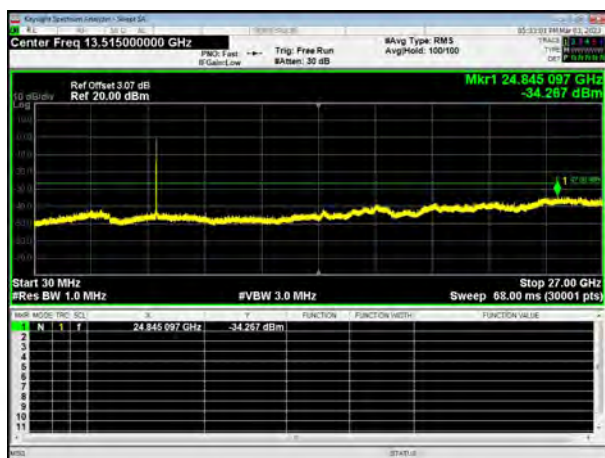





802.11ac20 on channel 149 ANT. 1

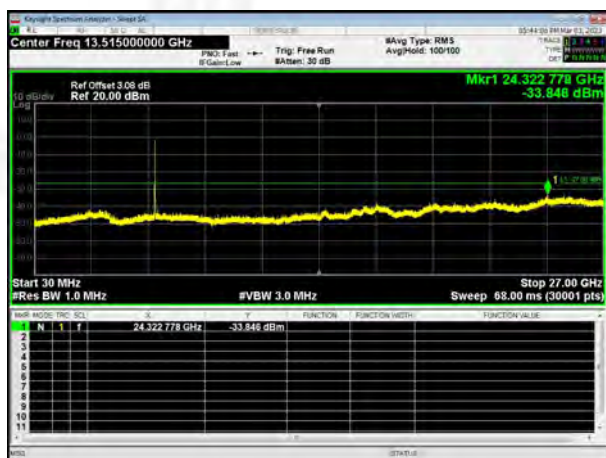


802.11ac20 on channel 149 ANT. 2

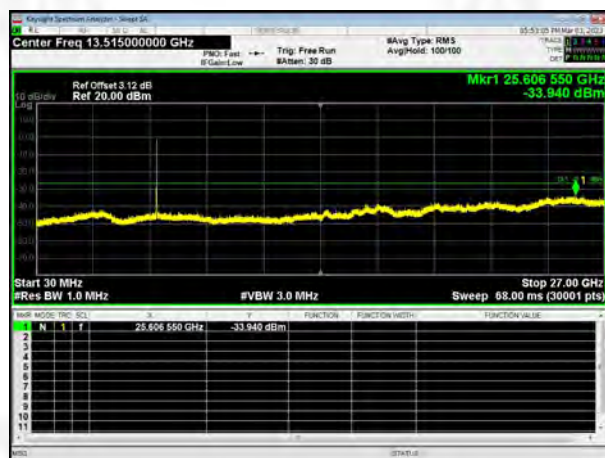


802.11ac20 on channel 157 ANT. 1

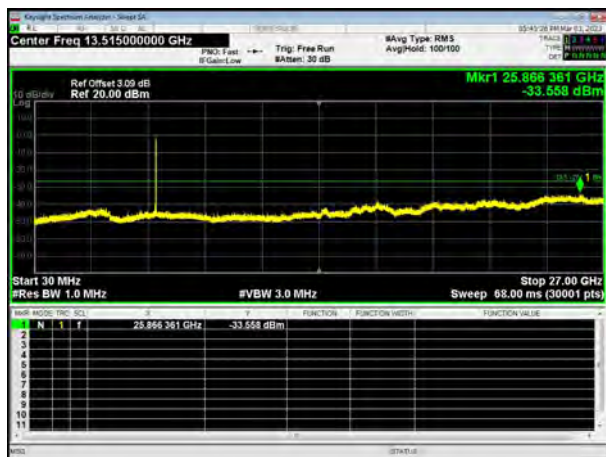


802.11ac20 on channel 157 ANT. 2

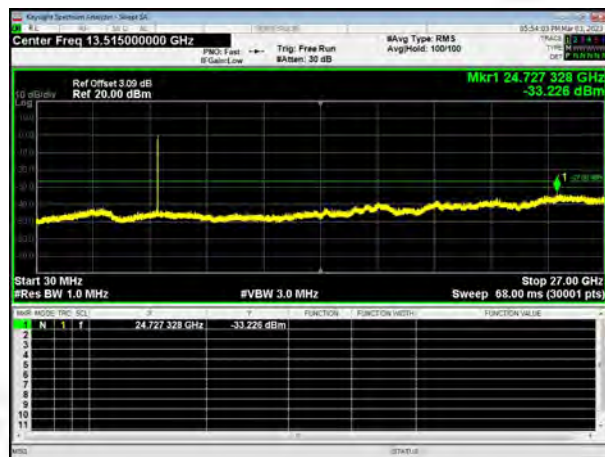

802.11ac20 on channel 165 ANT. 1

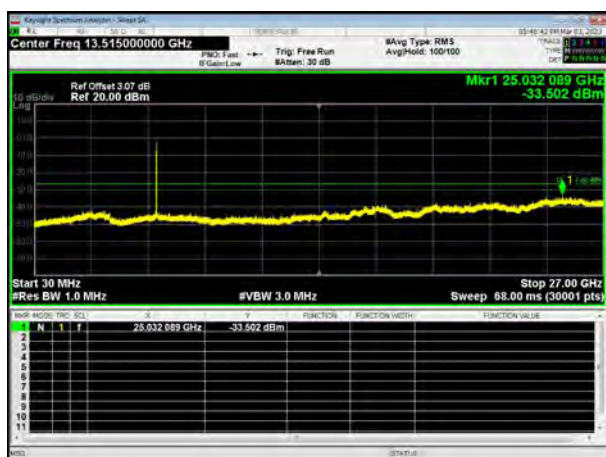


802.11ac20 on channel 165 ANT. 2

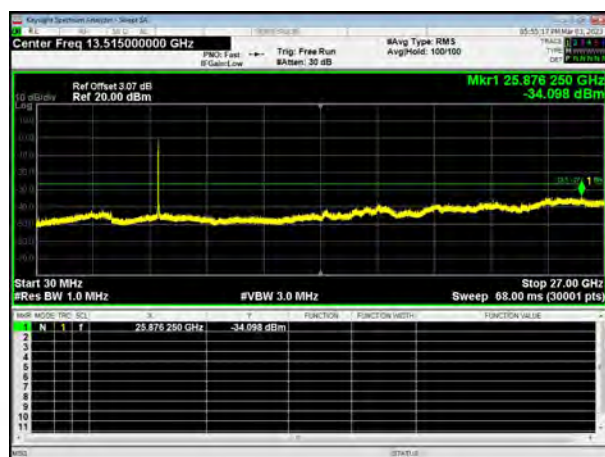





802.11n20 on channel 149 ANT. 1

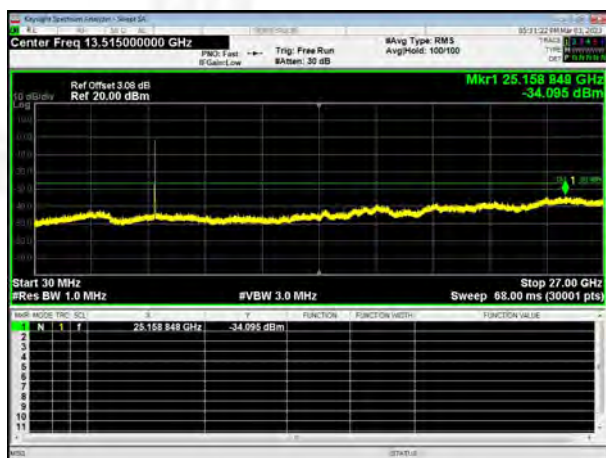


802.11n20 on channel 149 ANT. 2

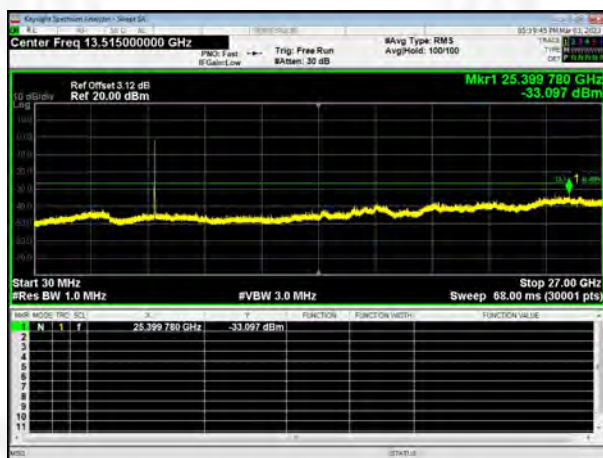


802.11n20 on channel 157 ANT. 1

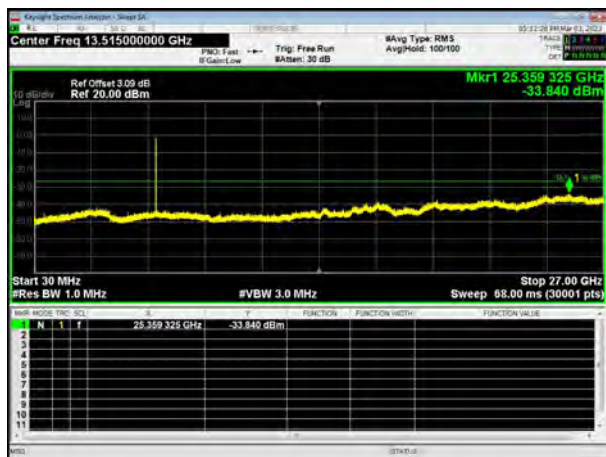


802.11n20 on channel 157 ANT. 2

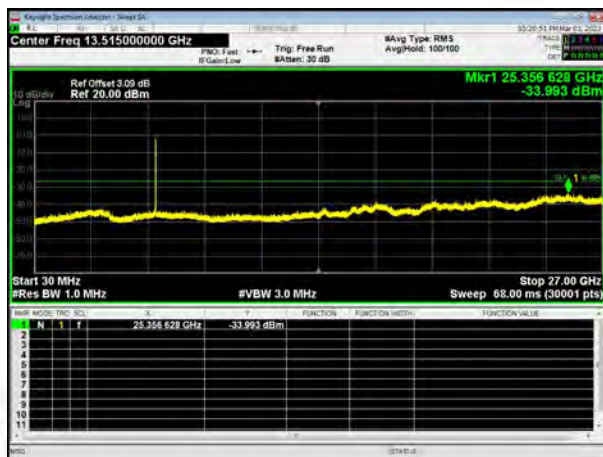

802.11n20 on channel 165 ANT. 1

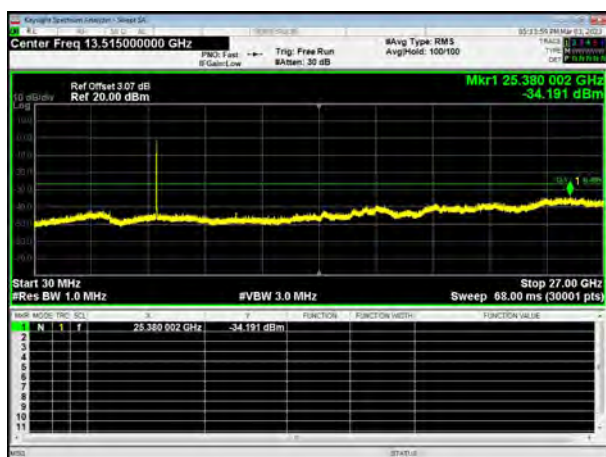


802.11n20 on channel 165 ANT. 2

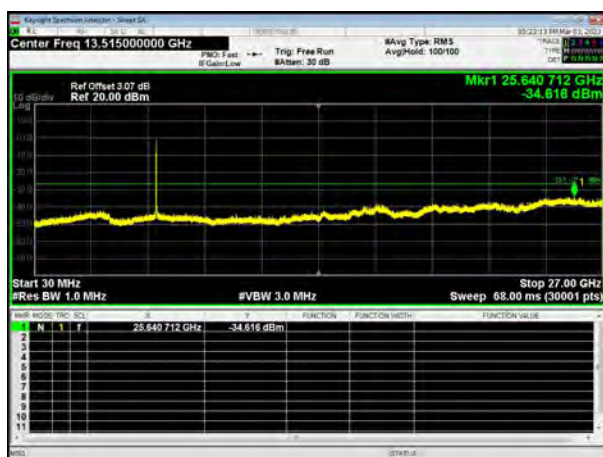




802.11n40 on channel 151 ANT. 2

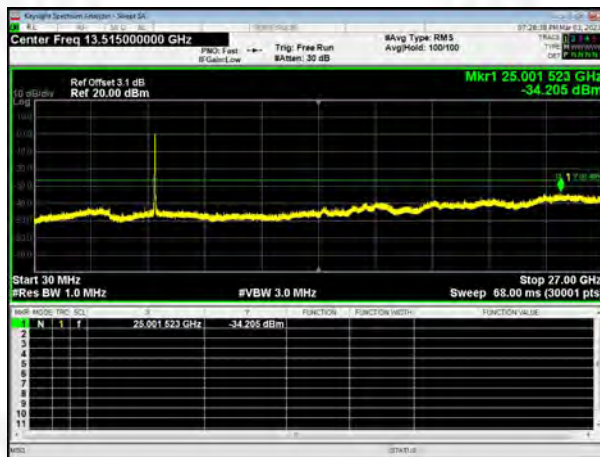


802.11n40 on channel 159 ANT. 2

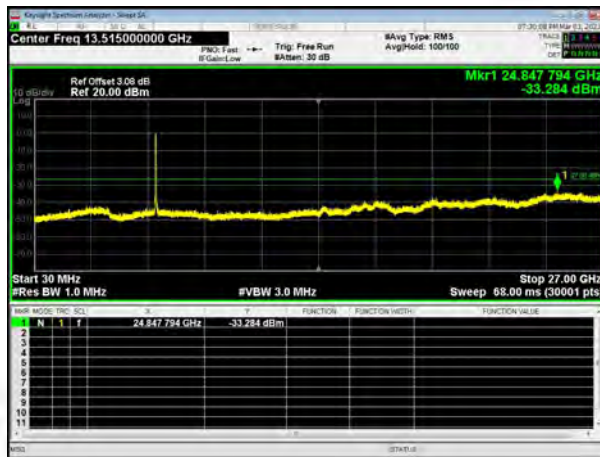





802.11ac40 on channel 151 ANT. 1

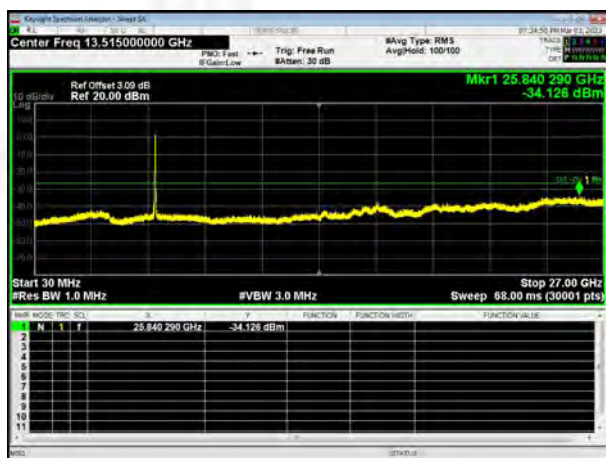


802.11ac40 on channel 151 ANT. 2

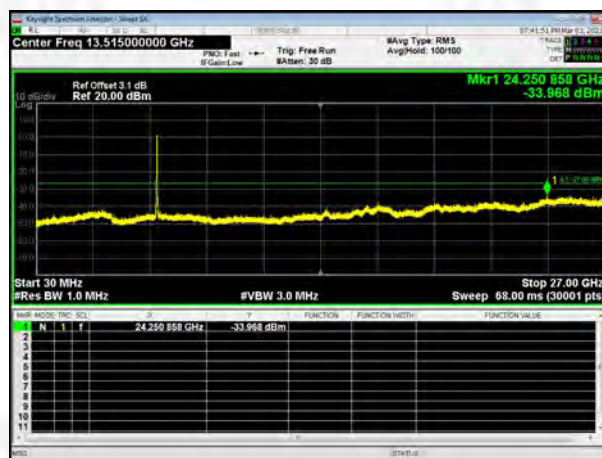


802.11ac40 on channel 159 ANT. 1

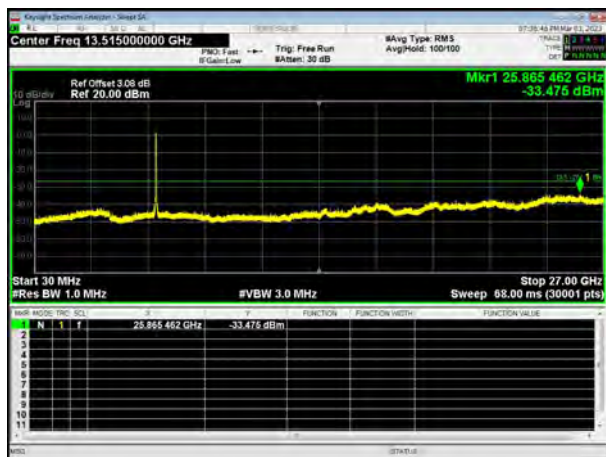


802.11ac40 on channel 159 ANT. 2

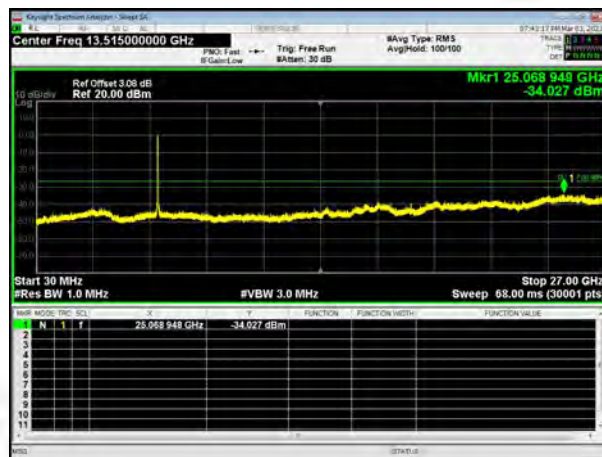

802.11ac80 on channel 155 ANT. 1

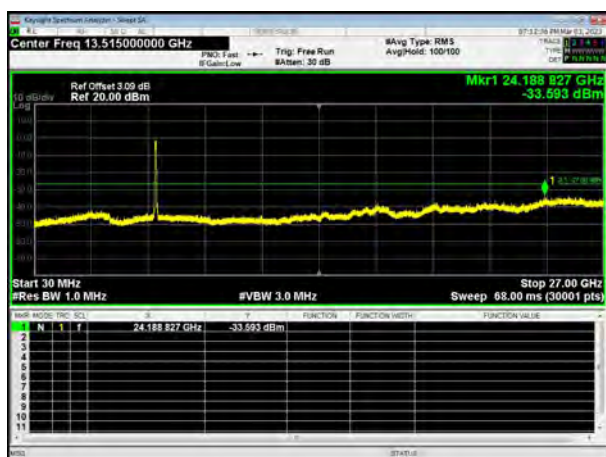

802.11ac80 on channel 155 ANT. 2

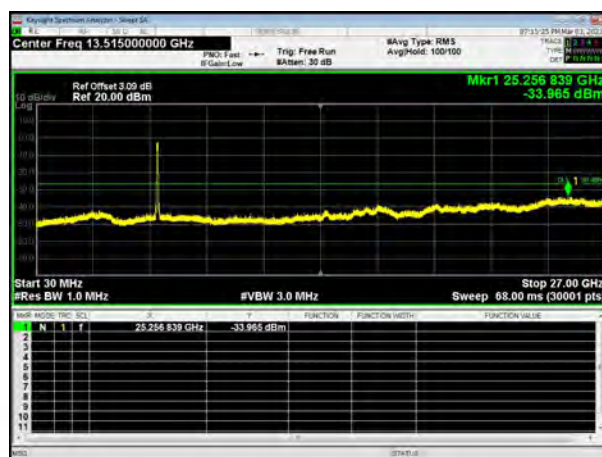



10. Frequency Stability Measurement

10.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

10.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 70^\circ\text{C}$.

10.3 TEST SETUP LAYOUT



10.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

10.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 12V
Test Mode :	TX		



5.2G

802.11a

Reference Frequency(Middle Channel): 5200 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	12	75	0.01442
40	12	46	0.00885
30	12	57	0.01096
20	12	53	0.01019
10	12	46	0.00885
0	12	33	0.00635
-10	12	47	0.00904
-20	12	49	0.00942
-30	12	53	0.01019

802.11ac20

Reference Frequency(Middle Channel): 5200 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	12	64	0.01231
40	12	48	0.00923
30	12	29	0.00558
20	12	33	0.00635
10	12	41	0.00788
0	12	35	0.00673
-10	12	29	0.00558
-20	12	47	0.00904
-30	12	44	0.00846



802.11n_HT20

Reference Frequency(Middle Channel): 5200MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	12	62	0.01192
40	12	54	0.01038
30	12	62	0.01192
20	12	48	0.00923
10	12	52	0.01000
0	12	44	0.00846
-10	12	28	0.00538
-20	12	31	0.00596
-30	12	29	0.00558

802.11ac40

Reference Frequency(Middle Channel): 5190MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	12	76	0.01464
40	12	57	0.01098
30	12	66	0.01272
20	12	43	0.00829
10	12	49	0.00944
0	12	38	0.00732
-10	12	41	0.00790
-20	12	48	0.00925
-30	12	54	0.01040



802.11n_HT40

Reference Frequency(Middle Channel): 5190MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	12	64	0.01233
40	12	47	0.00906
30	12	61	0.01175
20	12	53	0.01021
10	12	62	0.01195
0	12	47	0.00906
-10	12	55	0.01060
-20	12	58	0.01118
-30	12	62	0.01195

802.11ac80

Reference Frequency(Middle Channel): 5210MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	12	64	0.01228
40	12	27	0.00518
30	12	38	0.00729
20	12	45	0.00864
10	12	52	0.00998
0	12	64	0.01228
-10	12	28	0.00537
-20	12	37	0.00710
-30	12	46	0.00883



So, Frequency Stability Versus Input Voltage is:

802.11a

Reference Frequency(Middle Channel): 5200 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	12	54	0.01038
	10.8	64	0.01231
	13.2	26	0.00500

802.11ac20

Reference Frequency(Middle Channel): 5200 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	12	54	0.01038
	10.8	36	0.00692
	13.2	47	0.00904

802.11n_HT20

Reference Frequency(Middle Channel): 5200 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	12	74	0.01423
	10.8	73	0.01404
	13.2	64	0.01231

802.11ac40

Reference Frequency(Middle Channel): 5190 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	12	54	0.01040
	10.8	62	0.01195
	13.2	52	0.01002



802.11n_HT40

Reference Frequency(Middle Channel): 5190 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	12	54	0.01040
	10.8	36	0.00694
	13.2	52	0.01002

802.11ac80

Reference Frequency(Middle Channel): 5210 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	12	64	0.01228
	10.8	56	0.01075
	13.2	52	0.00998



5.8G

802.11a

Reference Frequency(Middle Channel): 5785 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	12	74	0.01279
40	12	64	0.01106
30	12	66	0.01141
20	12	53	0.00916
10	12	52	0.00899
0	12	56	0.00968
-10	12	63	0.01089
-20	12	25	0.00432
-30	12	35	0.00605

802.11ac20

Reference Frequency(Middle Channel): 5785 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	12	54	0.00933
40	12	27	0.00467
30	12	36	0.00622
20	12	46	0.00795
10	12	36	0.00622
0	12	47	0.00812
-10	12	28	0.00484
-20	12	58	0.01003
-30	12	35	0.00605



802.11n_HT20

Reference Frequency(Middle Channel): 5785 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	12	64	0.01106
40	12	56	0.00968
30	12	63	0.01089
20	12	28	0.00484
10	12	47	0.00812
0	12	27	0.00467
-10	12	34	0.00588
-20	12	34	0.00588
-30	12	26	0.00449

802.11ac40

Reference Frequency(Middle Channel): 5755 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	12	45	0.00782
40	12	37	0.00643
30	12	27	0.00469
20	12	47	0.00817
10	12	37	0.00643
0	12	38	0.00660
-10	12	17	0.00295
-20	12	37	0.00643
-30	12	45	0.00782



802.11n_HT40

Reference Frequency(Middle Channel): 5755 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	12	63	0.01095
40	12	46	0.00799
30	12	38	0.00660
20	12	25	0.00434
10	12	37	0.00643
0	12	32	0.00556
-10	12	23	0.00400
-20	12	48	0.00834
-30	12	38	0.00660

802.11ac80

Reference Frequency(Middle Channel): 5775 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	12	46	0.00797
40	12	27	0.00468
30	12	26	0.00450
20	12	52	0.00900
10	12	25	0.00433
0	12	28	0.00485
-10	12	34	0.00589
-20	12	39	0.00675
-30	12	47	0.00814



So, Frequency Stability Versus Input Voltage is:

802.11a

Reference Frequency(Middle Channel): 5785 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	12	34	0.00588
	10.8	38	0.00657
	13.2	28	0.00484

802.11ac20

Reference Frequency(Middle Channel): 5785 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	12	74	0.01279
	10.8	37	0.00640
	13.2	45	0.00778

802.11n_HT20

Reference Frequency(Middle Channel): 5785 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	12	64	0.01106
	10.8	27	0.00467
	13.2	34	0.00588

802.11ac40

Reference Frequency(Middle Channel): 5755 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	12	56	0.00973
	10.8	47	0.00817
	13.2	38	0.00660



802.11n_HT40

Reference Frequency(Middle Channel): 5755 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	12	64	0.01112
	10.8	47	0.00817
	13.2	52	0.00904

802.11ac80

Reference Frequency(Middle Channel): 5775 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	12	73	0.01264
	10.8	62	0.01074
	13.2	55	0.00952



11.ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is FPCB Antenna, the best case gain of the ANT. 1 is 3.28dBi and ANT. 2 is 3.28dBi, reference to the Internal Photos for details	



12. TEST SETUP PHOTO

Reference to the Test Setup Photos.

13. EUT CONSTRUCTIONAL DETAILS

Reference to the External Photos and Internal Photos.

***** END OF REPORT *****