




KIEL2403-YW03402-R01

RF TEST REPORT				
Report Number		KIEL2403-YW03402-R01		
Applicant	Company Name	MAYTON		
	Address	404, Annam-ro Bupyeong-gu, Incheon, South Korea		
Product	Product Name	AutoProX		
	Model Name	AUTOPRO-X		
	FCC ID	2BAG8-AUTOPROX		
	Manufacturer	SUZHOU MEIYITE AUTO PARTS CO.,LTD		
Other	Receipt Date	2024.02.07	Receipt Number	RQW2403-1235
	Issued Date	2023.03.29	Tested Date	2024.02.07 ~ 2024.03.11
Standards		FCC Part 15 Subpart C ANSI C63.10 : 2020		
Tested by		Dominic Sim (Sign)		
Approved by		David Jang (Sign)		
KIEL Institute Daewoo Technopark A-403, 261, Doyak-ro, Bucheon-si, Gyeonggi-do, 14523, Korea. Tel : +82-32-670-8888, Fax : +82-32-670-8889 <i>o This is certified that the above mentioned products have been tested for the sample provided by client.</i> <i>o No part of this document may not be duplicated or reproduced by any means without the express written permission of KIEL Institute.</i> <i>o This test report is irrelevant to KS Q ISO/IEC 17025 and KOLAS accreditation</i>				





Revision History

Issued Date	Issued Report No.	Revisions
2024.03.25	KIEL2403-YW03402	Initial Issue
2024.03.29	KIEL2403-YW03402-R01	Correct typo





Contents



1.0 LABORATORY INFORMATION	5
2.0 APPLICANT INFORMATION	5
3.0 SUMMARY OF TEST RESULTS	6
3.1 Meaurement Uncertainty.....	7
4.0 GENERAL INFORMATION.....	8
4.1 EUT Description.....	8
4.1.1 List of Accessories	8
4.1.2 Auxiliary Test equipment.....	8
4.1.3 Antenna Information	9
4.1.4 Channel List of EUT	9
4.2 Description of Test Mode	10
4.2.1 Test Mode Configuration.....	10
4.3 General Description of Applied Standard.....	14
5.0 TEST EQUIPMENT	15
6.0 TEST RESULTS.....	16
6.1 Antenna Requirement.....	16
6.1.1 Result.....	16
6.2 6 dB Bandwidth.....	17
6.2.1 Regulation.....	17
6.2.2 Test Procedure.....	17
6.2.3 Test Setup	17
6.2.4 Test Result	18
6.3 Maximum Peak Output Power.....	22
6.3.1 Regulation.....	22
6.3.2 Test Procedure.....	22
6.3.3 Test Setup	23
6.3.4 Test Result	24
6.4 Power Spectral Density	26
6.4.1 Regulation.....	26
6.4.2 Test Procedure.....	26
6.4.3 Test Setup	26
6.4.4 Test Result	27
6.5 Spurious Emission, Band edge and Restricted Bands	31
6.5.1 Regulation.....	31
6.5.2 Test Procedure.....	32
6.5.3 Test Setup	35
6.5.4 Test Result	37





KIEL2403-YW03402-R01

6.6 AC Conducted Emissionss (150 kHz to 30 MHz).....	79
6.6.1 Regulation.....	79
6.6.2 Test Procedure.....	79
6.6.3 Test Setup	79
6.6.4 Test Result	80






KIEL2403-YW03402-R01

1.0 Laboratory Information

Laboratory Name	KIEL Institute
Location	1-1, Gilju-ro, Bucheon-city, Gyeonggi-do, Korea 14505
FCC Registration No.	KR0167 (RRA accredited Lab.)
IC Registration No.	KR0167 (31291)
Phone	+82-32-325-7045
Fax	+82-32-670-8889

2.0 Applicant Information

Applicant Name	MAYTON
Address	404, Annam-ro Bupyeong-gu, Incheon, South Korea
Manufacturer	SUZHOU MEIYITE AUTO PARTS CO.,LTD
Address	Room A212, Building 2, 160 Sanxiang Road, Suzhou City, China





3.0 Summary of Test Results

Applied standard: FCC part 15, subpart C 15.247

FCC Part Section(s)	Test Item	Reference	Result
15.247 (a)(2)	6 dB Channel Bandwidth (DTS Bandwith)	Section 6.2	P
15.247 (b)(3)	Maximum Conducted Output Power	Section 6.3	P
15.247 €	Power Spectral Density	Section 6.4	P
15.247 (d)	Band Edge / Out-of-Band Emissions (Conducted Spurious Emission)	Section 6.5	P
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Section 6.5	P
15.207	AC Power Line Conducted Emissions (150 kHz – 30 MHz)	Section 6.6	P


(Note 1) P = Pass, NC = Not comply, NT = Not Tested, NA = Not Applicable

(Note 2) The general test methods used to test on this devices are ANSI C63.10.

(Note 3) Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

(Note 4) For emission test from 9 kHz to 30 MHz,

Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.






3.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2

Measurement Items	Frequency Range	Expanded Uncertainty U = kUc (k = 2)
Conducted Emission at main ports	150 kHz – 30 MHz	3.24 dB
Radiated Spurious Emissions	9 kHz – 30 MHz	3.39 dB
	30 MHz – 1 GHz	5.14 dB
	1 GHz – 18 GHz	3.18 dB
	18 GHz – 40 GHz	4.54 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k = 2.





4.0 General Information

4.1 EUT Description

Product name	AutoProX
Basic model	AUTOPRO-X
Product S/N	-
Variant model(s)	-
Model Difference	-
Power supply	DC 5 V
Modulation	OFDM, DSSS, GFSK
Transfer Rate	802.11b : 1, 2, 5.5, 11 [Mbps] 802.11g : 6, 9, 12, 18, 24, 36, 48, 54 [Mbps] 802.11n(HT20), (HT40) : 0 to 7 [MCS] BLE : 0.125, 0.5, 1, 2 [Mbps]
Operating Frequency	802.11b/g/n(HT20) : 2 412 ~ 2 462 [MHz] 802.11n(HT40) : 2 422 ~ 2 452 [MHz] BLE : 2 402 ~ 2 480 [MHz]
Number of channel	802.11b/g/n(HT20) : 11 channels 802.11n(HT40) : 7 channels BLE : 40 channels
Output Power	6.61 dBm (4.58 mW)
Antenna Type	FPCB (1T1R)
Antenna Connector	U.FL Connector


(Note 1) The above equipment has been tested by KIEL Institute, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

4.1.1 List of Accessories

Accessories	Brand	Model	Manufacturer	Specification
-	-	-	-	-

4.1.2 Auxiliary Test equipment

Accessories	Brand	Model	Manufacturer	Specification
Laptop	Lenovo IdeaPad S500 Touch	20248	Lenovo PC HK Limited	-
AC Adapter(Laptop)	Lenovo	ADLX45NCC3A	CHICONY POWER TECHNOLOGY (SUZHOU) CO.,LTD.	Input: AC 100 V ~ 240 V / 50 ~ 60 Hz Output: DC 20 V





KIEL2403-YW03402-R01


4.1.3 Antenna Information

Antenna	Type	Frequency Range	Peak Gain
Ant A (Bluetooth)	FPCB	2 400 MHz – 2 483.5 MHz	1.56 dBi
Ant B (Wi-Fi)	FPCB	2 400 MHz – 2 483.5 MHz	2.15 dBi
		5 150 MHz – 5 350 MHz	4.41 dBi

4.1.4 Channel List of EUT

Bluetooth							
Channel	Frequency [MHz]	Channel	Frequency [MHz]	Channel	Frequency [MHz]	Channel	Frequency [MHz]
0	2 402	10	2 422	20	2 442	30	2 462
1	2 404	11	2 424	21	2 444	31	2 464
2	2 406	12	2 426	22	2 446	32	2 466
3	2 408	13	2 428	23	2 448	33	2 468
4	2 410	14	2 430	24	2 450	34	2 470
5	2 412	15	2 432	25	2 452	35	2 472
6	2 414	16	2 434	26	2 454	36	2 474
7	2 416	17	2 436	27	2 456	37	2 476
8	2 418	18	2 438	28	2 458	38	2 478
9	2 420	19	2 440	29	2 460	39	2 480

802.11b/g/n(HT20), (HT40)							
Channel	Frequency [MHz]	Channel	Frequency [MHz]	Channel	Frequency [MHz]	Channel	Frequency [MHz]
1	2 412	4	2 427	7	2 442	10	2 457
2	2 417	5	2 432	8	2 447	11	2 462
3	2 422	6	2 437	9	2 452		





4.2 Description of Test Mode

4.2.1 Test Mode Configuration

- Axis worst case

Pre-Scan has been performed to determine the worst case axis between antenna port, XYZ axis and frequency band.

EUT Configuration	Applicable to		Description
	Ant A(Bluetooth)	Ant B(Wi-Fi)	
Transmission	X axis	X axis	-

- Radiated Emission (Below 1 GHz, Above 18 GHz, and AC Power line conducted emission) worst case



Radiated emission below 1 GHz, above 18 GHz and AC power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Tested Mode	Tested Channel	Packet Type	Description
802.11n(HT40)	3	MCS 0	-
LE1M	19	1 Mbps	-

- Radiated Emission (Above 1 GHz)

Radiated emission above 1 GHz was performed with the EUT set to transmit Low/Mid/High channels.

Tested Mode	Tested Channel	Data Rate / Packet Type	Description
802.11b	1, 6, 11	1 Mbps	-
802.11g	1, 6, 11	6 Mbps	-
802.11n(HT20)	1, 6, 11	MCS 0	-
802.11n(HT40)	3, 6, 9	MCS 0	-
LE1M	0, 19, 39	1 Mbps	-
LE2M	0, 19, 39	2 Mbps	-





- Antenna Port Conducted Measurement

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Tested Mode	Tested Channel	Data Rate / Packet Type	Description
802.11b	1, 6, 11	1 Mbps	-
802.11g	1, 6, 11	6 Mbps	-
802.11n(HT20)	1, 6, 11	MCS 0	-
802.11n(HT40)	3, 6, 9	MCS 0	-
LE1M	0, 19, 39	1 Mbps	-
LE2M	0, 19, 39	2 Mbps	-

- Test Conditon

Applicable to	Environmental Conditions	Test Voltage	Tested by
Radiated emissions(< 1GHz)	(23.0 ± 2) °C, (41.6 ± 3) % R.H.	DC 5 V	Dominic Sim
Radiated emissions(> 1GHz)	(22.5 ± 2) °C, (42.6 ± 3) % R.H.	DC 5 V	Dominic Sim
AC power line emission	(23.2 ± 2) °C, (43.1 ± 3) % R.H.	AC 120 V, 60 Hz	Dominic Sim
Antenna port conducted	(23.1 ± 2) °C, (44.3 ± 3) % R.H.	DC 5 V	Dominic Sim

- Worst case of data rates

Transmission	Test Mode	Bandwidth [MHz]	Worst Case Data Rate / Packet Type
SISO	802.11b	20	1 Mbps
	802.11g	20	6 Mbps
	802.11n	20	MCS 0
		40	MCS 0
	LE1M	1	1 Mbps
	LE2M	2	2 Mbps







KIEL2403-YW03402-R01

- Duty Cycle of Test Signal


Test Mode	On Time [msec]	Period [msec]	Duty cycle X [Linear]	Duty Cycle [%]	DCCF [dB]
802.11b	12.441 1	12.831 7	0.969 6	96.96	0.13
802.11g	2.040 9	2.237 1	0.912 3	91.23	0.40
802.11n(HT20)	1.903 3	2.106 8	0.903 4	90.34	0.44
802.11n(HT40)	0.912 6	1.129 4	0.808 0	80.80	0.93
LE1M	0.392 2	0.626 2	0.626 3	62.63	2.03
LE2M	0.207 6	0.626 2	0.331 5	33.15	4.80

- Test Plots of Duty Cycle

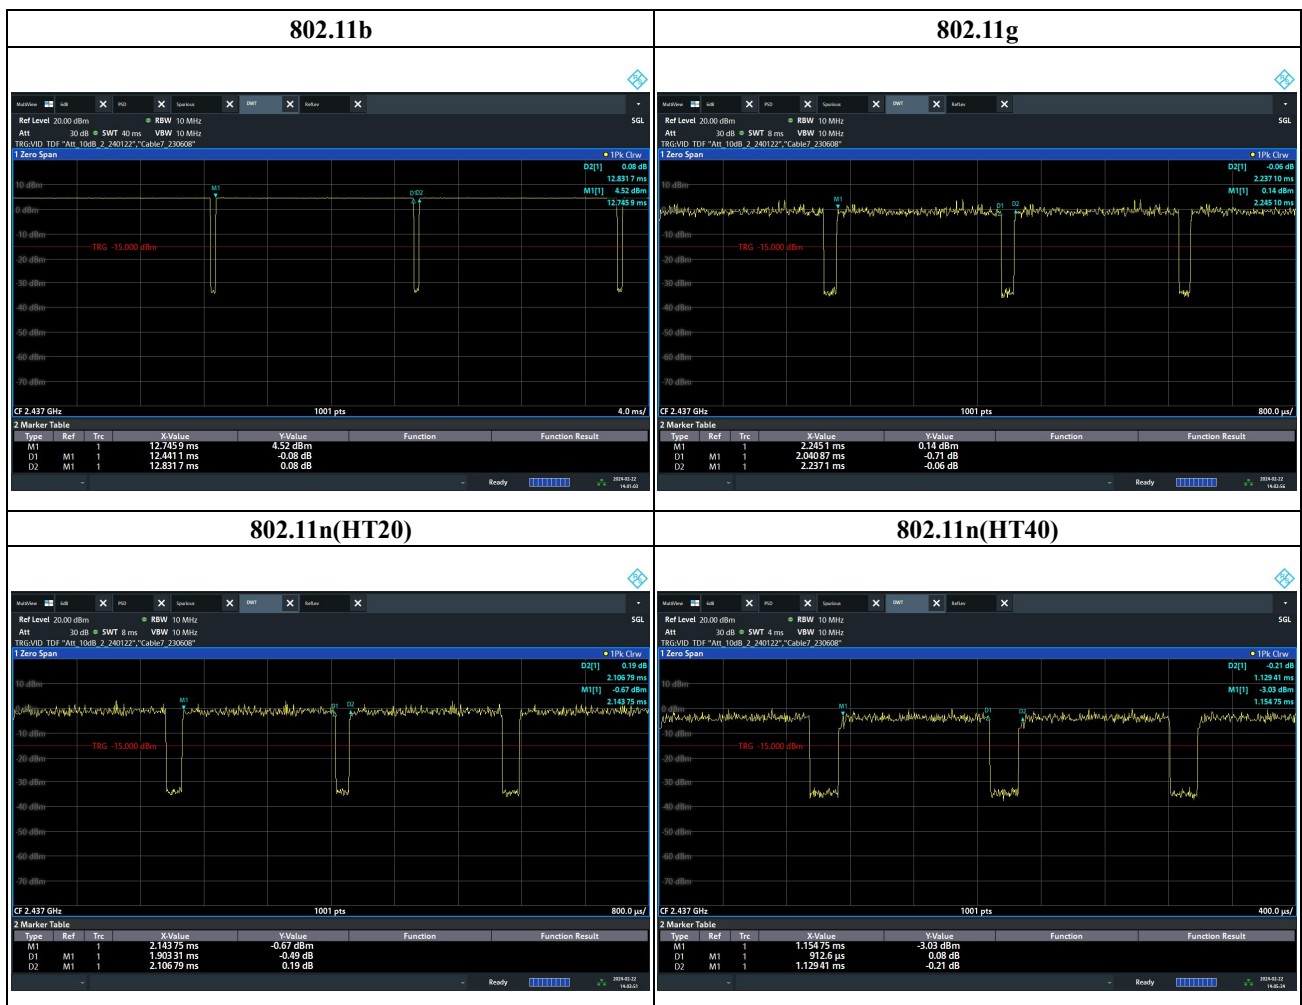



KIEL2403-YW03402-R01

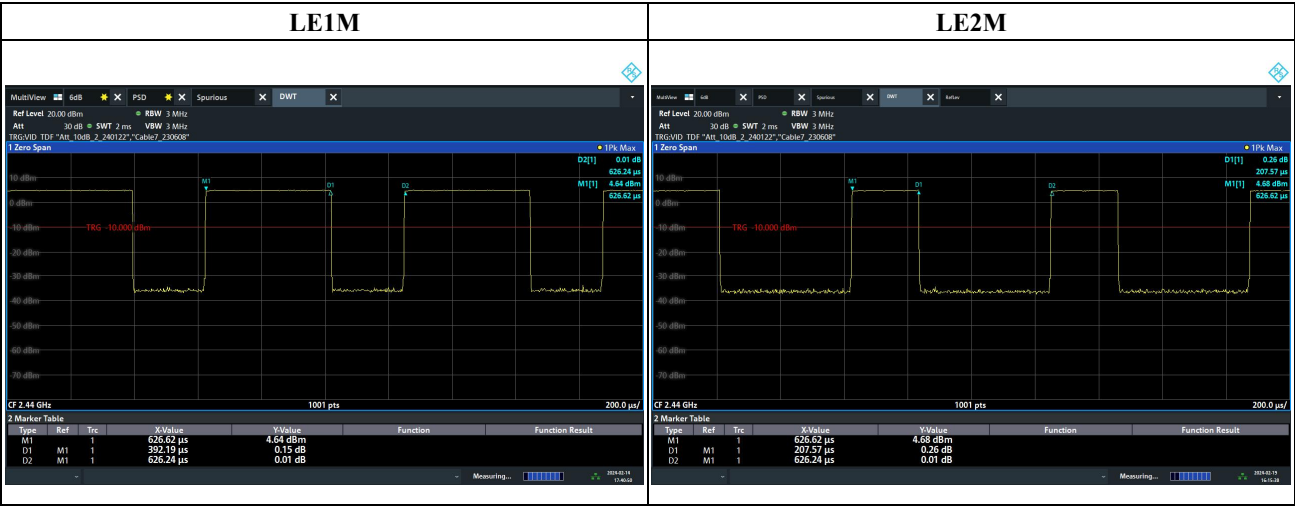



KIEL2403-YW03402-R01

4.3 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards.

FCC CFR 47 Part 15, Subpart C (§15.247)

KDB 558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2020

All test items in this test report have been performed and recorded as per the above standards.






KIEL2403-YW03402-R01

5.0 Test Equipment

Test Equipment is traceable to the National Institute of Standards and Technology (NIST). Measurement antenna used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

	Equipment	Manufacturer	Model	S/N	Description	Cal Due
■	Spectrum Analyzer	Rohde & Schwarz	FSV3044	101034	10 Hz ~ 44 GHz	2025-01-22
■	Spectrum Analyzer	Rohde & Schwarz	FSV3030	102117	10 Hz ~ 30 GHz	2024-05-25
■	DC Power Supply	ODA	OPM-305D	ODA-04-0923-07960	DC 30 V, 5 A, 2Ch	2025-01-24
■	Signal Generator	Rohde & Schwarz	SMBV100B	101818	8 kHz ~ 6 GHz	2025-01-23
■	Vector Signal Generator	Rohde & Schwarz	SMB100A	180880	100 kHz ~ 40 GHz	2024-08-03
■	Attenuator	INMET	26A-10	2	DC to 26.5 GHz, 10 dB,	2025-01-22
■	Attenuator	INMET	26A-10	3	DC to 26.5 GHz, 10 dB,	2025-01-22
■	True RMS Multimeter	FLUKE	177	59570153	1000 V, 10 A	2025-01-24
■	Power Meter	Rohde & Schwarz	NRX	101971	DC ~ 40 GHz	2025-01-23
■	Power Sensor	Rohde & Schwarz	NRP-Z86	104137	50 MHz ~ 40 GHz	2024-06-23
■	Notch Filter	Micro-Tronics	BRM50702	G577	Stop band: 2 400 MHz ~ 2 500 MHz	2024-05-25
■	High Pass Filter	WT Microwave INC.	WT-A3331-HS	23041001-1	Pass band: 6.0 GHz ~ 24.5 GHz	2024-05-25
■	EMI Test Receiver	Rohde & Schwarz	ESW44	101737	1 Hz ~ 44 GHz	2025-01-22
■	EMI Test Receiver	Rohde & Schwarz	ESW26	103106	1 Hz ~ 26.5 GHz	2025-01-22
■	Active Loop Antenna	Rohde & Schwarz	HFH2-Z2E	100858	8.3 kHz ~ 30 MHz	2024-08-22
■	Bi-Log Antenna	SCHWARZBECK	VULB9168	00915	25 MHz ~ 2 GHz	2024-10-27
■	Horn Antenna	Rohde & Schwarz	HF907	102722	800 MHz ~ 18 GHz	2024-08-16
■	Horn Antenna	SCHWARZBECK	BBHA9170	00981	15 GHz ~ 40 GHz	2025-04-29
■	Preamplifier	Rohde & Schwarz	SCU-01F	010094	10 kHz ~ 1 GHz, 35 dB	2024-08-02
■	Preamplifier	Rohde & Schwarz	SCU-18F	180084	1 GHz ~ 18 GHz	2024-08-02
■	Preamplifier	EXYNOD	ELNA40-50	2305161	18 GHz ~ 40 GHz	2024-05-25
■	6dB Attenuator	Fairview Microwave	SA3N5W-06	190311028	DC ~ 3 GHz, 6 dB	2024-10-27
■	Turntable	Innco	DT 3000-3t	-	-	-
□	Antenna Mast_L	Innco	MA4000-EP	-	-	-
■	Antenna Mast_R	Innco	MA4000-EP	-	-	-
■	Controller_1	Innco	CO3000	1062	-	-
■	Controller_2	Innco	CO3000	1063	-	-
■	Software	Rohde & Schwarz	EMC32	101535	-	-
■	Software	Rohde & Schwarz	ELEKTRA	102739	-	-





6.0 Test Results

6.1 Antenna Requirement


Except from §15.203 of the FCC Rules/Regulations:

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of the section.

- The antenna(s) of the EUT are Unique (non-standard) antenna connector.
 - The connector is within the transmitter enclosure
- There are no provisions for connection to an external antenna.

6.1.1 Result

The EUT complies with the requirement of §15.203



6.2 6 dB Bandwidth

6.2.1 Regulation

§15.247(a)(2) : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.



6.2.2 Test Procedure

The method of measurement used to test this DTS device is ANSI C63.10-2020.

The following procedures shall be used for measuring the OBW of the fundamental frequencies of certain unlicensed wireless devices, when required.

- a) Use the following spectrum analyzer settings:
 - 1) Set RBW = shall be in the range of 1 % to 5 % of the OBW but not less than 100 kHz.
 - 2) Set the VBW $\geq [3 \times \text{RBW}]$.
 - 3) Detector = Peak.
 - 4) Trace mode = Max hold.
 - 5) Sweep = No faster than coupled (auto) time.
- b) Allow trace to stabilize
- c) Use the N dB down function and set N value to -6.
- d) In case of 99 % bandwidth, Use 99 % power bandwidth function.
- e) A plot of the test results and setup description shall be included in the test report.


6.2.3 Test Setup

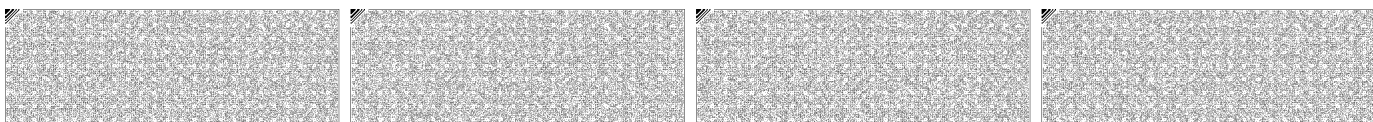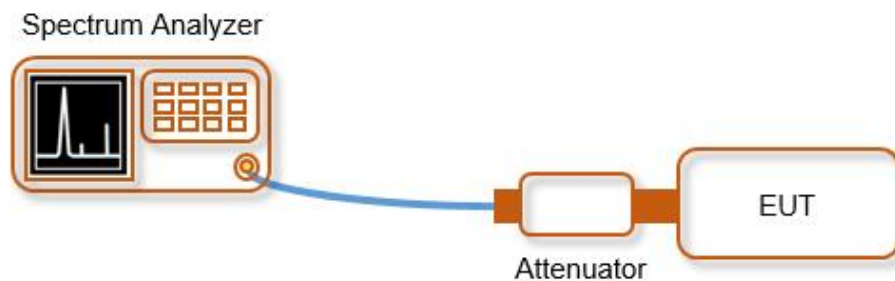



6.2.4 Test Result


Test Mode	Channel	Frequency [MHz]	6 dB BW [MHz]
802.11b	1	2 412	10.072
	6	2.437	10.045
	11	2.462	10.067
802.11g	1	2 412	15.111
	6	2.437	15.125
	11	2.462	15.105
802.11n(HT20)	1	2 412	15.125
	6	2.437	15.119
	11	2.462	15.122
802.11n(HT40)	3	2.422	32.561
	6	2.437	32.561
	9	2.452	32.631
LE1M	0	2.402	0.677
	19	2.440	0.667
	39	2.480	0.669
LE2M	0	2.402	1.014
	19	2.440	1.136
	39	2.480	1.095





KIEL2403-YW03402-R01

Test Plot of 6 dB Bandwidth

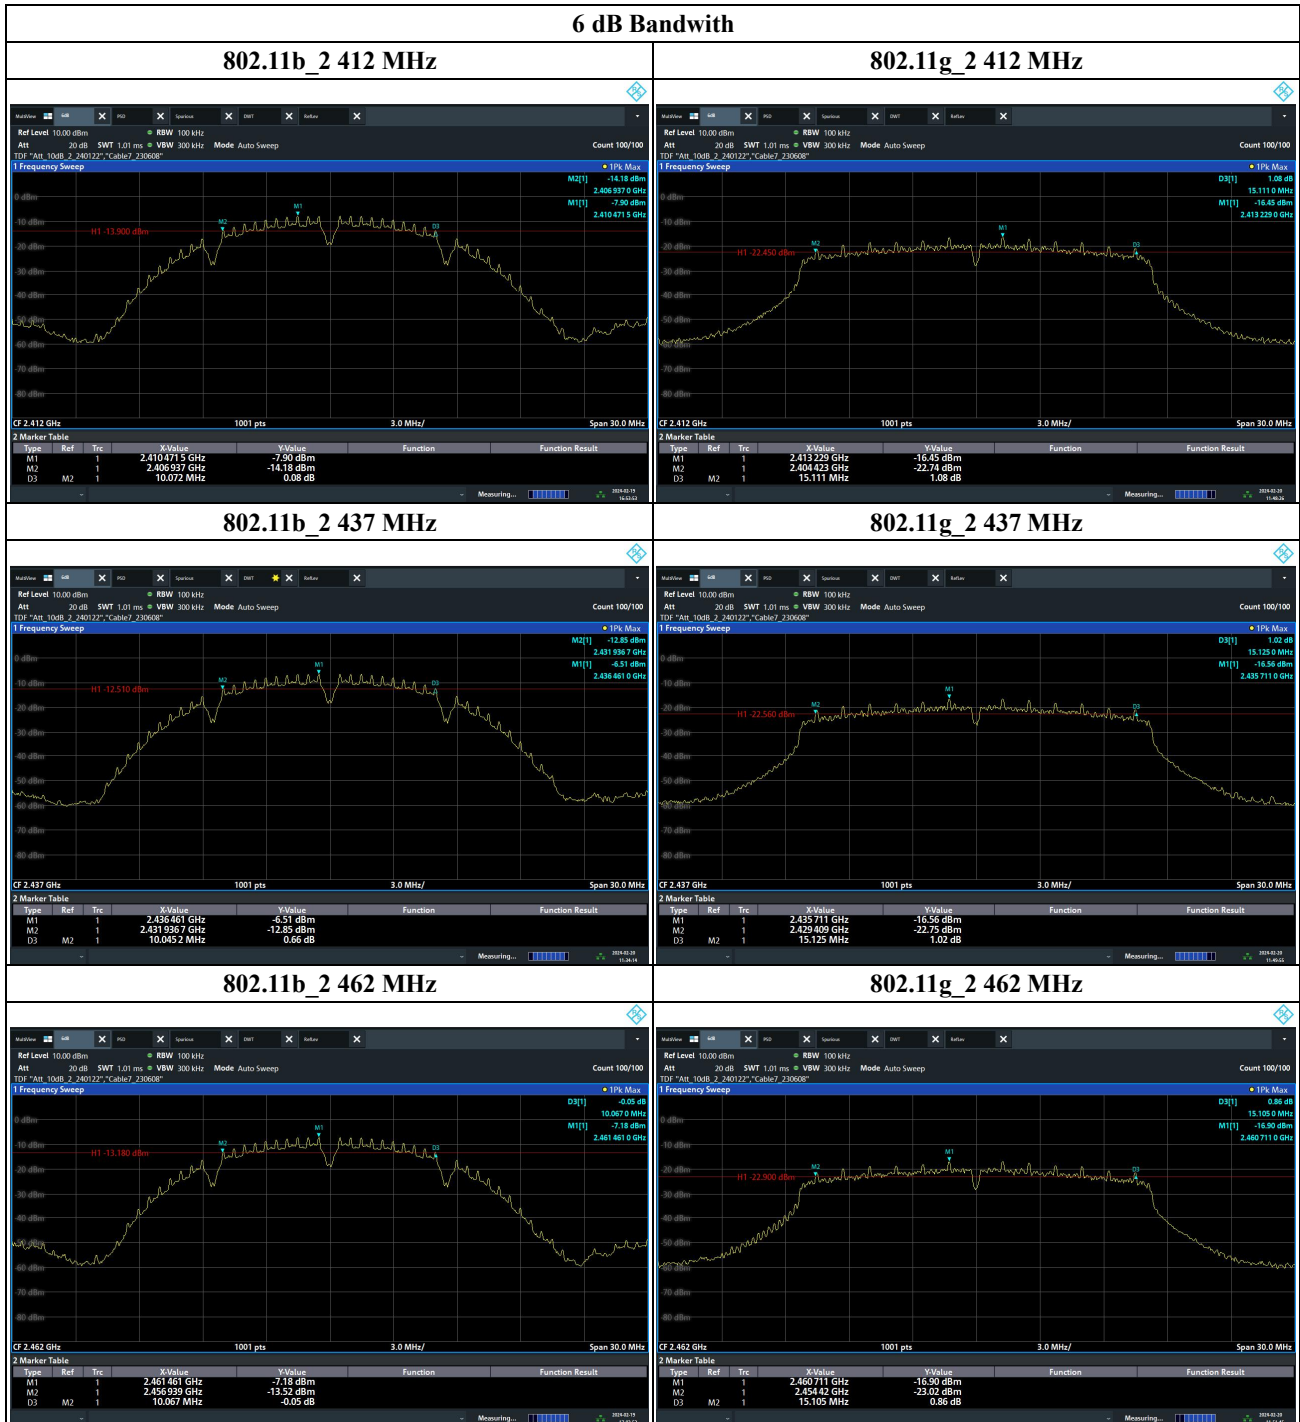





KIEL2403-YW03402-R01

6 dB Bandwidth


802.11n(HT20)_ 2 412 MHz

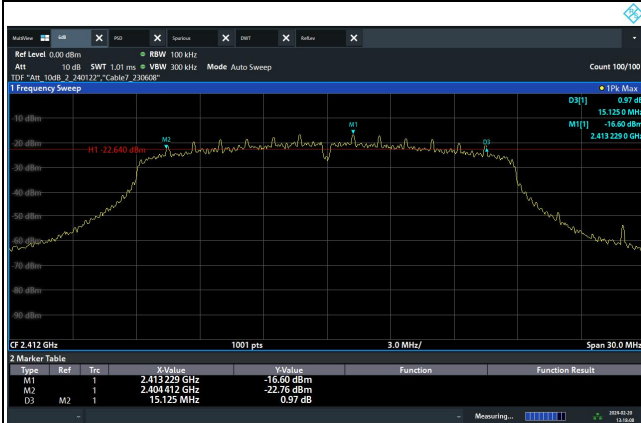


802.11n(HT40)_ 2 422 MHz

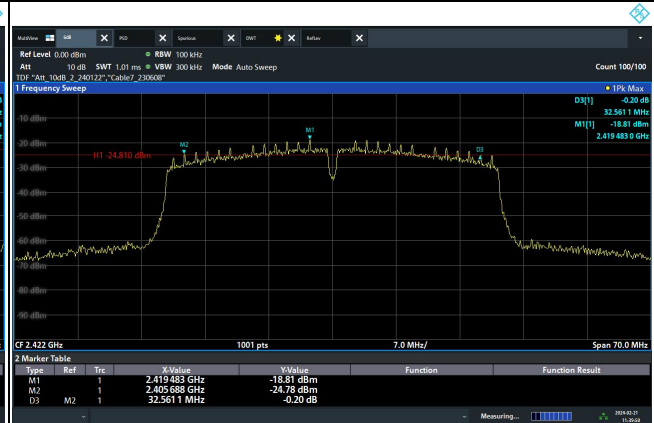


802.11n(HT20)_ 2 437 MHz

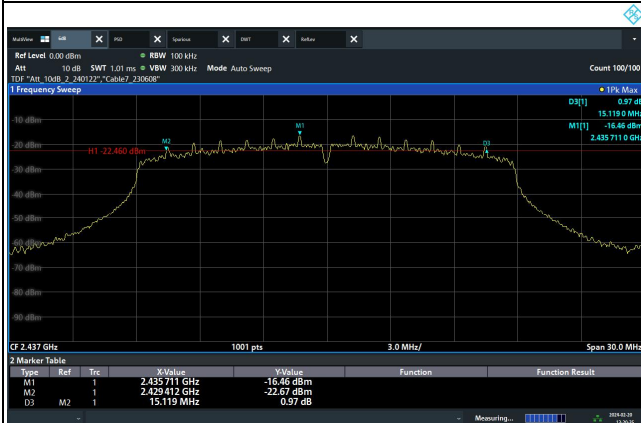

802.11n(HT40)_ 2 437 MHz

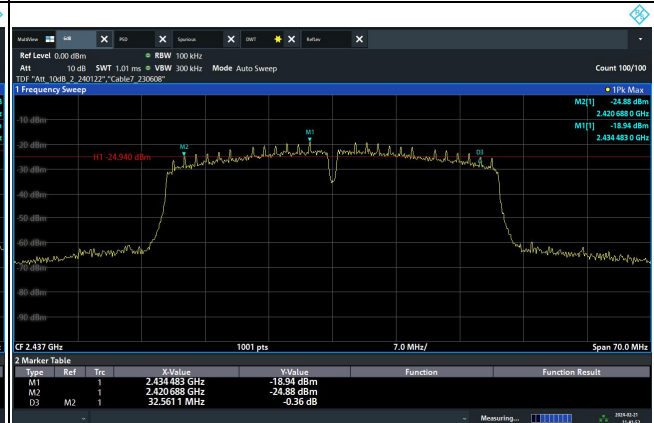

802.11n(HT20)_ 2 462 MHz

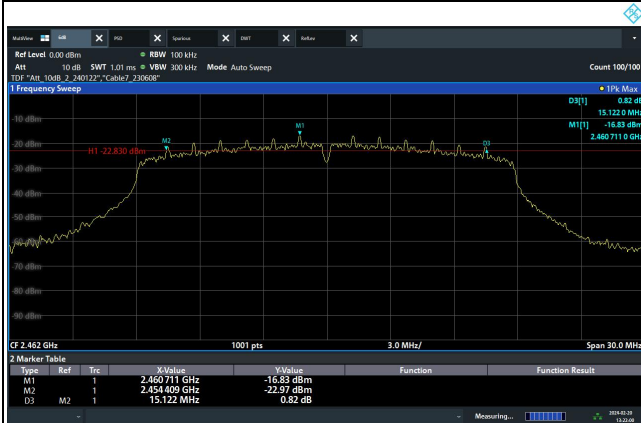

802.11n(HT40)_ 2 452 MHz

