



Test Mode:	802.11n-HT20	Test Date:	2024-05-23
Test Channel:	06	Test Engineer:	Stone Zhang

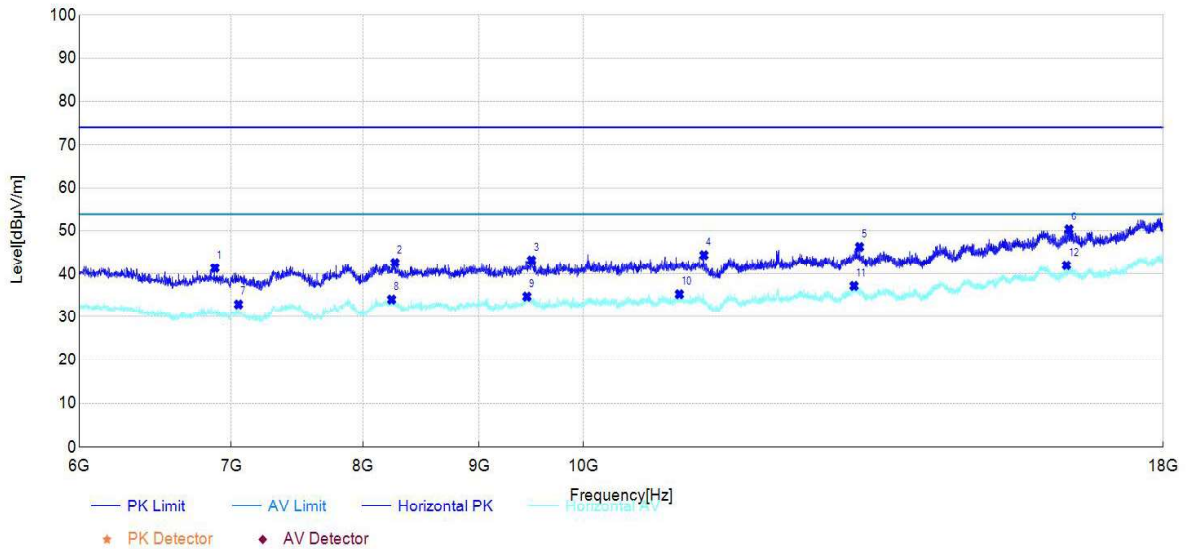

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6885.00	45.80	41.33	-4.47	74.00	32.67	150	115	PK	Horizontal	PASS
2	8263.50	43.89	42.61	-1.28	74.00	31.39	150	344	PK	Horizontal	PASS
3	9489.00	43.23	43.20	-0.03	74.00	30.80	150	4	PK	Horizontal	PASS
4	11301.00	43.55	44.41	0.86	74.00	29.59	150	80	PK	Horizontal	PASS
5	13231.50	43.09	46.29	3.20	74.00	27.71	150	344	PK	Horizontal	PASS
6	16360.50	40.91	50.31	9.40	74.00	23.69	150	35	PK	Horizontal	PASS
7	7051.50	37.49	32.96	-4.53	54.00	21.04	150	19	AV	Horizontal	PASS
8	8235.00	35.43	34.08	-1.35	54.00	19.92	150	202	AV	Horizontal	PASS
9	9445.50	35.13	34.76	-0.37	54.00	19.24	150	115	AV	Horizontal	PASS
10	11023.50	34.14	35.30	1.16	54.00	18.70	150	335	AV	Horizontal	PASS
11	13158.00	33.99	37.20	3.21	54.00	16.80	150	276	AV	Horizontal	PASS
12	16318.50	32.68	41.98	9.30	54.00	12.02	150	87	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

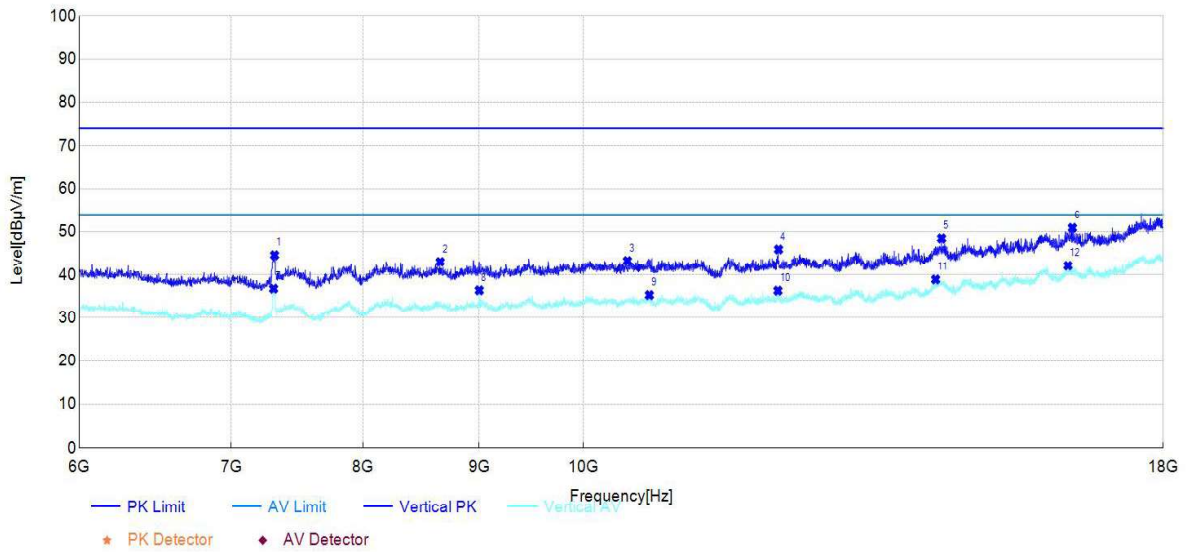


Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7314.00	47.97	44.60	-3.37	74.00	29.40	150	205	PK	Vertical	PASS
2	8650.50	44.23	43.03	-1.20	74.00	30.97	150	1	PK	Vertical	PASS
3	10458.00	42.35	43.25	0.90	74.00	30.75	150	87	PK	Vertical	PASS
4	12189.00	44.16	45.93	1.77	74.00	28.07	150	360	PK	Vertical	PASS
5	14379.00	42.90	48.44	5.54	74.00	25.56	150	80	PK	Vertical	PASS
6	16417.50	41.22	50.87	9.65	74.00	23.13	150	224	PK	Vertical	PASS
7	7306.50	40.19	36.77	-3.42	54.00	17.23	150	158	AV	Vertical	PASS
8	9000.00	37.17	36.39	-0.78	54.00	17.61	150	118	AV	Vertical	PASS
9	10693.50	34.60	35.31	0.71	54.00	18.69	150	10	AV	Vertical	PASS
10	12181.50	34.56	36.31	1.75	54.00	17.69	150	0	AV	Vertical	PASS
11	14292.00	33.65	38.89	5.24	54.00	15.11	150	122	AV	Vertical	PASS
12	16344.00	32.63	42.11	9.48	54.00	11.89	150	302	AV	Vertical	PASS

Note: (1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11n-HT20	Test Date:	2024-05-23
Test Channel:	11	Test Engineer:	Stone Zhang

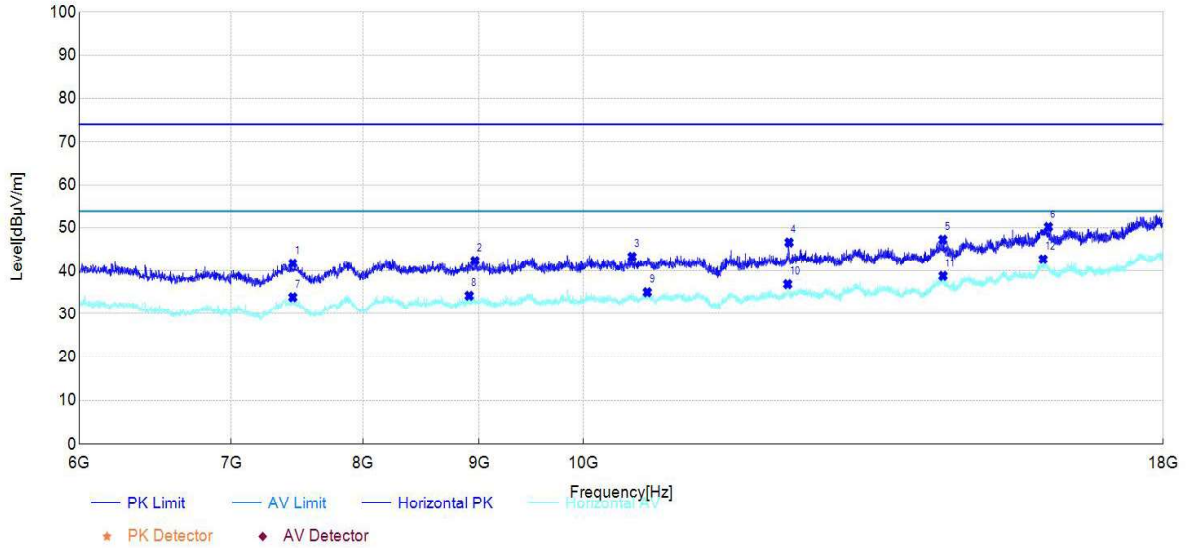

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7450.50	44.63	41.75	-2.88	74.00	32.25	150	240	PK	Horizontal	PASS
2	8961.00	43.32	42.38	-0.94	74.00	31.62	150	141	PK	Horizontal	PASS
3	10507.50	42.49	43.35	0.86	74.00	30.65	150	20	PK	Horizontal	PASS
4	12319.50	44.90	46.62	1.72	74.00	27.38	150	357	PK	Horizontal	PASS
5	14397.00	42.11	47.26	5.15	74.00	26.74	150	205	PK	Horizontal	PASS
6	16023.00	40.76	50.18	9.42	74.00	23.82	150	221	PK	Horizontal	PASS
7	7450.50	36.80	33.92	-2.88	54.00	20.08	150	240	AV	Horizontal	PASS
8	8908.50	35.41	34.26	-1.15	54.00	19.74	150	43	AV	Horizontal	PASS
9	10671.00	34.53	35.08	0.55	54.00	18.92	150	125	AV	Horizontal	PASS
10	12303.00	35.32	36.92	1.60	54.00	17.08	150	359	AV	Horizontal	PASS
11	14400.00	33.64	38.81	5.17	54.00	15.19	150	148	AV	Horizontal	PASS
12	15937.50	32.95	42.73	9.78	54.00	11.27	150	175	AV	Horizontal	PASS

Note: (1) Level=Reading+Factor

(2) Margin=Limit-Level

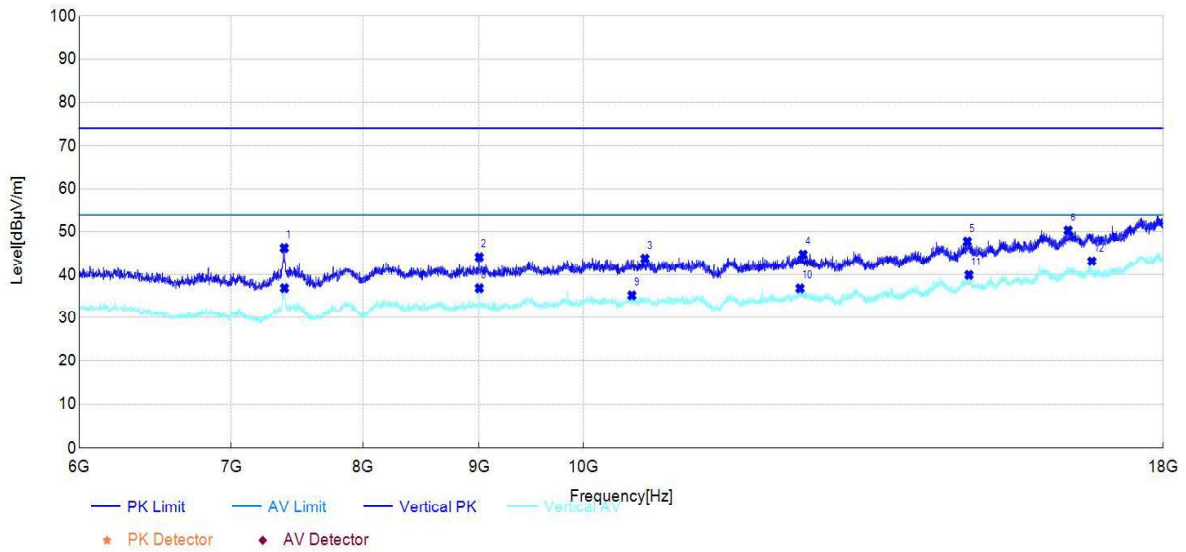

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7386.00	49.07	46.24	-2.83	74.00	27.76	150	170	PK	Vertical	PASS
2	9000.00	44.92	44.14	-0.78	74.00	29.86	150	115	PK	Vertical	PASS
3	10645.50	42.95	43.81	0.86	74.00	30.19	150	0	PK	Vertical	PASS
4	12496.50	42.20	44.74	2.54	74.00	29.26	150	181	PK	Vertical	PASS
5	14760.00	42.10	47.72	5.62	74.00	26.28	150	349	PK	Vertical	PASS
6	16347.00	40.76	50.26	9.50	74.00	23.74	150	323	PK	Vertical	PASS
7	7387.50	39.70	36.88	-2.82	54.00	17.12	150	166	AV	Vertical	PASS
8	9000.00	37.65	36.87	-0.78	54.00	17.13	150	115	AV	Vertical	PASS
9	10506.00	34.08	35.24	1.16	54.00	18.76	150	147	AV	Vertical	PASS
10	12457.50	34.36	36.83	2.47	54.00	17.17	150	275	AV	Vertical	PASS
11	14784.00	34.30	39.92	5.62	54.00	14.08	150	75	AV	Vertical	PASS
12	16744.50	33.16	43.17	10.01	54.00	10.83	150	208	AV	Vertical	PASS

Note: (1) Level=Reading+Factor

(2) Margin=Limit-Level

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510MHz.

² Above 38.6

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For RSS-Gen Section 8.10 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.009 - 0.110	240 - 285	9.0 - 9.2
2.1735 - 2.1905	322 - 335.4	9.3 - 9.5
3.020 - 3.026	399.9 - 410	10.6 - 12.7
4.125 - 4.128	608 - 614	13.25 - 13.4
4.17725 - 4.17775	960 - 1427	14.47 - 14.5
4.20725 - 4.20775	1435 - 1626.5	15.35 - 16.2
5.677 - 5.683	1645.5 - 1646.5	17.7 - 21.4
6.215 - 6.218	1660 - 1710	22.01 - 23.12
6.26775 - 6.26825	1718.8 -1722.2	23.6 - 24.0
6.31175 - 6.31225	2200 - 2300	31.2 - 31.8
8.291 - 8.294	2310 -2390	36.43 - 36.5
8.362 - 8.366	2655 - 2900	Above 38.6
8.37625 - 8.38675	3260 - 3267	--
8.41425 - 8.41475	3332 -3339	
12.29 - 12.293	334.5 - 3358	
12.51975 - 12.52025	3500 - 4400	
12.57675 - 12.57725	4500 - 5150	
13.36 -13.41	5350 - 5460	
16.42 - 16.423	7250 - 7750	
16.69475 - 16.69525	8025 - 8500	
16.80425 - 16.80475	--	
25.5 - 25.67		
37.5 - 38.25		
73 - 74.6		
74.8 - 75.2		
108 - 138		
156.52475 - 156.525225		
156.7 - 156.9		

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen

must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.7.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Power Average (RMS)
5. Number of sweep point = 2001 (Number of sweep points must be $\geq 2 \times \text{span} / \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.


7.7.4. Test Setup

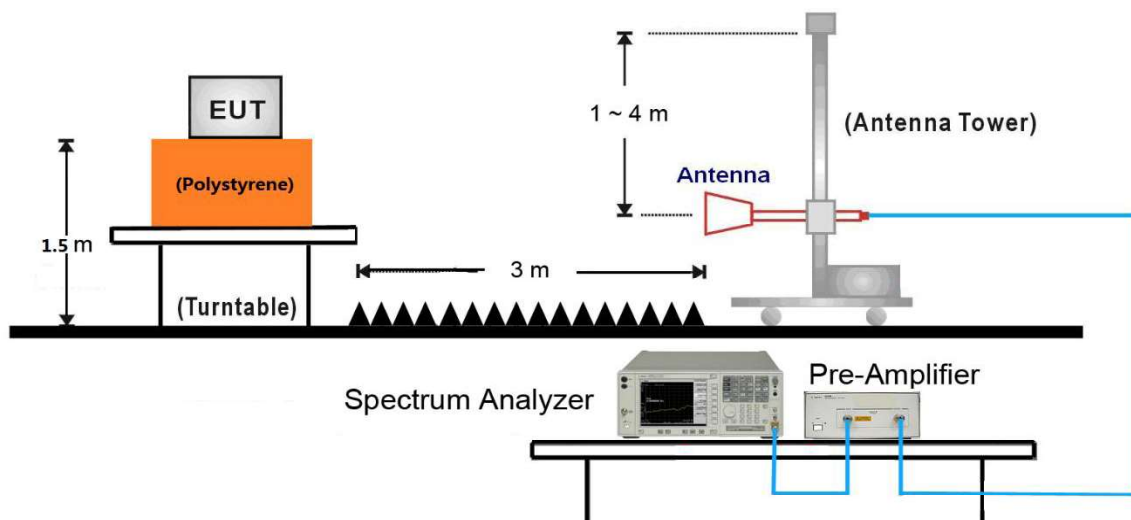

Note: This item was performed with the WIFI antenna connected.

7.7.5. Test Result

Project Information			
EUT:	Smart Hub WZ3	Model:	3RSH06027BWZ
Test Date:	2024-05-22	Voltage:	AC 120V 60HZ
Environment:	Temp: 27.2°C; Humi:58%	Engineer:	Stone Zhang
Remark:	Transmit by 802.11b at Channel 2412MHz		

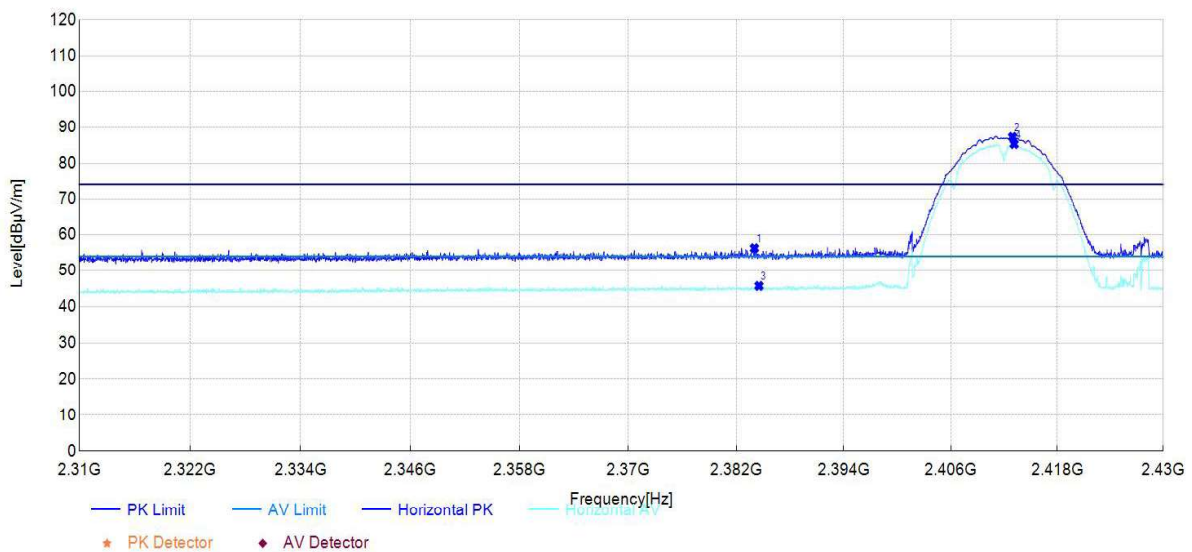


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2384.03	20.20	56.27	36.07	74.00	17.73	150	288	PK	Horizontal	PASS
2	2412.96	51.11	87.29	36.18	/	/	150	24	PK	Horizontal	PASS
3	2384.54	9.65	45.72	36.07	54.00	8.28	150	131	AV	Horizontal	PASS
4	2413.14	49.13	85.31	36.18	/	/	150	20	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

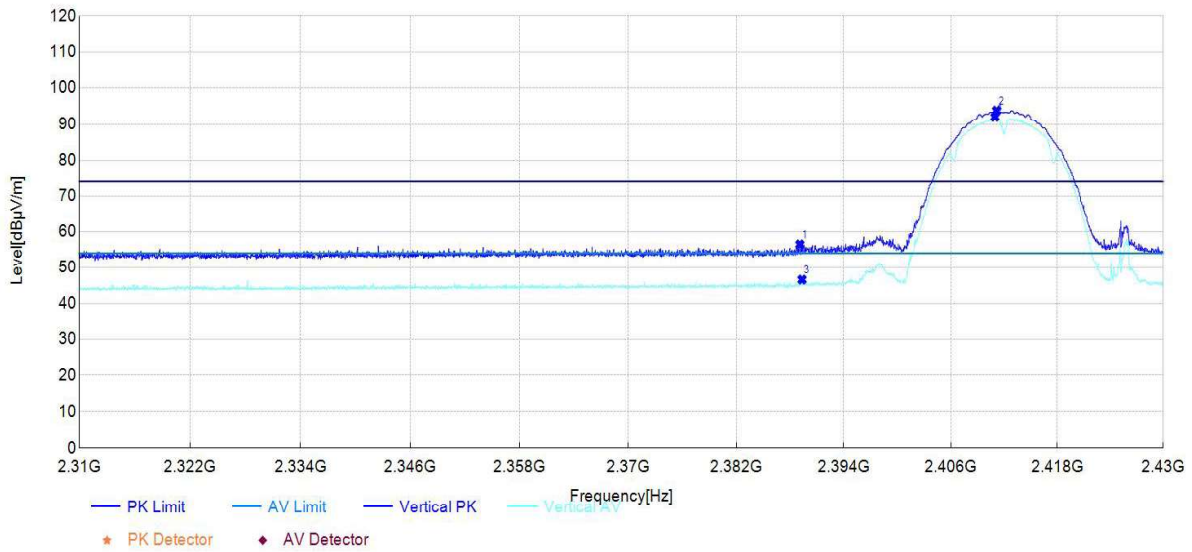

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2389.10	20.53	56.48	35.95	74.00	17.52	150	336	PK	Vertical	PASS
2	2411.16	57.77	93.77	36.00	/	/	150	267	PK	Vertical	PASS
3	2389.34	10.68	46.63	35.95	54.00	7.37	150	285	AV	Vertical	PASS
4	2410.98	56.04	92.04	36.00	/	/	150	267	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Smart Hub WZ3	Model:	3RSH06027BWZ
Test Date:	2024-05-22	Voltage:	AC 120V 60HZ
Environment:	Temp: 27.2°C; Humi:58%	Engineer:	Stone Zhang
Remark:	Transmit by 802.11b at Channel 2462MHz		

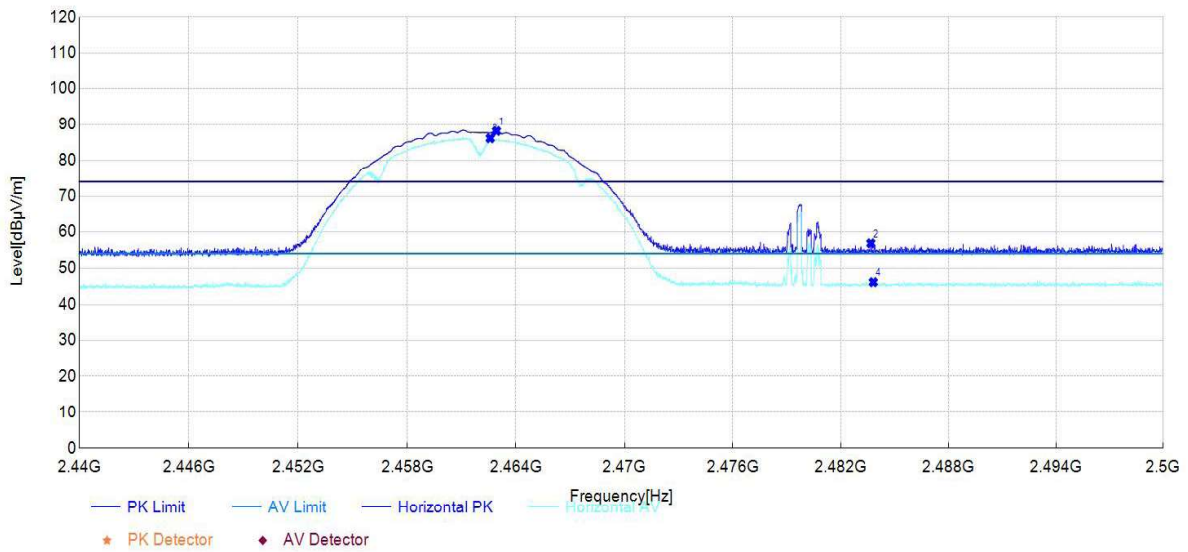


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2462.93	51.81	88.12	36.31	/	/	150	28	PK	Horizontal	PASS
2	2483.68	20.48	56.84	36.36	74.00	17.16	150	210	PK	Horizontal	PASS
3	2462.58	49.79	86.10	36.31	/	/	150	28	AV	Horizontal	PASS
4	2483.81	9.84	46.20	36.36	54.00	7.80	150	181	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

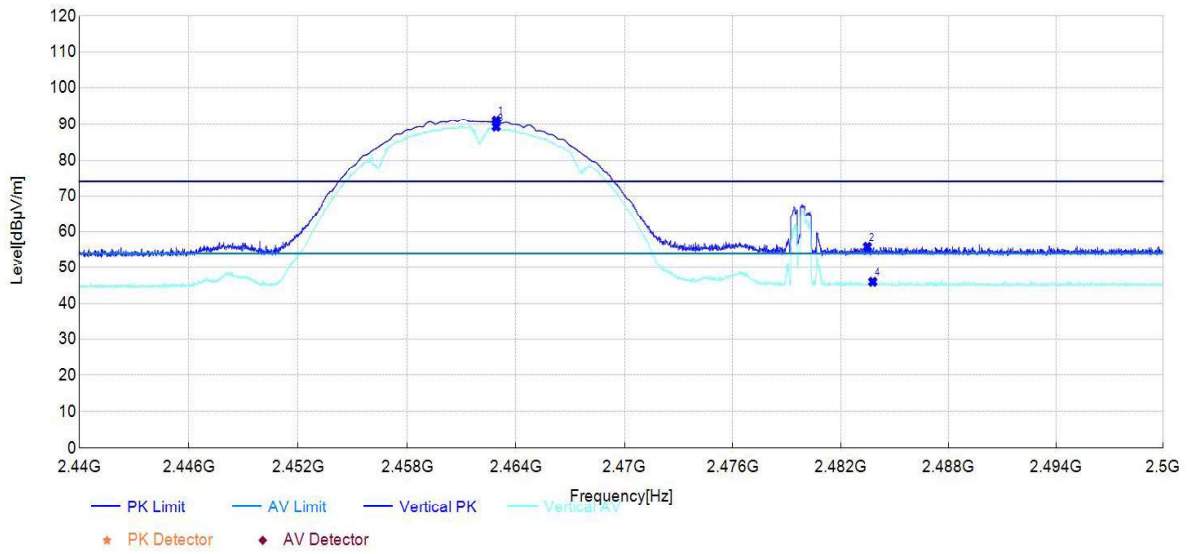

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2462.91	55.06	91.12	36.06	/	/	150	256	PK	Vertical	PASS
2	2483.78	19.76	55.84	36.08	74.00	18.16	150	213	PK	Vertical	PASS
3	2462.91	53.18	89.24	36.06	/	/	150	253	AV	Vertical	PASS
4	2483.78	9.92	46.00	36.08	54.00	8.00	150	278	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Smart Hub WZ3	Model:	3RSH06027BWZ
Test Date:	2024-05-22	Voltage:	AC 120V 60HZ
Environment:	Temp: 27.2°C; Humi:58%	Engineer:	Stone Zhang
Remark:	Transmit by 802.11g at Channel 2412MHz		

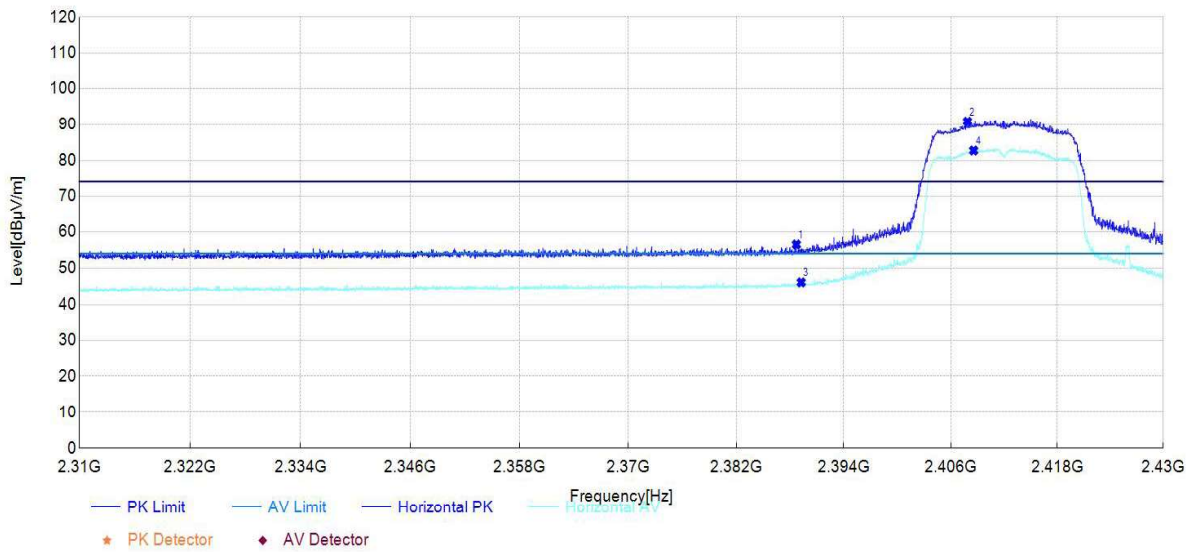


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2388.71	20.42	56.51	36.09	74.00	17.49	150	60	PK	Horizontal	PASS
2	2407.88	54.67	90.84	36.17	/	/	150	21	PK	Horizontal	PASS
3	2389.25	10.05	46.14	36.09	54.00	7.86	150	202	AV	Horizontal	PASS
4	2408.57	46.58	82.75	36.17	/	/	150	21	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

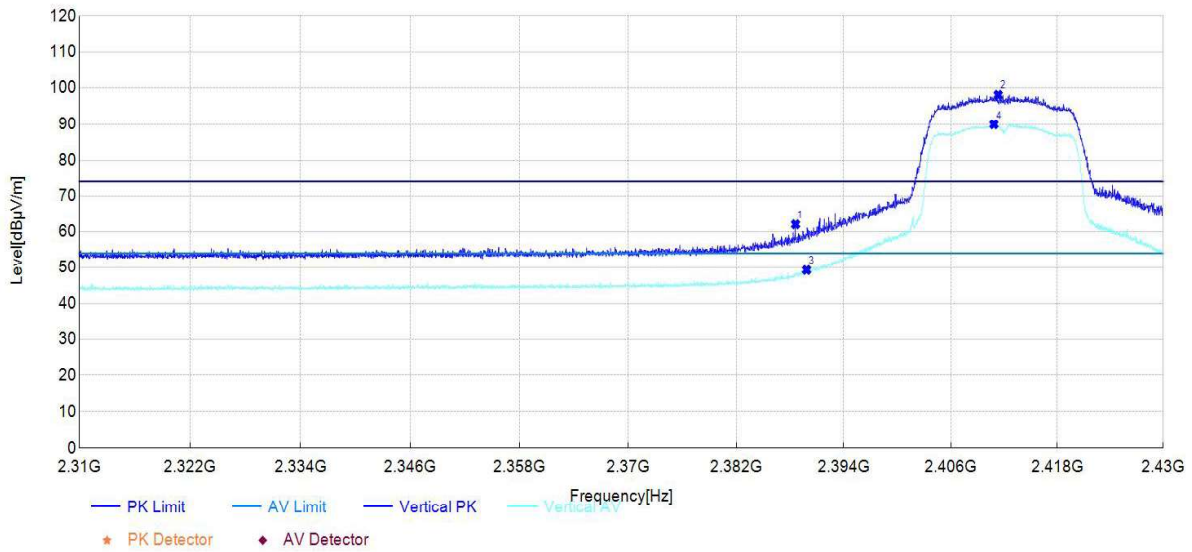

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2388.62	26.08	62.03	35.95	74.00	11.97	150	7	PK	Vertical	PASS
2	2411.34	62.04	98.04	36.00	/	/	150	272	PK	Vertical	PASS
3	2389.85	13.37	49.32	35.95	54.00	4.68	150	354	AV	Vertical	PASS
4	2410.86	53.93	89.93	36.00	/	/	150	272	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Smart Hub WZ3	Model:	3RSH06027BWZ
Test Date:	2024-05-22	Voltage:	AC 120V 60HZ
Environment:	Temp: 27.2°C; Humi:58%	Engineer:	Stone Zhang
Remark:	Transmit by 802.11g at Channel 2462MHz		

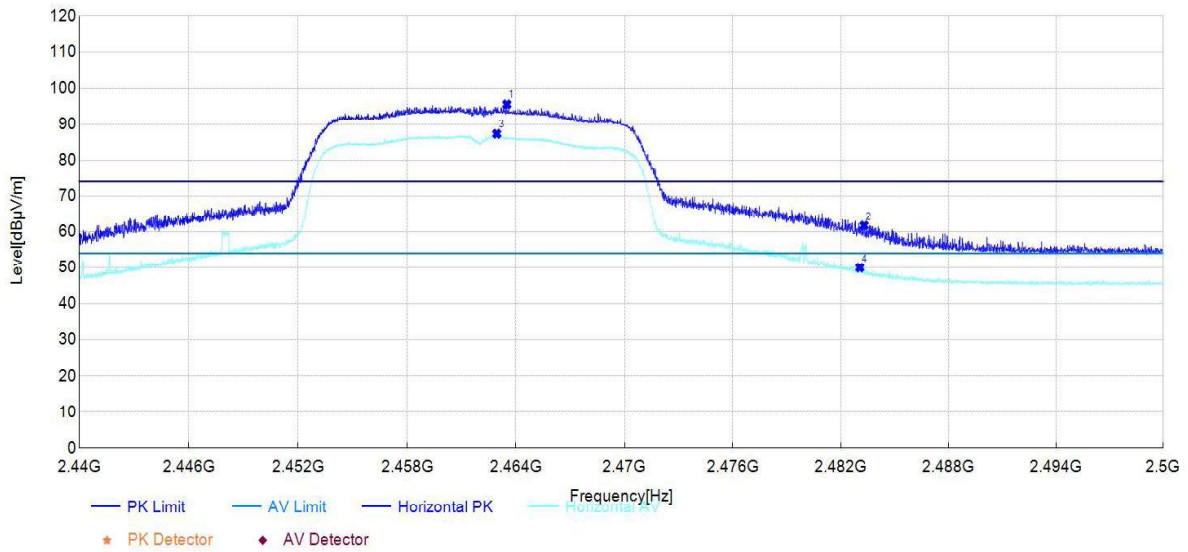


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2463.50	59.28	95.59	36.31	/	/	150	324	PK	Horizontal	PASS
2	2483.70	25.36	61.72	36.36	74.00	12.28	150	178	PK	Horizontal	PASS
3	2462.94	51.01	87.32	36.31	/	/	150	324	AV	Horizontal	PASS
4	2483.66	13.62	49.98	36.36	54.00	4.02	150	352	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

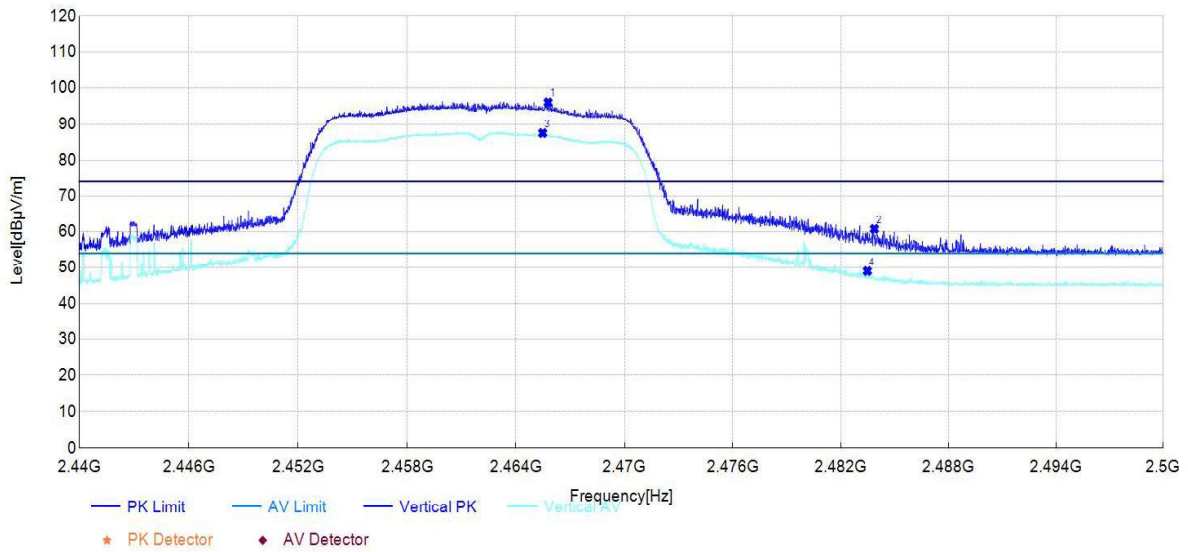

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2465.78	59.93	96.00	36.07	/	/	150	102	PK	Vertical	PASS
2	2483.87	24.66	60.74	36.08	74.00	13.26	150	102	PK	Vertical	PASS
3	2465.48	51.43	87.50	36.07	/	/	150	94	AV	Vertical	PASS
4	2483.58	12.91	48.99	36.08	54.00	5.01	150	98	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Smart Hub WZ3	Model:	3RSH06027BWZ
Test Date:	2024-05-22	Voltage:	AC 120V 60HZ
Environment:	Temp: 27.2°C; Humi:58%	Engineer:	Stone Zhang
Remark:	Transmit by 802.11n-HT20 at Channel 2412MHz		

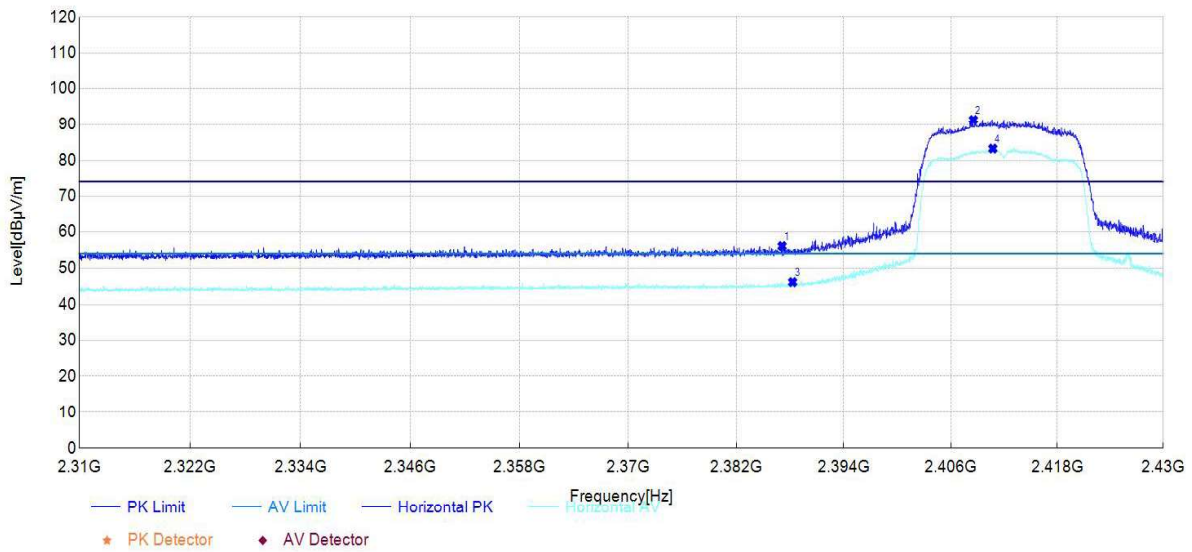


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2387.12	19.99	56.08	36.09	74.00	17.92	150	61	PK	Horizontal	PASS
2	2408.54	55.12	91.29	36.17	/	/	150	21	PK	Horizontal	PASS
3	2388.29	10.12	46.21	36.09	54.00	7.79	150	207	AV	Horizontal	PASS
4	2410.74	47.10	83.28	36.18	/	/	150	24	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

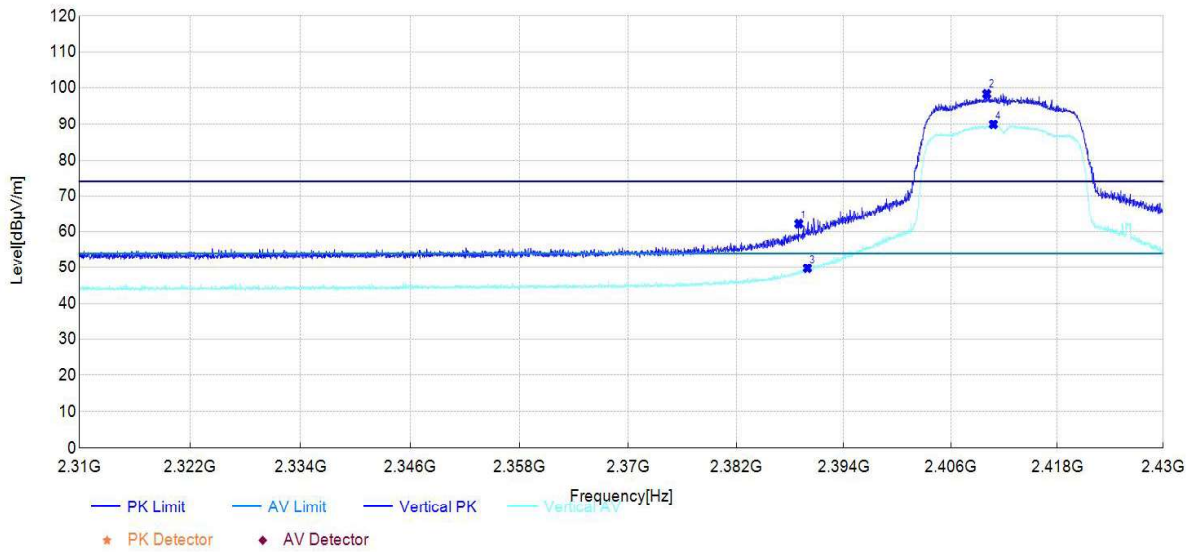

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2388.98	26.20	62.15	35.95	74.00	11.85	150	347	PK	Vertical	PASS
2	2410.05	62.29	98.29	36.00	/	/	150	275	PK	Vertical	PASS
3	2389.94	13.81	49.76	35.95	54.00	4.24	150	6	AV	Vertical	PASS
4	2410.80	53.88	89.88	36.00	/	/	150	268	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	Smart Hub WZ3	Model:	3RSH06027BWZ
Test Date:	2024-05-22	Voltage:	AC 120V 60HZ
Environment:	Temp: 27.2°C; Humi:58%	Engineer:	Stone Zhang
Remark:	Transmit by 802.11n-HT20 at Channel 2462MHz		

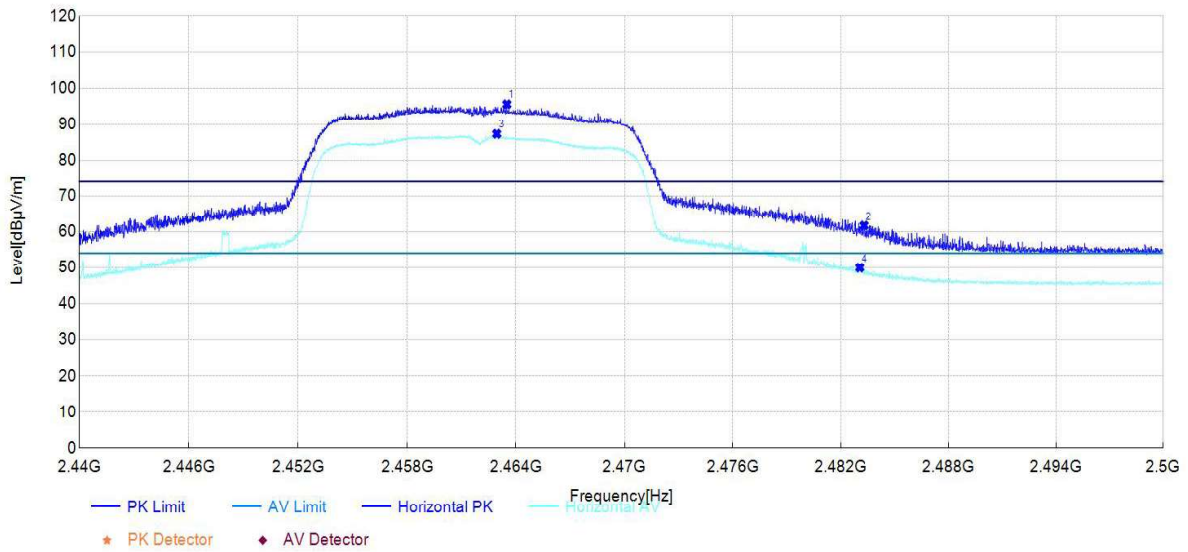


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2463.50	59.28	95.59	36.31	/	/	150	324	PK	Horizontal	PASS
2	2483.60	25.36	61.72	36.36	74.00	12.28	150	178	PK	Horizontal	PASS
3	2462.94	51.01	87.32	36.31	/	/	150	324	AV	Horizontal	PASS
4	2483.56	13.62	49.98	36.36	54.00	4.02	150	352	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

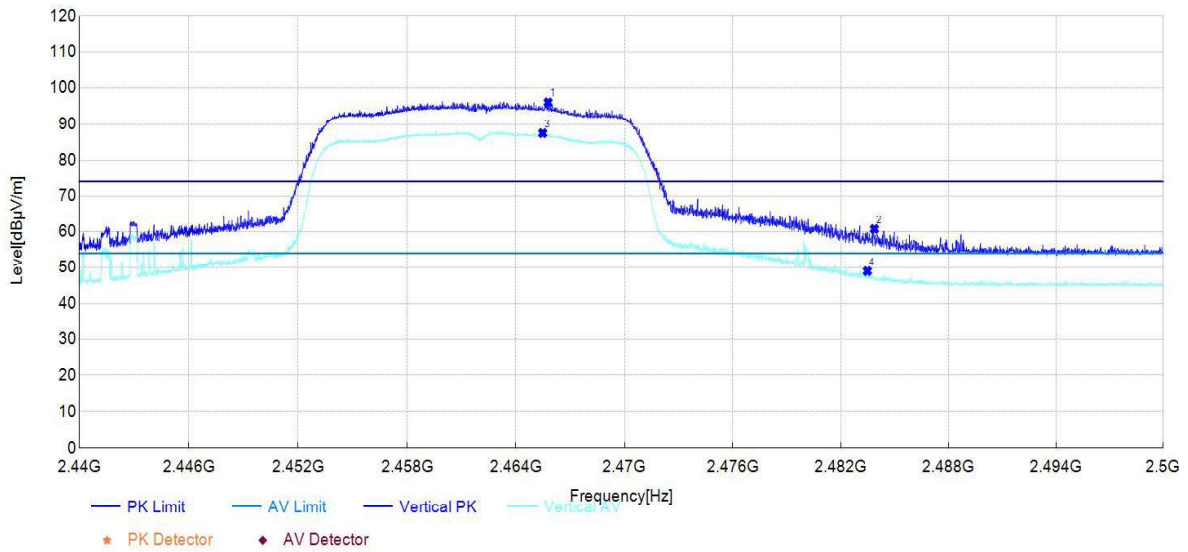

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2465.78	59.93	96.00	36.07	/	/	150	102	PK	Vertical	PASS
2	2483.87	24.66	60.74	36.08	74.00	13.26	150	102	PK	Vertical	PASS
3	2465.48	51.43	87.50	36.07	/	/	150	94	AV	Vertical	PASS
4	2483.58	12.91	48.99	36.08	54.00	5.01	150	98	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.8.2. Test Setup

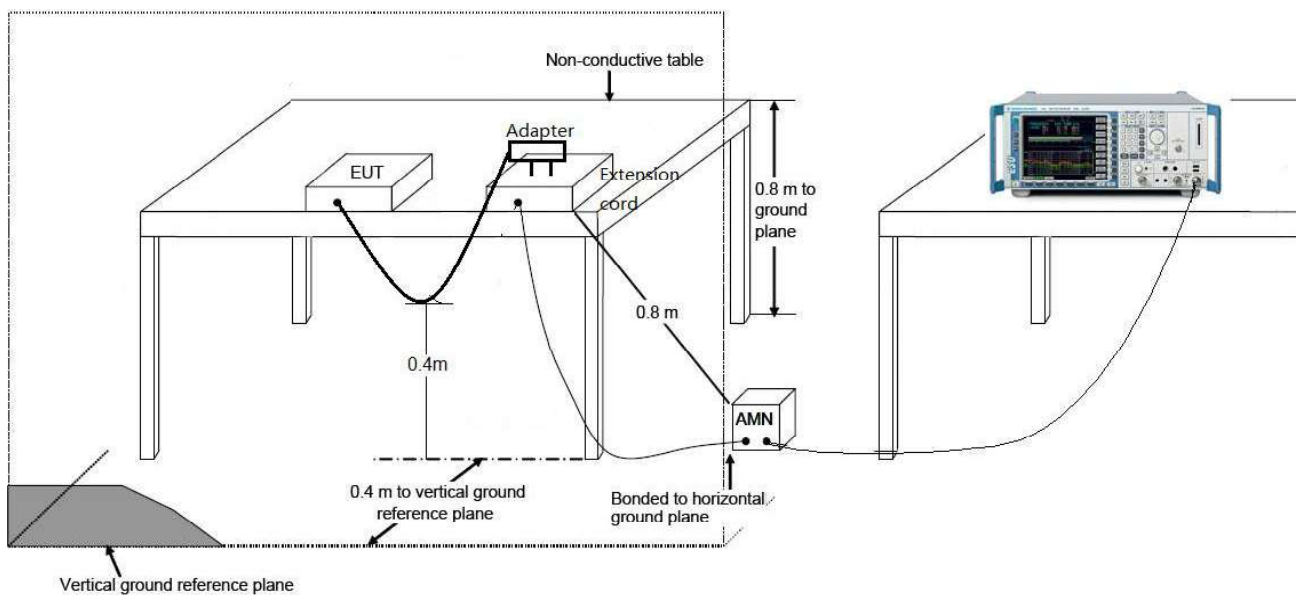

7.8.3. Test Result


The worst case of Conducted Emissions:

EUT:	Smart Hub WZ3	Polarity:	LINE
Model:	3RSH06027BWZ	Test Date:	2025-05-20
Mode:	Transmit at 802.11b-2412MHz	Voltage:	120V/60Hz
Environment:	Temp: 23.6°C; Humi:38%	Engineer:	Stone Zhang

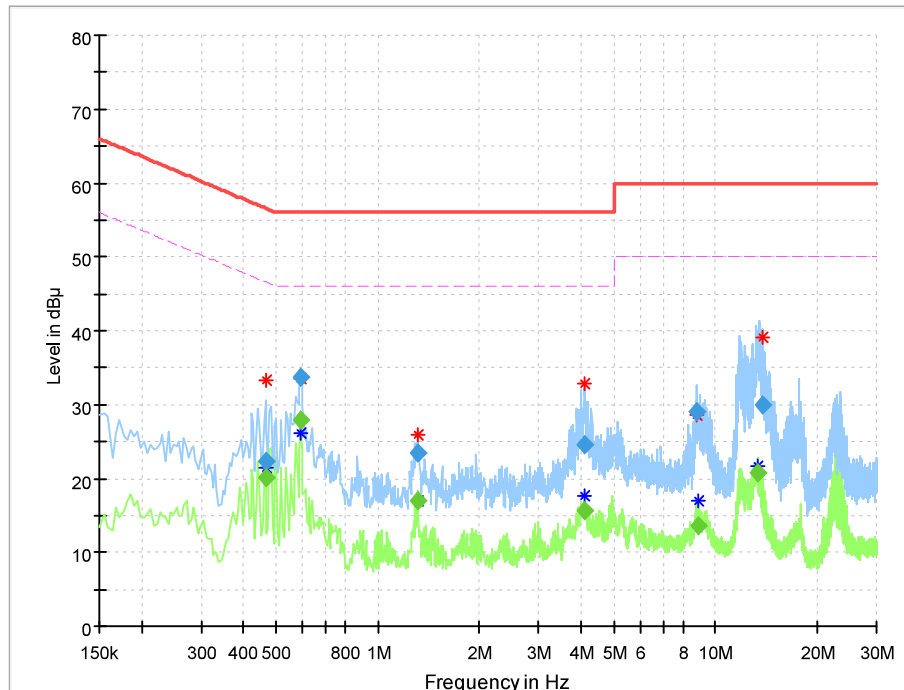

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.465000	---	20.19	46.60	26.42	100.0	9.000	L1	ON	9.8
0.465000	22.29	---	56.60	34.32	100.0	9.000	L1	ON	9.8
0.591000	---	27.93	46.00	18.07	100.0	9.000	L1	ON	9.8
0.591000	33.73	---	56.00	22.27	100.0	9.000	L1	ON	9.8
1.315500	---	16.96	46.00	29.04	100.0	9.000	L1	ON	9.8
1.315500	23.45	---	56.00	32.55	100.0	9.000	L1	ON	9.8
4.092000	---	15.74	46.00	30.26	100.0	9.000	L1	ON	9.8
4.101000	24.62	---	56.00	31.38	100.0	9.000	L1	ON	9.8
8.812500	28.98	---	60.00	31.02	100.0	9.000	L1	ON	9.8
8.884500	---	13.68	50.00	36.32	100.0	9.000	L1	ON	9.8
13.357500	---	20.81	50.00	29.19	100.0	9.000	L1	ON	9.8
13.762500	30.03	---	60.00	29.97	100.0	9.000	L1	ON	9.8

EUT:	Smart Hub WZ3	Polarity:	NEUTRAL
Model:	3RSH06027BWZ	Test Date:	2025-05-20
Mode:	Transmit at 802.11b-2412MHz	Voltage:	120V/60Hz
Environment:	Temp: 24°C; Humi:52%	Engineer:	Stone Zhang

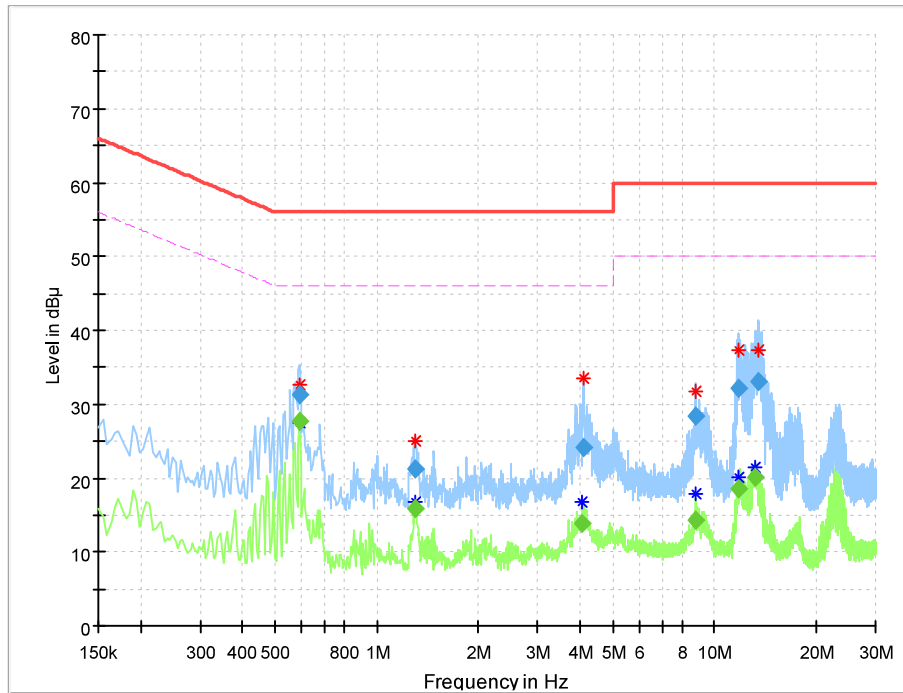

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.591000	---	27.73	46.00	18.27	100.0	9.000	N	ON	9.8
0.591000	31.27	---	56.00	24.73	100.0	9.000	N	ON	9.8
1.297500	21.19	---	56.00	34.81	100.0	9.000	N	ON	9.8
1.302000	---	15.88	46.00	30.12	100.0	9.000	N	ON	9.8
4.069500	---	13.87	46.00	32.13	100.0	9.000	N	ON	9.8
4.087500	24.18	---	56.00	31.82	100.0	9.000	N	ON	9.8
8.812500	28.49	---	60.00	31.51	100.0	9.000	N	ON	9.8
8.812500	---	14.28	50.00	35.72	100.0	9.000	N	ON	9.8
11.746500	32.09	---	60.00	27.91	100.0	9.000	N	ON	9.8
11.796000	---	18.49	50.00	31.51	100.0	9.000	N	ON	9.8
13.267500	---	20.04	50.00	29.96	100.0	9.000	N	ON	9.8
13.528500	33.00	---	60.00	27.00	100.0	9.000	N	ON	9.8

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Smart Hub WZ3** is compliance with Part 15C of the FCC Rules.