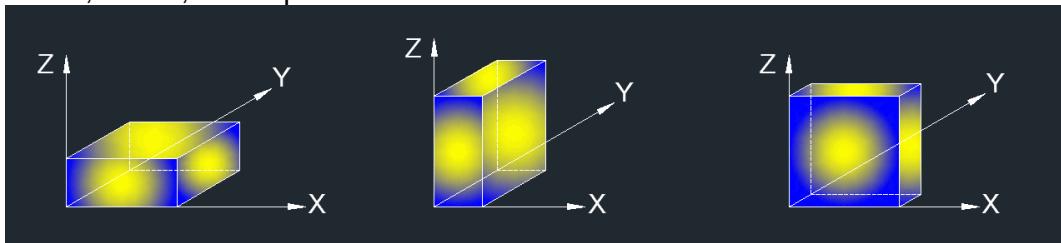


X axis, Y axis, Z axis positions:



Note: The EUT uses an adjustable antenna, the antenna can be adjusted from 0° to 90°, all the typical positions have been explored, the 90° was the worst case, so the EUT in one orthogonal axis (X axis) emissions with 90° of the antenna has been tested and recorded in the report for all radiated test.

## 8.2. TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

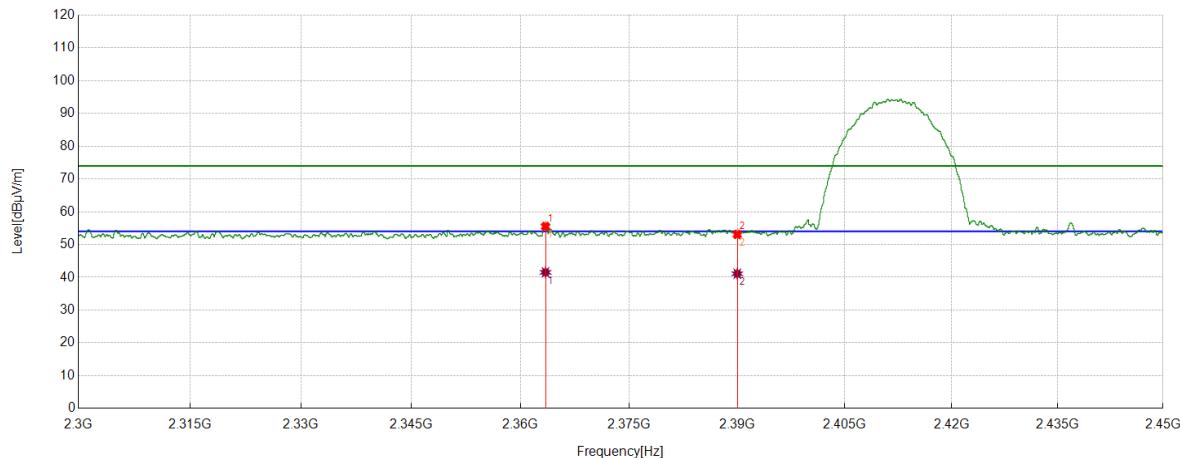
## 8.3. RESTRICTED BANDEDGE

### TEST RESULT TABLE

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS

**TEST GRAPHS**

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2363.4579	45.56	9.97	55.53	74.00	-18.47	Horizontal
2	2390.0000	42.75	10.35	53.10	74.00	-20.90	Horizontal

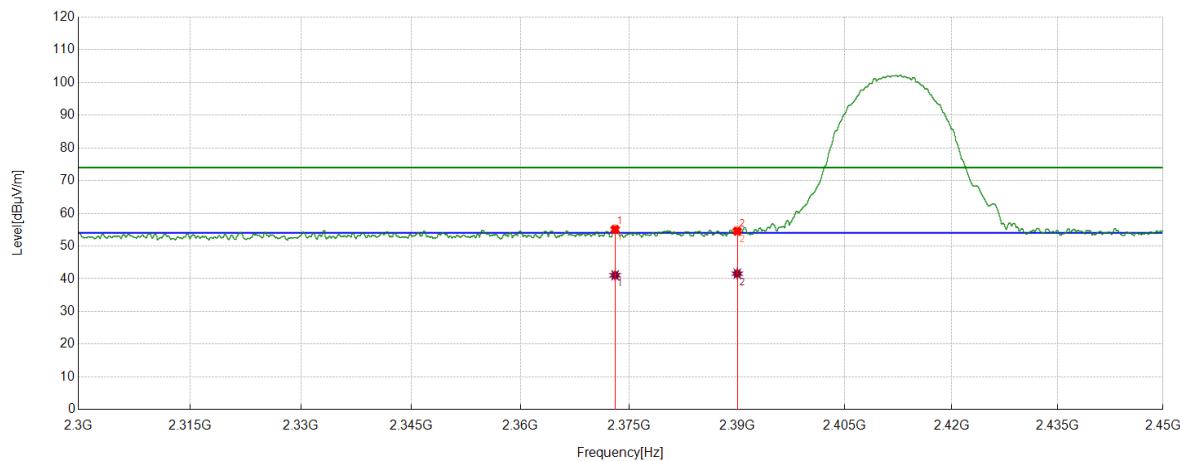
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2363.4579	31.56	9.97	41.53	54.00	-12.47	Horizontal
2	2390.0000	30.75	10.35	41.10	54.00	-12.90	Horizontal

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2373.0591	44.91	10.17	55.08	74.00	-18.92	Vertical
2	2390.0000	44.21	10.35	54.56	74.00	-19.44	Vertical

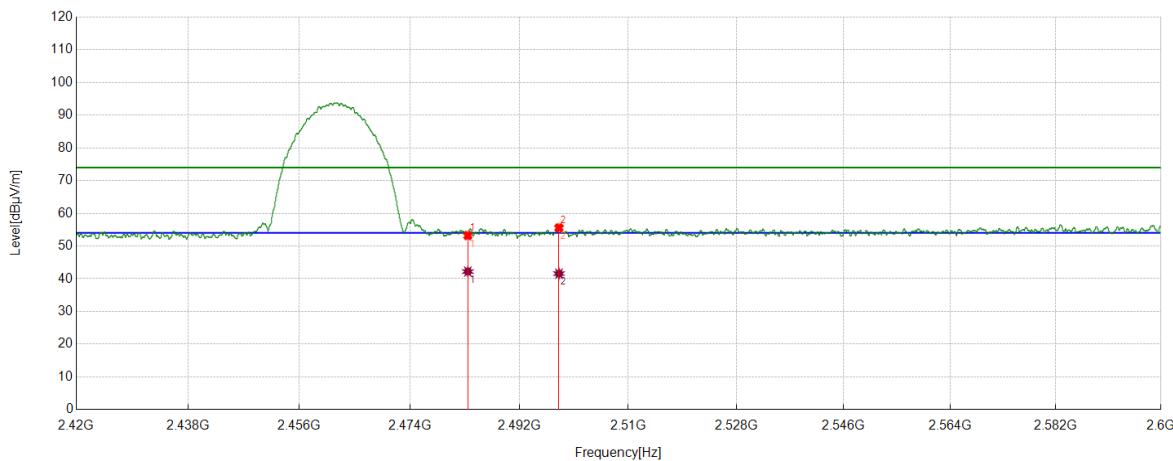
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2373.0591	30.91	10.17	41.08	54.00	-12.92	Vertical
2	2390.0000	31.21	10.35	41.56	54.00	-12.44	Vertical

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	42.57	10.64	53.21	74.00	-20.79	Horizontal
2	2498.5123	44.84	10.74	55.58	74.00	-18.42	Horizontal

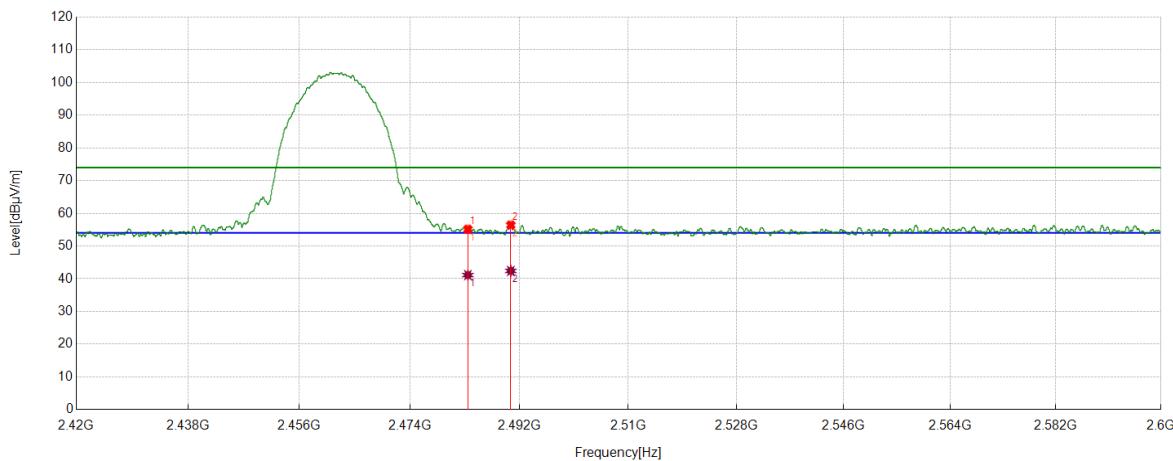
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	31.57	10.64	42.21	54.00	-11.79	Horizontal
2	2498.5123	30.84	10.74	41.58	54.00	-12.42	Horizontal

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	44.49	10.64	55.13	74.00	-18.87	Vertical
2	2490.5688	45.63	10.78	56.41	74.00	-17.59	Vertical

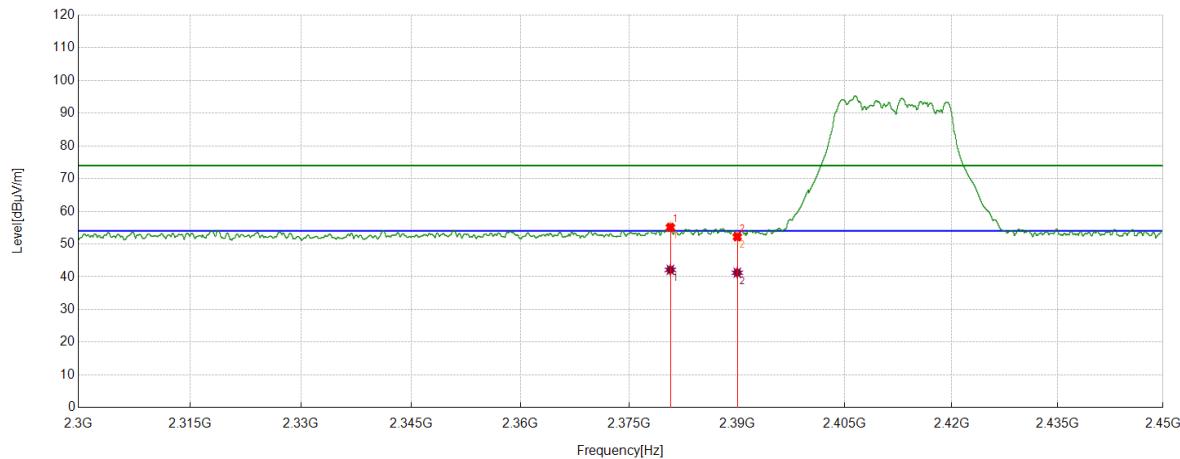
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	30.49	10.64	41.13	54.00	-12.87	Vertical
2	2490.5688	31.63	10.78	42.41	54.00	-11.59	Vertical

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2380.7101	44.82	10.30	55.12	74.00	-18.88	Horizontal
2	2390.0000	41.89	10.35	52.24	74.00	-21.76	Horizontal

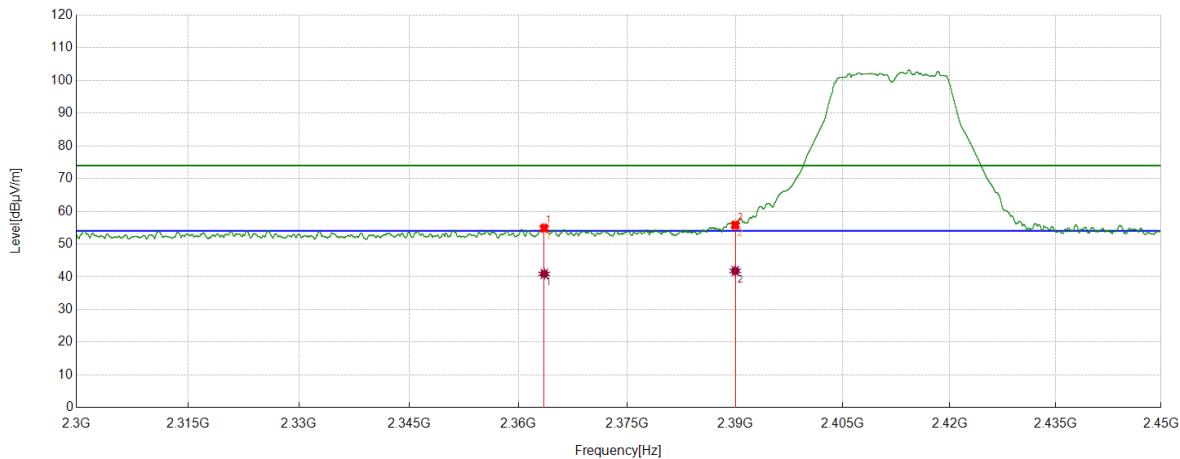
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2380.7101	31.82	10.30	42.12	54.00	-11.88	Horizontal
2	2390.0000	30.89	10.35	41.24	54.00	-12.76	Horizontal

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2363.5517	44.90	9.98	54.88	74.00	-19.12	Vertical
2	2390.0000	45.44	10.35	55.79	74.00	-18.21	Vertical

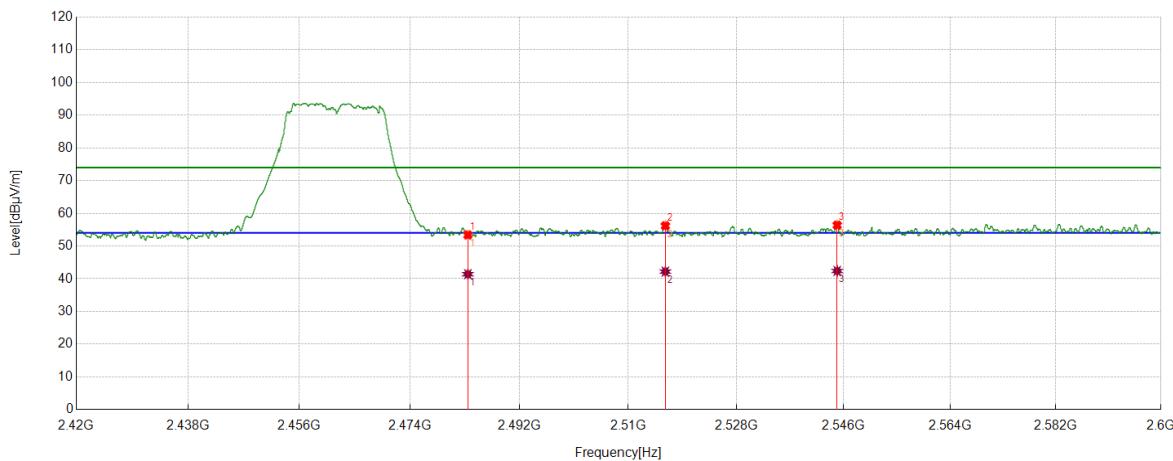
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2363.5517	30.90	9.98	40.88	54.00	-13.12	Vertical
2	2390.0000	31.44	10.35	41.79	54.00	-12.21	Vertical

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	42.76	10.64	53.40	74.00	-20.60	Horizontal
2	2516.1545	45.16	11.04	56.20	74.00	-17.80	Horizontal
3	2544.9131	45.24	11.15	56.39	74.00	-17.61	Horizontal

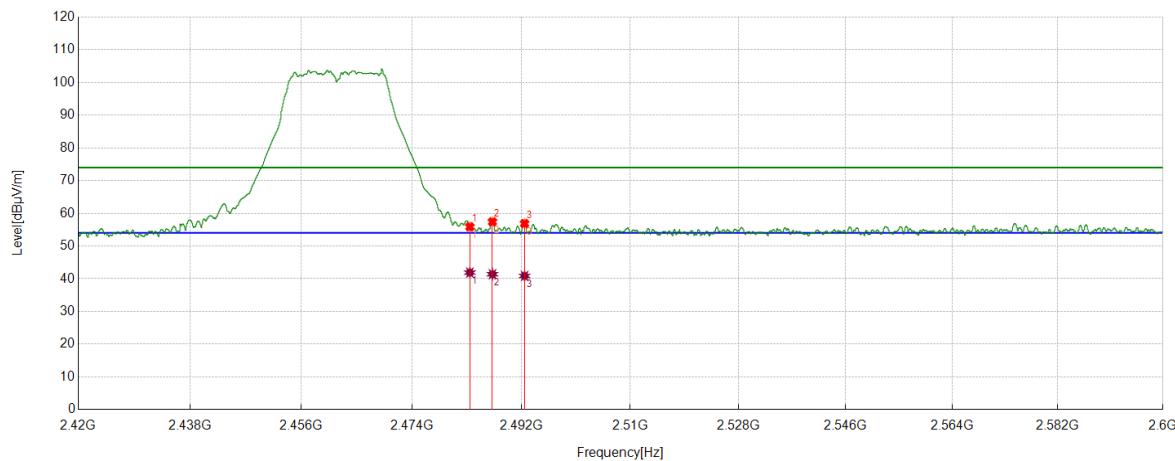
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	30.76	10.64	41.40	54.00	-12.60	Horizontal
2	2516.1545	31.16	11.04	42.20	54.00	-11.80	Horizontal
3	2544.9131	31.24	11.15	42.39	54.00	-11.61	Horizontal

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	45.25	10.64	55.89	74.00	-18.11	Vertical
2	2487.2159	46.68	10.72	57.40	74.00	-16.60	Vertical
3	2492.5041	46.10	10.78	56.88	74.00	-17.12	Vertical

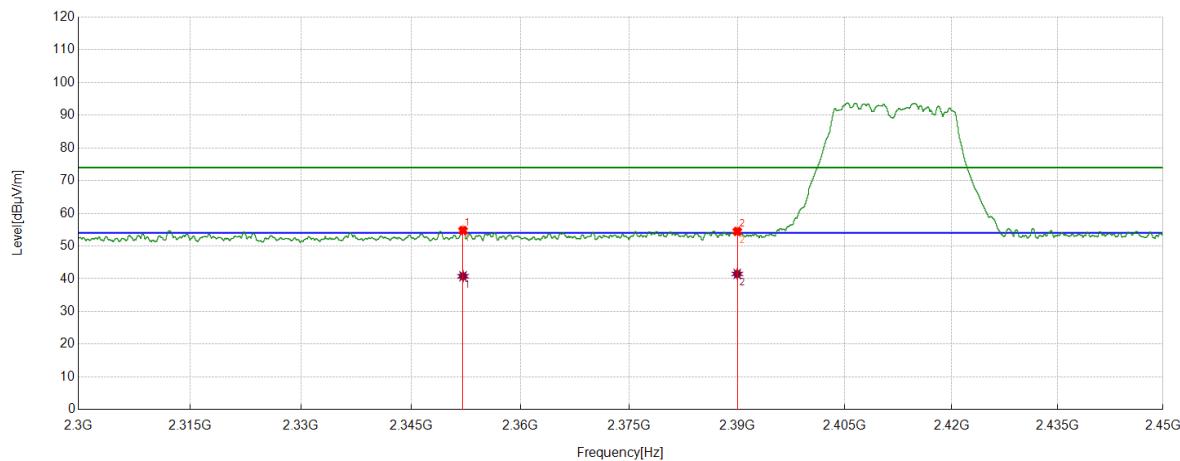
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	31.25	10.64	41.89	54.00	-12.11	Vertical
2	2487.2159	30.68	10.72	41.40	54.00	-12.60	Vertical
3	2492.5041	30.09	10.78	40.87	54.00	-13.13	Vertical

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2352.1315	44.86	9.91	54.77	74.00	-19.23	Horizontal
2	2390.0000	44.13	10.35	54.48	74.00	-19.52	Horizontal

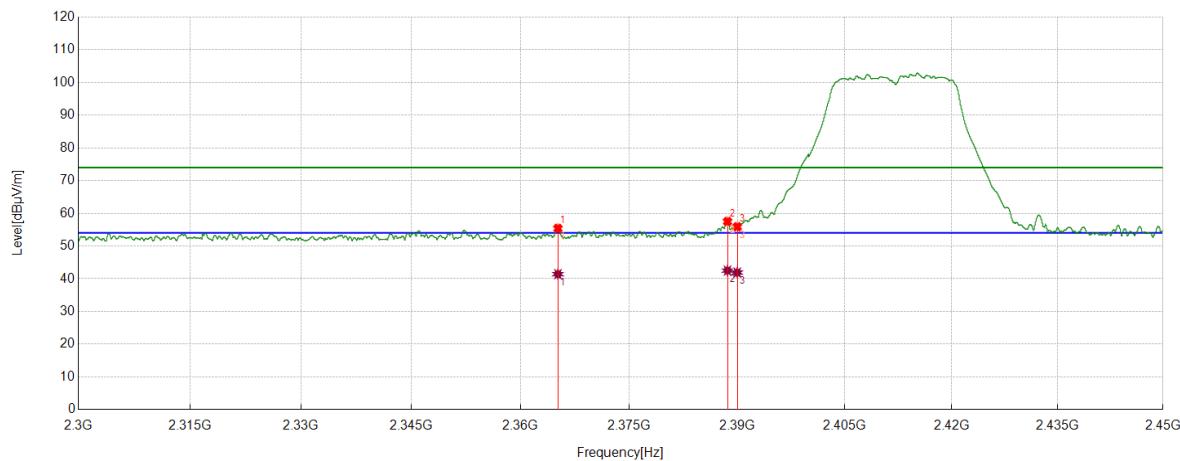
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2352.1315	30.86	9.91	40.77	54.00	-13.23	Horizontal
2	2390.0000	31.13	10.35	41.48	54.00	-12.52	Horizontal

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2365.1644	45.40	10.01	55.41	74.00	-18.59	Vertical
2	2388.6423	47.16	10.34	57.50	74.00	-16.50	Vertical
3	2390.0000	45.55	10.35	55.90	74.00	-18.10	Vertical

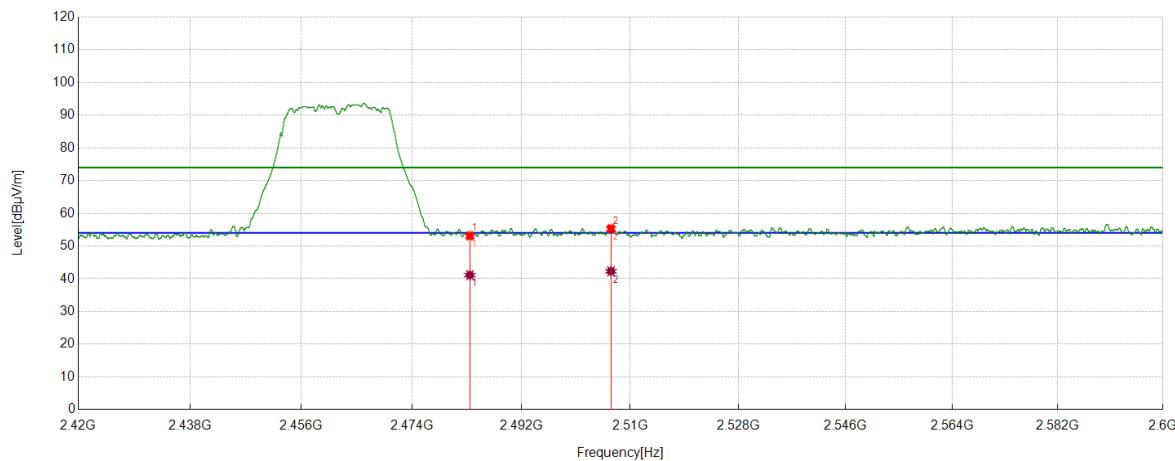
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2365.1644	31.40	10.01	41.41	54.00	-12.59	Vertical
2	2388.6423	32.16	10.34	42.50	54.00	-11.50	Vertical
3	2390.0000	31.55	10.35	41.90	54.00	-12.10	Vertical

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	42.48	10.64	53.12	74.00	-20.88	Horizontal
2	2506.7933	44.31	10.98	55.29	74.00	-18.71	Horizontal

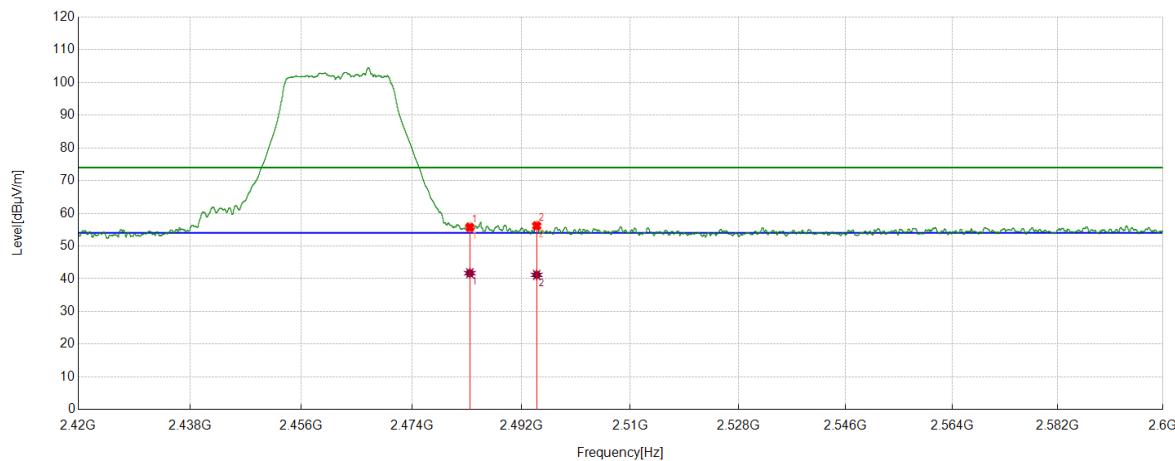
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	30.48	10.64	41.12	54.00	-12.88	Horizontal
2	2506.7933	31.31	10.98	42.29	54.00	-11.71	Horizontal

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	45.07	10.64	55.71	74.00	-18.29	Vertical
2	2494.5068	45.42	10.77	56.19	74.00	-17.81	Vertical

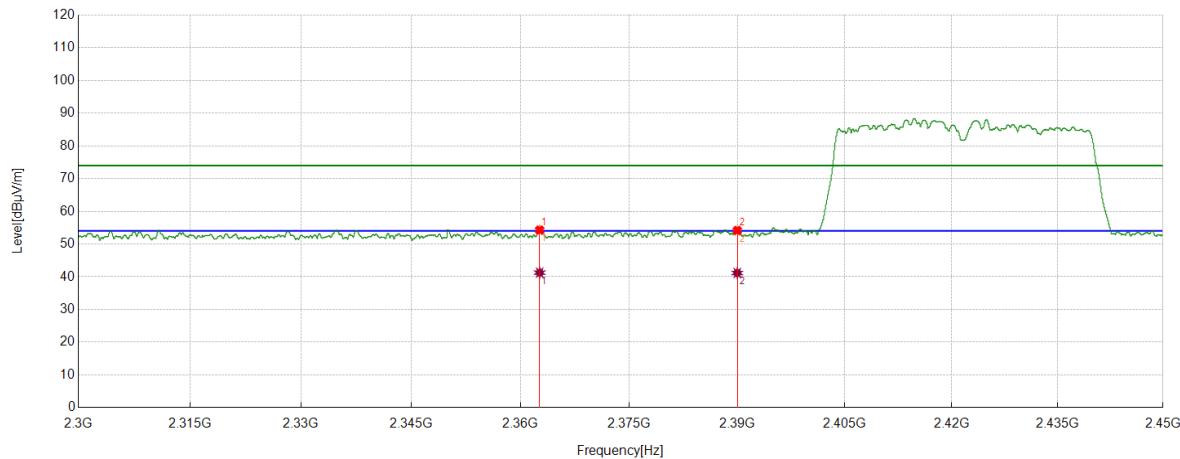
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	31.07	10.64	41.71	54.00	-12.29	Vertical
2	2494.5068	30.42	10.77	41.19	54.00	-12.81	Vertical

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2362.6516	44.32	9.95	54.27	74.00	-19.73	Horizontal
2	2390.0000	43.80	10.35	54.15	74.00	-19.85	Horizontal

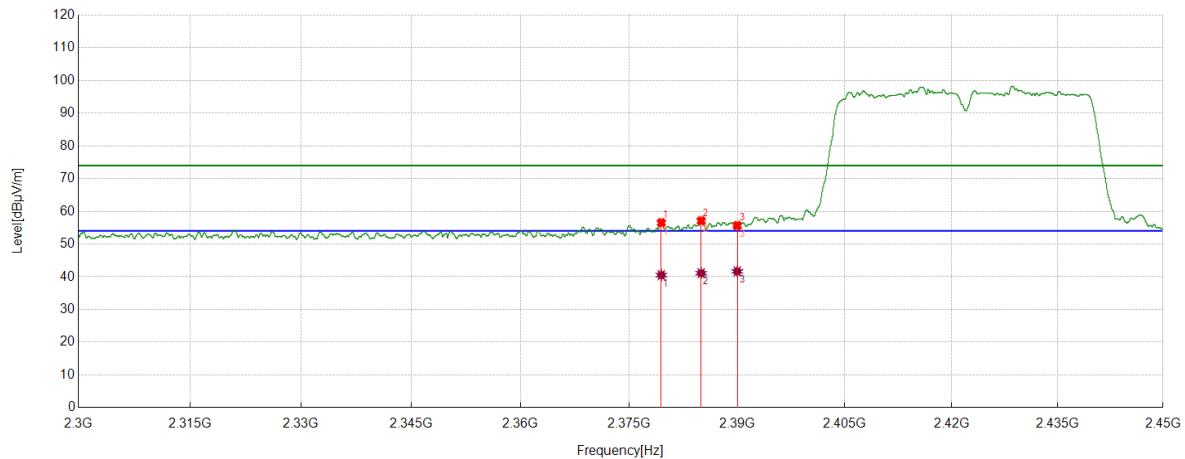
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2362.6516	31.31	9.95	41.26	54.00	-12.74	Horizontal
2	2390.0000	30.80	10.35	41.15	54.00	-12.85	Horizontal

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2379.4537	46.23	10.29	56.52	74.00	-17.48	Vertical
2	2384.9856	46.77	10.32	57.09	74.00	-16.91	Vertical
3	2390.0000	45.29	10.35	55.64	74.00	-18.36	Vertical

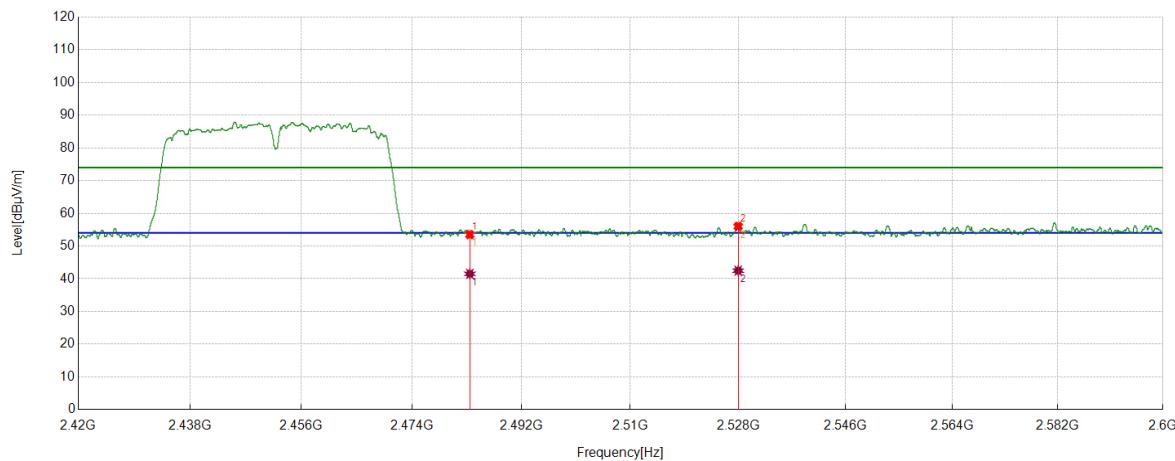
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2379.4537	30.23	10.29	40.52	54.00	-13.48	Vertical
2	2384.9856	30.77	10.32	41.09	54.00	-12.91	Vertical
3	2390.0000	31.29	10.35	41.64	54.00	-12.36	Vertical

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	42.87	10.64	53.51	74.00	-20.49	Horizontal
2	2527.9685	44.75	11.27	56.02	74.00	-17.98	Horizontal

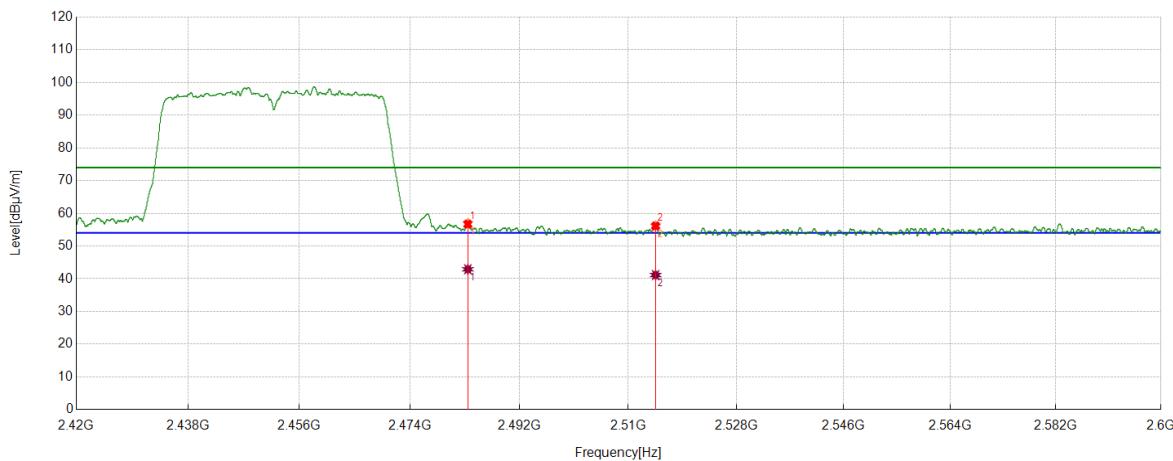
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	30.87	10.64	41.51	54.00	-12.49	Horizontal
2	2527.9685	31.21	11.27	42.48	54.00	-11.52	Horizontal

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	46.04	10.64	56.68	74.00	-17.32	Vertical
2	2514.5343	45.08	11.06	56.14	74.00	-17.86	Vertical

**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	32.26	10.64	42.90	54.00	-11.10	Vertical
2	2514.5343	30.08	11.06	41.14	54.00	-12.86	Vertical

Note:

1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

## 8.4. SPURIOUS EMISSIONS

### TEST RESULTS TABLE

#### 1) For 1GHz~18GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS

#### 2) For 9kHz~30MHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	MCH	<Limit	PASS

Remark:

- 1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

#### 3) For 30MHz~1GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	MCH	<Limit	PASS

Remark:

- 1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

#### 4) For 18GHz~26.5GHz

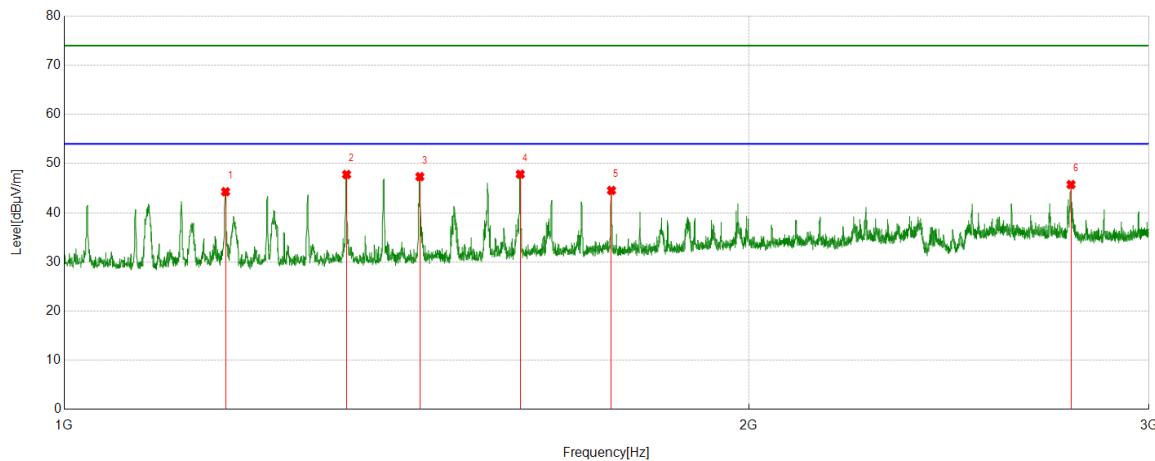
Test Mode	Channel	Puw(dBm)	Verdict
11B	MCH	<Limit	PASS

Remark:

- 1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

Part 1: 1GHz~3GHz
HARMONICS AND SPURIOUS EMISSIONS

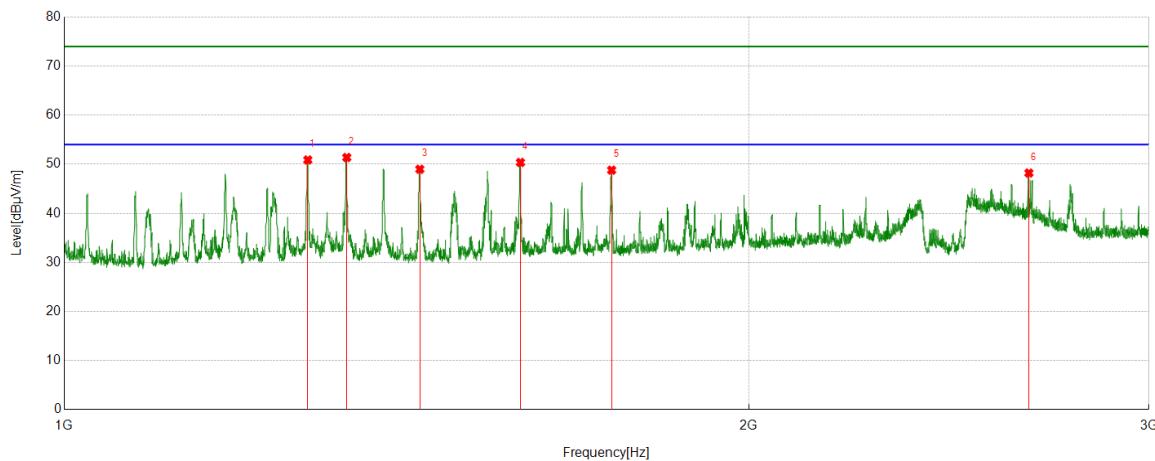
Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS



No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1177.5222	66.01	-21.73	44.28	74.00	-29.72	Horizontal
2	1331.0414	68.37	-20.59	47.78	74.00	-26.22	Horizontal
3	1433.5542	67.25	-19.91	47.34	74.00	-26.66	Horizontal
4	1587.0734	66.67	-18.83	47.84	74.00	-26.16	Horizontal
5	1740.5926	62.56	-18.02	44.54	74.00	-29.46	Horizontal
6	2772.2215	58.67	-12.94	45.73	74.00	-28.27	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,  
     Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.  
     2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
     3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
     4. Peak: Peak detector.  
     5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
     6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

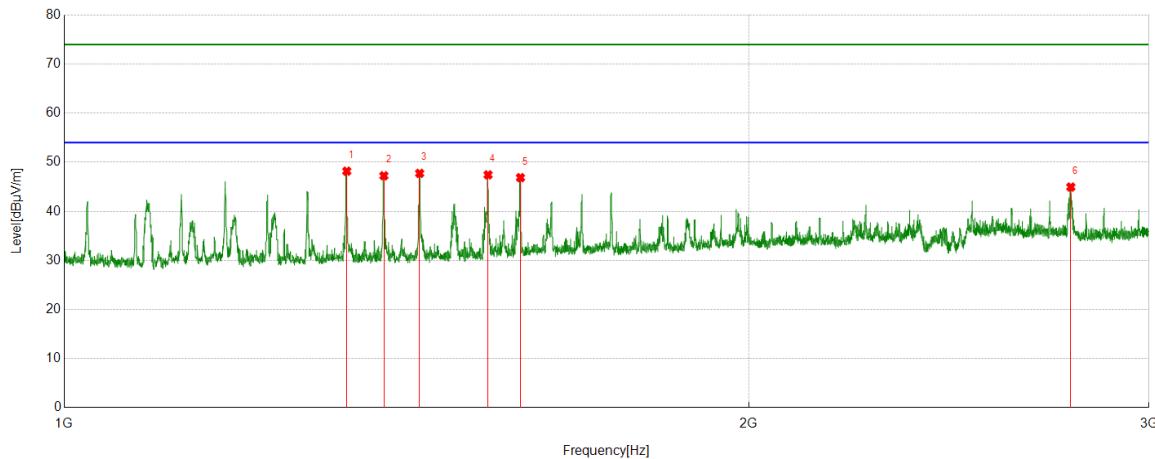


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1279.785	71.71	-20.83	50.88	74.00	-23.12	Vertical
2	1331.2914	71.97	-20.59	51.38	74.00	-22.62	Vertical
3	1433.5542	68.89	-19.91	48.98	74.00	-25.02	Vertical
4	1587.3234	69.18	-18.81	50.37	74.00	-23.63	Vertical
5	1740.8426	66.82	-18.02	48.80	74.00	-25.20	Vertical
6	2656.4571	61.43	-13.22	48.21	74.00	-25.79	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

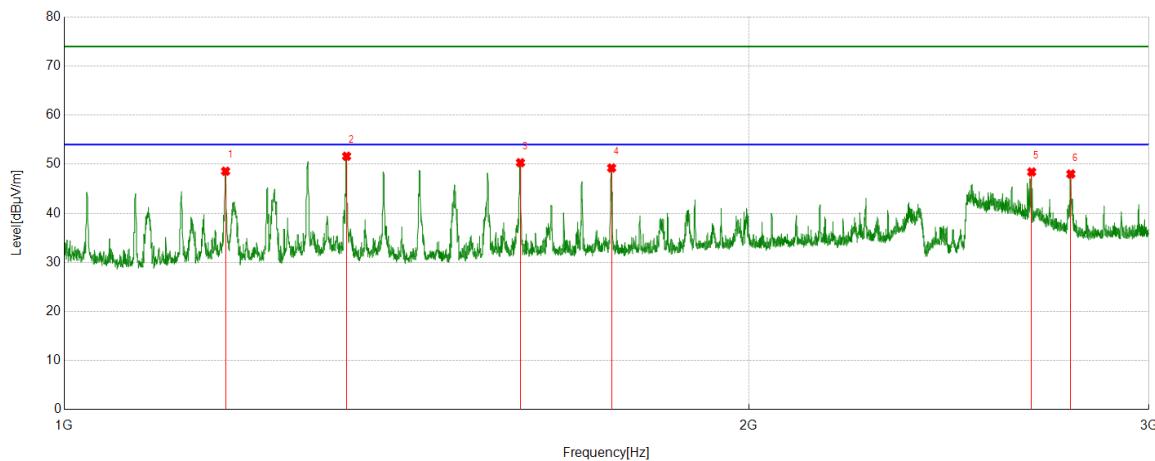


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1331.2914	68.77	-20.59	48.18	74.00	-25.82	Horizontal
2	1382.2978	67.82	-20.58	47.24	74.00	-26.76	Horizontal
3	1433.3042	67.66	-19.92	47.74	74.00	-26.26	Horizontal
4	1536.067	67.01	-19.58	47.43	74.00	-26.57	Horizontal
5	1587.3234	65.67	-18.81	46.86	74.00	-27.14	Horizontal
6	2771.7215	57.90	-12.95	44.95	74.00	-29.05	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

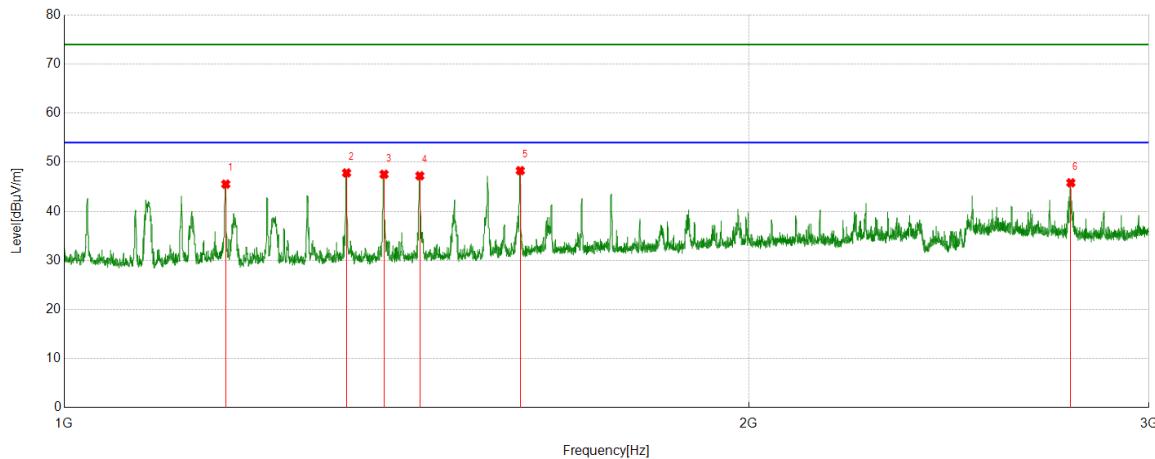


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1177.5222	70.31	-21.73	48.58	74.00	-25.42	Vertical
2	1331.0414	72.22	-20.59	51.63	74.00	-22.37	Vertical
3	1587.3234	69.13	-18.81	50.32	74.00	-23.68	Vertical
4	1740.8426	67.26	-18.02	49.24	74.00	-24.76	Vertical
5	2663.958	61.66	-13.23	48.43	74.00	-25.57	Vertical
6	2771.7215	60.96	-12.95	48.01	74.00	-25.99	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

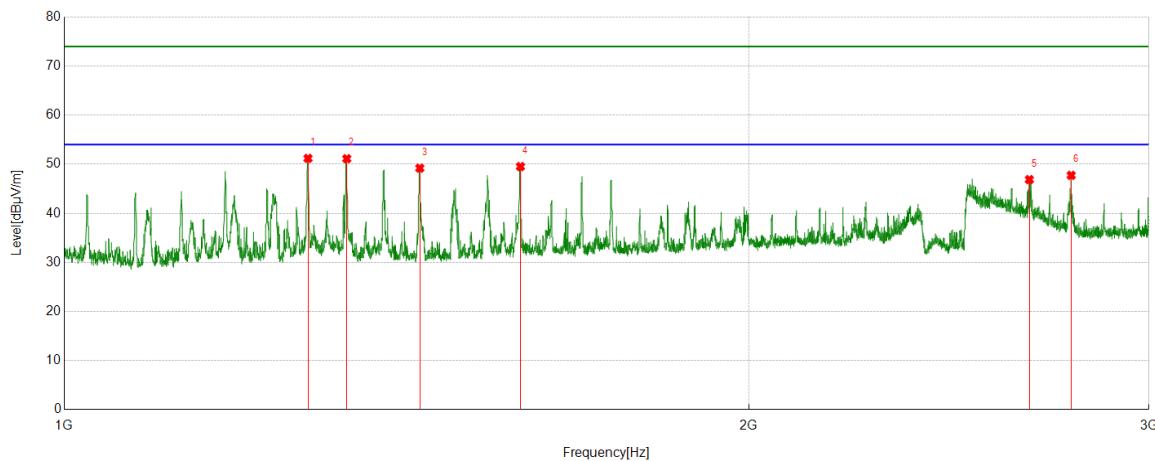


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1177.7722	67.28	-21.74	45.54	74.00	-28.46	Horizontal
2	1331.0414	68.42	-20.59	47.83	74.00	-26.17	Horizontal
3	1382.5478	68.13	-20.58	47.55	74.00	-26.45	Horizontal
4	1433.5542	67.15	-19.91	47.24	74.00	-26.76	Horizontal
5	1587.0734	67.12	-18.83	48.29	74.00	-25.71	Horizontal
6	2771.7215	58.76	-12.95	45.81	74.00	-28.19	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

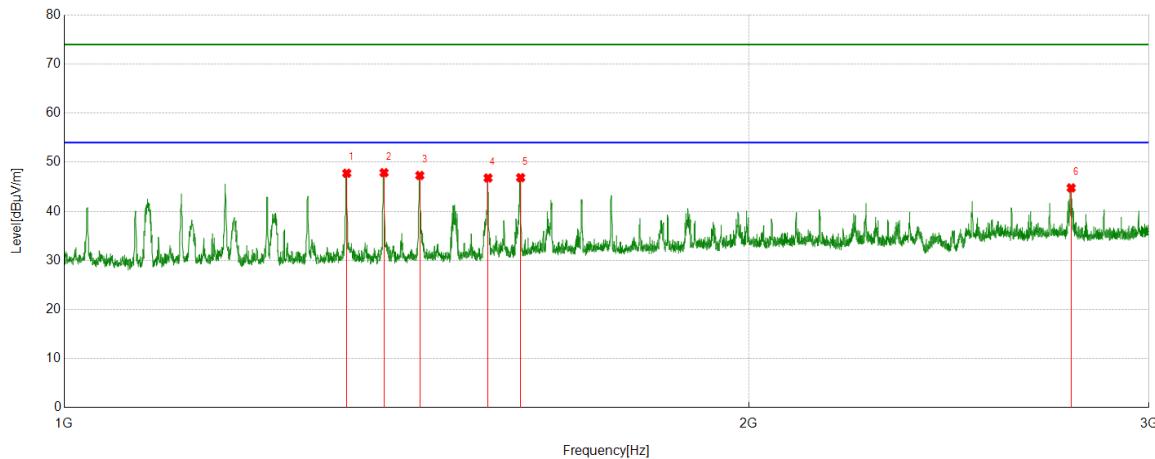


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1280.035	72.03	-20.83	51.20	74.00	-22.80	Vertical
2	1331.2914	71.72	-20.59	51.13	74.00	-22.87	Vertical
3	1433.5542	69.12	-19.91	49.21	74.00	-24.79	Vertical
4	1587.3234	68.34	-18.81	49.53	74.00	-24.47	Vertical
5	2657.7072	60.09	-13.22	46.87	74.00	-27.13	Vertical
6	2772.7216	60.69	-12.95	47.74	74.00	-26.26	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

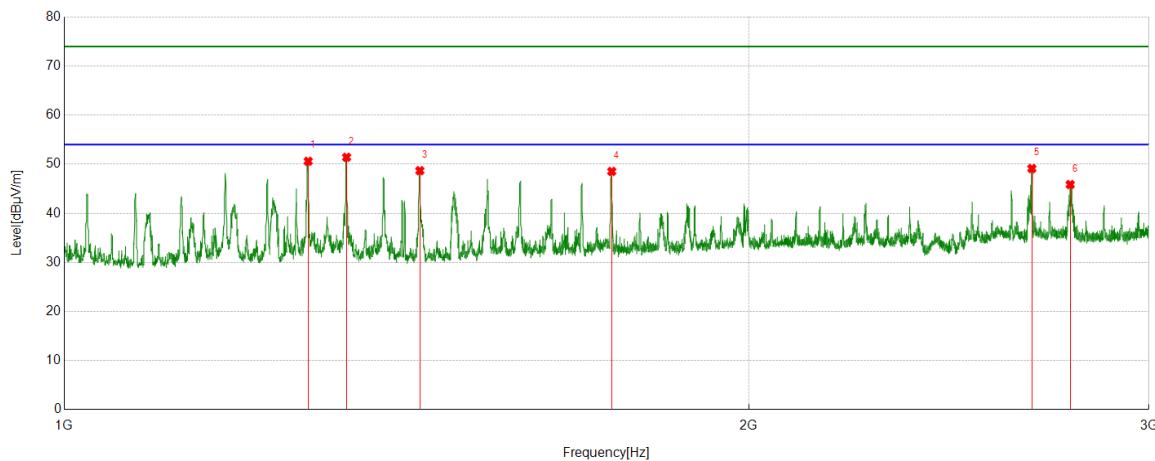


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1331.2914	68.35	-20.59	47.76	74.00	-26.24	Horizontal
2	1382.5478	68.45	-20.58	47.87	74.00	-26.13	Horizontal
3	1433.5542	67.22	-19.91	47.31	74.00	-26.69	Horizontal
4	1536.067	66.37	-19.58	46.79	74.00	-27.21	Horizontal
5	1587.5734	65.67	-18.81	46.86	74.00	-27.14	Horizontal
6	2772.7216	57.72	-12.95	44.77	74.00	-29.23	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

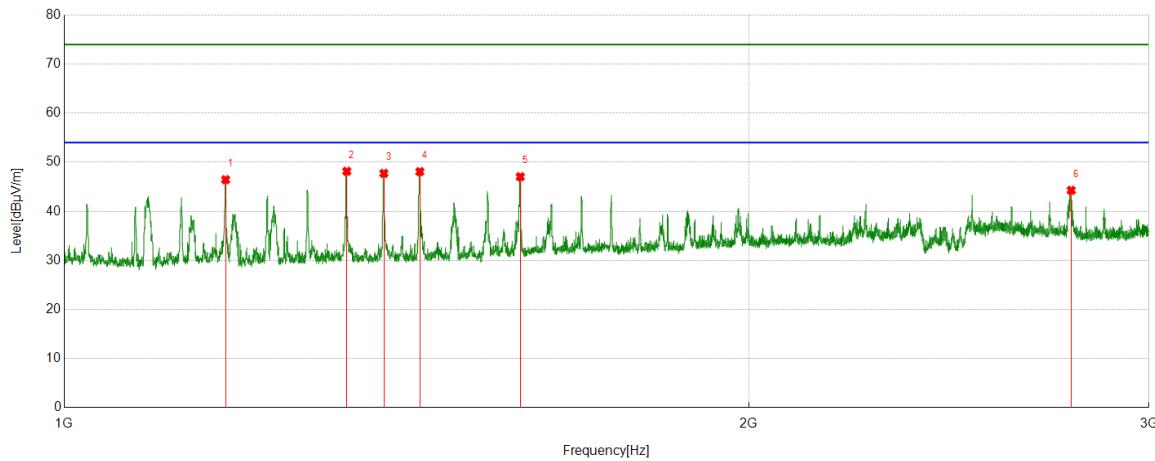


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1280.285	71.43	-20.82	50.61	74.00	-23.39	Vertical
2	1331.0414	72.01	-20.59	51.42	74.00	-22.58	Vertical
3	1433.5542	68.60	-19.91	48.69	74.00	-25.31	Vertical
4	1741.0926	66.56	-18.02	48.54	74.00	-25.46	Vertical
5	2664.4581	62.37	-13.24	49.13	74.00	-24.87	Vertical
6	2769.9712	58.82	-12.96	45.86	74.00	-28.14	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

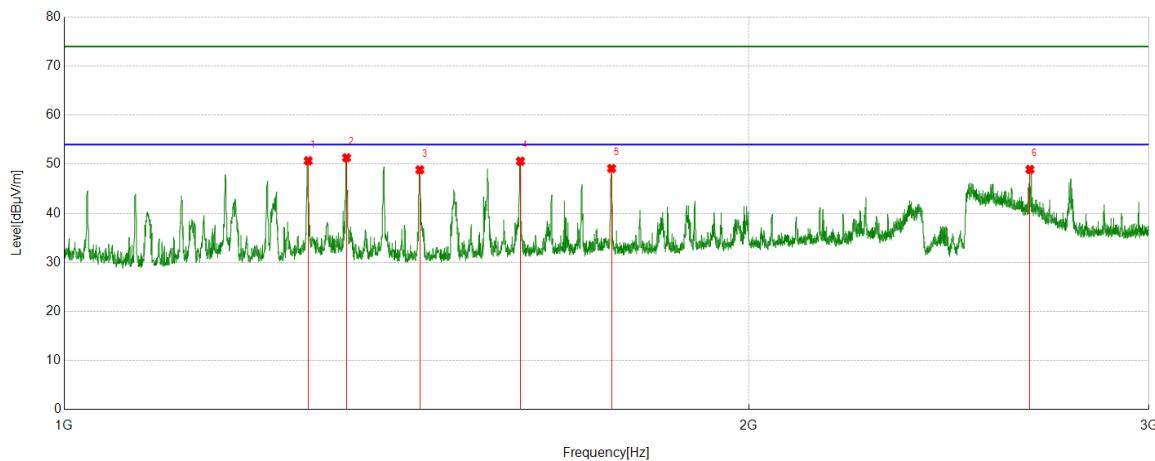


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1177.5222	68.18	-21.73	46.45	74.00	-27.55	Horizontal
2	1331.2914	68.74	-20.59	48.15	74.00	-25.85	Horizontal
3	1382.2978	68.32	-20.58	47.74	74.00	-26.26	Horizontal
4	1433.5542	68.00	-19.91	48.09	74.00	-25.91	Horizontal
5	1587.0734	65.88	-18.83	47.05	74.00	-26.95	Horizontal
6	2772.7216	57.23	-12.95	44.28	74.00	-29.72	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

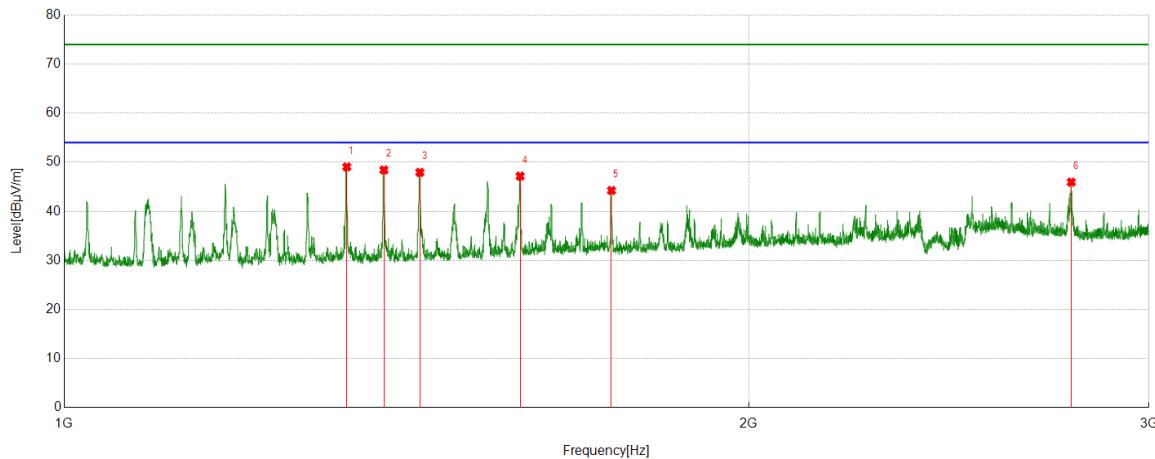


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1280.285	71.53	-20.82	50.71	74.00	-23.29	Vertical
2	1331.0414	71.91	-20.59	51.32	74.00	-22.68	Vertical
3	1433.5542	68.77	-19.91	48.86	74.00	-25.14	Vertical
4	1587.3234	69.43	-18.81	50.62	74.00	-23.38	Vertical
5	1740.8426	67.16	-18.02	49.14	74.00	-24.86	Vertical
6	2659.2074	62.15	-13.22	48.93	74.00	-25.07	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

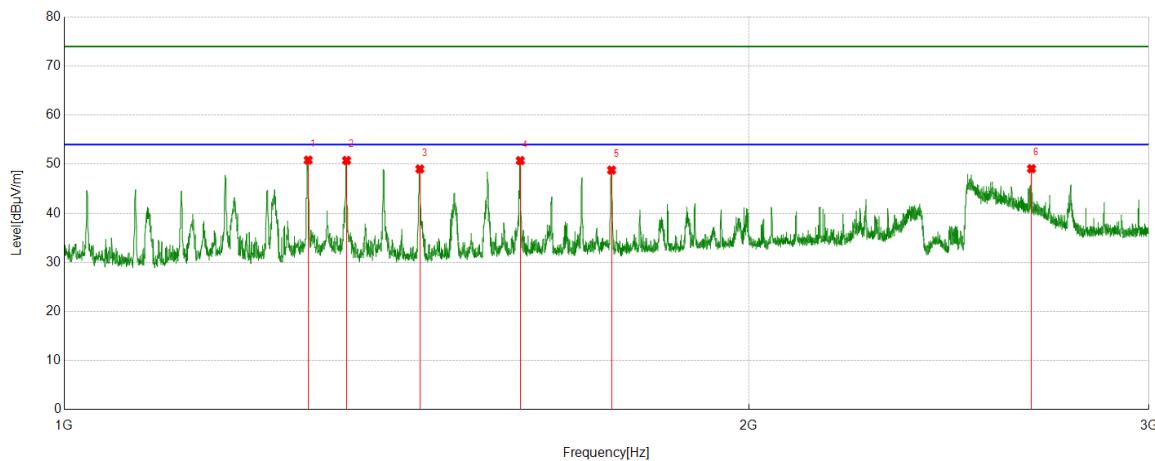


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1331.2914	69.64	-20.59	49.05	74.00	-24.95	Horizontal
2	1382.2978	69.00	-20.58	48.42	74.00	-25.58	Horizontal
3	1433.5542	67.84	-19.91	47.93	74.00	-26.07	Horizontal
4	1586.8234	66.01	-18.84	47.17	74.00	-26.83	Horizontal
5	1740.5926	62.27	-18.02	44.25	74.00	-29.75	Horizontal
6	2772.9716	58.88	-12.94	45.94	74.00	-28.06	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

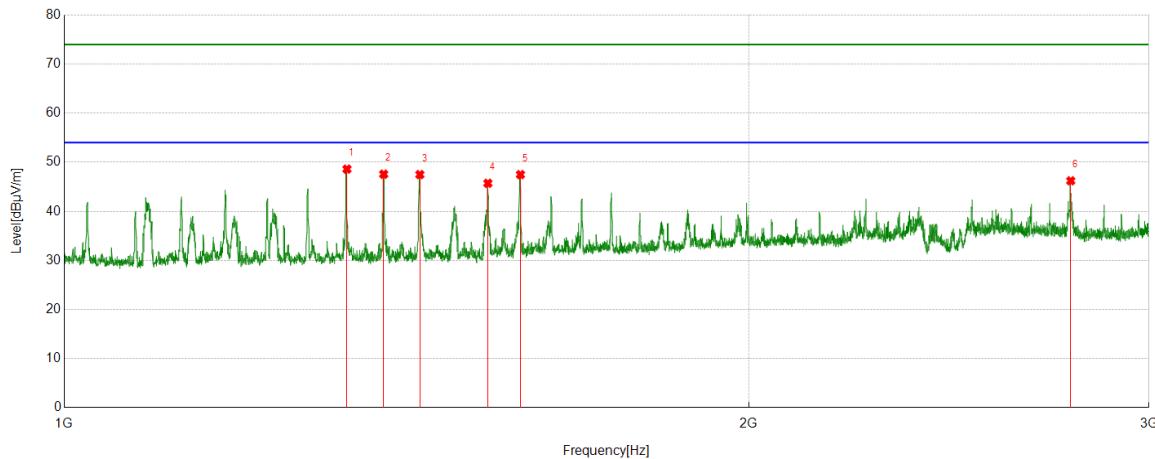


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1280.285	71.66	-20.82	50.84	74.00	-23.16	Vertical
2	1331.0414	71.36	-20.59	50.77	74.00	-23.23	Vertical
3	1433.5542	68.94	-19.91	49.03	74.00	-24.97	Vertical
4	1587.0734	69.57	-18.83	50.74	74.00	-23.26	Vertical
5	1740.8426	66.83	-18.02	48.81	74.00	-25.19	Vertical
6	2663.4579	62.33	-13.24	49.09	74.00	-24.91	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

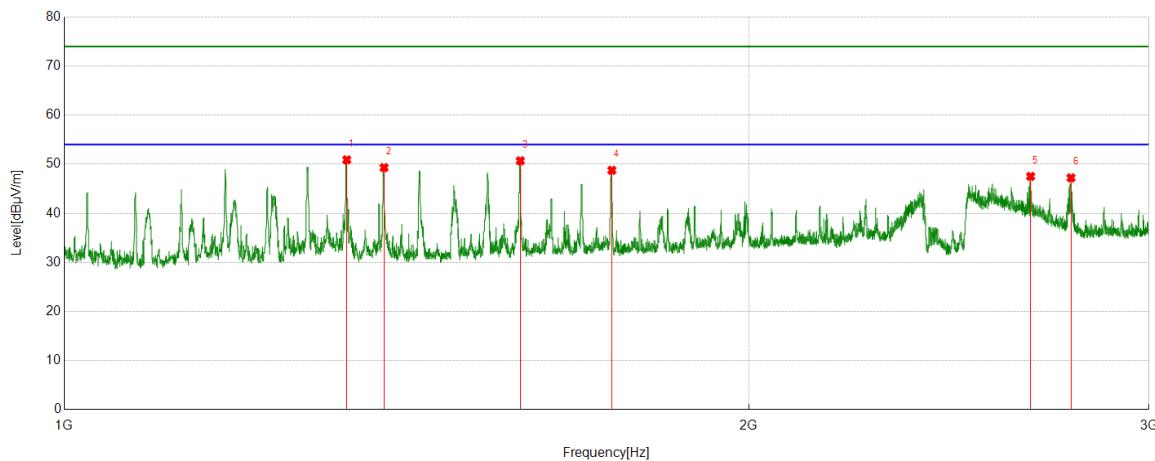


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1331.5414	69.19	-20.59	48.60	74.00	-25.40	Horizontal
2	1382.0478	68.15	-20.58	47.57	74.00	-26.43	Horizontal
3	1433.5542	67.40	-19.91	47.49	74.00	-26.51	Horizontal
4	1535.817	65.30	-19.58	45.72	74.00	-28.28	Horizontal
5	1587.3234	66.29	-18.81	47.48	74.00	-26.52	Horizontal
6	2771.4714	59.17	-12.95	46.22	74.00	-27.78	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

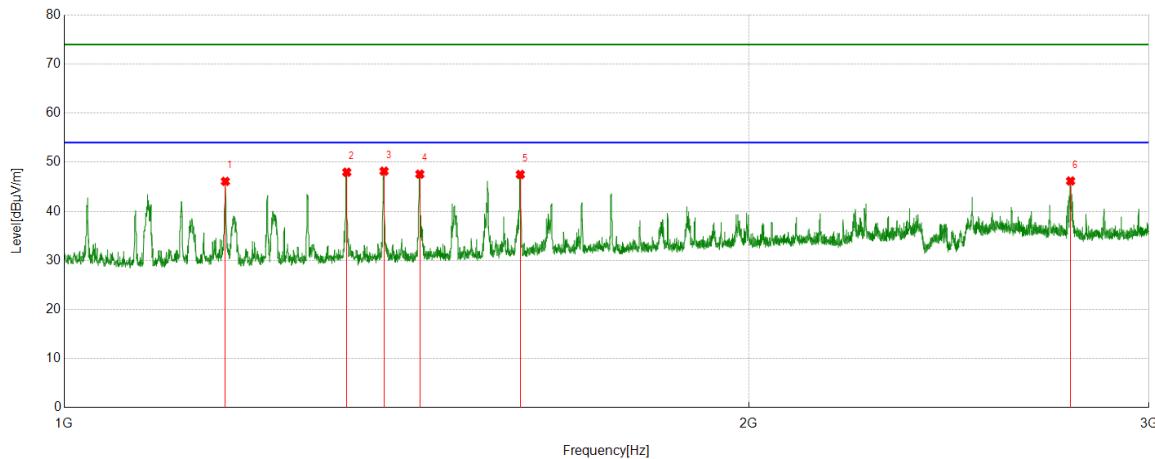


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1331.2914	71.49	-20.59	50.90	74.00	-23.10	Vertical
2	1382.5478	69.90	-20.58	49.32	74.00	-24.68	Vertical
3	1587.0734	69.53	-18.83	50.70	74.00	-23.30	Vertical
4	1741.3427	66.79	-18.02	48.77	74.00	-25.23	Vertical
5	2661.2077	60.77	-13.24	47.53	74.00	-26.47	Vertical
6	2772.2215	60.17	-12.94	47.23	74.00	-26.77	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

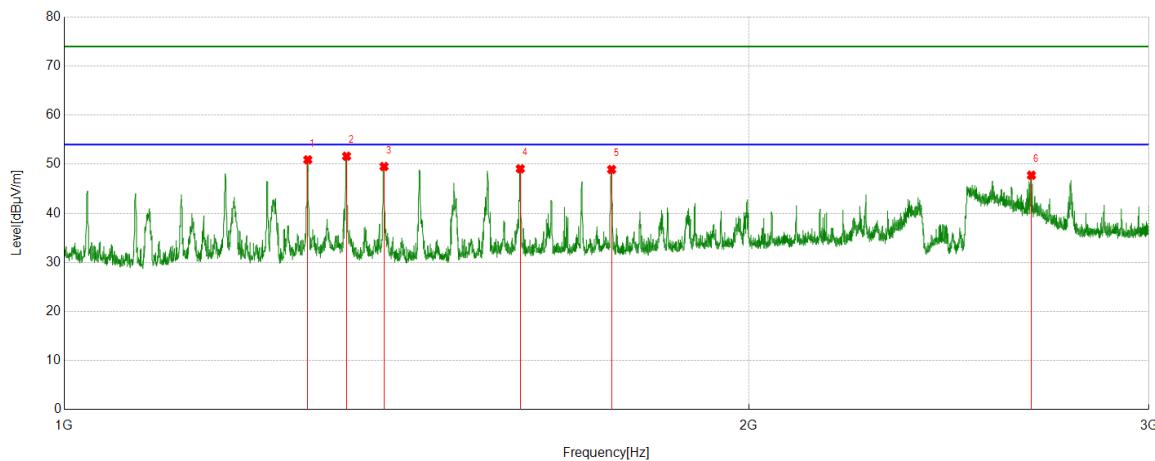


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1177.2722	67.83	-21.73	46.10	74.00	-27.90	Horizontal
2	1331.2914	68.56	-20.59	47.97	74.00	-26.03	Horizontal
3	1382.5478	68.76	-20.58	48.18	74.00	-25.82	Horizontal
4	1433.5542	67.49	-19.91	47.58	74.00	-26.42	Horizontal
5	1587.0734	66.34	-18.83	47.51	74.00	-26.49	Horizontal
6	2770.9714	59.14	-12.96	46.18	74.00	-27.82	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

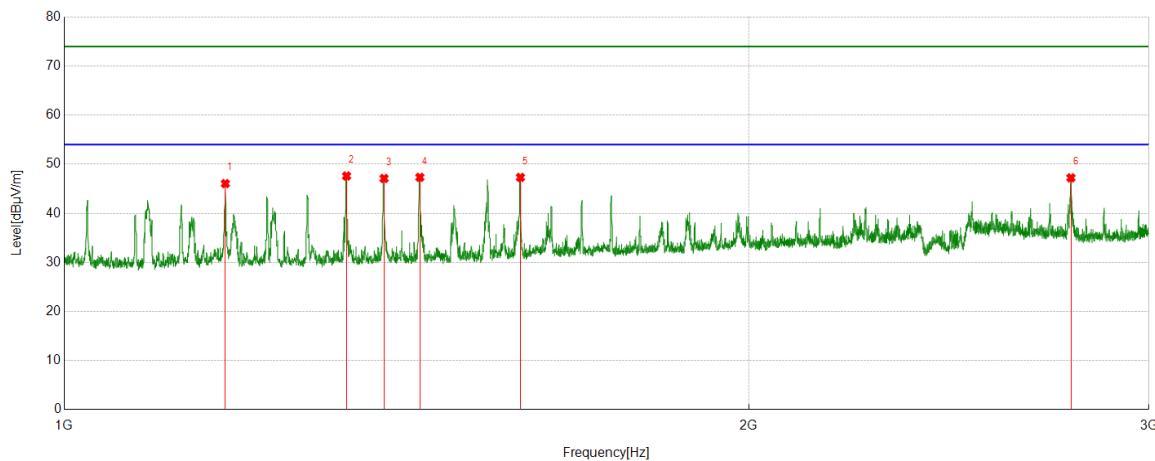


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1279.785	71.74	-20.83	50.91	74.00	-23.09	Vertical
2	1331.0414	72.23	-20.59	51.64	74.00	-22.36	Vertical
3	1382.5478	70.12	-20.58	49.54	74.00	-24.46	Vertical
4	1587.0734	67.91	-18.83	49.08	74.00	-24.92	Vertical
5	1740.8426	66.95	-18.02	48.93	74.00	-25.07	Vertical
6	2663.2079	61.00	-13.24	47.76	74.00	-26.24	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

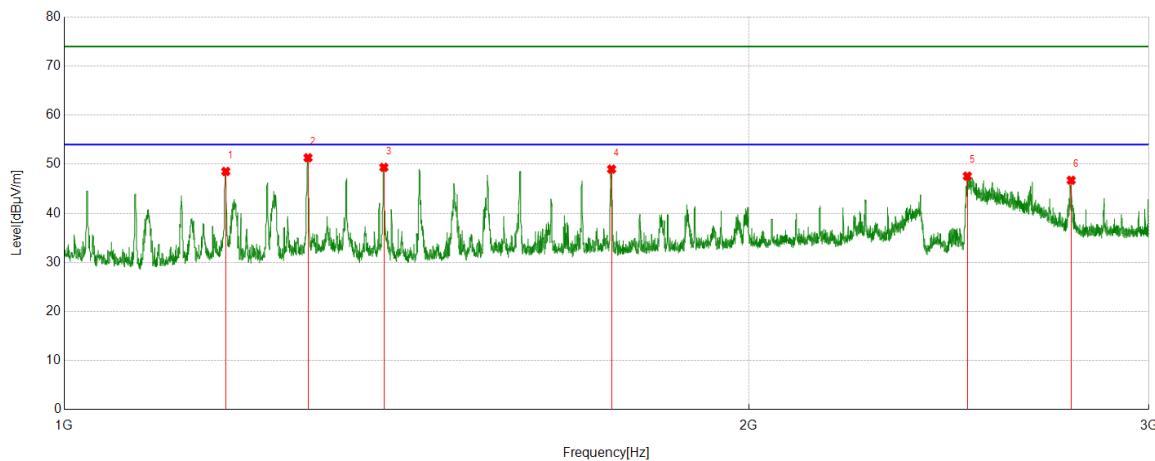


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1177.2722	67.79	-21.73	46.06	74.00	-27.94	Horizontal
2	1331.0414	68.20	-20.59	47.61	74.00	-26.39	Horizontal
3	1382.5478	67.69	-20.58	47.11	74.00	-26.89	Horizontal
4	1433.5542	67.25	-19.91	47.34	74.00	-26.66	Horizontal
5	1587.3234	66.13	-18.81	47.32	74.00	-26.68	Horizontal
6	2771.9715	60.18	-12.95	47.23	74.00	-26.77	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

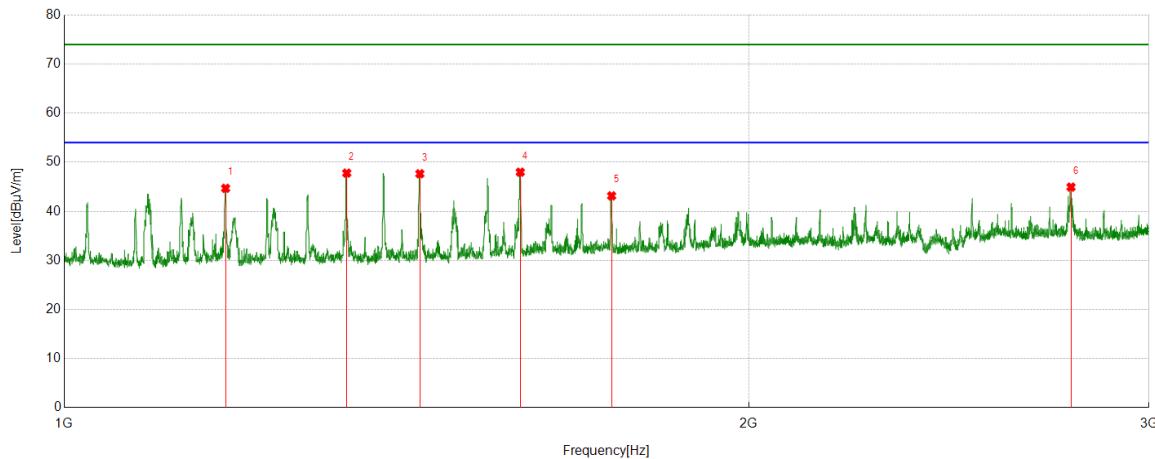


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1177.7722	70.27	-21.74	48.53	74.00	-25.47	Vertical
2	1280.035	72.15	-20.83	51.32	74.00	-22.68	Vertical
3	1382.2978	69.95	-20.58	49.37	74.00	-24.63	Vertical
4	1740.8426	67.02	-18.02	49.00	74.00	-25.00	Vertical
5	2495.937	61.02	-13.44	47.58	74.00	-26.42	Vertical
6	2772.7216	59.69	-12.95	46.74	74.00	-27.26	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

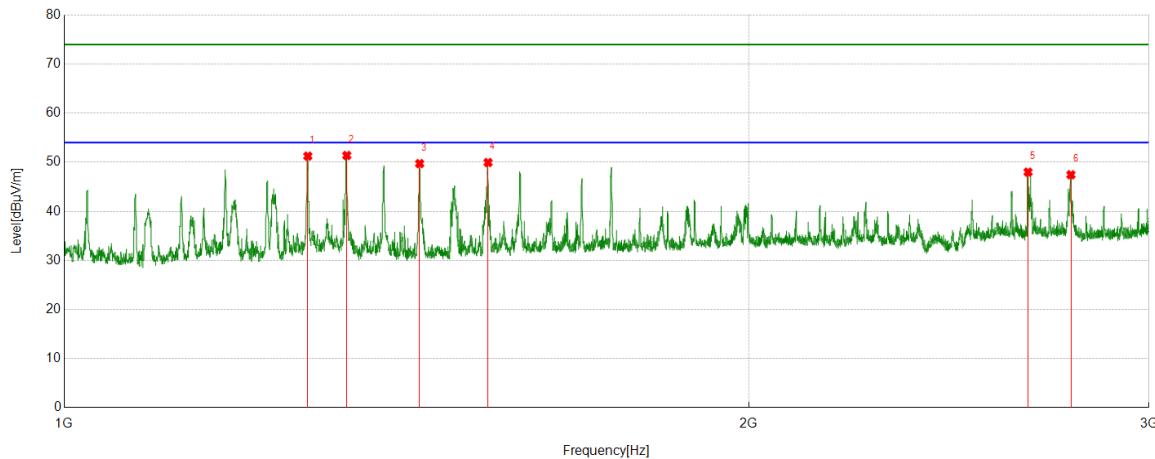


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1177.5222	66.42	-21.73	44.69	74.00	-29.31	Horizontal
2	1331.2914	68.38	-20.59	47.79	74.00	-26.21	Horizontal
3	1433.5542	67.57	-19.91	47.66	74.00	-26.34	Horizontal
4	1587.0734	66.81	-18.83	47.98	74.00	-26.02	Horizontal
5	1740.8426	61.18	-18.02	43.16	74.00	-30.84	Horizontal
6	2772.2215	57.88	-12.94	44.94	74.00	-29.06	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

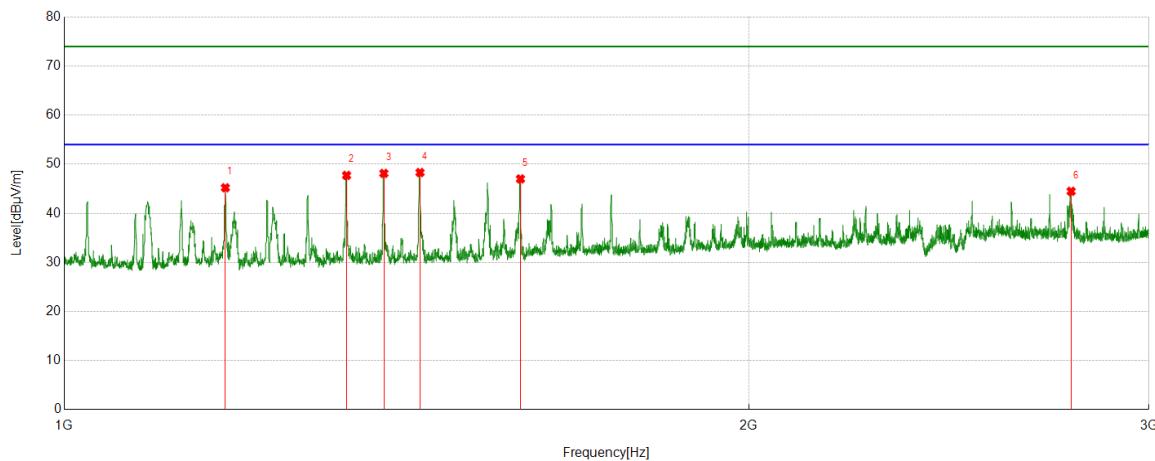


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1279.785	72.08	-20.83	51.25	74.00	-22.75	Vertical
2	1331.2914	71.97	-20.59	51.38	74.00	-22.62	Vertical
3	1433.3042	69.65	-19.92	49.73	74.00	-24.27	Vertical
4	1536.067	69.53	-19.58	49.95	74.00	-24.05	Vertical
5	2654.2068	61.20	-13.21	47.99	74.00	-26.01	Vertical
6	2771.9715	60.40	-12.95	47.45	74.00	-26.55	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

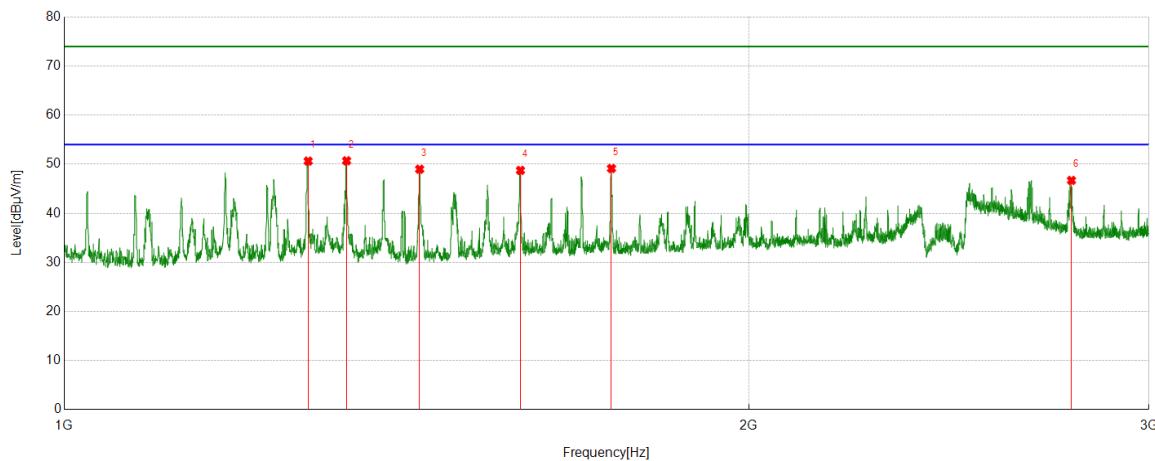


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1177.2722	66.94	-21.73	45.21	74.00	-28.79	Horizontal
2	1331.0414	68.32	-20.59	47.73	74.00	-26.27	Horizontal
3	1382.2978	68.72	-20.58	48.14	74.00	-25.86	Horizontal
4	1433.8042	68.21	-19.90	48.31	74.00	-25.69	Horizontal
5	1587.3234	65.82	-18.81	47.01	74.00	-26.99	Horizontal
6	2772.4716	57.43	-12.94	44.49	74.00	-29.51	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

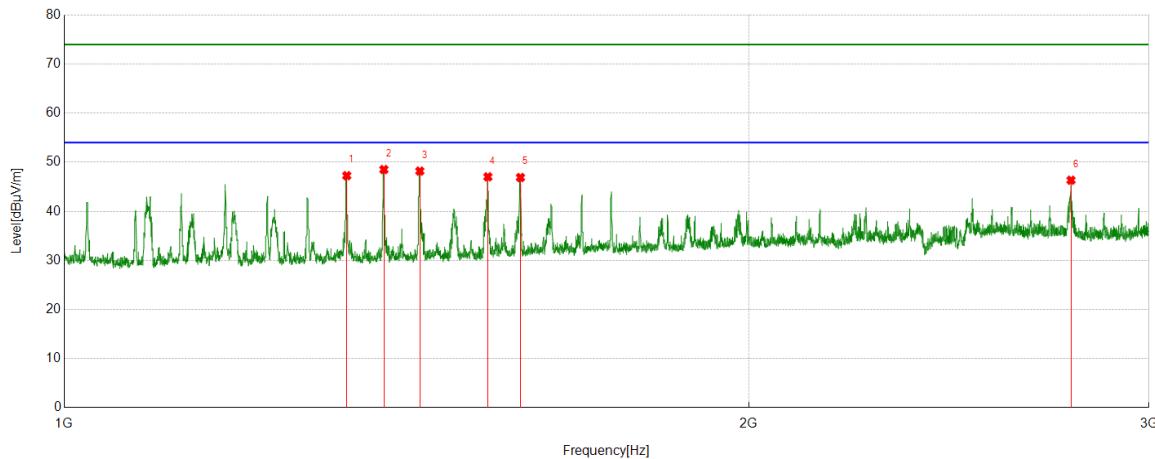


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1280.285	71.46	-20.82	50.64	74.00	-23.36	Vertical
2	1331.0414	71.29	-20.59	50.70	74.00	-23.30	Vertical
3	1433.3042	68.91	-19.92	48.99	74.00	-25.01	Vertical
4	1587.3234	67.56	-18.81	48.75	74.00	-25.25	Vertical
5	1740.5926	67.16	-18.02	49.14	74.00	-24.86	Vertical
6	2773.4717	59.65	-12.94	46.71	74.00	-27.29	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

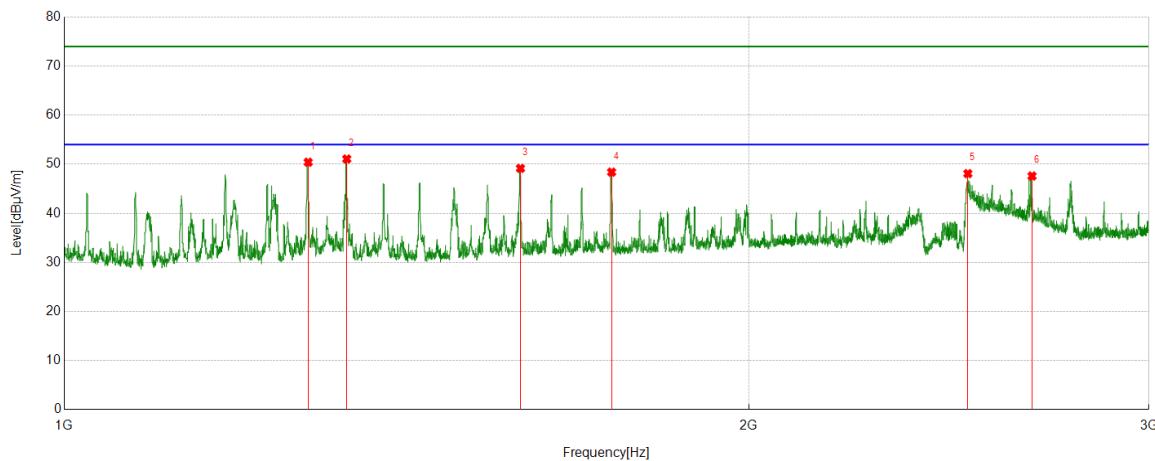


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1331.2914	67.86	-20.59	47.27	74.00	-26.73	Horizontal
2	1382.2978	69.09	-20.58	48.51	74.00	-25.49	Horizontal
3	1433.5542	68.11	-19.91	48.20	74.00	-25.80	Horizontal
4	1535.817	66.61	-19.58	47.03	74.00	-26.97	Horizontal
5	1587.3234	65.70	-18.81	46.89	74.00	-27.11	Horizontal
6	2772.2215	59.28	-12.94	46.34	74.00	-27.66	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS



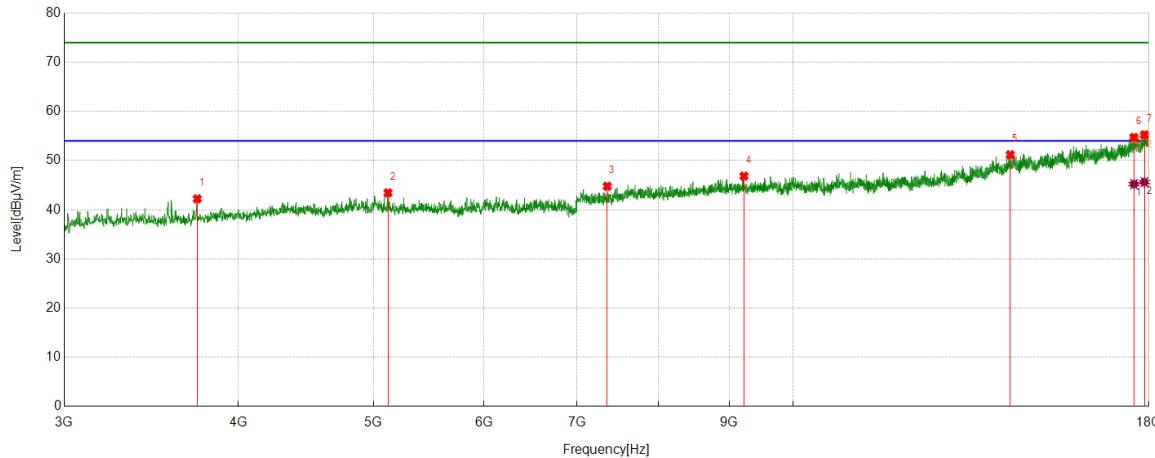
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1280.285	71.23	-20.82	50.41	74.00	-23.59	Vertical
2	1331.2914	71.66	-20.59	51.07	74.00	-22.93	Vertical
3	1587.3234	67.97	-18.81	49.16	74.00	-24.84	Vertical
4	1740.8426	66.41	-18.02	48.39	74.00	-25.61	Vertical
5	2497.1871	61.53	-13.44	48.09	74.00	-25.91	Vertical
6	2664.9581	60.84	-13.24	47.60	74.00	-26.40	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Part 2: 3GHz~18GHz
HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3736.9671	50.28	-8.05	42.23	74.00	-31.77	Horizontal
2	5120.8901	46.82	-3.38	43.44	74.00	-30.56	Horizontal
3	7356.1695	44.95	-0.17	44.78	74.00	-29.22	Horizontal
4	9220.1525	43.84	3.00	46.84	74.00	-27.16	Horizontal
5	14313.2892	39.99	11.20	51.19	74.00	-22.81	Horizontal
6	17559.3199	37.50	17.21	54.71	74.00	-19.29	Horizontal
7	17864.9831	36.43	18.81	55.24	74.00	-18.76	Horizontal

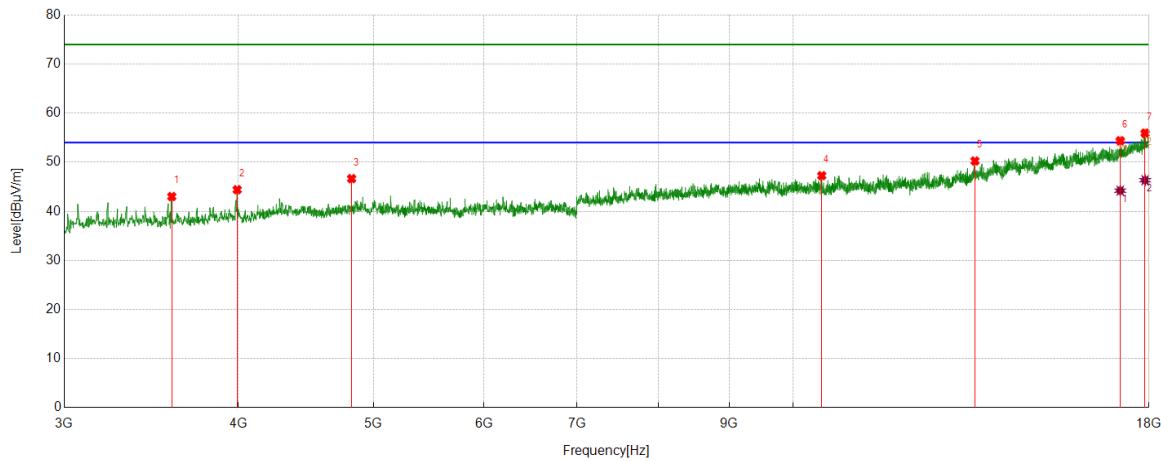
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17559.3199	28.00	17.21	45.21	54.00	-8.79	Horizontal
2	17864.9831	26.81	18.81	45.62	54.00	-8.38	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3583.1979	51.73	-8.72	43.01	74.00	-30.99	Vertical
2	3991.999	51.47	-7.07	44.40	74.00	-29.60	Vertical
3	4822.7278	50.75	-4.09	46.66	74.00	-27.34	Vertical
4	10484.0605	43.40	3.87	47.27	74.00	-26.73	Vertical
5	13503.1879	41.32	8.94	50.26	74.00	-23.74	Vertical
6	17165.5207	38.75	15.63	54.38	74.00	-19.62	Vertical
7	17885.6107	36.78	19.15	55.93	74.00	-18.07	Vertical

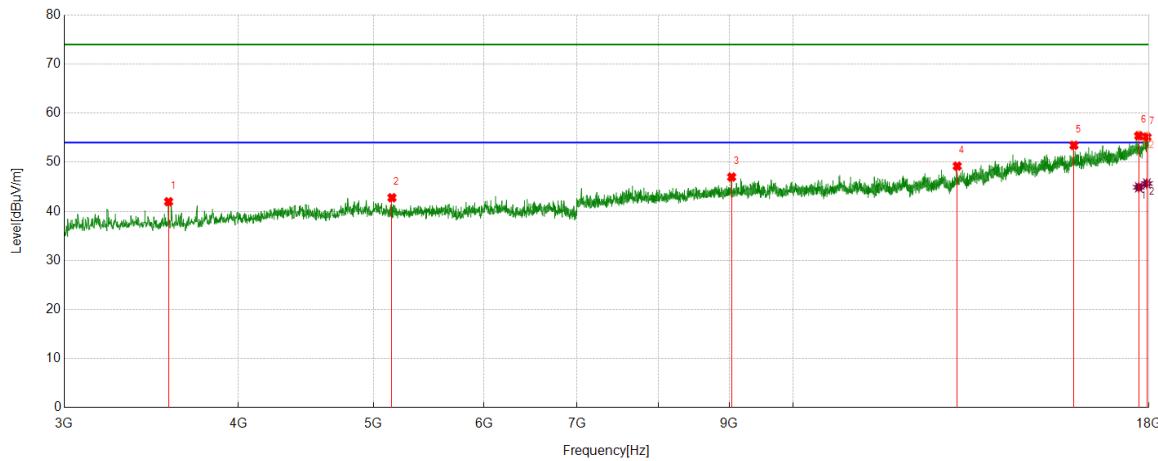
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17165.5207	28.58	15.63	44.21	54.00	-9.79	Vertical
2	17885.6107	27.19	19.15	46.34	54.00	-7.66	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS


**PK Result:**

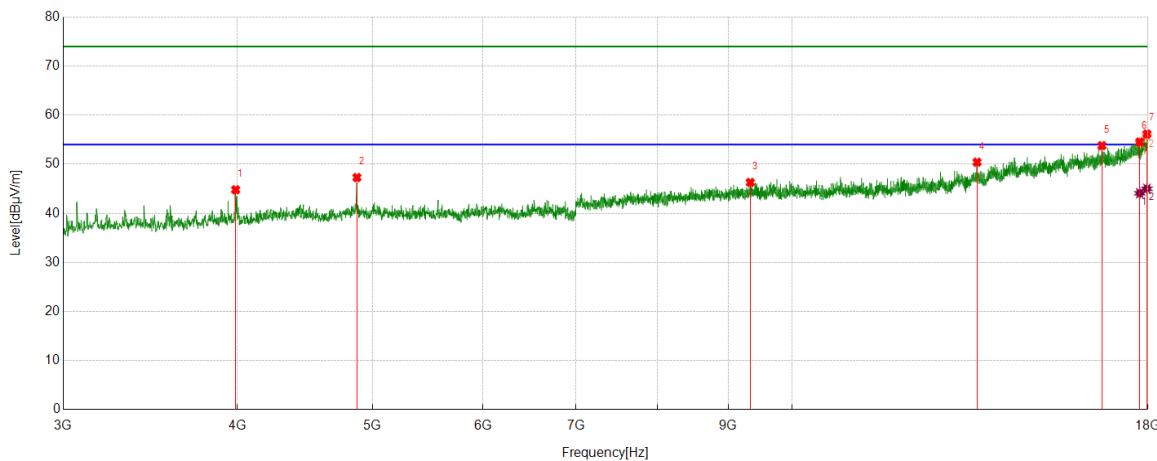
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3564.4456	50.73	-8.77	41.96	74.00	-32.04	Horizontal
2	5154.6443	47.03	-4.26	42.77	74.00	-31.23	Horizontal
3	9034.5043	44.16	2.83	46.99	74.00	-27.01	Horizontal
4	13113.1391	41.04	8.17	49.21	74.00	-24.79	Horizontal
5	15901.6127	39.97	13.48	53.45	74.00	-20.55	Horizontal
6	17699.9625	37.77	17.62	55.39	74.00	-18.61	Horizontal
7	17938.1173	36.50	18.64	55.14	74.00	-18.86	Horizontal

**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17699.9625	27.28	17.62	44.90	54.00	-9.10	Horizontal
2	17938.1173	27.02	18.64	45.66	54.00	-8.34	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,  
     Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.  
     2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
     3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.  
     4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).  
     5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
     6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS


**PK Result:**

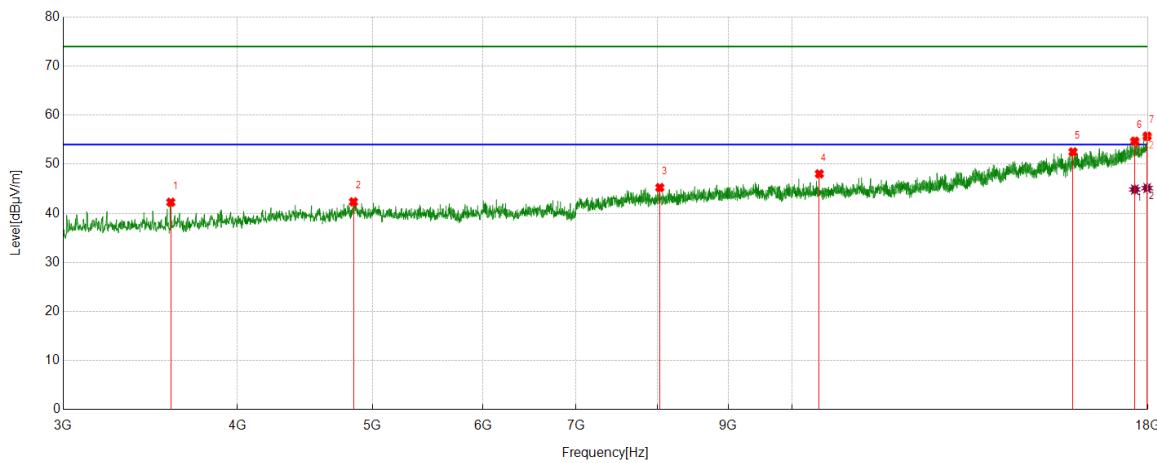
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3988.2485	51.84	-7.04	44.80	74.00	-29.20	Vertical
2	4873.3592	50.92	-3.62	47.30	74.00	-26.70	Vertical
3	9332.6666	43.22	3.07	46.29	74.00	-27.71	Vertical
4	13572.5716	41.18	9.24	50.42	74.00	-23.58	Vertical
5	16681.7102	38.57	15.22	53.79	74.00	-20.21	Vertical
6	17756.2195	36.88	17.65	54.53	74.00	-19.47	Vertical
7	17969.9962	37.47	18.70	56.17	74.00	-17.83	Vertical

**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17756.2195	26.44	17.65	44.09	54.00	-9.91	Vertical
2	17969.9962	26.30	18.70	45.00	54.00	-9.00	Vertical

Note: 1. Measurement = Reading Level + Correct Factor,  
     Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.  
     2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
     3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.  
     4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).  
     5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
     6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3583.1979	50.97	-8.72	42.25	74.00	-31.75	Horizontal
2	4845.2307	45.95	-3.61	42.34	74.00	-31.66	Horizontal
3	8036.8796	43.04	2.21	45.25	74.00	-28.75	Horizontal
4	10459.6825	44.17	3.87	48.04	74.00	-25.96	Horizontal
5	15903.4879	38.96	13.55	52.51	74.00	-21.49	Horizontal
6	17611.8265	37.08	17.61	54.69	74.00	-19.31	Horizontal
7	17975.622	37.05	18.68	55.73	74.00	-18.27	Horizontal

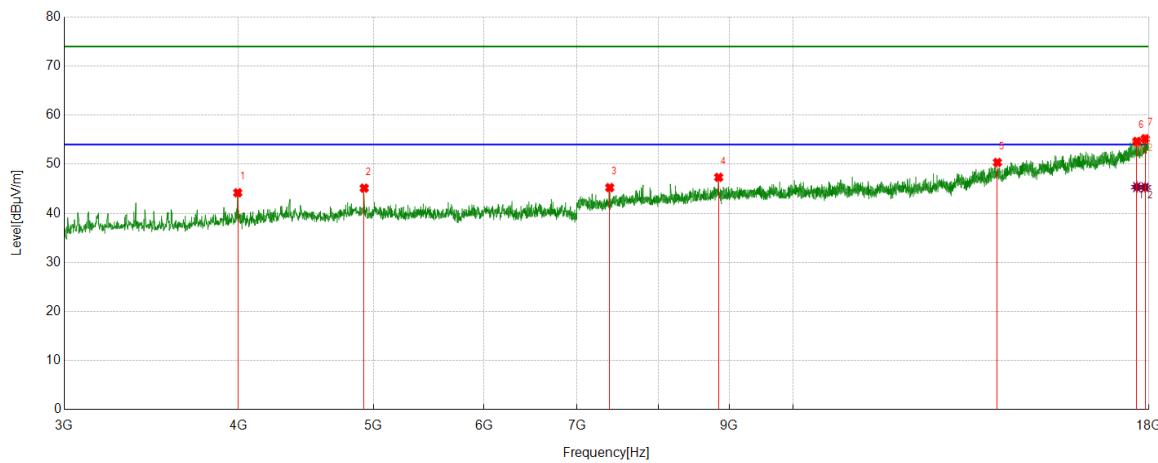
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17611.8265	27.24	17.61	44.85	54.00	-9.15	Horizontal
2	17975.622	26.46	18.68	45.14	54.00	-8.86	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3995.7495	51.17	-6.98	44.19	74.00	-29.81	Vertical
2	4923.9905	49.01	-3.88	45.13	74.00	-28.87	Vertical
3	7386.1733	45.26	-0.02	45.24	74.00	-28.76	Vertical
4	8843.2304	44.69	2.64	47.33	74.00	-26.67	Vertical
5	14013.2517	39.85	10.52	50.37	74.00	-23.63	Vertical
6	17643.7055	36.85	17.80	54.65	74.00	-19.35	Vertical
7	17889.3612	35.95	19.24	55.19	74.00	-18.81	Vertical

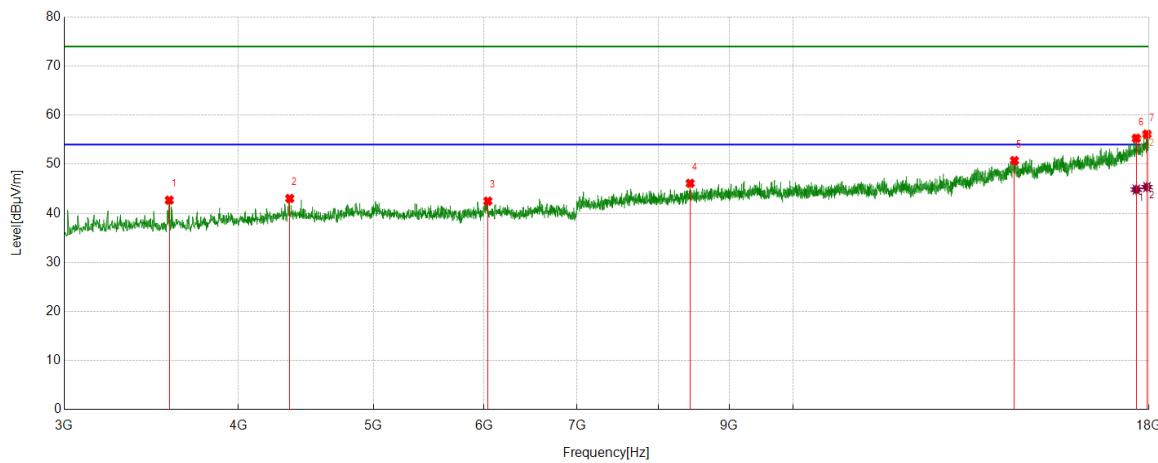
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17643.7055	27.55	17.80	45.35	54.00	-8.65	Vertical
2	17889.3612	26.05	19.24	45.29	54.00	-8.71	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3568.196	51.39	-8.71	42.68	74.00	-31.32	Horizontal
2	4353.9192	48.75	-5.72	43.03	74.00	-30.97	Horizontal
3	6039.755	44.48	-1.99	42.49	74.00	-31.51	Horizontal
4	8436.3045	44.04	2.08	46.12	74.00	-27.88	Horizontal
5	14412.6766	39.23	11.52	50.75	74.00	-23.25	Horizontal
6	17626.8284	37.92	17.37	55.29	74.00	-18.71	Horizontal
7	17939.9925	37.50	18.63	56.13	74.00	-17.87	Horizontal

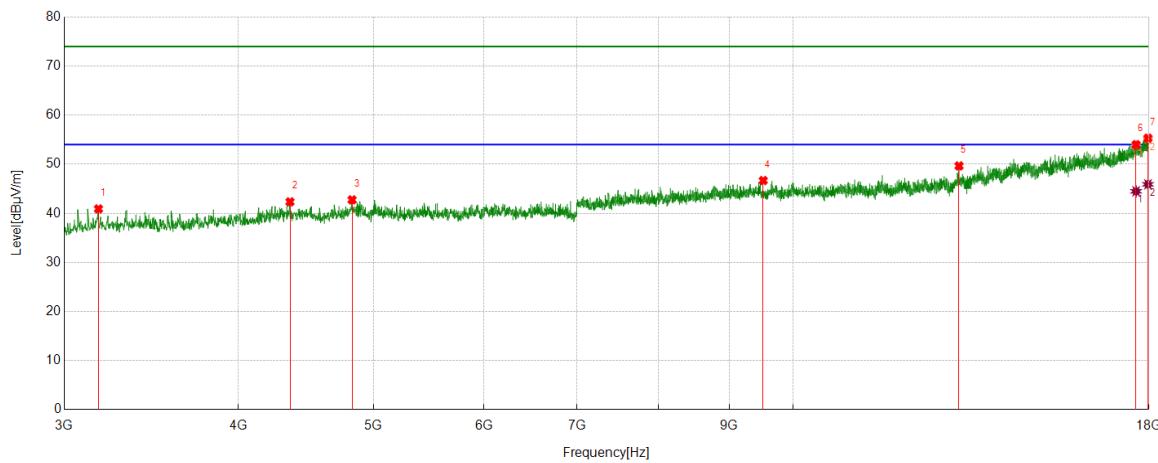
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17626.8284	27.46	17.37	44.83	54.00	-9.17	Horizontal
2	17939.9925	26.72	18.63	45.35	54.00	-8.65	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3174.3968	50.65	-9.75	40.90	74.00	-33.10	Vertical
2	4355.7945	48.07	-5.73	42.34	74.00	-31.66	Vertical
3	4826.4783	46.66	-3.91	42.75	74.00	-31.25	Vertical
4	9518.3148	43.40	3.29	46.69	74.00	-27.31	Vertical
5	13152.5191	41.60	8.06	49.66	74.00	-24.34	Vertical
6	17621.2026	36.38	17.60	53.98	74.00	-20.02	Vertical
7	17969.9962	36.61	18.70	55.31	74.00	-18.69	Vertical

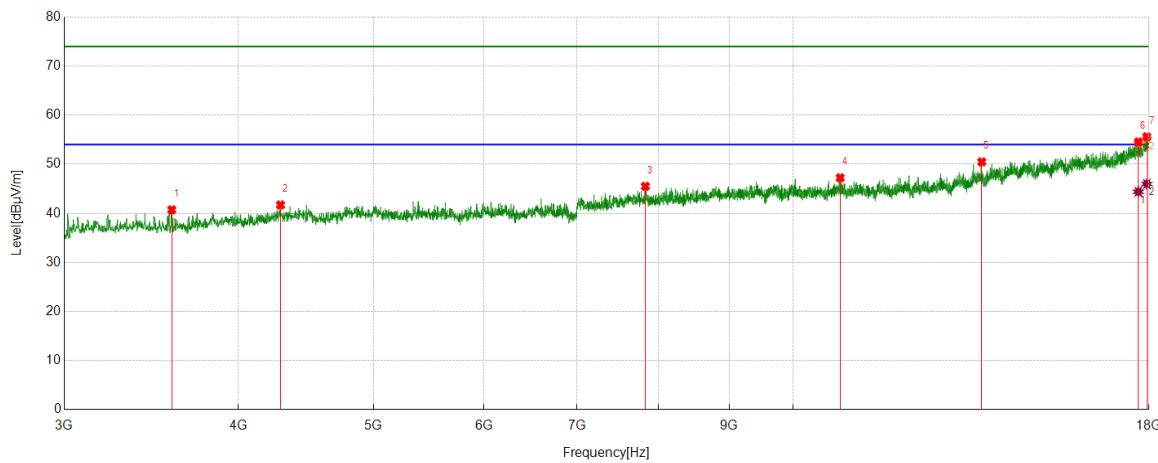
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17621.2026	26.89	17.60	44.49	54.00	-9.51	Vertical
2	17969.9962	27.21	18.70	45.91	54.00	-8.09	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3583.1979	49.44	-8.72	40.72	74.00	-33.28	Horizontal
2	4288.286	46.98	-5.27	41.71	74.00	-32.29	Horizontal
3	7834.3543	44.18	1.32	45.50	74.00	-28.50	Horizontal
4	10808.4761	43.01	4.24	47.25	74.00	-26.75	Horizontal
5	13656.9571	40.94	9.55	50.49	74.00	-23.51	Horizontal
6	17686.8359	37.06	17.47	54.53	74.00	-19.47	Horizontal
7	17936.242	36.93	18.67	55.60	74.00	-18.40	Horizontal

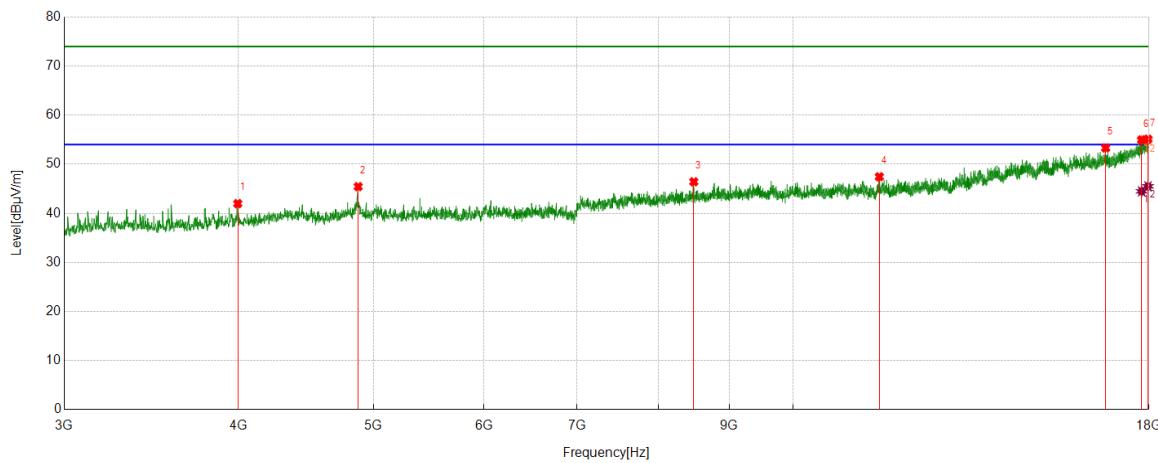
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17686.8359	26.93	17.47	44.40	54.00	-9.60	Horizontal
2	17936.242	27.31	18.67	45.98	54.00	-8.02	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS


**PK Result:**

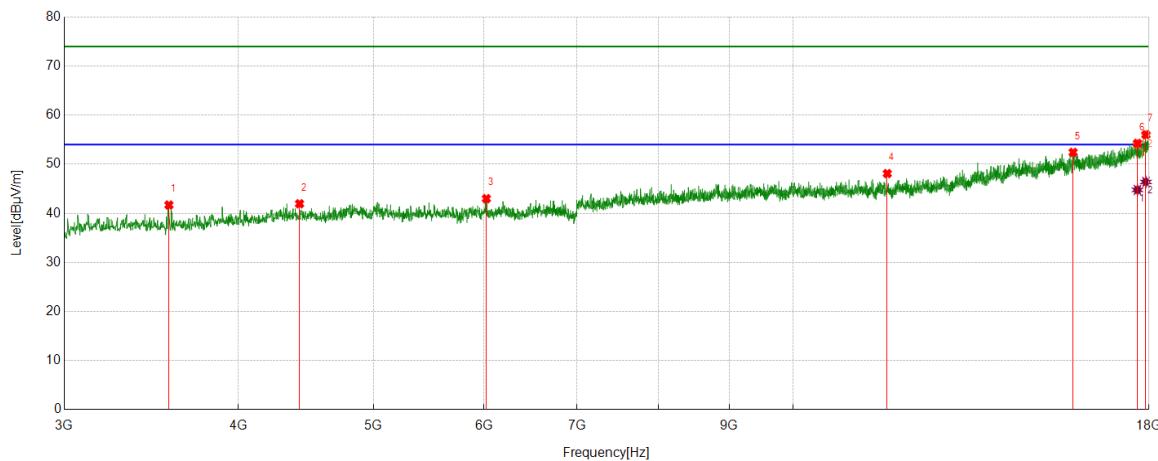
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3995.7495	48.96	-6.98	41.98	74.00	-32.02	Vertical
2	4875.2344	49.02	-3.58	45.44	74.00	-28.56	Vertical
3	8486.9359	44.46	1.97	46.43	74.00	-27.57	Vertical
4	11530.4413	41.59	5.86	47.45	74.00	-26.55	Vertical
5	16756.7196	38.26	15.05	53.31	74.00	-20.69	Vertical
6	17782.4728	37.05	17.92	54.97	74.00	-19.03	Vertical
7	17969.9962	36.41	18.70	55.11	74.00	-18.89	Vertical

**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17782.4728	26.56	17.92	44.48	54.00	-9.52	Vertical
2	17969.9962	26.80	18.70	45.50	54.00	-8.50	Vertical

Note: 1. Measurement = Reading Level + Correct Factor,  
     Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.  
     2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
     3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.  
     4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).  
     5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
     6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3566.3208	50.44	-8.74	41.70	74.00	-32.30	Horizontal
2	4425.1781	47.30	-5.35	41.95	74.00	-32.05	Horizontal
3	6024.7531	44.72	-1.73	42.99	74.00	-31.01	Horizontal
4	11682.3353	41.72	6.38	48.10	74.00	-25.90	Horizontal
5	15880.9851	38.90	13.52	52.42	74.00	-21.58	Horizontal
6	17660.5826	36.51	17.75	54.26	74.00	-19.74	Horizontal
7	17909.9887	36.98	19.04	56.02	74.00	-17.98	Horizontal

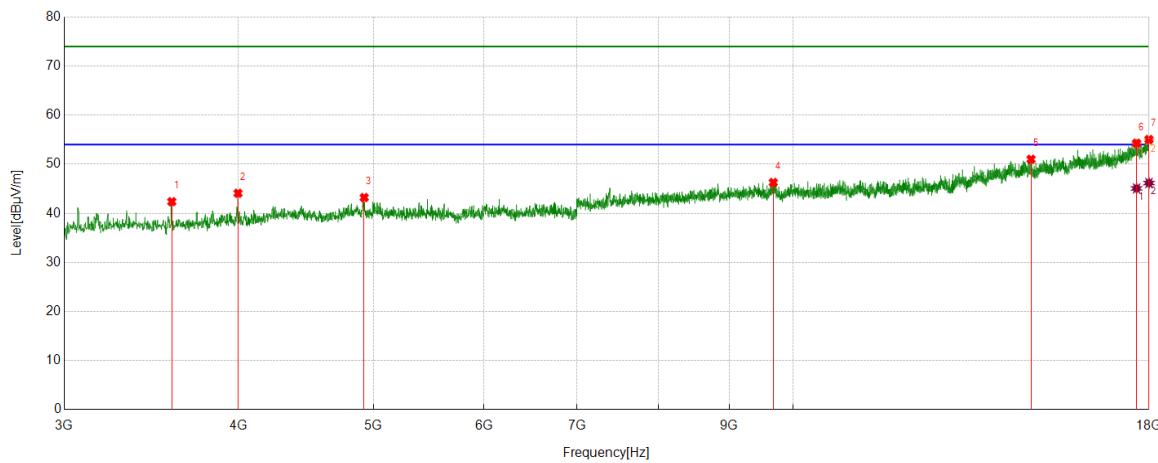
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17660.5826	27.02	17.75	44.77	54.00	-9.23	Horizontal
2	17909.9887	27.36	19.04	46.40	54.00	-7.60	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3583.1979	51.10	-8.72	42.38	74.00	-31.62	Vertical
2	3997.6247	51.03	-6.94	44.09	74.00	-29.91	Vertical
3	4923.9905	47.10	-3.88	43.22	74.00	-30.78	Vertical
4	9677.7097	42.68	3.60	46.28	74.00	-27.72	Vertical
5	14813.9767	39.08	11.93	51.01	74.00	-22.99	Vertical
6	17634.3293	36.80	17.49	54.29	74.00	-19.71	Vertical
7	18000	36.29	18.76	55.05	74.00	-18.95	Vertical

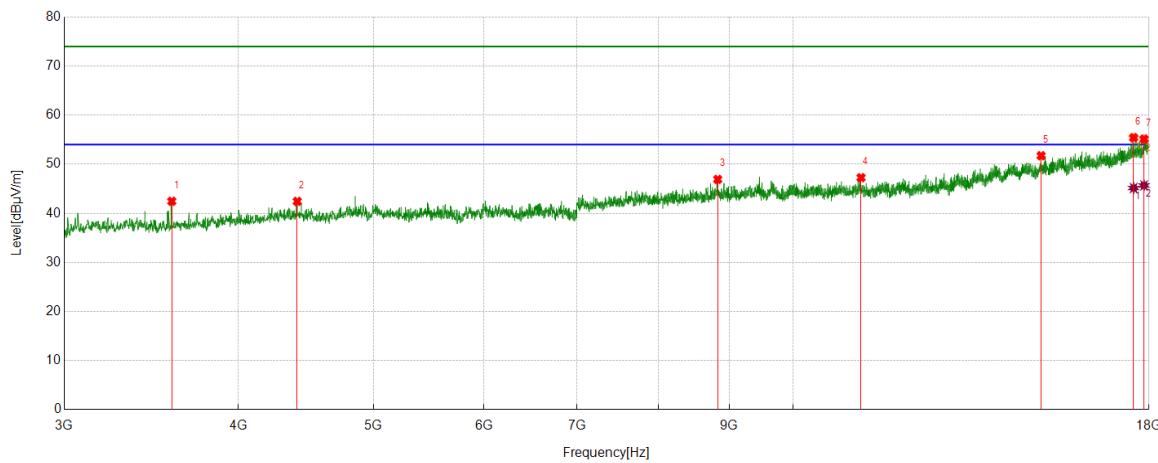
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17634.3293	27.59	17.49	45.08	54.00	-8.92	Vertical
2	18000	27.42	18.76	46.18	54.00	-7.82	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3583.1979	51.18	-8.72	42.46	74.00	-31.54	Horizontal
2	4408.301	47.90	-5.46	42.44	74.00	-31.56	Horizontal
3	8828.2285	44.37	2.55	46.92	74.00	-27.08	Horizontal
4	11187.2734	42.24	5.03	47.27	74.00	-26.73	Horizontal
5	15063.3829	39.66	12.08	51.74	74.00	-22.26	Horizontal
6	17549.9437	38.82	16.60	55.42	74.00	-18.58	Horizontal
7	17853.7317	36.38	18.76	55.14	74.00	-18.86	Horizontal

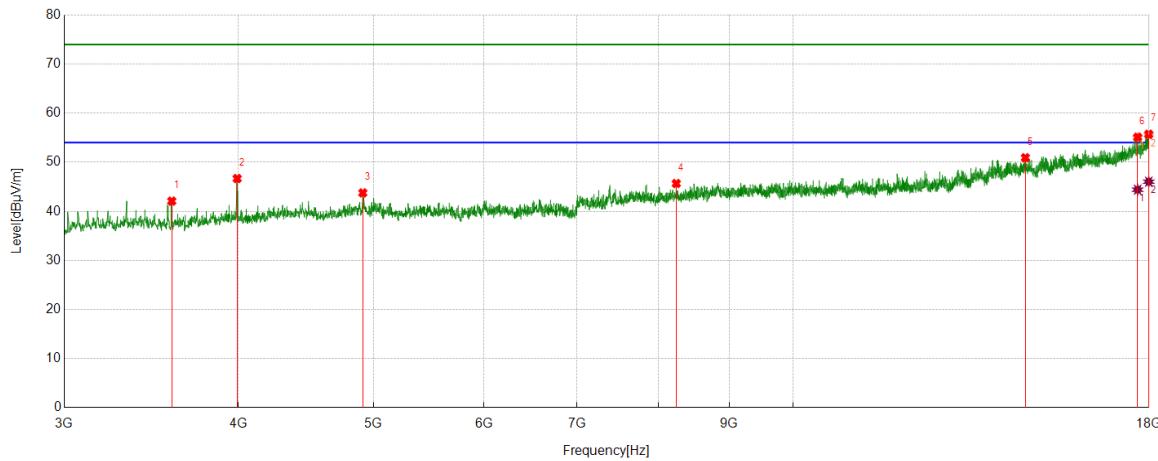
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17549.9437	28.55	16.60	45.15	54.00	-8.85	Horizontal
2	17853.7317	26.92	18.76	45.68	54.00	-8.32	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS


**PK Result:**

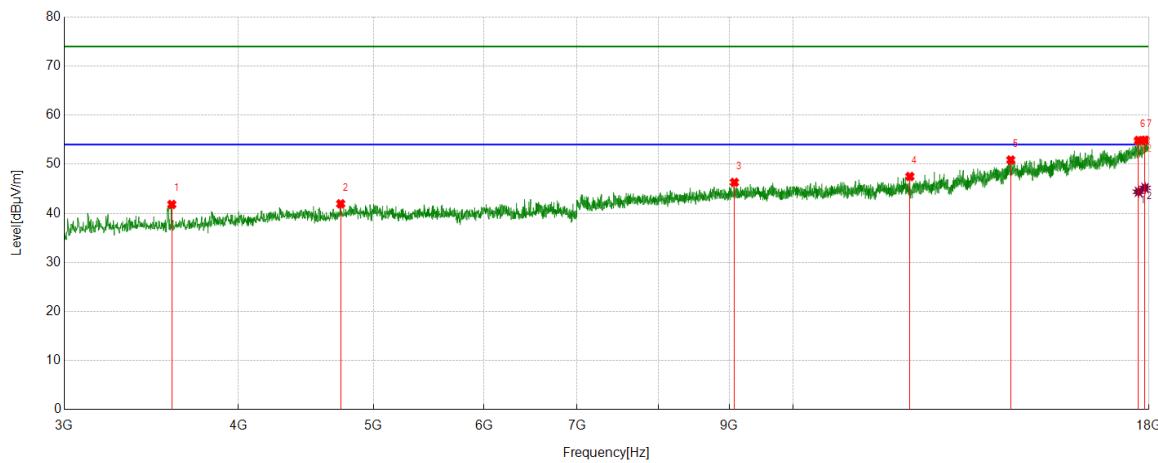
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3583.1979	50.81	-8.72	42.09	74.00	-31.91	Vertical
2	3991.999	53.75	-7.07	46.68	74.00	-27.32	Vertical
3	4912.7391	47.59	-3.83	43.76	74.00	-30.24	Vertical
4	8245.0306	43.42	2.25	45.67	74.00	-28.33	Vertical
5	14675.2094	39.00	11.92	50.92	74.00	-23.08	Vertical
6	17666.2083	37.54	17.57	55.11	74.00	-18.89	Vertical
7	17992.4991	37.08	18.63	55.71	74.00	-18.29	Vertical

**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17666.2083	26.84	17.57	44.41	54.00	-9.59	Vertical
2	17992.4991	27.41	18.63	46.04	54.00	-7.96	Vertical

Note: 1. Measurement = Reading Level + Correct Factor,  
     Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.  
     2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
     3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.  
     4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).  
     5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
     6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3583.1979	50.53	-8.72	41.81	74.00	-32.19	Horizontal
2	4736.4671	46.26	-4.32	41.94	74.00	-32.06	Horizontal
3	9075.7595	43.35	2.96	46.31	74.00	-27.69	Horizontal
4	12126.7658	40.65	6.85	47.50	74.00	-26.50	Horizontal
5	14326.4158	39.87	11.00	50.87	74.00	-23.13	Horizontal
6	17690.5863	37.30	17.54	54.84	74.00	-19.16	Horizontal
7	17883.7355	35.81	19.10	54.91	74.00	-19.09	Horizontal

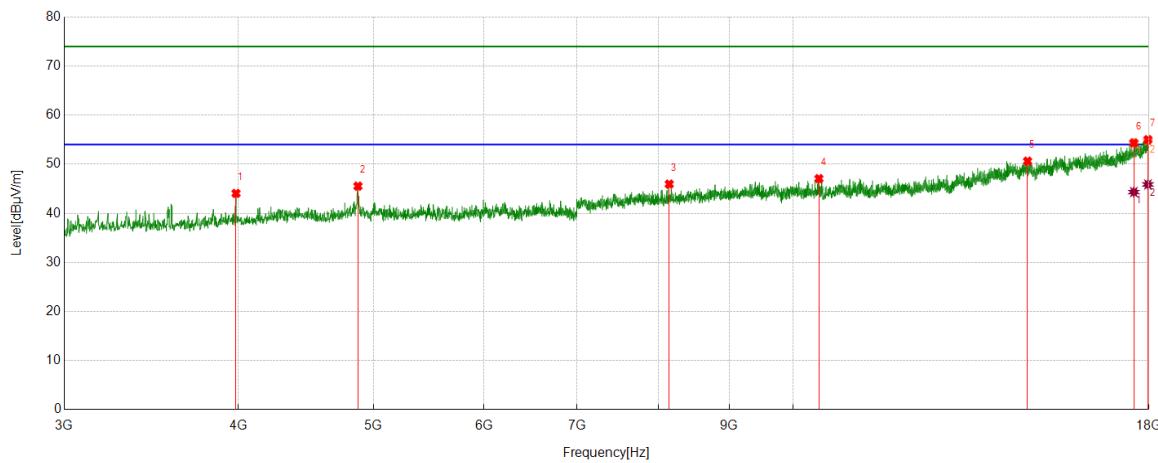
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17690.5863	26.85	17.54	44.39	54.00	-9.61	Horizontal
2	17883.7355	26.08	19.10	45.18	54.00	-8.82	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS


**PK Result:**

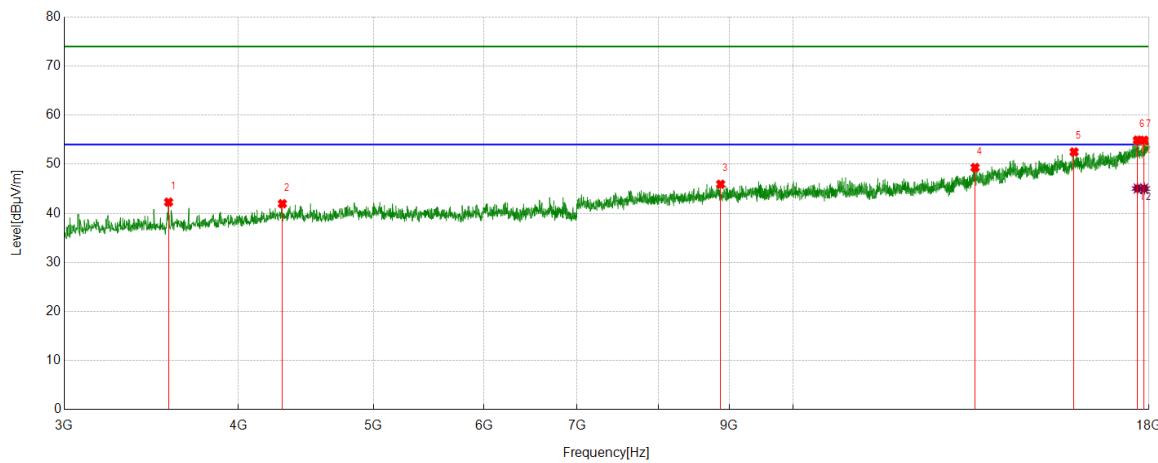
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3984.4981	50.96	-6.90	44.06	74.00	-29.94	Vertical
2	4873.3592	49.16	-3.62	45.54	74.00	-28.46	Vertical
3	8149.3937	44.29	1.66	45.95	74.00	-28.05	Vertical
4	10435.3044	43.29	3.78	47.07	74.00	-26.93	Vertical
5	14729.5912	39.20	11.42	50.62	74.00	-23.38	Vertical
6	17555.5694	37.38	16.97	54.35	74.00	-19.65	Vertical
7	17968.121	36.36	18.65	55.01	74.00	-18.99	Vertical

**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17555.5694	27.36	16.97	44.33	54.00	-9.67	Vertical
2	17968.121	27.23	18.65	45.88	54.00	-8.12	Vertical

Note: 1. Measurement = Reading Level + Correct Factor,  
     Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.  
     2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
     3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.  
     4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).  
     5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
     6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3564.4456	51.05	-8.77	42.28	74.00	-31.72	Horizontal
2	4301.4127	47.42	-5.46	41.96	74.00	-32.04	Horizontal
3	8871.3589	43.23	2.70	45.93	74.00	-28.07	Horizontal
4	13505.0631	40.31	9.02	49.33	74.00	-24.67	Horizontal
5	15905.3632	38.88	13.62	52.50	74.00	-21.50	Horizontal
6	17660.5826	37.17	17.75	54.92	74.00	-19.08	Horizontal
7	17859.3574	35.98	18.90	54.88	74.00	-19.12	Horizontal

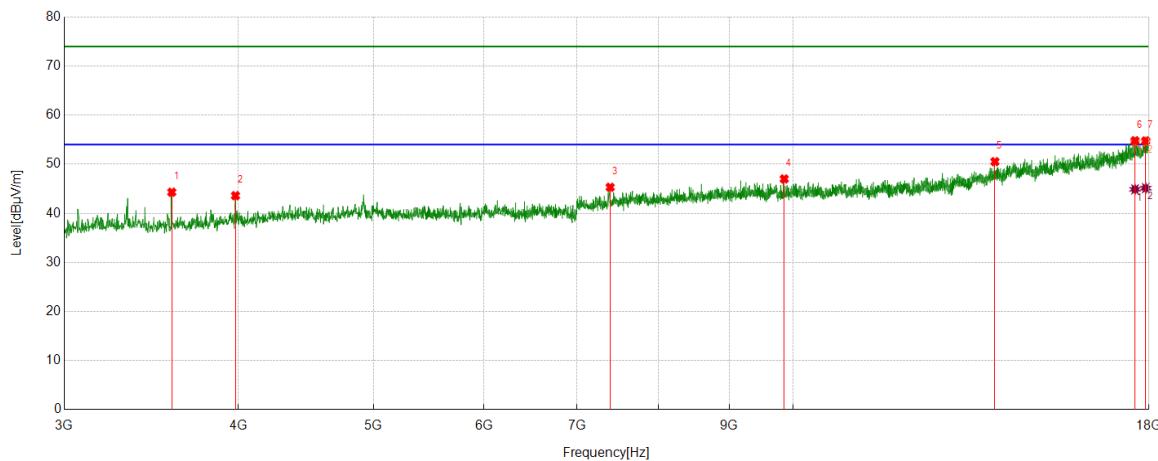
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17660.5826	27.31	17.75	45.06	54.00	-8.94	Horizontal
2	17859.3574	26.14	18.90	45.04	54.00	-8.96	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3583.1979	53.03	-8.72	44.31	74.00	-29.69	Vertical
2	3980.7476	50.36	-6.76	43.60	74.00	-30.40	Vertical
3	7391.799	45.31	0.00	45.31	74.00	-28.69	Vertical
4	9853.9817	43.28	3.73	47.01	74.00	-26.99	Vertical
5	13956.9946	39.71	10.82	50.53	74.00	-23.47	Vertical
6	17589.3237	37.13	17.65	54.78	74.00	-19.22	Vertical
7	17904.363	35.58	19.18	54.76	74.00	-19.24	Vertical

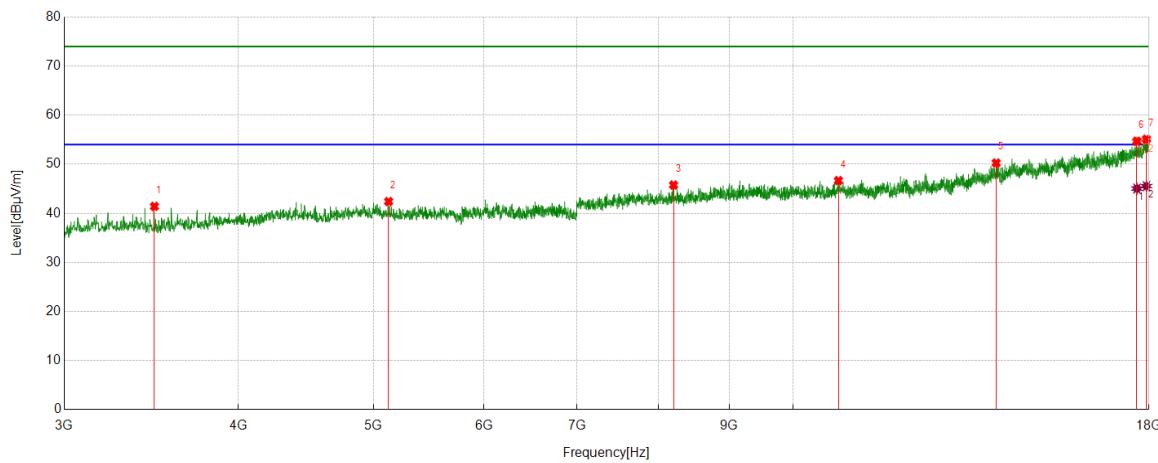
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17589.3237	27.24	17.65	44.89	54.00	-9.11	Vertical
2	17904.363	25.95	19.18	45.13	54.00	-8.87	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS


**PK Result:**

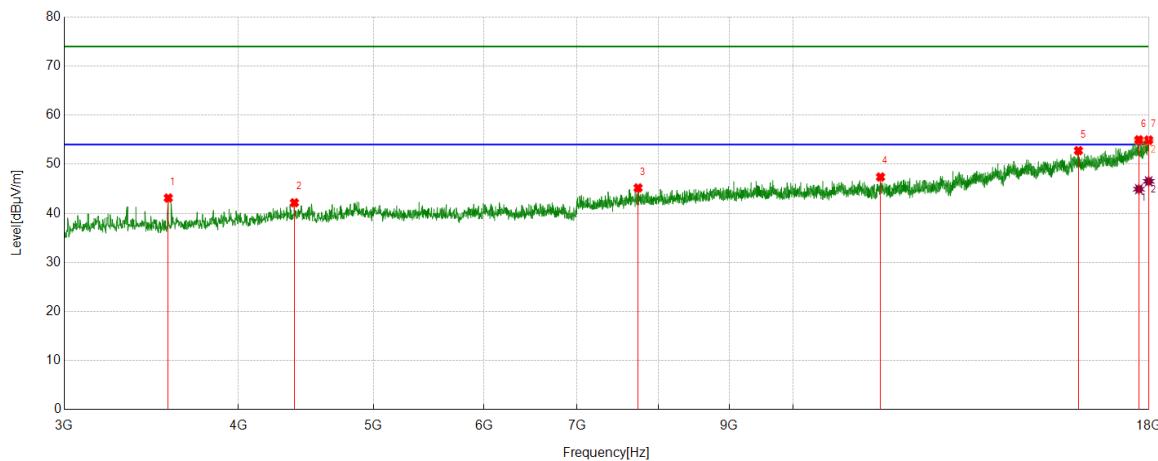
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3481.9352	50.34	-8.93	41.41	74.00	-32.59	Horizontal
2	5126.5158	45.82	-3.41	42.41	74.00	-31.59	Horizontal
3	8207.5259	43.68	2.09	45.77	74.00	-28.23	Horizontal
4	10776.5971	42.37	4.30	46.67	74.00	-27.33	Horizontal
5	13985.1231	39.92	10.34	50.26	74.00	-23.74	Horizontal
6	17645.5807	36.91	17.78	54.69	74.00	-19.31	Horizontal
7	17924.9906	36.39	18.71	55.10	74.00	-18.90	Horizontal

**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17645.5807	27.26	17.78	45.04	54.00	-8.96	Horizontal
2	17924.9906	26.82	18.71	45.53	54.00	-8.47	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,  
     Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.  
     2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
     3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.  
     4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).  
     5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
     6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3562.5703	51.93	-8.81	43.12	74.00	-30.88	Vertical
2	4387.6735	47.37	-5.21	42.16	74.00	-31.84	Vertical
3	7740.5926	43.86	1.32	45.18	74.00	-28.82	Vertical
4	11552.9441	42.17	5.23	47.40	74.00	-26.60	Vertical
5	16019.7525	38.56	14.21	52.77	74.00	-21.23	Vertical
6	17701.8377	37.30	17.67	54.97	74.00	-19.03	Vertical
7	17990.6238	36.35	18.59	54.94	74.00	-19.06	Vertical

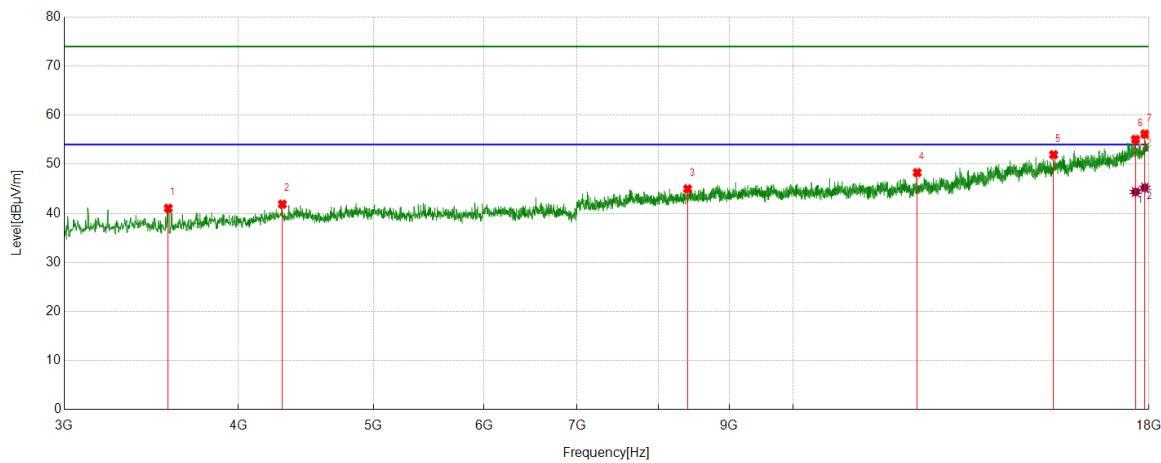
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17701.8377	27.26	17.67	44.93	54.00	-9.07	Vertical
2	17990.6238	27.93	18.59	46.52	54.00	-7.48	Vertical

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3562.5703	49.84	-8.81	41.03	74.00	-32.97	Horizontal
2	4301.4127	47.32	-5.46	41.86	74.00	-32.14	Horizontal
3	8400.6751	42.98	2.00	44.98	74.00	-29.02	Horizontal
4	12274.9094	41.45	6.85	48.30	74.00	-25.70	Horizontal
5	15376.5471	39.32	12.62	51.94	74.00	-22.06	Horizontal
6	17604.3255	37.48	17.57	55.05	74.00	-18.95	Horizontal
7	17879.985	37.14	19.02	56.16	74.00	-17.84	Horizontal

**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17604.3255	26.78	17.57	44.35	54.00	-9.65	Horizontal
2	17879.985	26.20	19.02	45.22	54.00	-8.78	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.