

8.2. TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V


8.3. RESTRICTED BANDEDGE

TEST RESULT TABLE

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS

TEST GRAPHS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

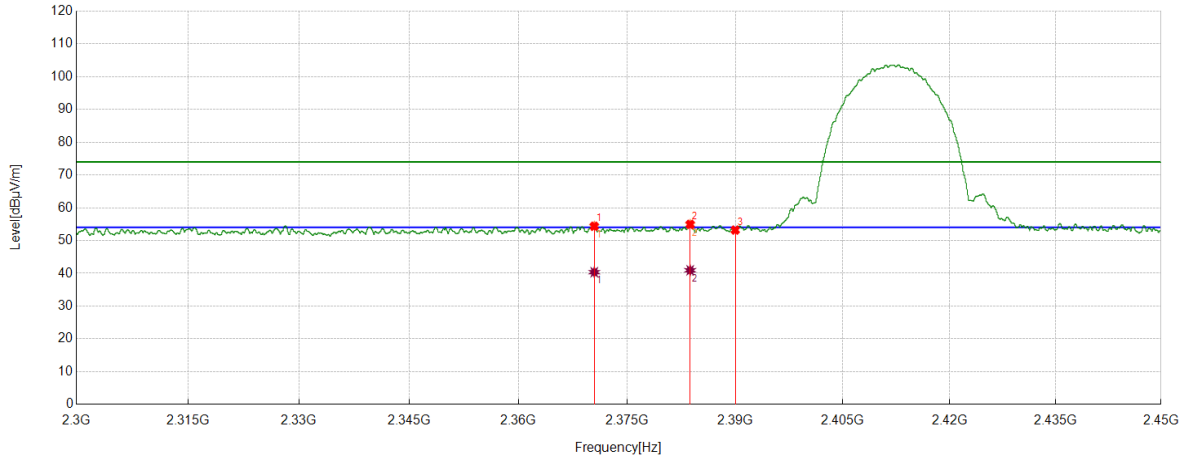

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2370.4526	44.23	10.13	54.36	74.00	-19.64	Horizontal
2	2383.7292	44.61	10.32	54.93	74.00	-19.07	Horizontal
3	2390.0000	42.85	10.35	53.20	74.00	-20.80	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2370.4526	30.22	10.13	40.35	54.00	-13.65	Horizontal
2	2383.7292	30.61	10.32	40.93	54.00	-13.07	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

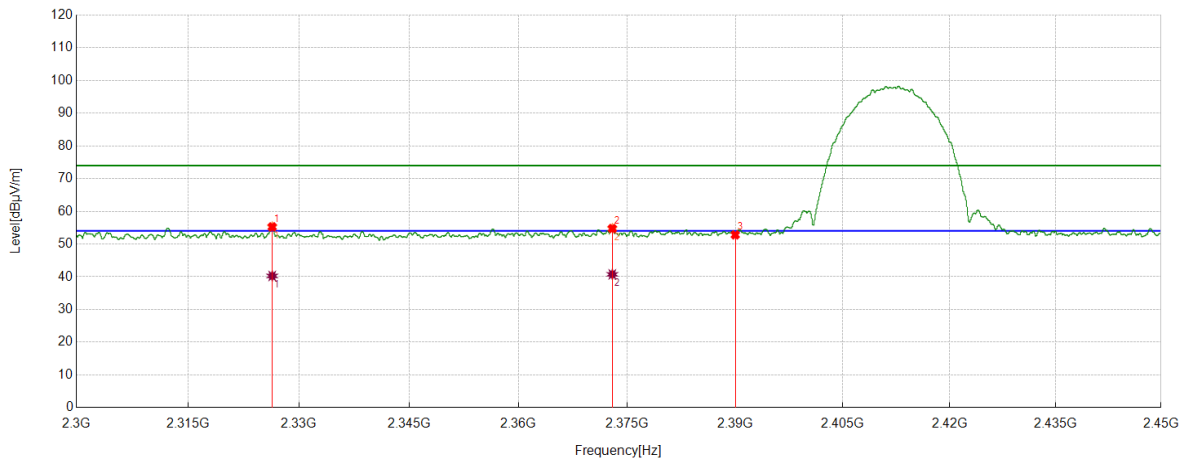

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2326.4033	45.45	9.80	55.25	74.00	-18.75	Vertical
2	2372.9466	44.57	10.17	54.74	74.00	-19.26	Vertical
3	2390.0000	42.46	10.35	52.81	74.00	-21.19	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2326.4033	30.45	9.80	40.25	54.00	-13.75	Vertical
2	2372.9466	30.57	10.17	40.74	54.00	-13.26	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

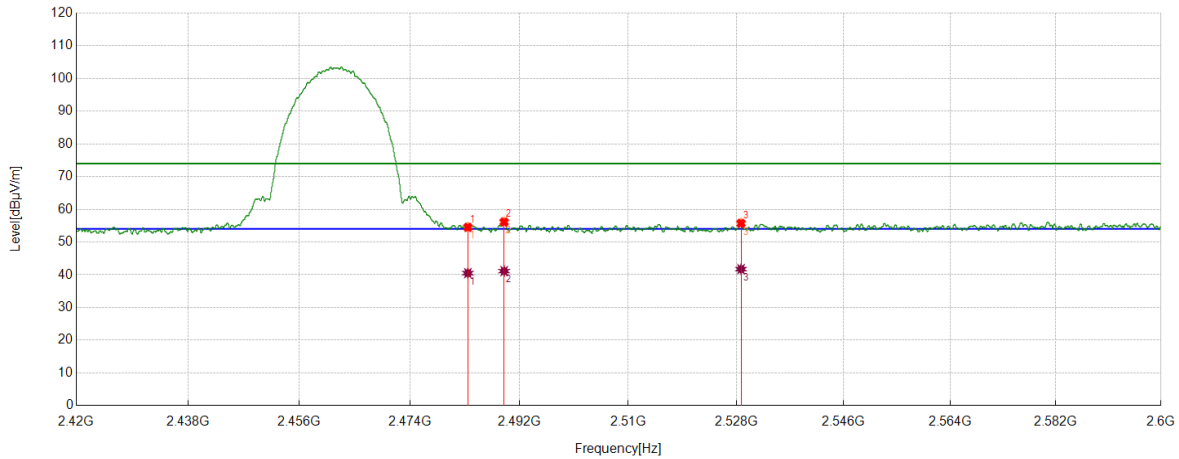

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	43.87	10.64	54.51	74.00	-19.49	Horizontal
2	2489.4662	45.35	10.78	56.13	74.00	-17.87	Horizontal
3	2528.7786	44.42	11.30	55.72	74.00	-18.28	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	29.87	10.64	40.51	54.00	-13.49	Horizontal
2	2489.4662	30.34	10.78	41.12	54.00	-12.88	Horizontal
3	2528.7786	30.42	11.30	41.72	54.00	-12.28	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

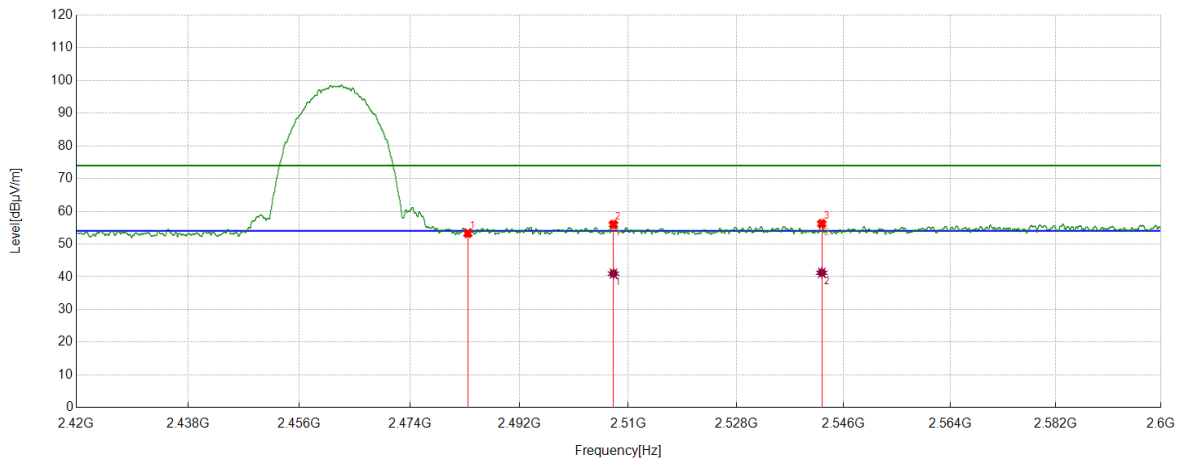

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	42.61	10.64	53.25	74.00	-20.75	Vertical
2	2507.5359	44.97	11.01	55.98	74.00	-18.02	Vertical
3	2542.3253	45.01	11.22	56.23	74.00	-17.77	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2507.5359	29.97	11.01	40.98	54.00	-13.02	Vertical
2	2542.3253	30.01	11.22	41.23	54.00	-12.77	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

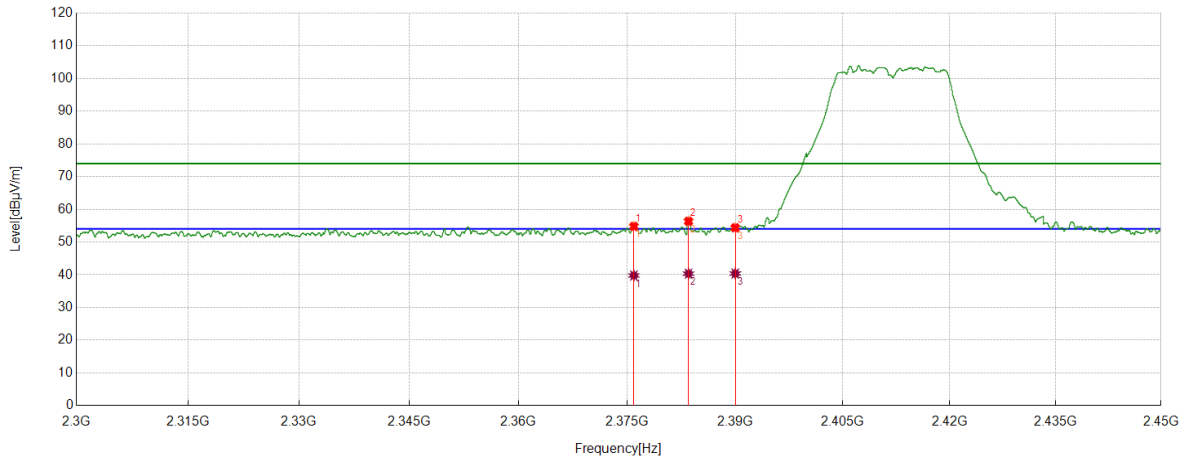

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2375.9282	44.55	10.23	54.78	74.00	-19.22	Horizontal
2	2383.5042	46.04	10.31	56.35	74.00	-17.65	Horizontal
3	2390.0000	44.02	10.35	54.37	74.00	-19.63	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2375.9282	29.55	10.23	39.78	54.00	-14.22	Horizontal
2	2383.5042	30.03	10.31	40.34	54.00	-13.66	Horizontal
3	2390.0000	30.02	10.35	40.37	54.00	-13.63	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

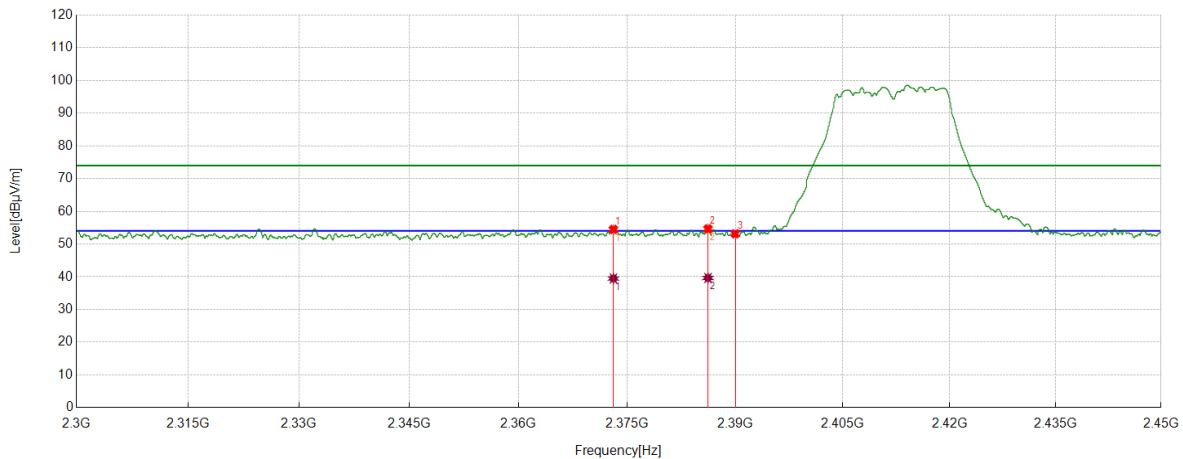

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2373.0966	44.30	10.17	54.47	74.00	-19.53	Vertical
2	2386.2045	44.32	10.33	54.65	74.00	-19.35	Vertical
3	2390.0000	42.77	10.35	53.12	74.00	-20.88	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2373.0966	29.30	10.17	39.47	54.00	-14.53	Vertical
2	2386.2045	29.32	10.33	39.65	54.00	-14.35	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

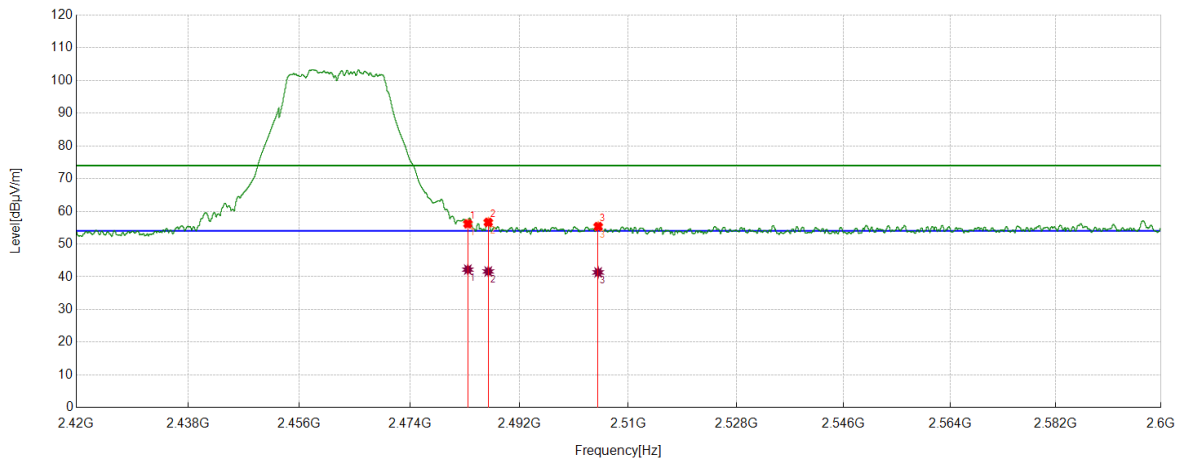

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	45.55	10.64	56.19	74.00	-17.81	Horizontal
2	2486.8559	45.92	10.72	56.64	74.00	-17.36	Horizontal
3	2504.9931	44.44	10.91	55.35	74.00	-18.65	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	31.55	10.64	42.19	54.00	-11.81	Horizontal
2	2486.8559	30.91	10.72	41.63	54.00	-12.37	Horizontal
3	2504.9931	30.44	10.91	41.35	54.00	-12.65	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

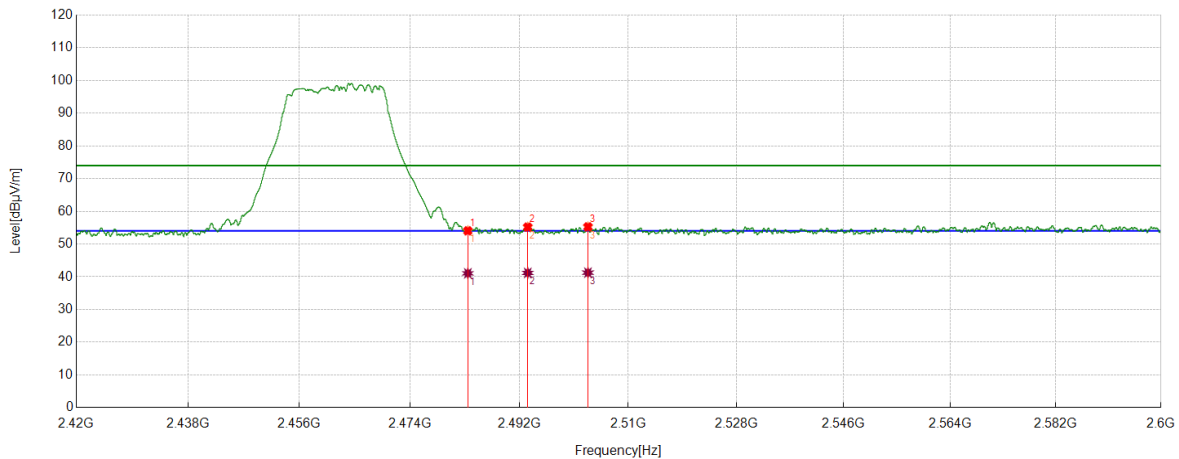

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	43.41	10.64	54.05	74.00	-19.95	Vertical
2	2493.3592	44.42	10.77	55.19	74.00	-18.81	Vertical
3	2503.3054	44.40	10.86	55.26	74.00	-18.74	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	30.41	10.64	41.05	54.00	-12.95	Vertical
2	2493.3592	30.41	10.77	41.18	54.00	-12.82	Vertical
3	2503.3054	30.40	10.86	41.26	54.00	-12.74	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

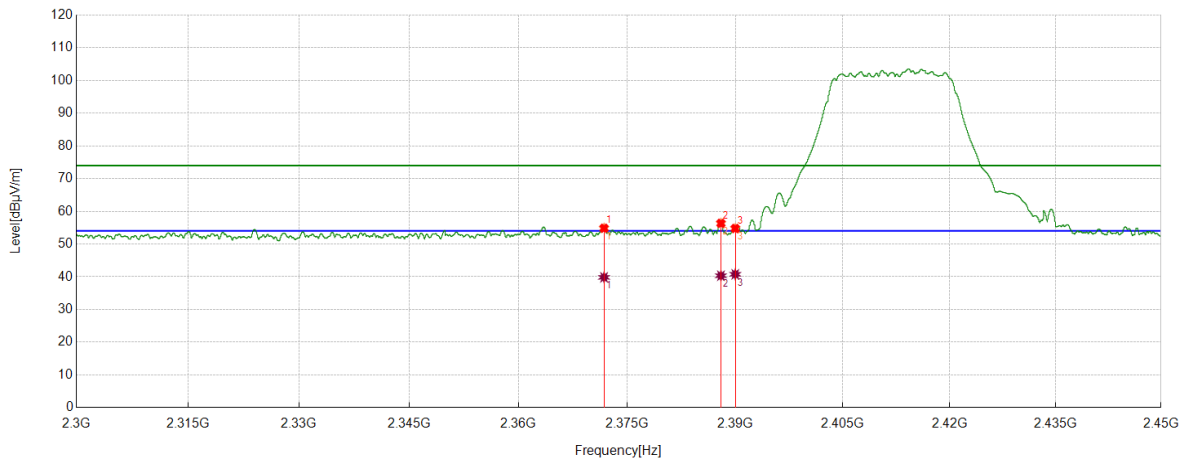

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2371.8027	44.67	10.16	54.83	74.00	-19.17	Horizontal
2	2388.0048	45.99	10.34	56.33	74.00	-17.67	Horizontal
3	2390.0000	44.41	10.35	54.76	74.00	-19.24	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2371.8027	29.67	10.16	39.83	54.00	-14.17	Horizontal
2	2388.0048	29.99	10.34	40.33	54.00	-13.67	Horizontal
3	2390.0000	30.41	10.35	40.76	54.00	-13.24	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

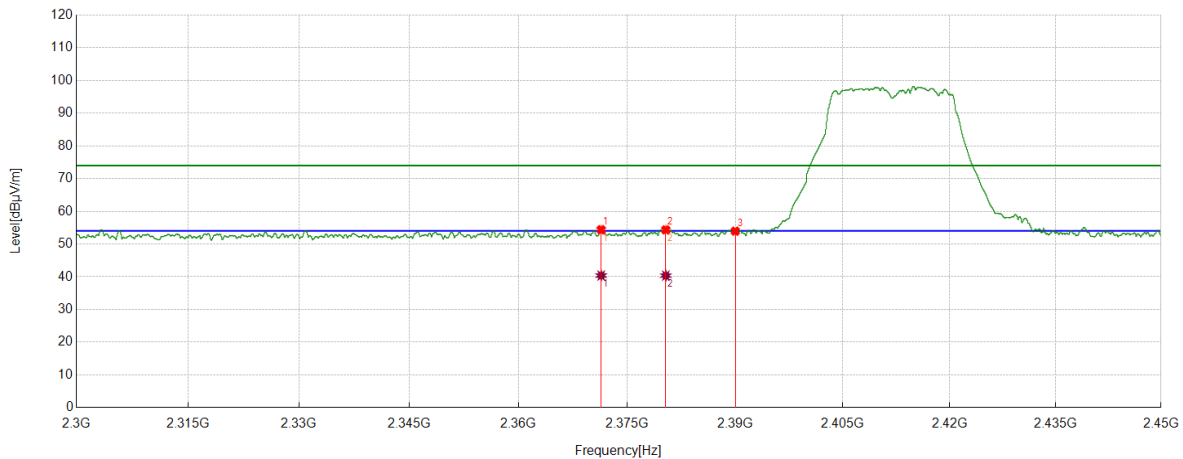

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2371.4089	44.23	10.15	54.38	74.00	-19.62	Vertical
2	2380.3538	44.04	10.30	54.34	74.00	-19.66	Vertical
3	2390.0000	43.59	10.35	53.94	74.00	-20.06	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2371.4089	30.23	10.15	40.38	54.00	-13.62	Vertical
2	2380.3538	30.04	10.30	40.34	54.00	-13.66	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

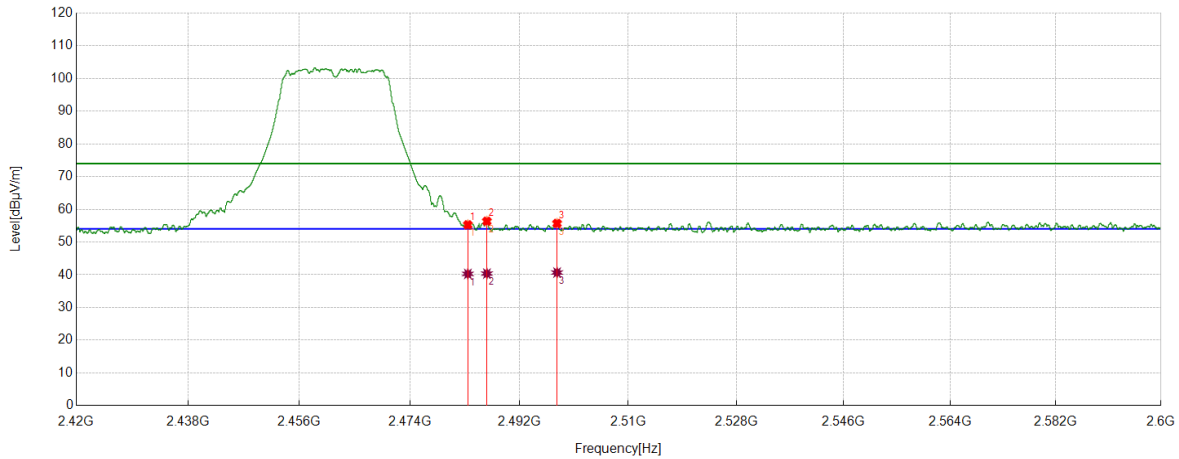

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	44.63	10.64	55.27	74.00	-18.73	Horizontal
2	2486.6308	45.65	10.71	56.36	74.00	-17.64	Horizontal
3	2498.1973	44.95	10.74	55.69	74.00	-18.31	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	29.63	10.64	40.27	54.00	-13.73	Horizontal
2	2486.6308	29.65	10.71	40.36	54.00	-13.64	Horizontal
3	2498.1973	29.94	10.74	40.68	54.00	-13.32	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

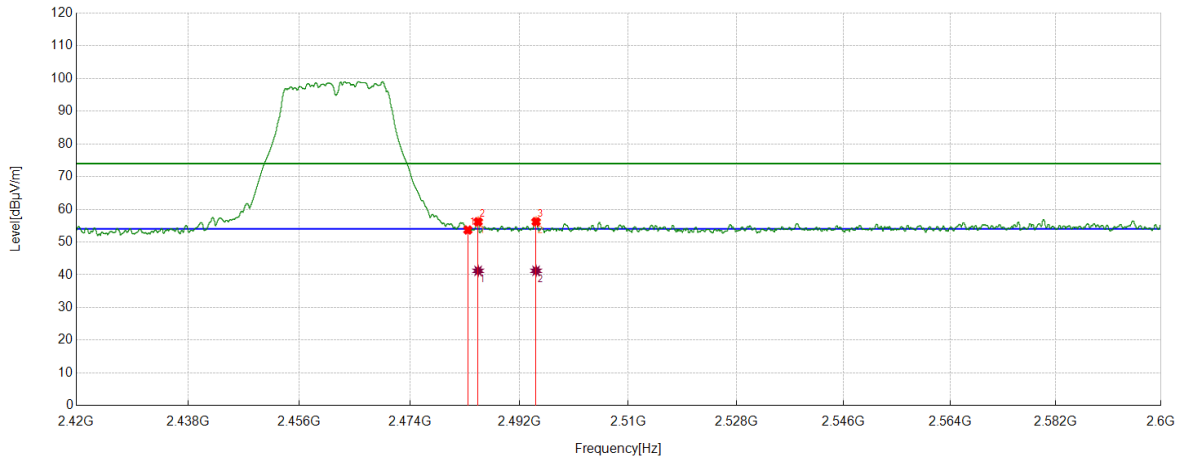

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	43.05	10.64	53.69	74.00	-20.31	Vertical
2	2485.1906	45.52	10.68	56.20	74.00	-17.80	Vertical
3	2494.7318	45.45	10.76	56.21	74.00	-17.79	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2485.1906	30.52	10.68	41.20	54.00	-12.80	Vertical
2	2494.7318	30.45	10.76	41.21	54.00	-12.79	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

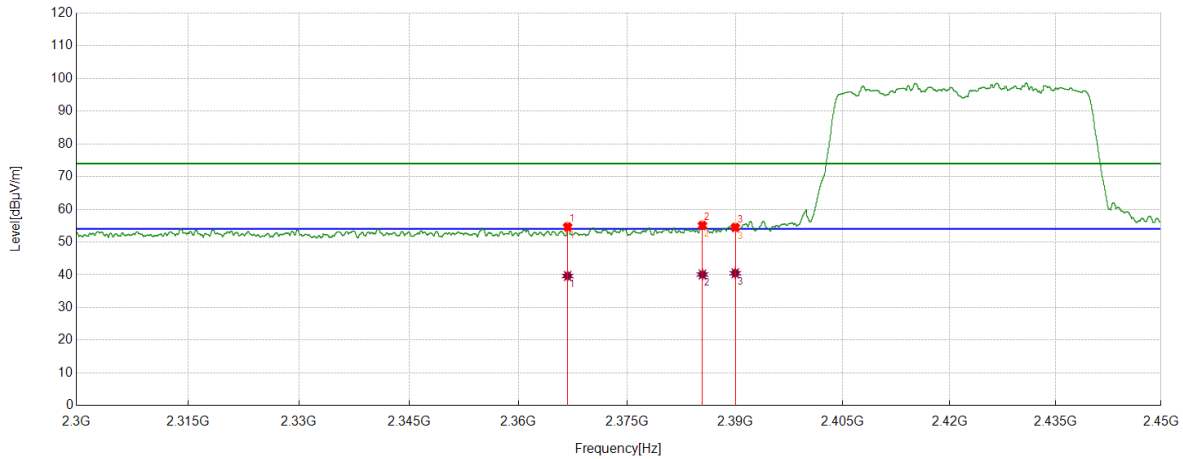

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2366.7771	44.59	10.05	54.64	74.00	-19.36	Horizontal
2	2385.4357	44.75	10.33	55.08	74.00	-18.92	Horizontal
3	2390.0000	44.12	10.35	54.47	74.00	-19.53	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2366.7771	29.59	10.05	39.64	54.00	-14.36	Horizontal
2	2385.4357	29.75	10.33	40.08	54.00	-13.92	Horizontal
3	2390.0000	30.12	10.35	40.47	54.00	-13.53	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

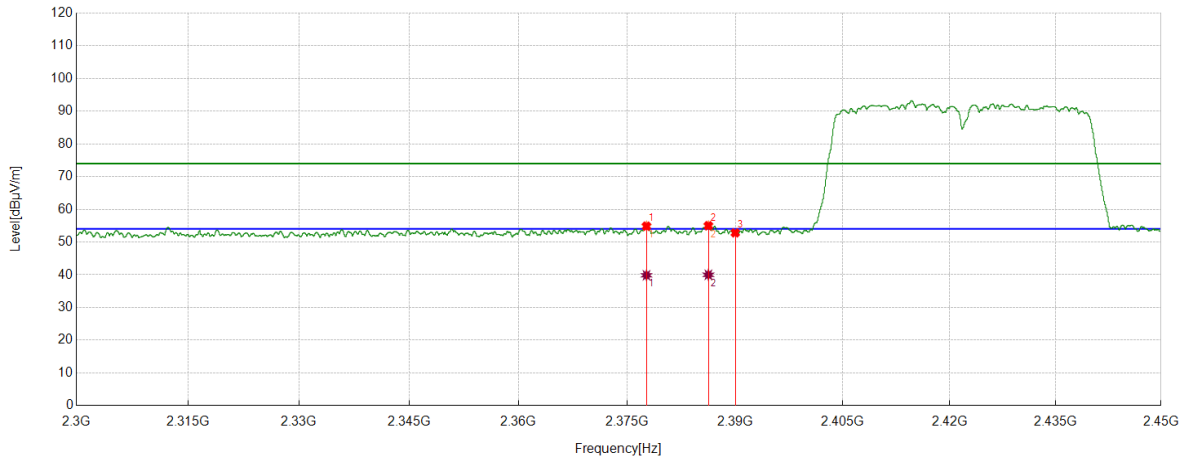

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2377.6722	44.60	10.25	54.85	74.00	-19.15	Vertical
2	2386.2608	44.66	10.33	54.99	74.00	-19.01	Vertical
3	2390.0000	42.47	10.35	52.82	74.00	-21.18	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2377.6722	29.60	10.25	39.85	54.00	-14.15	Vertical
2	2386.2608	29.66	10.33	39.99	54.00	-14.01	Vertical


Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.

2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).

3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.

4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

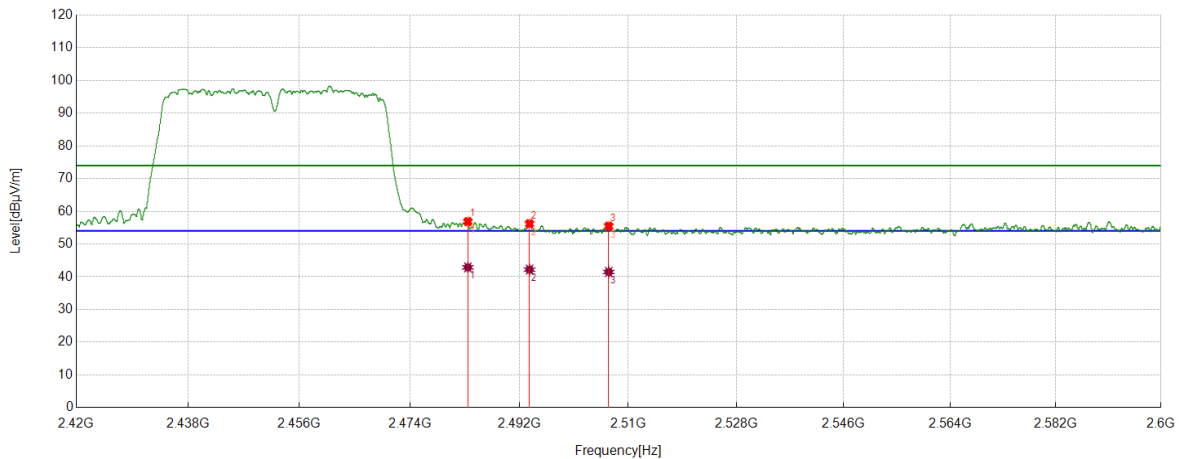

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	46.22	10.64	56.86	74.00	-17.14	Horizontal
2	2493.6517	45.43	10.77	56.20	74.00	-17.80	Horizontal
3	2506.7483	44.49	10.98	55.47	74.00	-18.53	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	32.22	10.64	42.86	54.00	-11.14	Horizontal
2	2493.6517	31.43	10.77	42.20	54.00	-11.80	Horizontal
3	2506.7483	30.49	10.98	41.47	54.00	-12.53	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

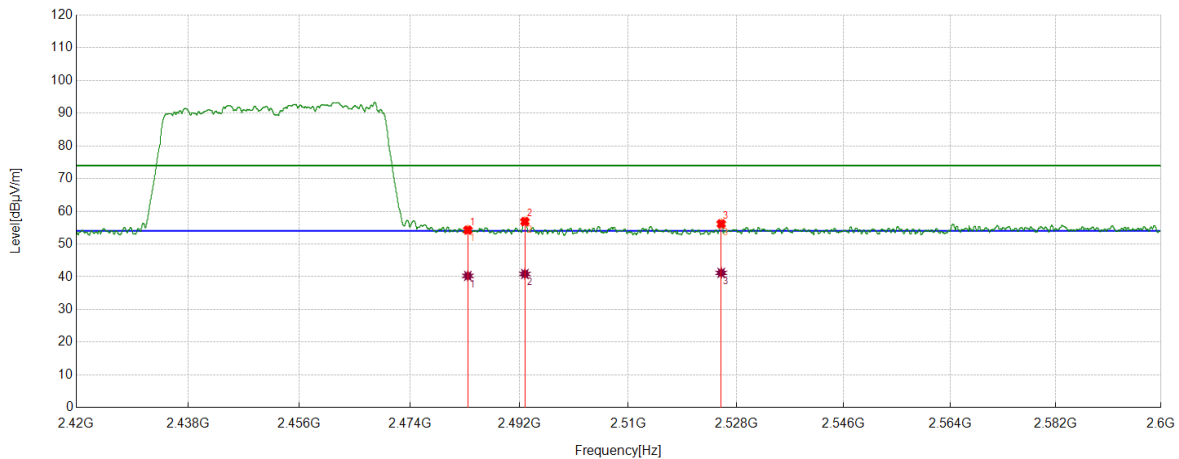

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	43.63	10.64	54.27	74.00	-19.73	Vertical
2	2492.8866	46.09	10.78	56.87	74.00	-17.13	Vertical
3	2525.4707	45.00	11.19	56.19	74.00	-17.81	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	29.63	10.64	40.27	54.00	-13.73	Vertical
2	2492.8866	30.09	10.78	40.87	54.00	-13.13	Vertical
3	2525.4707	30.00	11.19	41.19	54.00	-12.81	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8.4. SPURIOUS EMISSIONS

TEST RESULTS TABLE

1) For 1GHz~18GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS

2) For 9kHz~30MHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	MCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

3) For 30MHz~1GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	MCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

4) For 18GHz~26.5GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	MCH	<Limit	PASS


Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

Part 1: 1GHz~3GHz

HARMONICS AND SPURIOUS EMISSIONS


Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

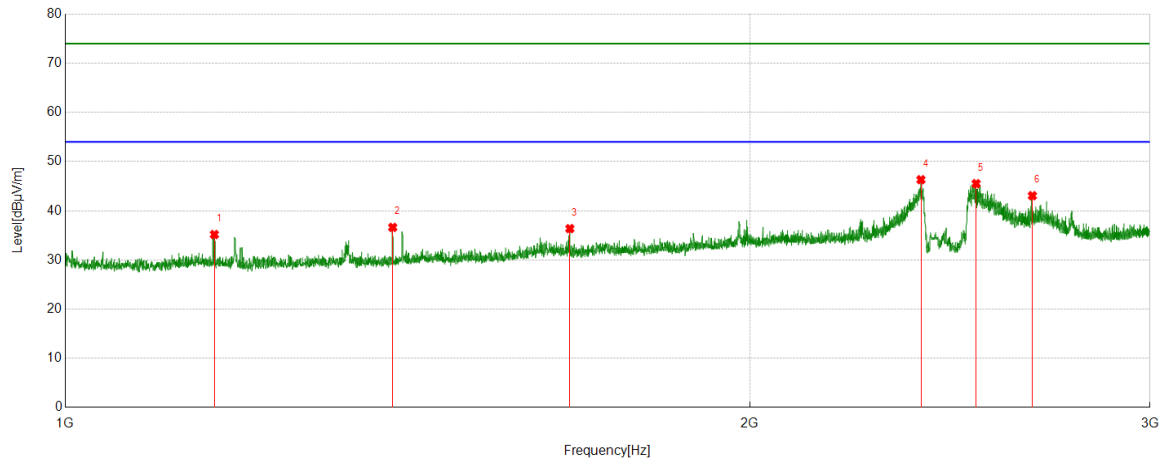

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1163.0204	56.60	-21.43	35.17	74.00	-38.83	Horizontal
2	1393.2992	57.16	-20.54	36.62	74.00	-37.38	Horizontal
3	1667.0834	54.54	-18.17	36.37	74.00	-37.63	Horizontal
4	2378.9224	60.56	-14.24	46.32	74.00	-27.68	Horizontal
5	2515.6895	59.17	-13.66	45.51	74.00	-28.49	Horizontal
6	2663.2079	56.30	-13.24	43.06	74.00	-30.94	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

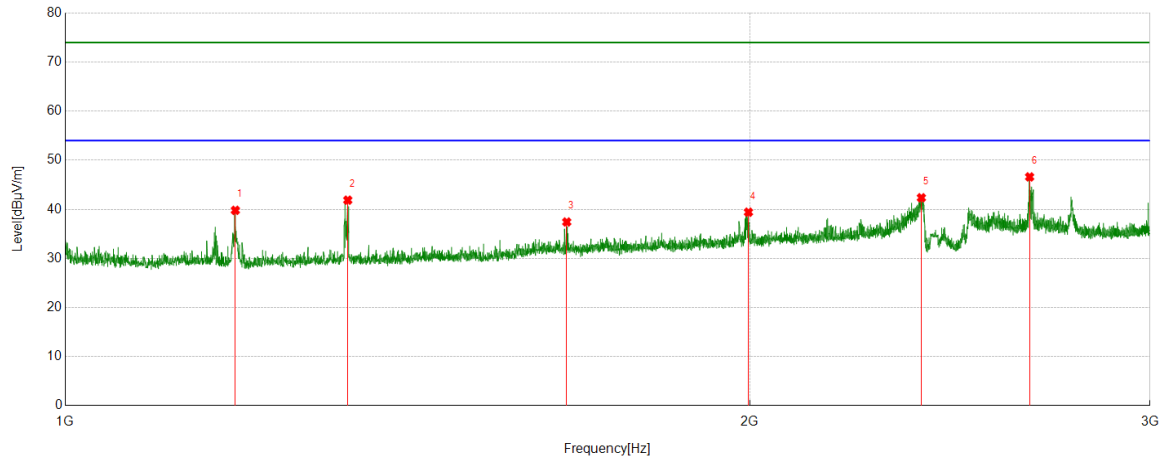

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1188.0235	61.66	-21.86	39.80	74.00	-34.20	Vertical
2	1331.2914	62.46	-20.59	41.87	74.00	-32.13	Vertical
3	1661.8327	55.71	-18.29	37.42	74.00	-36.58	Vertical
4	1997.6247	55.71	-16.29	39.42	74.00	-34.58	Vertical
5	2379.9225	56.58	-14.22	42.36	74.00	-31.64	Vertical
6	2655.707	59.83	-13.22	46.61	74.00	-27.39	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

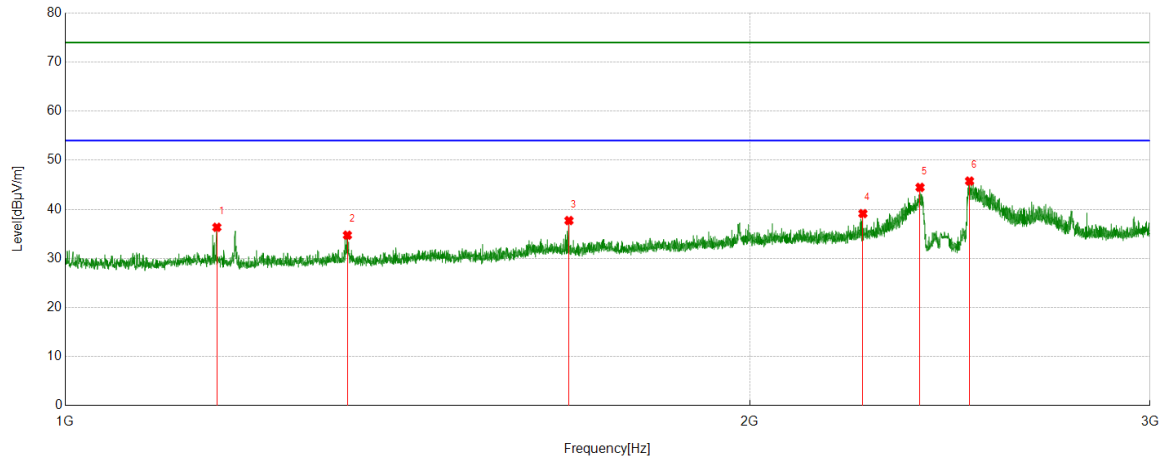

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1166.0208	57.81	-21.47	36.34	74.00	-37.66	Horizontal
2	1330.7913	55.31	-20.58	34.73	74.00	-39.27	Horizontal
3	1665.5832	55.92	-18.21	37.71	74.00	-36.29	Horizontal
4	2243.1554	54.15	-15.02	39.13	74.00	-34.87	Horizontal
5	2376.6721	58.76	-14.29	44.47	74.00	-29.53	Horizontal
6	2498.9374	59.19	-13.43	45.76	74.00	-28.24	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

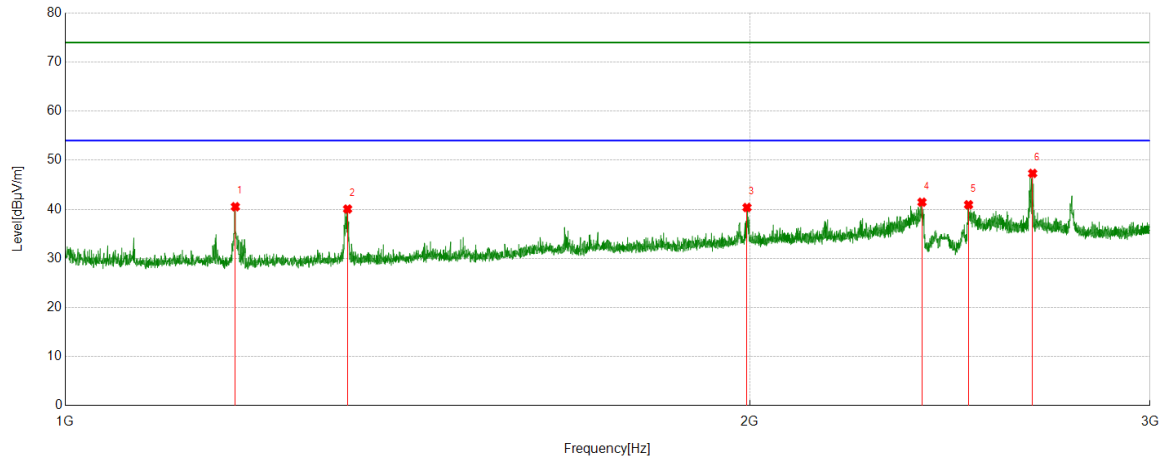

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1188.0235	62.39	-21.86	40.53	74.00	-33.47	Vertical
2	1331.0414	60.65	-20.59	40.06	74.00	-33.94	Vertical
3	1994.6243	56.68	-16.31	40.37	74.00	-33.63	Vertical
4	2381.4227	55.67	-14.22	41.45	74.00	-32.55	Vertical
5	2496.4371	54.37	-13.44	40.93	74.00	-33.07	Vertical
6	2663.958	60.55	-13.23	47.32	74.00	-26.68	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

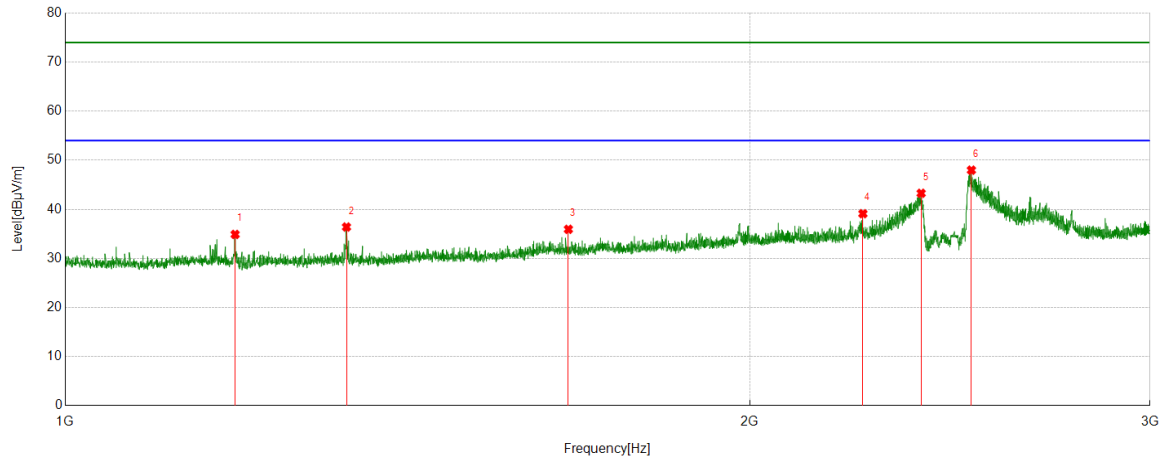

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1187.7735	56.75	-21.86	34.89	74.00	-39.11	Horizontal
2	1329.5412	56.98	-20.58	36.40	74.00	-37.60	Horizontal
3	1664.5831	54.16	-18.23	35.93	74.00	-38.07	Horizontal
4	2243.1554	54.13	-15.02	39.11	74.00	-34.89	Horizontal
5	2379.4224	57.50	-14.23	43.27	74.00	-30.73	Horizontal
6	2503.688	61.43	-13.45	47.98	74.00	-26.02	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

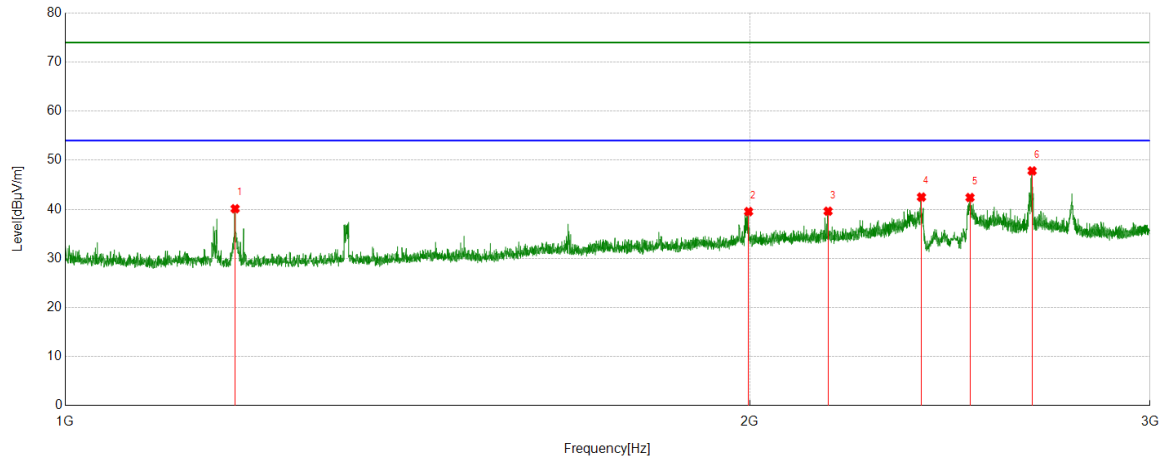

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1187.7735	61.98	-21.86	40.12	74.00	-33.88	Vertical
2	1997.8747	55.83	-16.29	39.54	74.00	-34.46	Vertical
3	2165.3957	55.59	-15.98	39.61	74.00	-34.39	Vertical
4	2380.1725	56.71	-14.22	42.49	74.00	-31.51	Vertical
5	2500.1875	55.82	-13.42	42.40	74.00	-31.60	Vertical
6	2662.4578	61.06	-13.23	47.83	74.00	-26.17	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

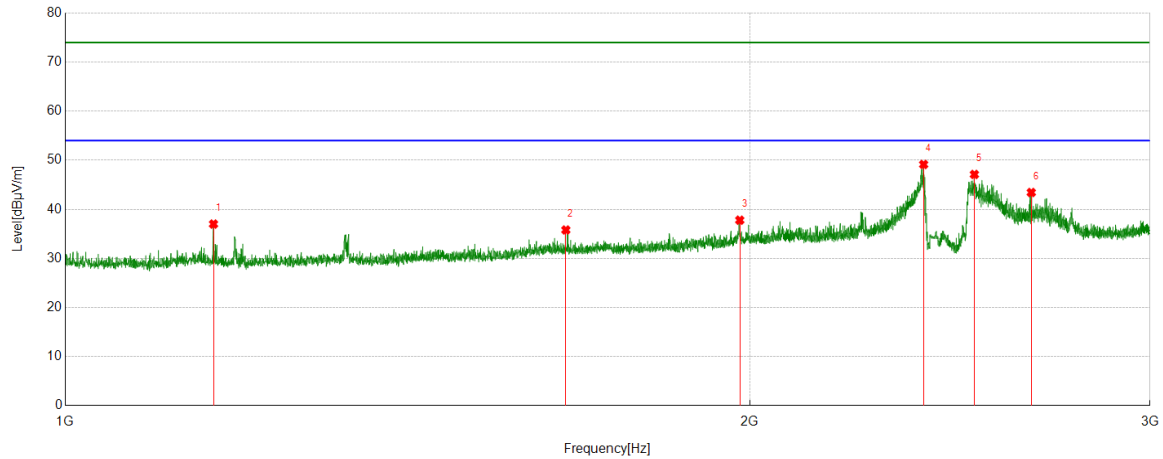

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1162.0203	58.43	-21.43	37.00	74.00	-37.00	Horizontal
2	1660.3325	54.11	-18.32	35.79	74.00	-38.21	Horizontal
3	1980.1225	54.08	-16.29	37.79	74.00	-36.21	Horizontal
4	2385.4232	63.37	-14.23	49.14	74.00	-24.86	Horizontal
5	2511.1889	60.66	-13.55	47.11	74.00	-26.89	Horizontal
6	2660.2075	56.66	-13.23	43.43	74.00	-30.57	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

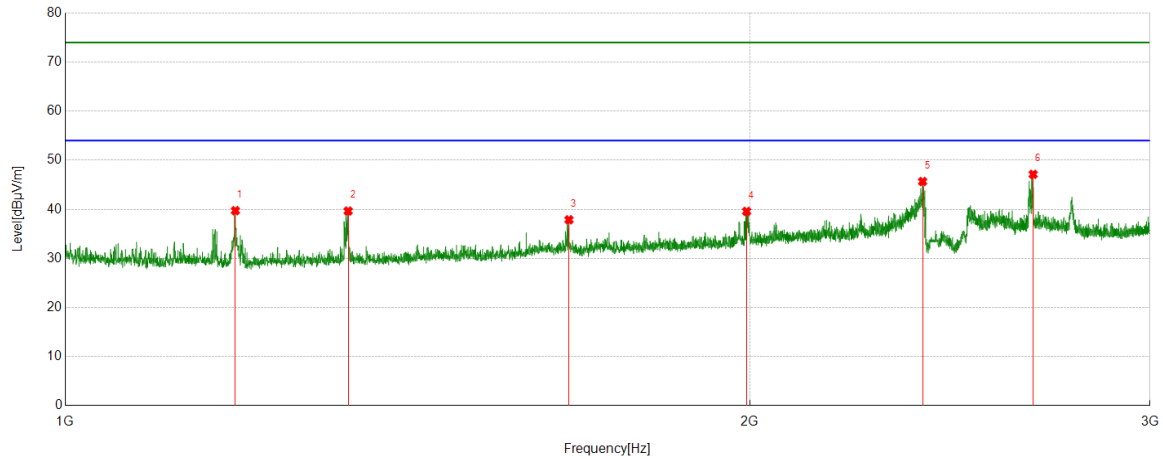

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1188.0235	61.59	-21.86	39.73	74.00	-34.27	Vertical
2	1331.7915	60.24	-20.59	39.65	74.00	-34.35	Vertical
3	1665.5832	56.08	-18.21	37.87	74.00	-36.13	Vertical
4	1993.8742	55.90	-16.32	39.58	74.00	-34.42	Vertical
5	2382.9229	59.90	-14.23	45.67	74.00	-28.33	Vertical
6	2665.2082	60.37	-13.24	47.13	74.00	-26.87	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

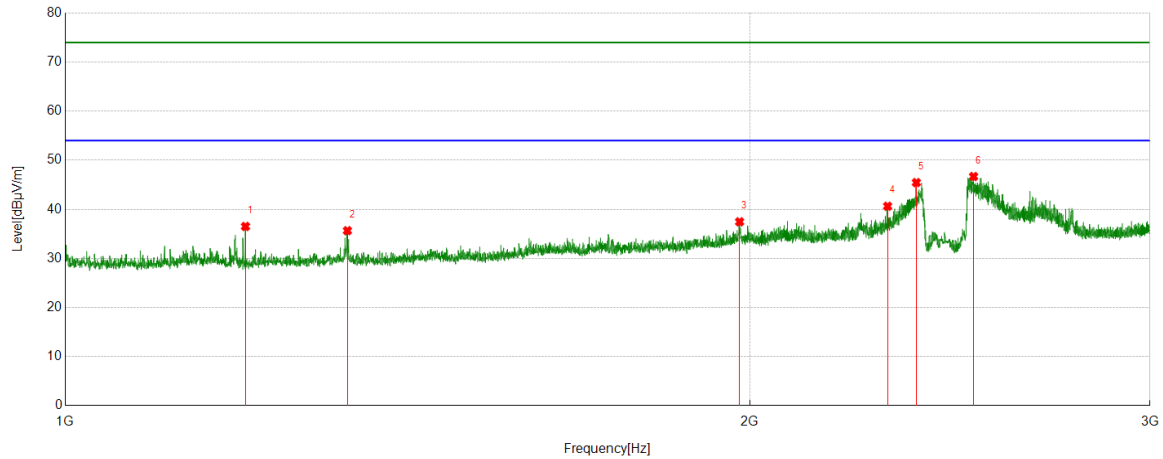

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1200.275	58.50	-21.99	36.51	74.00	-37.49	Horizontal
2	1330.7913	56.23	-20.58	35.65	74.00	-38.35	Horizontal
3	1979.8725	53.75	-16.29	37.46	74.00	-36.54	Horizontal
4	2299.9125	56.06	-15.43	40.63	74.00	-33.37	Horizontal
5	2367.921	59.96	-14.51	45.45	74.00	-28.55	Horizontal
6	2509.1886	60.19	-13.51	46.68	74.00	-27.32	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

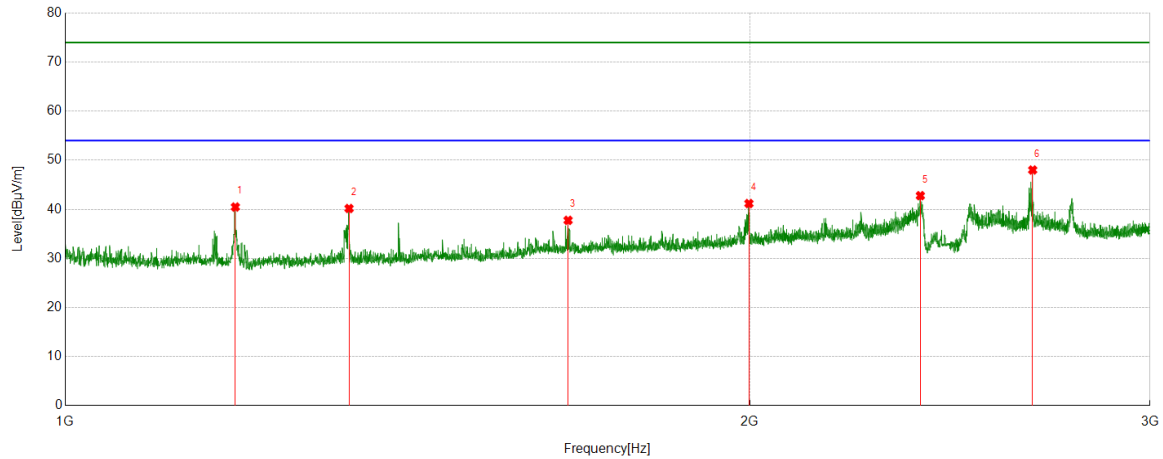

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1188.0235	62.33	-21.86	40.47	74.00	-33.53	Vertical
2	1333.0416	60.76	-20.59	40.17	74.00	-33.83	Vertical
3	1664.083	56.00	-18.24	37.76	74.00	-36.24	Vertical
4	1998.6248	57.47	-16.29	41.18	74.00	-32.82	Vertical
5	2377.4222	57.05	-14.27	42.78	74.00	-31.22	Vertical
6	2663.958	61.24	-13.23	48.01	74.00	-25.99	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

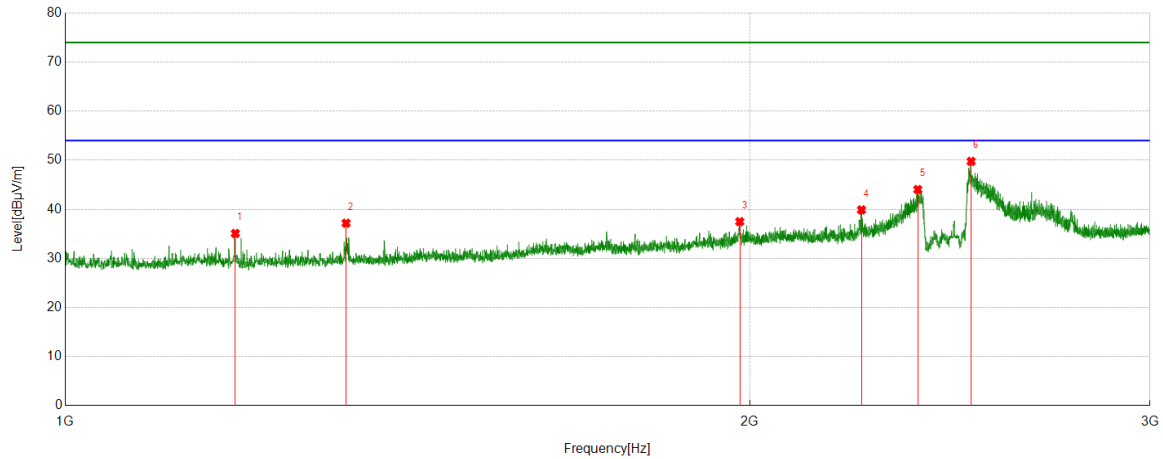

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1188.0235	56.95	-21.86	35.09	74.00	-38.91	Horizontal
2	1329.0411	57.77	-20.59	37.18	74.00	-36.82	Horizontal
3	1980.1225	53.78	-16.29	37.49	74.00	-36.51	Horizontal
4	2239.905	54.95	-15.06	39.89	74.00	-34.11	Horizontal
5	2371.4214	58.43	-14.40	44.03	74.00	-29.97	Horizontal
6	2502.9379	63.22	-13.45	49.77	74.00	-24.23	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

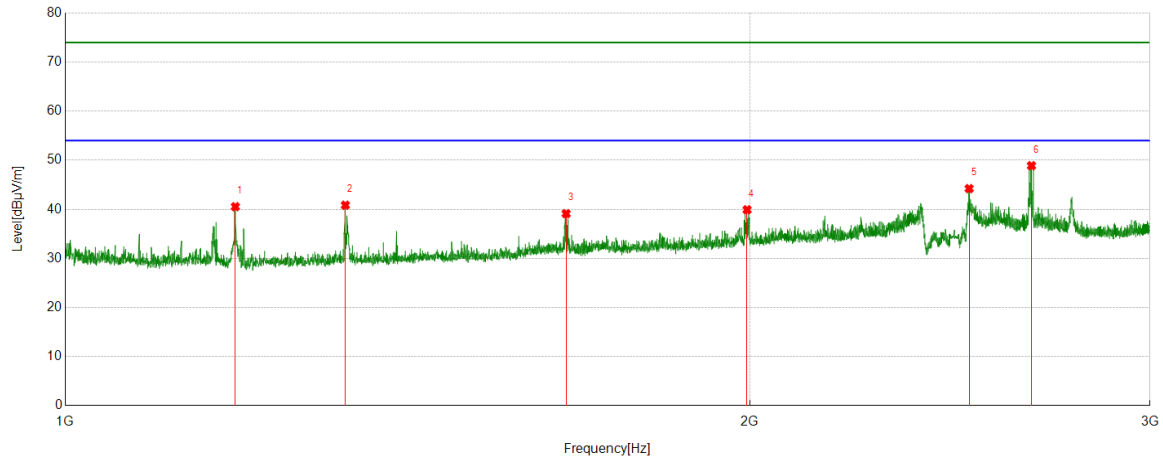

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1188.0235	62.40	-21.86	40.54	74.00	-33.46	Vertical
2	1328.041	61.44	-20.60	40.84	74.00	-33.16	Vertical
3	1660.8326	57.43	-18.31	39.12	74.00	-34.88	Vertical
4	1994.8744	56.22	-16.31	39.91	74.00	-34.09	Vertical
5	2497.9372	57.65	-13.43	44.22	74.00	-29.78	Vertical
6	2660.7076	62.12	-13.23	48.89	74.00	-25.11	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

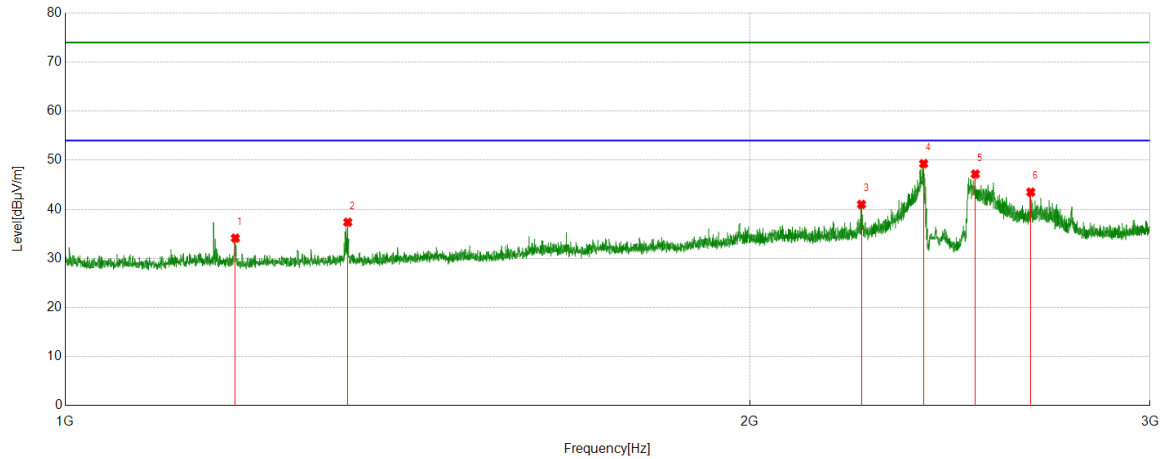

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1188.0235	55.99	-21.86	34.13	74.00	-39.87	Horizontal
2	1331.2914	57.96	-20.59	37.37	74.00	-36.63	Horizontal
3	2239.905	56.06	-15.06	41.00	74.00	-33.00	Horizontal
4	2385.4232	63.53	-14.23	49.30	74.00	-24.70	Horizontal
5	2513.6892	60.80	-13.61	47.19	74.00	-26.81	Horizontal
6	2658.7073	56.74	-13.23	43.51	74.00	-30.49	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

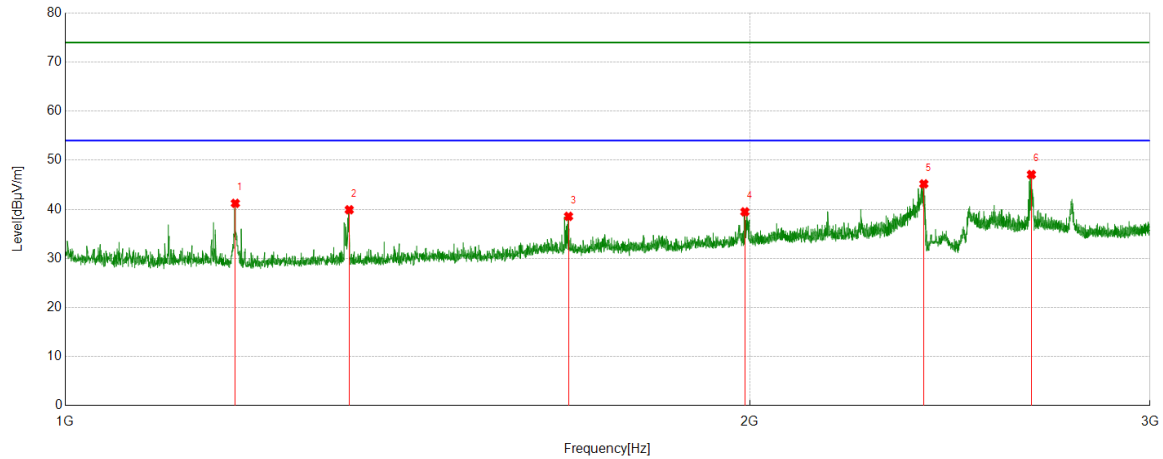

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1188.0235	63.08	-21.86	41.22	74.00	-32.78	Vertical
2	1333.2917	60.50	-20.59	39.91	74.00	-34.09	Vertical
3	1664.8331	56.79	-18.22	38.57	74.00	-35.43	Vertical
4	1990.3738	55.84	-16.35	39.49	74.00	-34.51	Vertical
5	2385.9232	59.41	-14.23	45.18	74.00	-28.82	Vertical
6	2660.4576	60.32	-13.23	47.09	74.00	-26.91	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

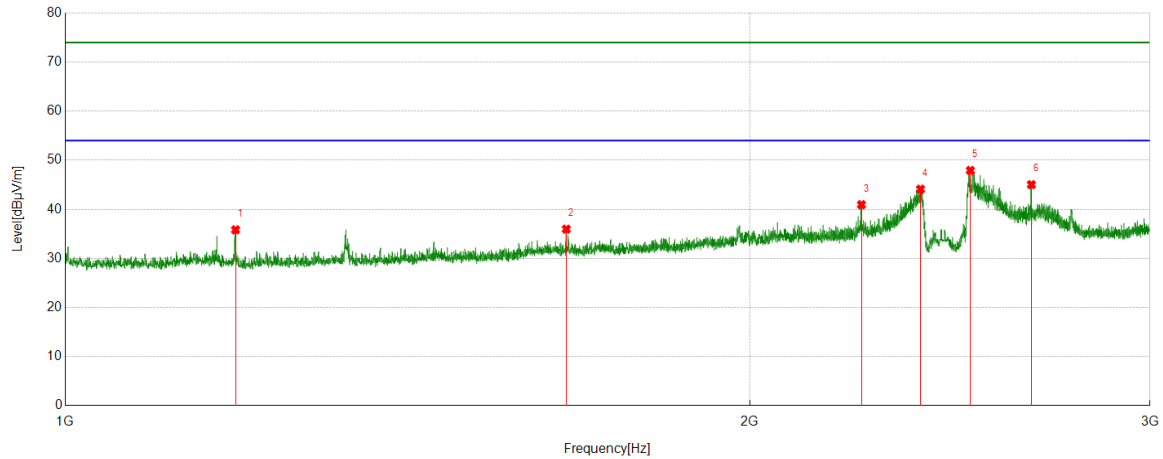

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1188.2735	57.70	-21.87	35.83	74.00	-38.17	Horizontal
2	1661.0826	54.27	-18.31	35.96	74.00	-38.04	Horizontal
3	2239.905	56.01	-15.06	40.95	74.00	-33.05	Horizontal
4	2377.9222	58.37	-14.27	44.10	74.00	-29.90	Horizontal
5	2500.9376	61.35	-13.43	47.92	74.00	-26.08	Horizontal
6	2660.4576	58.26	-13.23	45.03	74.00	-28.97	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

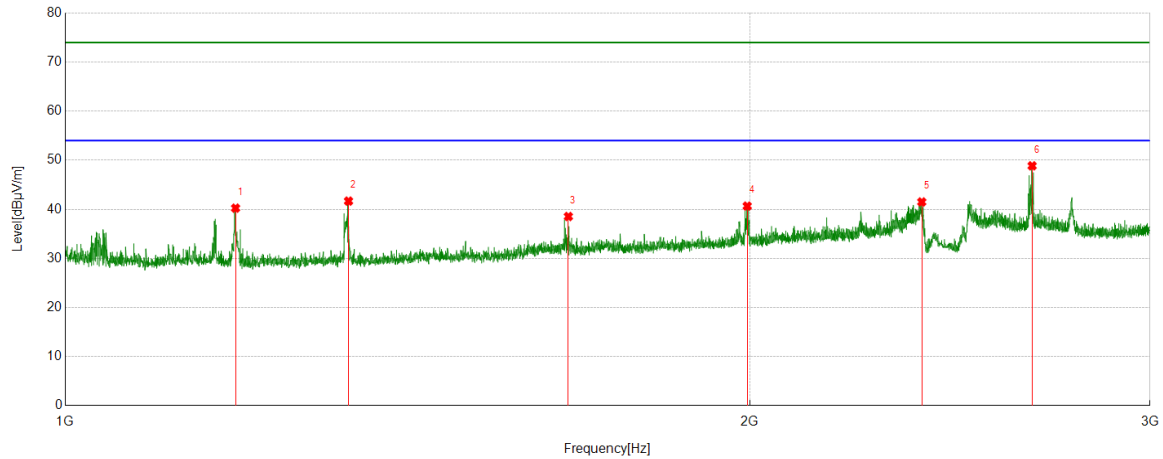

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1188.2735	62.11	-21.87	40.24	74.00	-33.76	Vertical
2	1332.2915	62.27	-20.59	41.68	74.00	-32.32	Vertical
3	1664.5831	56.77	-18.23	38.54	74.00	-35.46	Vertical
4	1995.1244	56.98	-16.32	40.66	74.00	-33.34	Vertical
5	2380.9226	55.72	-14.22	41.50	74.00	-32.50	Vertical
6	2662.4578	62.09	-13.23	48.86	74.00	-25.14	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

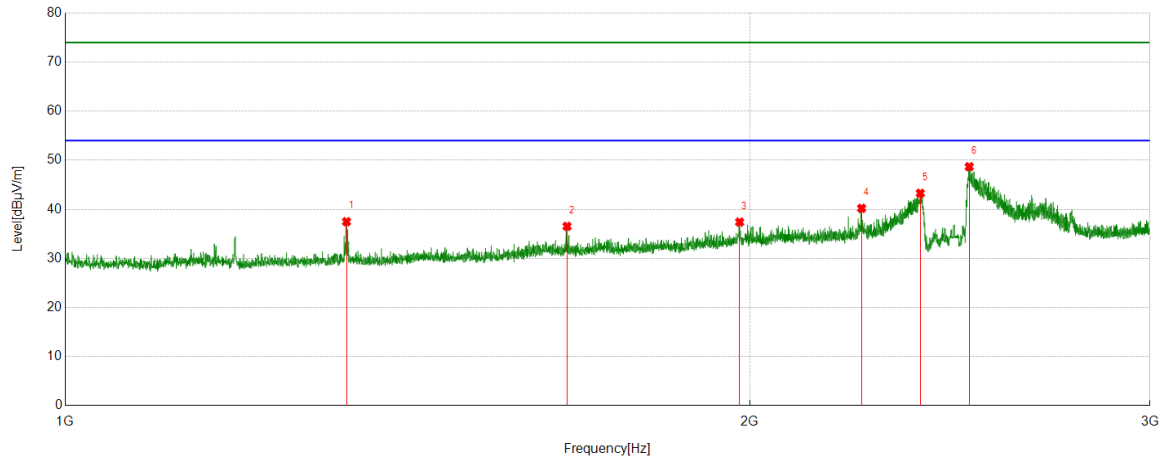

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1329.5412	58.06	-20.58	37.48	74.00	-36.52	Horizontal
2	1662.3328	54.82	-18.28	36.54	74.00	-37.46	Horizontal
3	1979.8725	53.70	-16.29	37.41	74.00	-36.59	Horizontal
4	2240.155	55.27	-15.06	40.21	74.00	-33.79	Horizontal
5	2377.4222	57.55	-14.27	43.28	74.00	-30.72	Horizontal
6	2498.1873	62.11	-13.43	48.68	74.00	-25.32	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

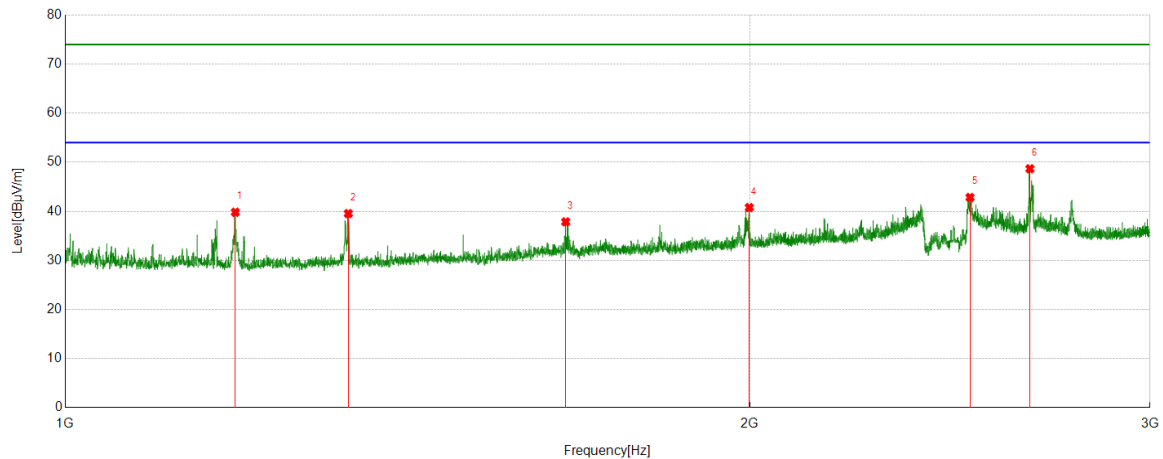

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1188.0235	61.68	-21.86	39.82	74.00	-34.18	Vertical
2	1332.0415	60.14	-20.59	39.55	74.00	-34.45	Vertical
3	1660.0825	56.18	-18.33	37.85	74.00	-36.15	Vertical
4	1999.3749	57.07	-16.29	40.78	74.00	-33.22	Vertical
5	2500.1875	56.25	-13.42	42.83	74.00	-31.17	Vertical
6	2656.4571	61.89	-13.22	48.67	74.00	-25.33	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

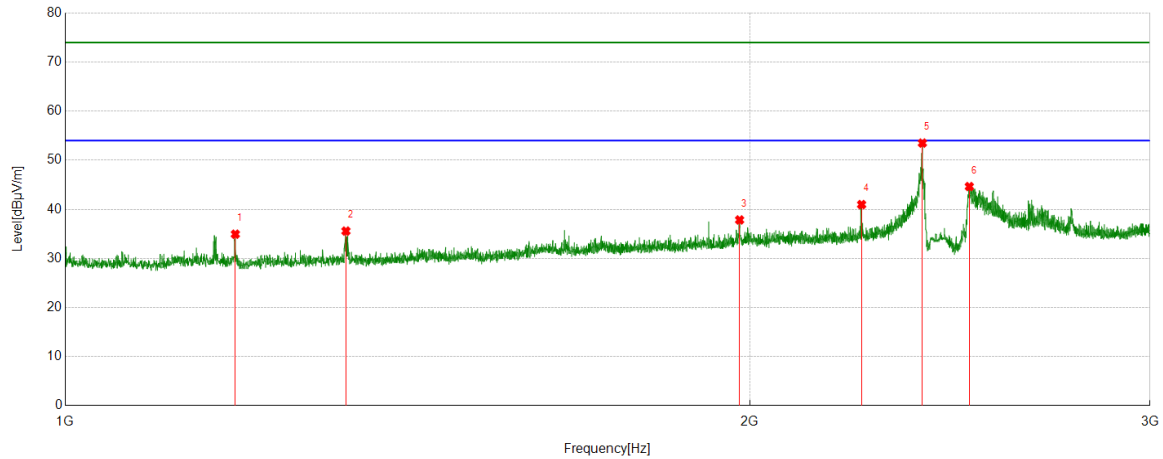

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1188.0235	56.80	-21.86	34.94	74.00	-39.06	Horizontal
2	1328.7911	56.16	-20.59	35.57	74.00	-38.43	Horizontal
3	1979.8725	54.13	-16.29	37.84	74.00	-36.16	Horizontal
4	2240.155	56.03	-15.06	40.97	74.00	-33.03	Horizontal
5	2382.4228	67.72	-14.22	53.50	74.00	-20.50	Horizontal
6	2498.4373	58.07	-13.43	44.64	74.00	-29.36	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

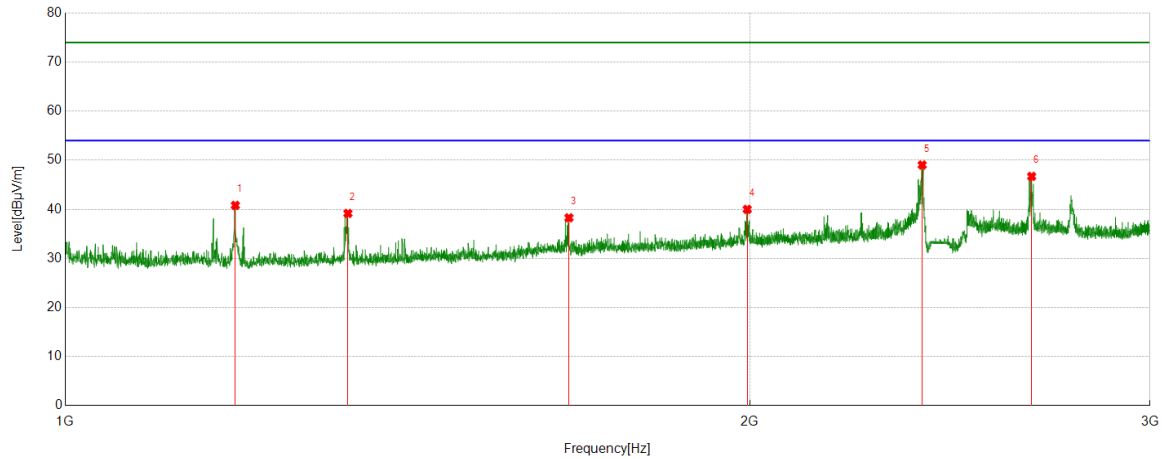

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1188.0235	62.67	-21.86	40.81	74.00	-33.19	Vertical
2	1331.5414	59.76	-20.59	39.17	74.00	-34.83	Vertical
3	1665.5832	56.49	-18.21	38.28	74.00	-35.72	Vertical
4	1995.1244	56.31	-16.32	39.99	74.00	-34.01	Vertical
5	2381.9227	63.26	-14.22	49.04	74.00	-24.96	Vertical
6	2661.2077	59.95	-13.24	46.71	74.00	-27.29	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

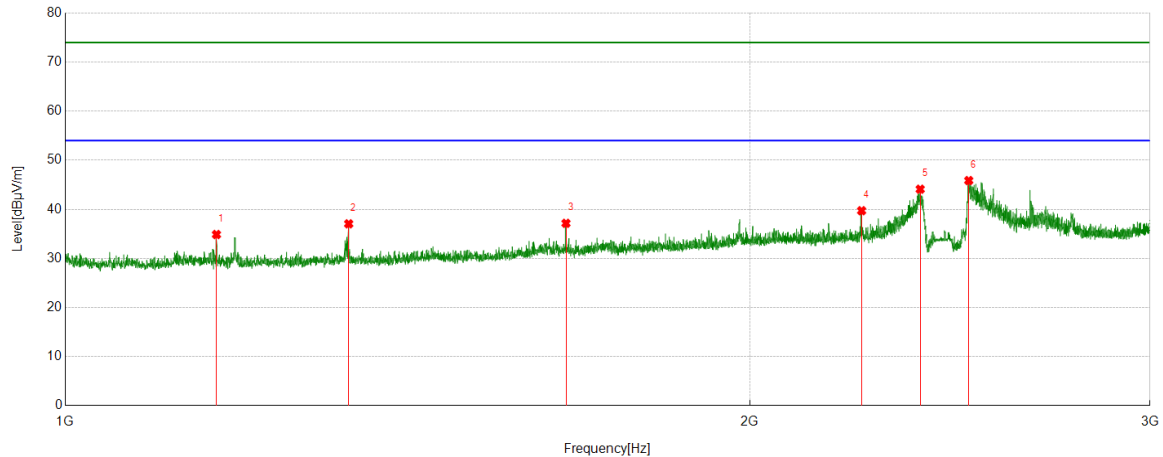

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1165.5207	56.33	-21.46	34.87	74.00	-39.13	Horizontal
2	1332.5416	57.64	-20.59	37.05	74.00	-36.95	Horizontal
3	1660.5826	55.47	-18.32	37.15	74.00	-36.85	Horizontal
4	2240.155	54.78	-15.06	39.72	74.00	-34.28	Horizontal
5	2377.1721	58.38	-14.28	44.10	74.00	-29.90	Horizontal
6	2496.9371	59.30	-13.44	45.86	74.00	-28.14	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

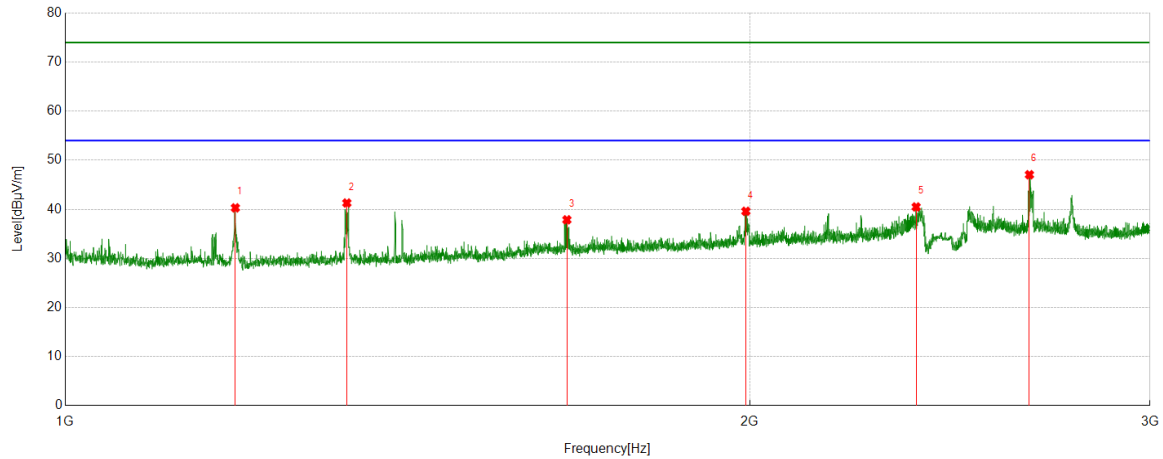

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1188.0235	62.16	-21.86	40.30	74.00	-33.70	Vertical
2	1330.0413	61.87	-20.58	41.29	74.00	-32.71	Vertical
3	1662.0828	56.15	-18.28	37.87	74.00	-36.13	Vertical
4	1992.374	55.94	-16.34	39.60	74.00	-34.40	Vertical
5	2367.4209	55.01	-14.52	40.49	74.00	-33.51	Vertical
6	2655.2069	60.27	-13.22	47.05	74.00	-26.95	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

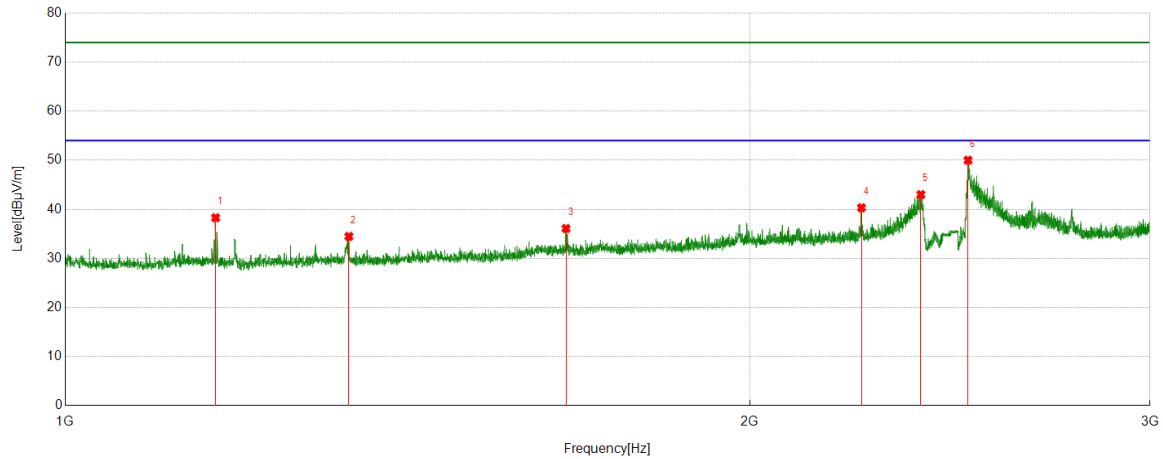

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1164.5206	59.73	-21.45	38.28	74.00	-35.72	Horizontal
2	1332.7916	55.06	-20.59	34.47	74.00	-39.53	Horizontal
3	1660.5826	54.41	-18.32	36.09	74.00	-37.91	Horizontal
4	2239.905	55.38	-15.06	40.32	74.00	-33.68	Horizontal
5	2378.6723	57.24	-14.25	42.99	74.00	-31.01	Horizontal
6	2495.1869	63.45	-13.45	50.00	74.00	-24.00	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

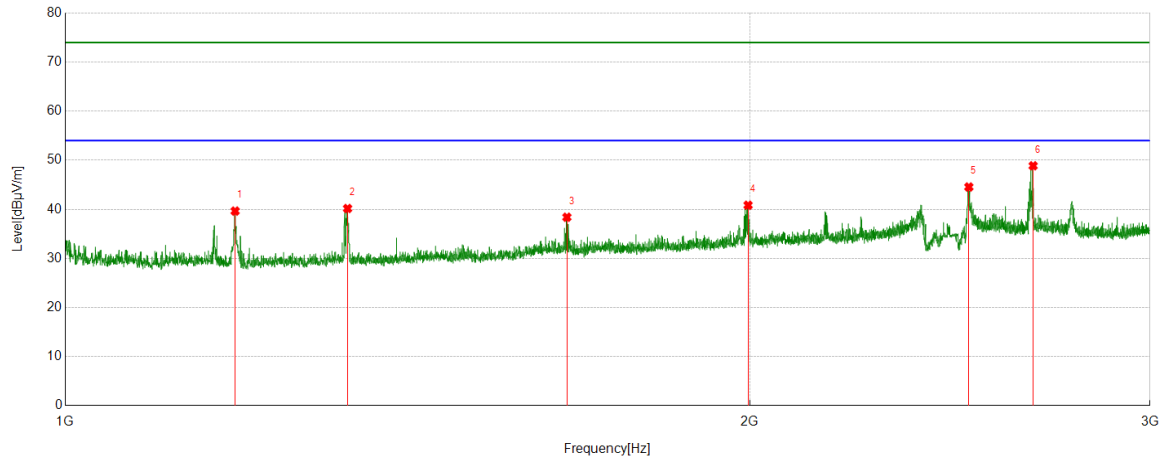


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1187.7735	61.51	-21.86	39.65	74.00	-34.35	Vertical
2	1331.0414	60.76	-20.59	40.17	74.00	-33.83	Vertical
3	1662.0828	56.67	-18.28	38.39	74.00	-35.61	Vertical
4	1996.8746	57.14	-16.30	40.84	74.00	-33.16	Vertical
5	2497.1871	57.99	-13.44	44.55	74.00	-29.45	Vertical
6	2665.2082	62.11	-13.24	48.87	74.00	-25.13	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Part 2: 3GHz~18GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

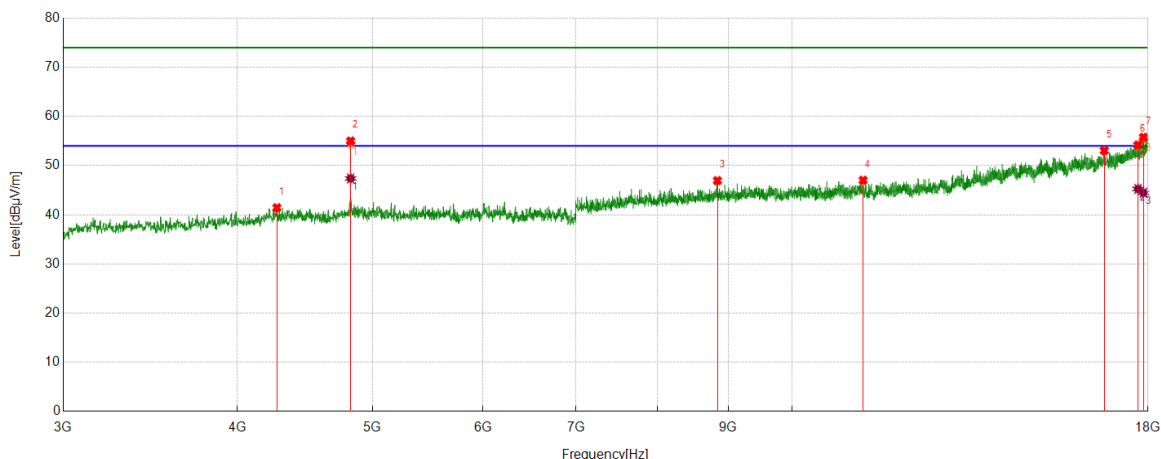

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4269.5337	46.79	-5.36	41.43	74.00	-32.57	Horizontal
2	4822.7278	59.08	-4.09	54.99	74.00	-19.01	Horizontal
3	8839.4799	44.39	2.55	46.94	74.00	-27.06	Horizontal
4	11243.5304	41.90	5.12	47.02	74.00	-26.98	Horizontal
5	16745.4682	38.12	14.93	53.05	74.00	-20.95	Horizontal
6	17705.5882	36.38	17.78	54.16	74.00	-19.84	Horizontal
7	17866.8584	36.98	18.78	55.76	74.00	-18.24	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4822.7278	51.47	-4.09	47.38	54.00	-6.62	Horizontal
2	17705.5882	27.47	17.78	45.25	54.00	-8.75	Horizontal
3	17866.8584	25.68	18.78	44.46	54.00	-9.54	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

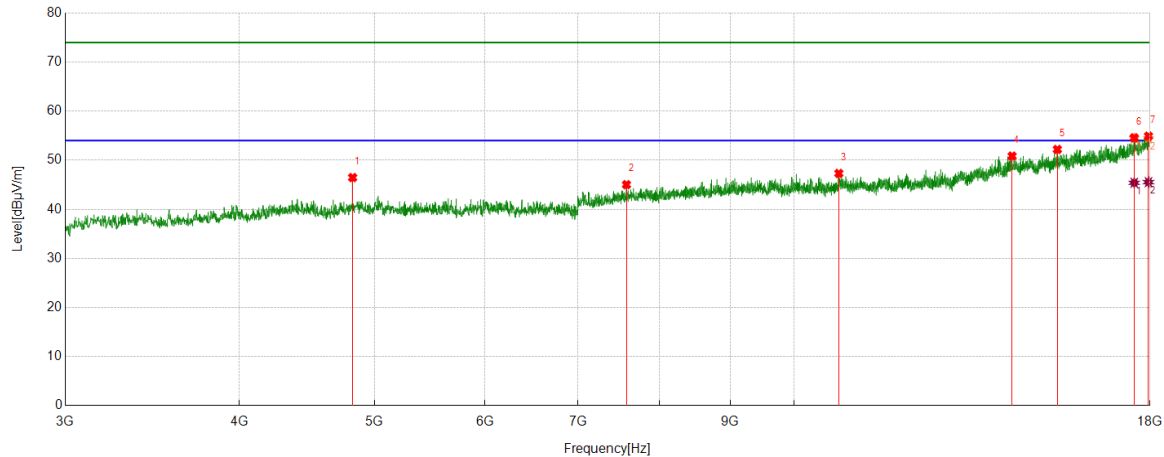

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4822.7278	50.56	-4.09	46.47	74.00	-27.53	Vertical
2	7581.1976	44.12	0.91	45.03	74.00	-28.97	Vertical
3	10767.2209	42.99	4.33	47.32	74.00	-26.68	Vertical
4	14333.9167	39.83	11.01	50.84	74.00	-23.16	Vertical
5	15445.9307	39.28	12.92	52.20	74.00	-21.80	Vertical
6	17536.8171	37.93	16.64	54.57	74.00	-19.43	Vertical
7	17954.9944	36.51	18.40	54.91	74.00	-19.09	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17536.8171	28.76	16.64	45.40	54.00	-8.60	Vertical
2	17954.9944	27.13	18.40	45.53	54.00	-8.47	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

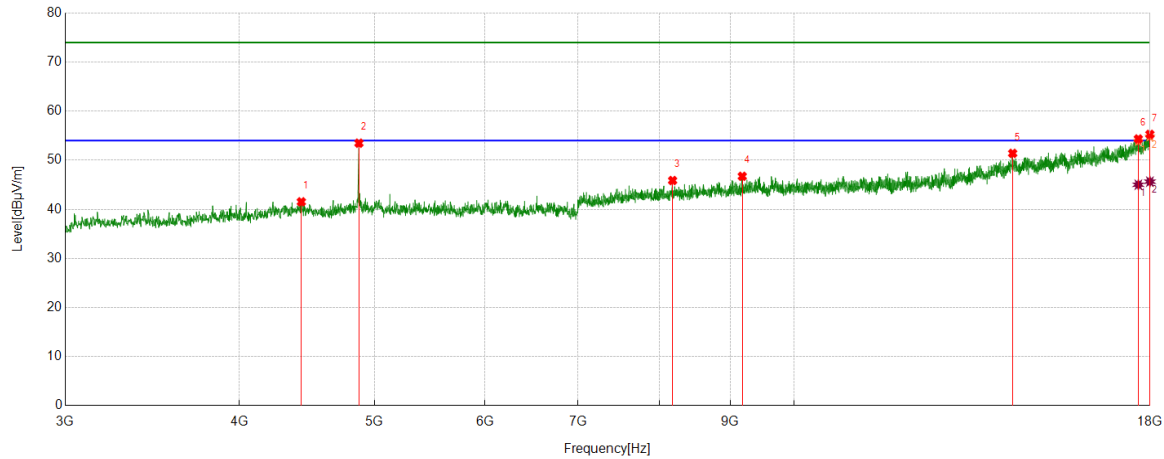

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4430.8038	46.95	-5.42	41.53	74.00	-32.47	Horizontal
2	4873.3592	57.10	-3.62	53.48	74.00	-20.52	Horizontal
3	8181.2727	43.61	2.26	45.87	74.00	-28.13	Horizontal
4	9178.8974	44.00	2.73	46.73	74.00	-27.27	Horizontal
5	14347.0434	40.31	11.09	51.40	74.00	-22.60	Horizontal
6	17656.8321	36.58	17.76	54.34	74.00	-19.66	Horizontal
7	17998.1248	36.55	18.72	55.27	74.00	-18.73	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17656.8321	27.25	17.76	45.01	54.00	-8.99	Horizontal
2	17998.1248	26.92	18.72	45.64	54.00	-8.36	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

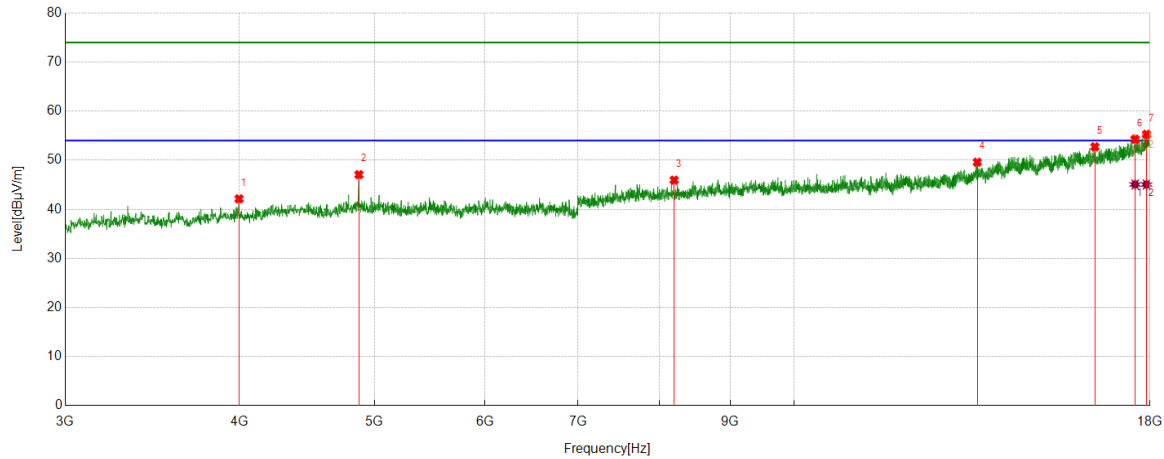

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	3997.6247	49.08	-6.94	42.14	74.00	-31.86	Vertical
2	4873.3592	50.68	-3.62	47.06	74.00	-26.94	Vertical
3	8201.9002	43.66	2.29	45.95	74.00	-28.05	Vertical
4	13533.1916	40.59	9.01	49.60	74.00	-24.40	Vertical
5	16434.1793	38.47	14.26	52.73	74.00	-21.27	Vertical
6	17563.0704	37.03	17.25	54.28	74.00	-19.72	Vertical
7	17896.8621	35.99	19.28	55.27	74.00	-18.73	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17563.0704	27.82	17.25	45.07	54.00	-8.93	Vertical
2	17896.8621	25.78	19.28	45.06	54.00	-8.94	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

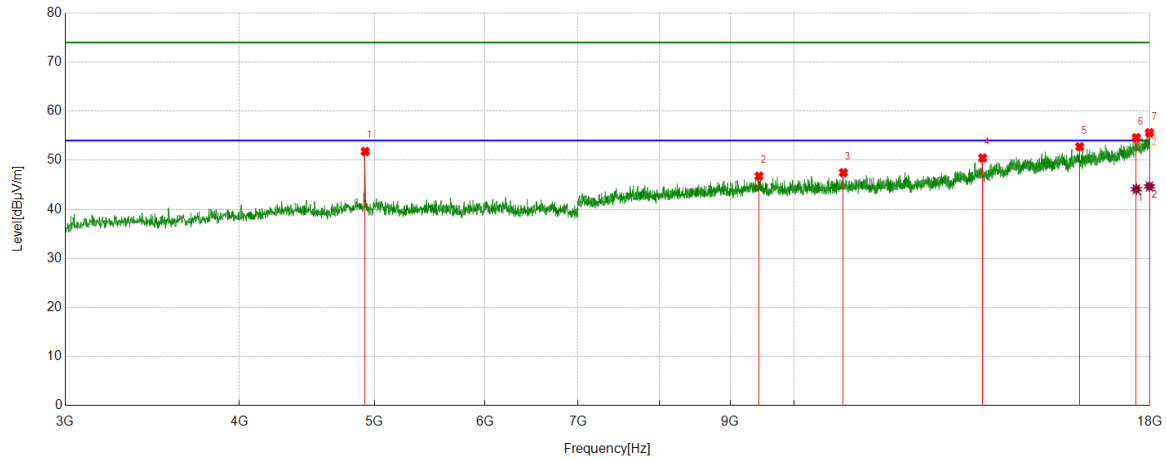

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4923.9905	55.67	-3.88	51.79	74.00	-22.21	Horizontal
2	9435.8045	43.16	3.61	46.77	74.00	-27.23	Horizontal
3	10847.856	43.02	4.45	47.47	74.00	-26.53	Horizontal
4	13653.2067	40.95	9.52	50.47	74.00	-23.53	Horizontal
5	16027.2534	38.40	14.37	52.77	74.00	-21.23	Horizontal
6	17598.6998	37.01	17.58	54.59	74.00	-19.41	Horizontal
7	17984.9981	37.01	18.62	55.63	74.00	-18.37	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17598.6998	26.52	17.58	44.10	54.00	-9.90	Horizontal
2	17984.9981	26.05	18.62	44.67	54.00	-9.33	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

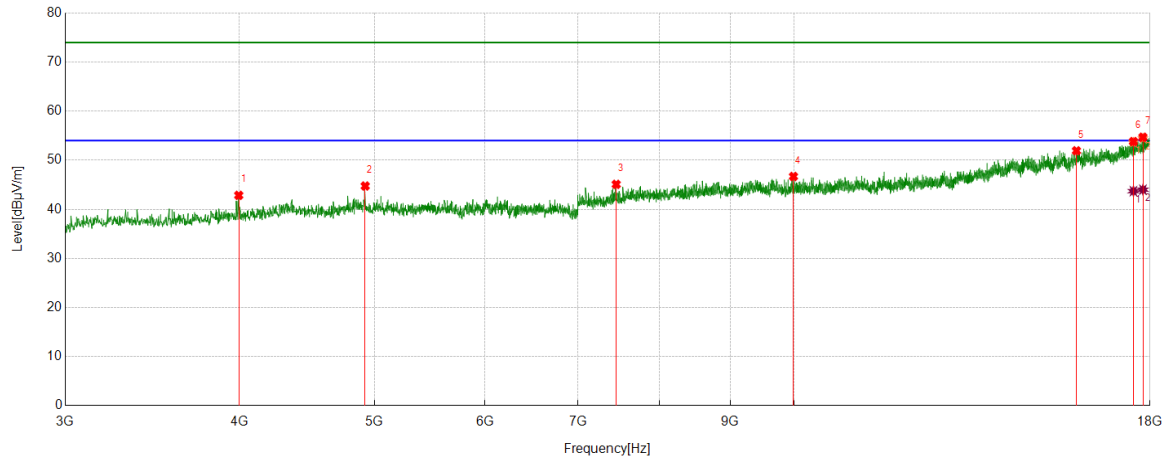

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3995.7495	49.83	-6.98	42.85	74.00	-31.15	Vertical
2	4923.9905	48.63	-3.88	44.75	74.00	-29.25	Vertical
3	7453.6817	44.10	0.99	45.09	74.00	-28.91	Vertical
4	9988.9986	42.95	3.75	46.70	74.00	-27.30	Vertical
5	15940.9926	38.25	13.68	51.93	74.00	-22.07	Vertical
6	17514.3143	36.62	17.19	53.81	74.00	-20.19	Vertical
7	17791.849	36.66	18.03	54.69	74.00	-19.31	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17514.3143	26.51	17.19	43.70	54.00	-10.30	Vertical
2	17791.849	25.97	18.03	44.00	54.00	-10.00	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

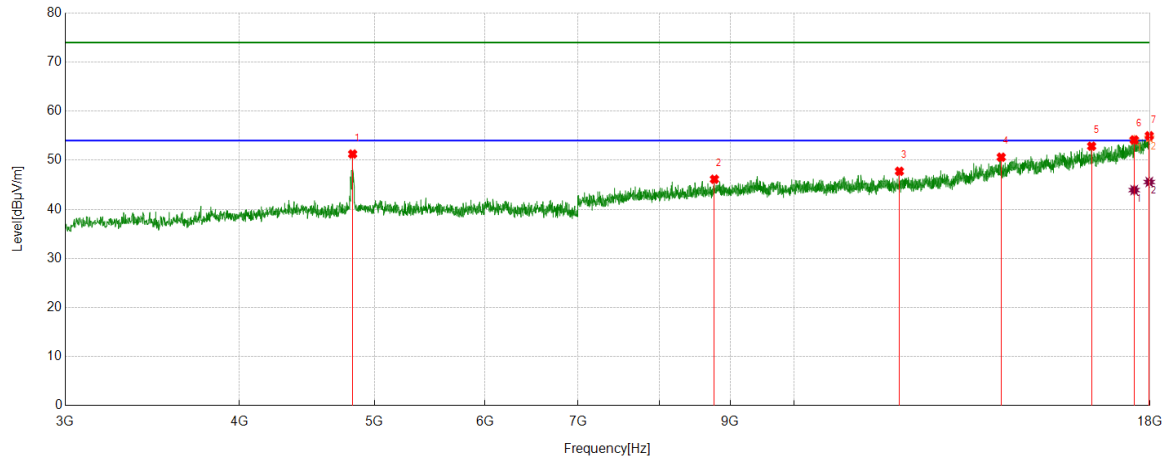

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4822.7278	55.35	-4.09	51.26	74.00	-22.74	Horizontal
2	8766.3458	43.41	2.72	46.13	74.00	-27.87	Horizontal
3	11899.8625	41.36	6.39	47.75	74.00	-26.25	Horizontal
4	14078.8849	39.01	11.61	50.62	74.00	-23.38	Horizontal
5	16346.0433	38.85	14.01	52.86	74.00	-21.14	Horizontal
6	17536.8171	37.50	16.64	54.14	74.00	-19.86	Horizontal
7	17979.3724	36.32	18.66	54.98	74.00	-19.02	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17536.8171	27.28	16.64	43.92	54.00	-10.08	Horizontal
2	17979.3724	26.91	18.66	45.57	54.00	-8.43	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

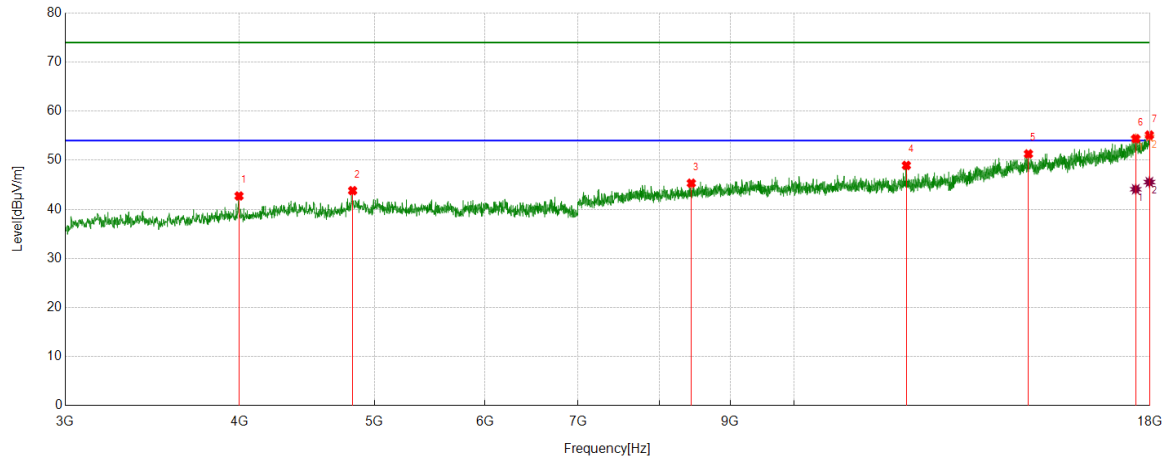

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	3997.6247	49.66	-6.94	42.72	74.00	-31.28	Vertical
2	4822.7278	47.89	-4.09	43.80	74.00	-30.20	Vertical
3	8438.1798	43.21	2.11	45.32	74.00	-28.68	Vertical
4	12036.7546	42.01	6.93	48.94	74.00	-25.06	Vertical
5	14725.8407	39.95	11.34	51.29	74.00	-22.71	Vertical
6	17581.8227	36.99	17.40	54.39	74.00	-19.61	Vertical
7	17983.1229	36.49	18.64	55.13	74.00	-18.87	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17581.8227	26.69	17.40	44.09	54.00	-9.91	Vertical
2	17983.1229	26.91	18.64	45.55	54.00	-8.45	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

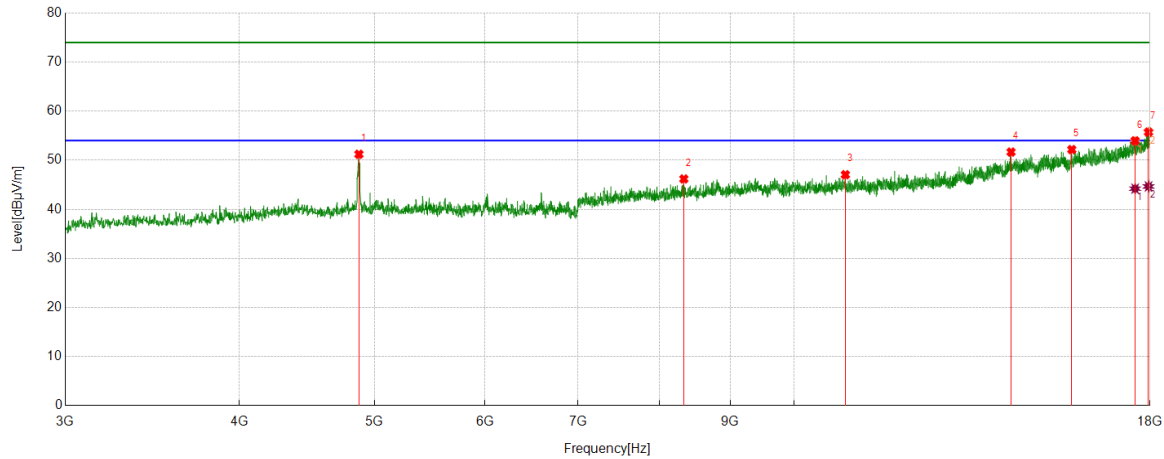

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4873.3592	54.84	-3.62	51.22	74.00	-22.78	Horizontal
2	8335.0419	44.42	1.77	46.19	74.00	-27.81	Horizontal
3	10883.4854	42.33	4.72	47.05	74.00	-26.95	Horizontal
4	14309.5387	40.43	11.24	51.67	74.00	-22.33	Horizontal
5	15819.1024	38.09	14.08	52.17	74.00	-21.83	Horizontal
6	17563.0704	36.71	17.25	53.96	74.00	-20.04	Horizontal
7	17956.8696	37.30	18.43	55.73	74.00	-18.27	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17563.0704	26.96	17.25	44.21	54.00	-9.79	Horizontal
2	17956.8696	26.23	18.43	44.66	54.00	-9.34	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

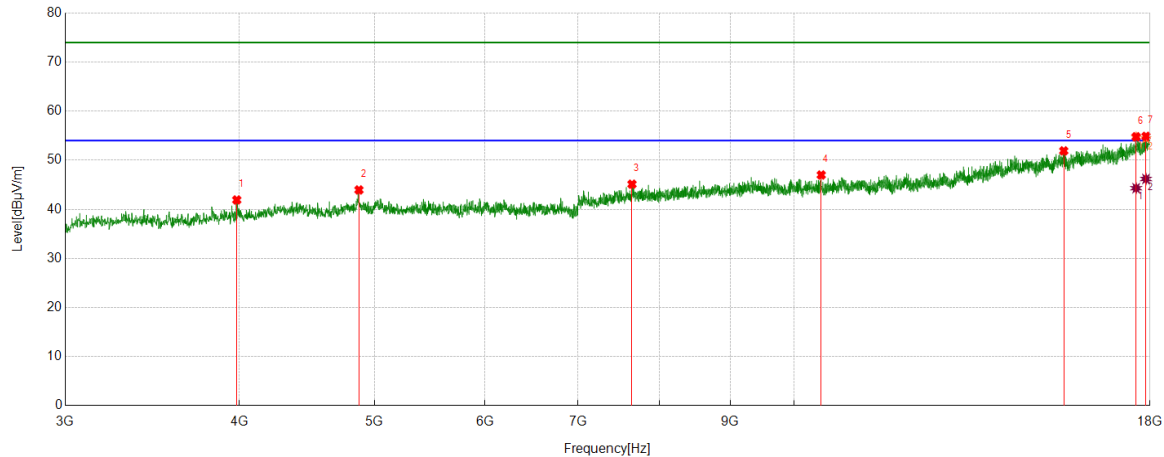

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3982.6228	48.74	-6.83	41.91	74.00	-32.09	Vertical
2	4873.3592	47.57	-3.62	43.95	74.00	-30.05	Vertical
3	7650.5813	43.80	1.32	45.12	74.00	-28.88	Vertical
4	10457.8072	43.18	3.82	47.00	74.00	-27.00	Vertical
5	15610.9514	38.47	13.44	51.91	74.00	-22.09	Vertical
6	17593.0741	37.14	17.64	54.78	74.00	-19.22	Vertical
7	17881.8602	35.80	19.07	54.87	74.00	-19.13	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17593.0741	26.67	17.64	44.31	54.00	-9.69	Vertical
2	17881.8602	27.12	19.07	46.19	54.00	-7.81	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

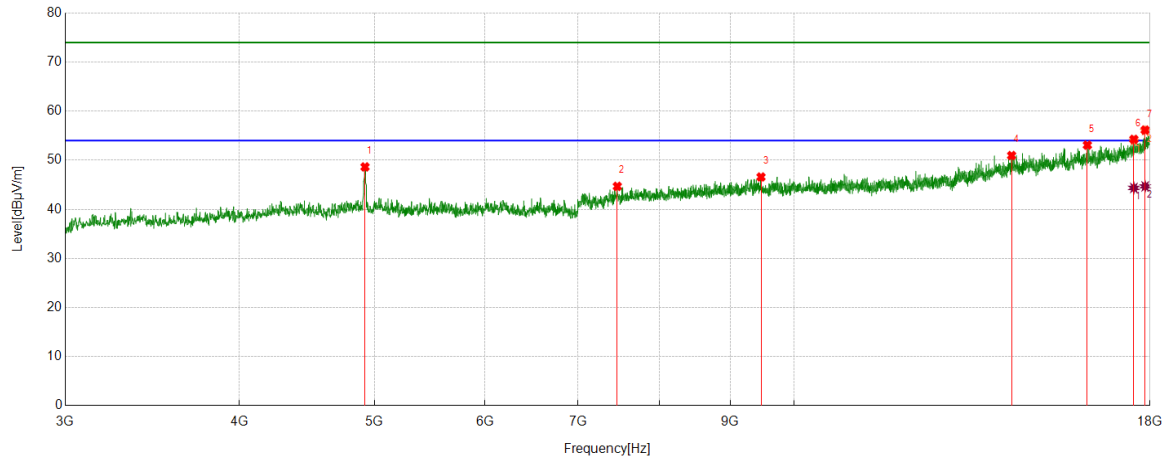

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4922.1153	52.53	-3.89	48.64	74.00	-25.36	Horizontal
2	7466.8084	43.66	1.02	44.68	74.00	-29.32	Horizontal
3	9467.6835	43.12	3.47	46.59	74.00	-27.41	Horizontal
4	14322.6653	39.89	11.07	50.96	74.00	-23.04	Horizontal
5	16231.654	38.68	14.40	53.08	74.00	-20.92	Horizontal
6	17527.4409	37.54	16.72	54.26	74.00	-19.74	Horizontal
7	17857.4822	37.30	18.85	56.15	74.00	-17.85	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17527.4409	27.64	16.72	44.36	54.00	-9.64	Horizontal
2	17857.4822	25.83	18.85	44.68	54.00	-9.32	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

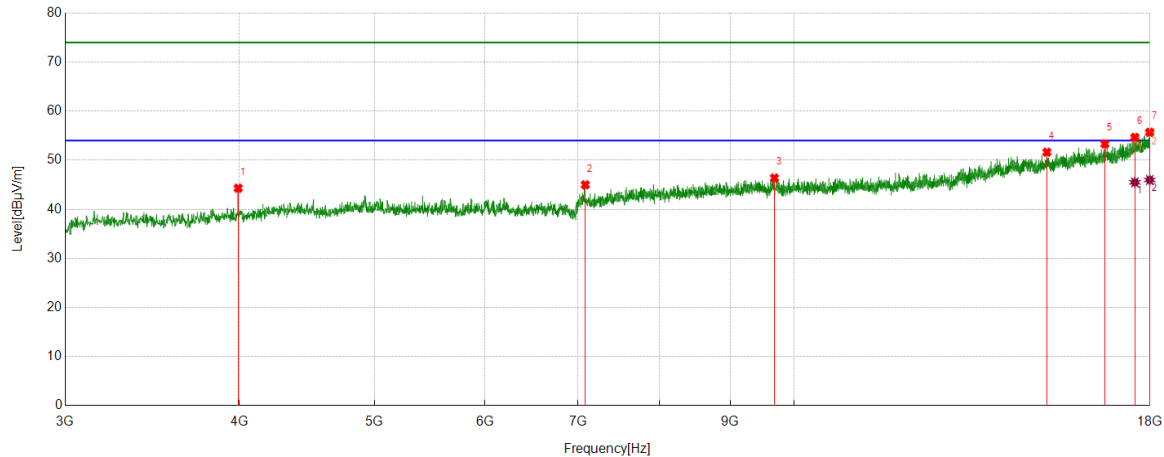

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3991.999	51.37	-7.07	44.30	74.00	-29.70	Vertical
2	7082.3853	44.94	0.06	45.00	74.00	-29.00	Vertical
3	9679.5849	42.76	3.62	46.38	74.00	-27.62	Vertical
4	15181.5227	39.28	12.36	51.64	74.00	-22.36	Vertical
5	16707.9635	38.56	14.76	53.32	74.00	-20.68	Vertical
6	17557.4447	37.58	17.08	54.66	74.00	-19.34	Vertical
7	17992.4991	37.08	18.63	55.71	74.00	-18.29	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17557.4447	28.41	17.08	45.49	54.00	-8.51	Vertical
2	17992.4991	27.35	18.63	45.98	54.00	-8.02	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

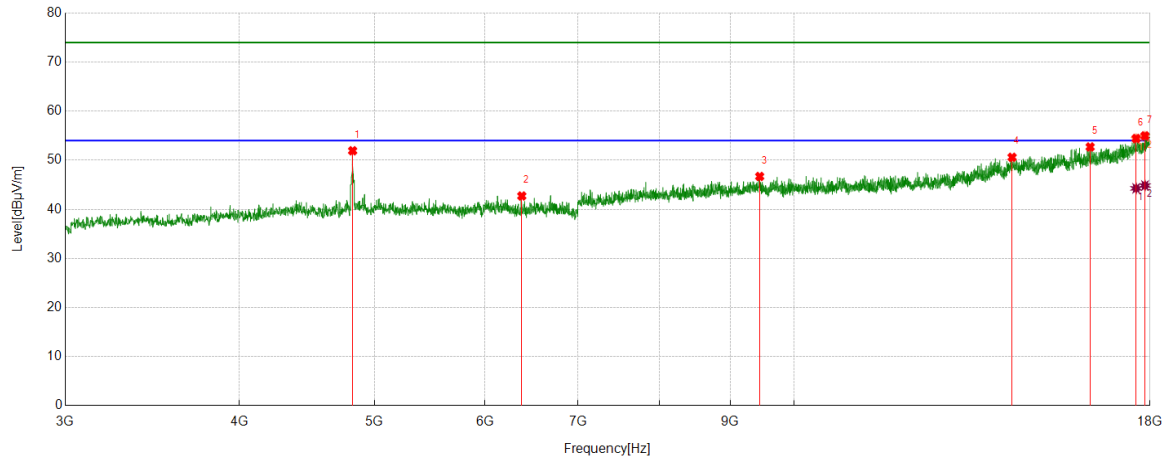

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4822.7278	56.02	-4.09	51.93	74.00	-22.07	Horizontal
2	6377.2972	44.74	-2.02	42.72	74.00	-31.28	Horizontal
3	9447.0559	43.06	3.64	46.70	74.00	-27.30	Horizontal
4	14333.9167	39.59	11.01	50.60	74.00	-23.40	Horizontal
5	16306.6633	38.88	13.83	52.71	74.00	-21.29	Horizontal
6	17593.0741	36.79	17.64	54.43	74.00	-19.57	Horizontal
7	17851.8565	36.25	18.72	54.97	74.00	-19.03	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17593.0741	26.63	17.64	44.27	54.00	-9.73	Horizontal
2	17851.8565	26.13	18.72	44.85	54.00	-9.15	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

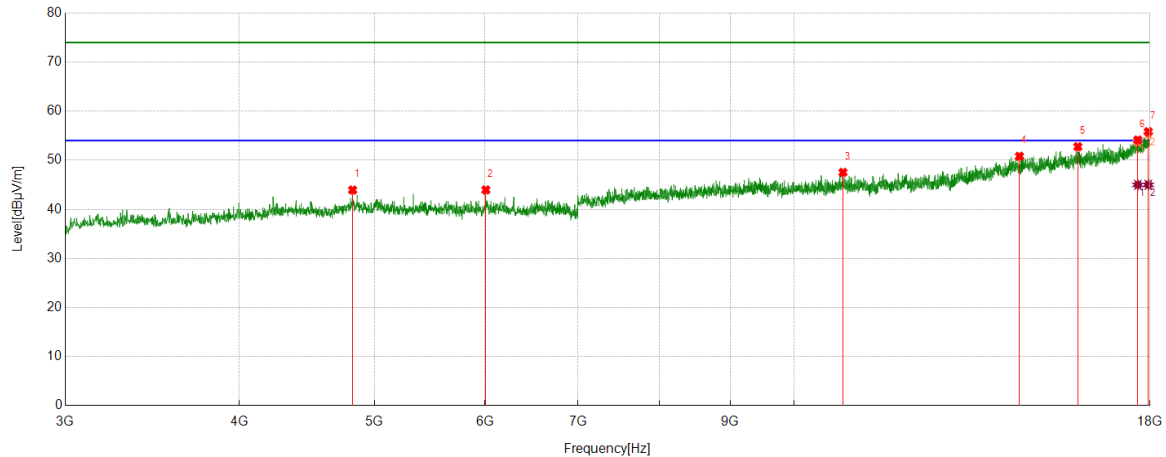

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4822.7278	48.02	-4.09	43.93	74.00	-30.07	Vertical
2	6009.7512	45.86	-1.91	43.95	74.00	-30.05	Vertical
3	10840.355	42.97	4.55	47.52	74.00	-26.48	Vertical
4	14508.3135	39.27	11.53	50.80	74.00	-23.20	Vertical
5	15978.4973	39.04	13.71	52.75	74.00	-21.25	Vertical
6	17641.8302	36.30	17.82	54.12	74.00	-19.88	Vertical
7	17949.3687	37.43	18.38	55.81	74.00	-18.19	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17641.8302	27.17	17.82	44.99	54.00	-9.01	Vertical
2	17949.3687	26.62	18.38	45.00	54.00	-9.00	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

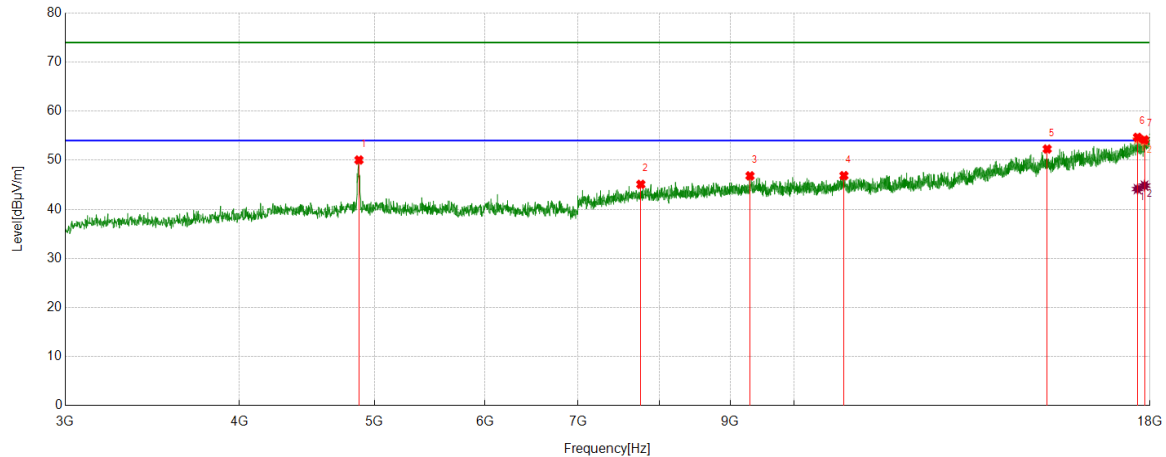

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4873.3592	53.67	-3.62	50.05	74.00	-23.95	Horizontal
2	7763.0954	43.71	1.38	45.09	74.00	-28.91	Horizontal
3	9297.0371	43.88	2.94	46.82	74.00	-27.18	Horizontal
4	10857.2322	42.36	4.50	46.86	74.00	-27.14	Horizontal
5	15189.0236	39.72	12.56	52.28	74.00	-21.72	Horizontal
6	17632.4541	37.29	17.38	54.67	74.00	-19.33	Horizontal
7	17838.7298	35.66	18.49	54.15	74.00	-19.85	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17632.4541	26.75	17.38	44.13	54.00	-9.87	Horizontal
2	17838.7298	26.34	18.49	44.83	54.00	-9.17	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

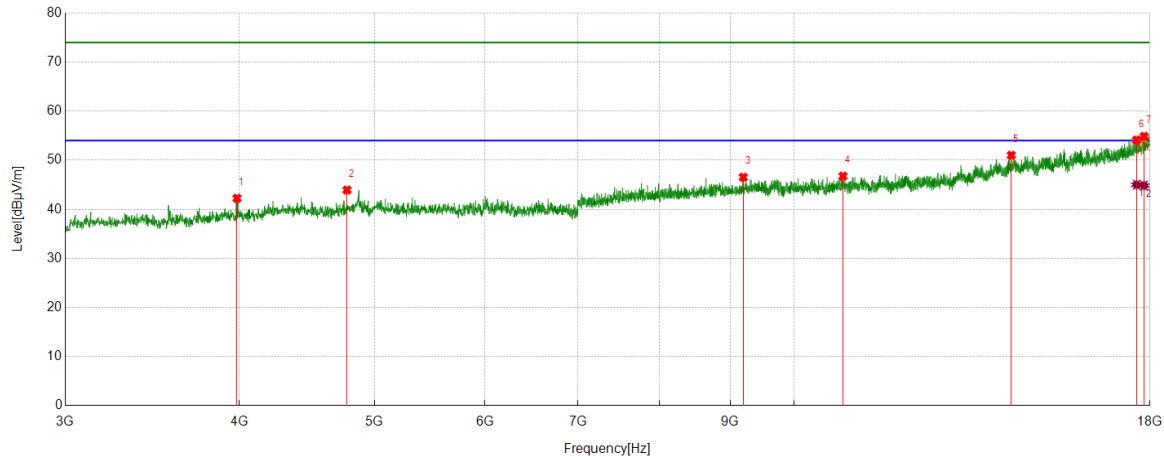

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3984.4981	49.15	-6.90	42.25	74.00	-31.75	Vertical
2	4777.7222	47.83	-3.91	43.92	74.00	-30.08	Vertical
3	9193.8992	43.83	2.71	46.54	74.00	-27.46	Vertical
4	10840.355	42.21	4.55	46.76	74.00	-27.24	Vertical
5	14315.1644	39.83	11.18	51.01	74.00	-22.99	Vertical
6	17606.2008	36.51	17.59	54.10	74.00	-19.90	Vertical
7	17825.6032	36.74	18.12	54.86	74.00	-19.14	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17606.2008	27.42	17.59	45.01	54.00	-8.99	Vertical
2	17825.6032	26.73	18.12	44.85	54.00	-9.15	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

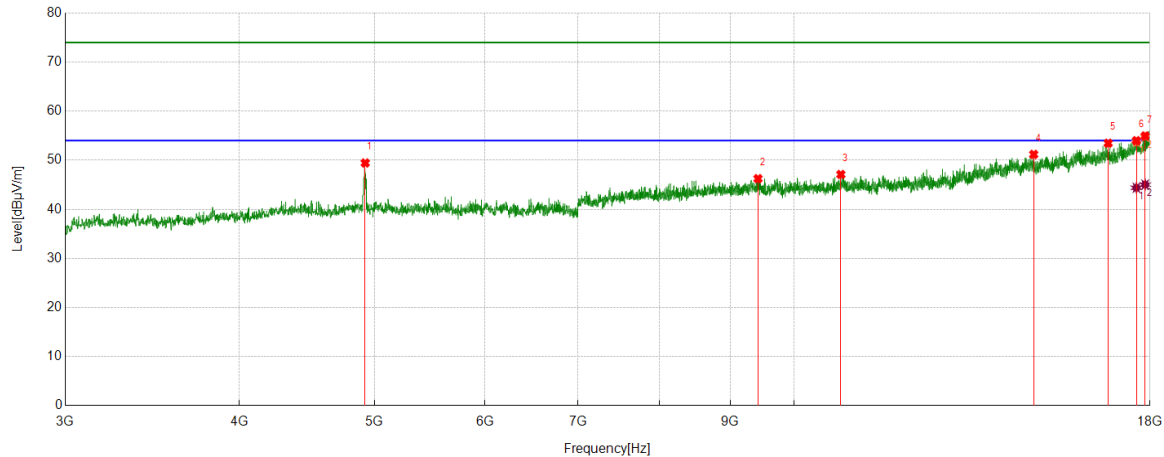

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4923.9905	53.32	-3.88	49.44	74.00	-24.56	Horizontal
2	9420.8026	43.08	3.17	46.25	74.00	-27.75	Horizontal
3	10802.8504	42.77	4.33	47.10	74.00	-26.90	Horizontal
4	14855.2319	39.25	11.94	51.19	74.00	-22.81	Horizontal
5	16799.85	38.46	15.01	53.47	74.00	-20.53	Horizontal
6	17600.5751	36.42	17.56	53.98	74.00	-20.02	Horizontal
7	17857.4822	36.09	18.85	54.94	74.00	-19.06	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17600.5751	26.83	17.56	44.39	54.00	-9.61	Horizontal
2	17857.4822	26.18	18.85	45.03	54.00	-8.97	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

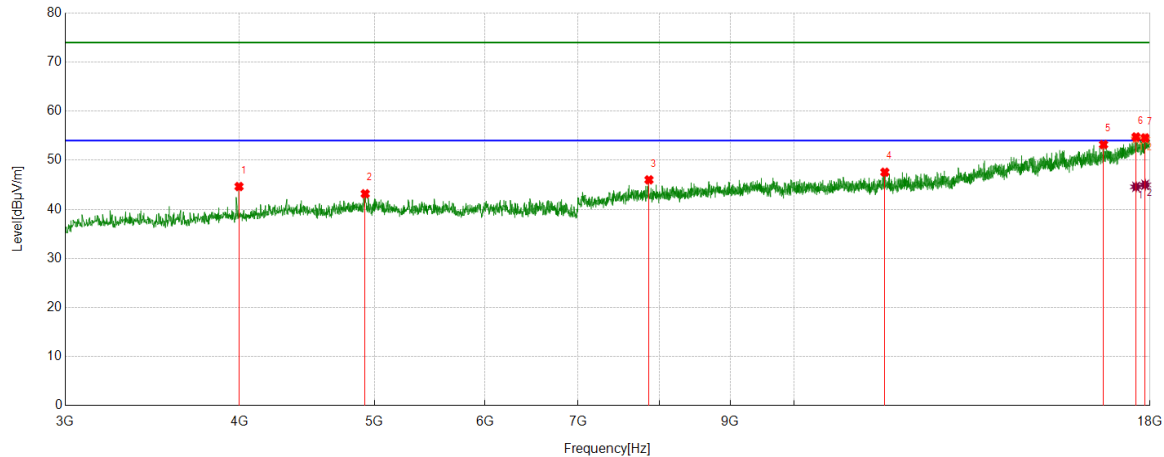

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3997.6247	51.58	-6.94	44.64	74.00	-29.36	Vertical
2	4923.9905	47.05	-3.88	43.17	74.00	-30.83	Vertical
3	7868.1085	44.39	1.62	46.01	74.00	-27.99	Vertical
4	11616.7021	41.85	5.71	47.56	74.00	-26.44	Vertical
5	16670.4588	38.57	14.62	53.19	74.00	-20.81	Vertical
6	17589.3237	37.09	17.65	54.74	74.00	-19.26	Vertical
7	17857.4822	35.70	18.85	54.55	74.00	-19.45	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17589.3237	26.94	17.65	44.59	54.00	-9.41	Vertical
2	17857.4822	26.14	18.85	44.99	54.00	-9.01	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

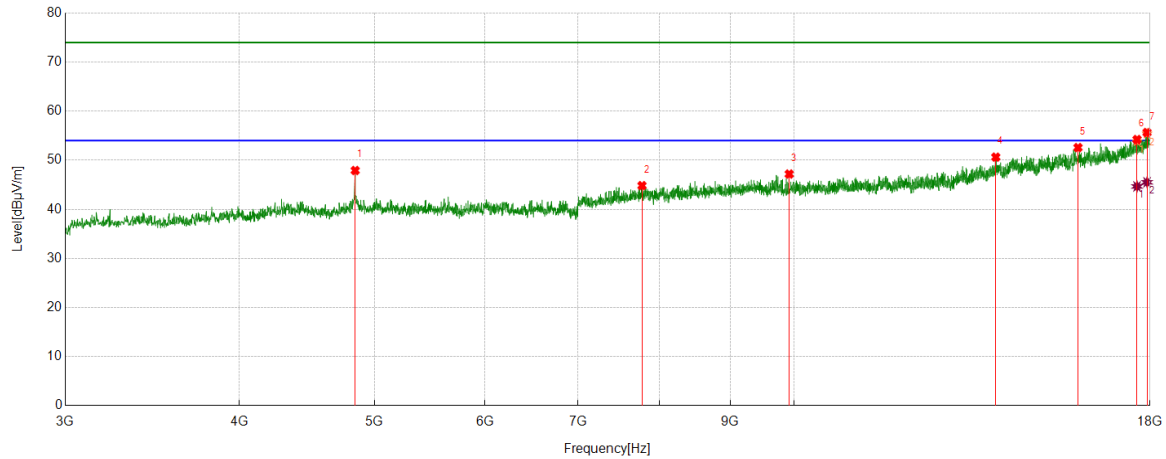

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4843.3554	51.54	-3.63	47.91	74.00	-26.09	Horizontal
2	7778.0973	43.50	1.33	44.83	74.00	-29.17	Horizontal
3	9919.615	43.31	3.88	47.19	74.00	-26.81	Horizontal
4	13953.2442	39.74	10.89	50.63	74.00	-23.37	Horizontal
5	15982.2478	38.86	13.72	52.58	74.00	-21.42	Horizontal
6	17619.3274	36.57	17.65	54.22	74.00	-19.78	Horizontal
7	17913.7392	36.73	18.92	55.65	74.00	-18.35	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17619.3274	27.01	17.65	44.66	54.00	-9.34	Horizontal
2	17913.7392	26.59	18.92	45.51	54.00	-8.49	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

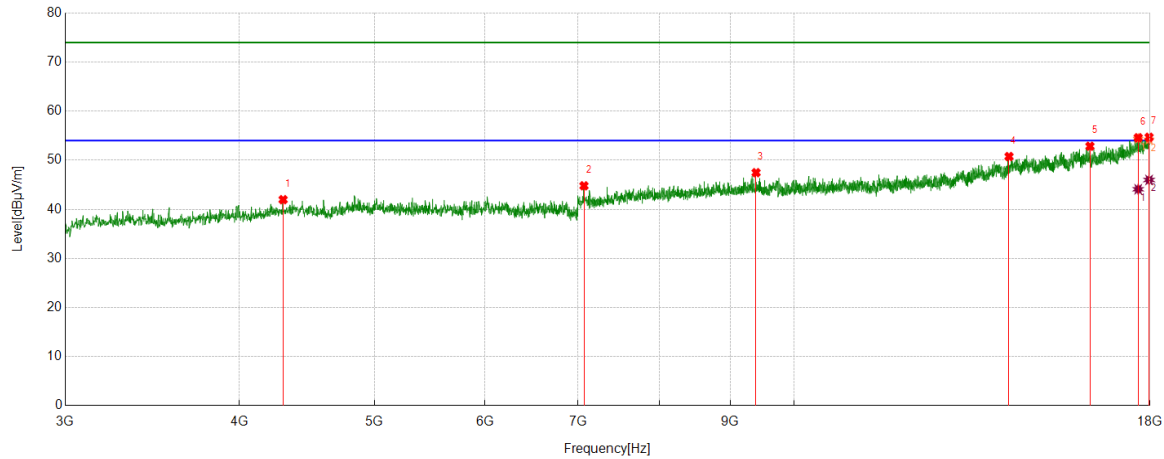

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4299.5374	47.41	-5.44	41.97	74.00	-32.03	Vertical
2	7067.3834	44.74	0.05	44.79	74.00	-29.21	Vertical
3	9390.7988	44.17	3.30	47.47	74.00	-26.53	Vertical
4	14260.7826	38.74	12.02	50.76	74.00	-23.24	Vertical
5	16301.0376	39.08	13.77	52.85	74.00	-21.15	Vertical
6	17653.0816	36.85	17.74	54.59	74.00	-19.41	Vertical
7	17973.7467	36.00	18.68	54.68	74.00	-19.32	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17653.0816	26.35	17.74	44.09	54.00	-9.91	Vertical
2	17973.7467	27.30	18.68	45.98	54.00	-8.02	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

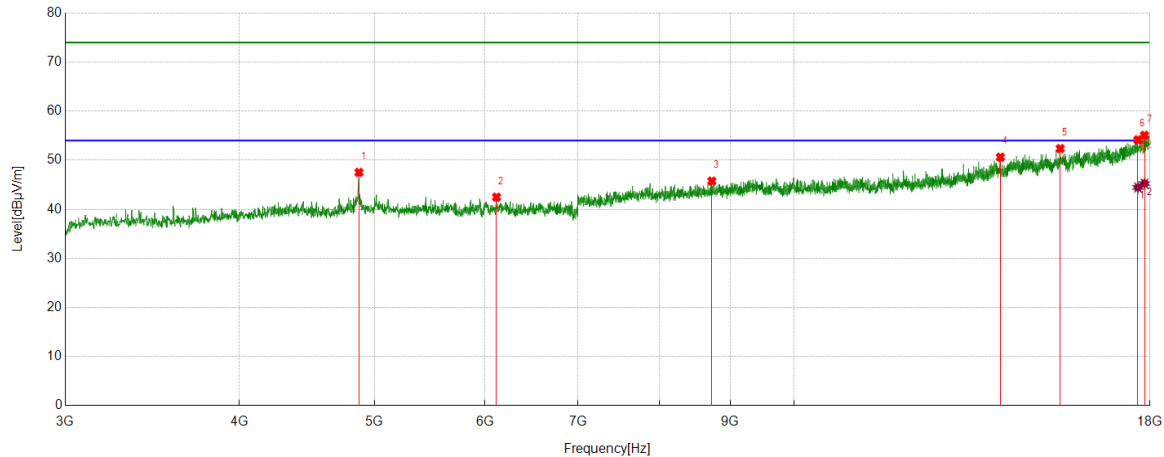

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4873.3592	51.15	-3.62	47.53	74.00	-26.47	Horizontal
2	6116.6396	44.72	-2.24	42.48	74.00	-31.52	Horizontal
3	8728.8411	43.30	2.45	45.75	74.00	-28.25	Horizontal
4	14060.1325	38.88	11.74	50.62	74.00	-23.38	Horizontal
5	15519.0649	39.47	12.90	52.37	74.00	-21.63	Horizontal
6	17645.5807	36.36	17.78	54.14	74.00	-19.86	Horizontal
7	17838.7298	36.59	18.49	55.08	74.00	-18.92	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17645.5807	26.67	17.78	44.45	54.00	-9.55	Horizontal
2	17838.7298	26.76	18.49	45.25	54.00	-8.75	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

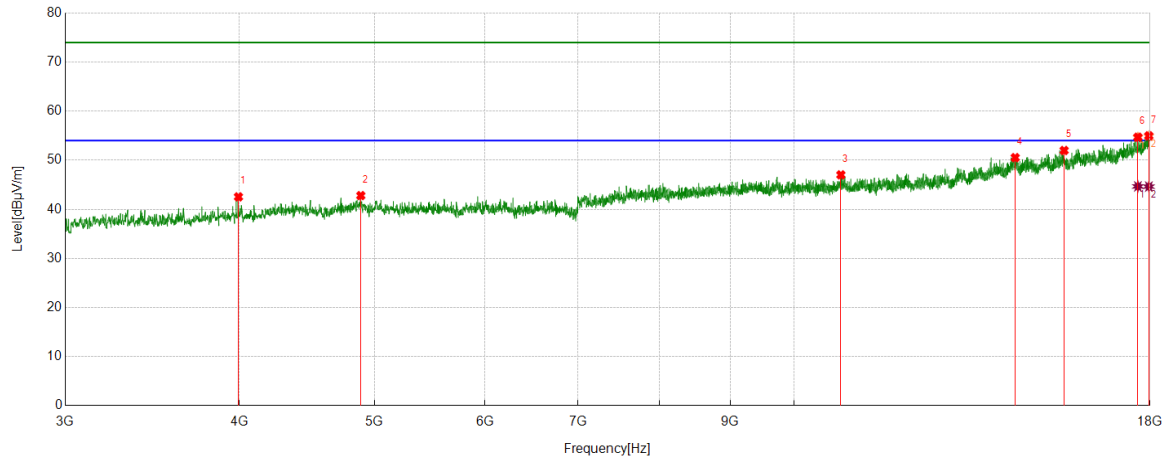

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	3993.8742	49.57	-7.03	42.54	74.00	-31.46	Vertical
2	4888.361	46.30	-3.50	42.80	74.00	-31.20	Vertical
3	10802.8504	42.69	4.33	47.02	74.00	-26.98	Vertical
4	14407.0509	39.01	11.52	50.53	74.00	-23.47	Vertical
5	15620.3275	38.54	13.45	51.99	74.00	-22.01	Vertical
6	17643.7055	36.89	17.80	54.69	74.00	-19.31	Vertical
7	17966.2458	36.36	18.61	54.97	74.00	-19.03	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17643.7055	26.87	17.80	44.67	54.00	-9.33	Vertical
2	17966.2458	26.02	18.61	44.63	54.00	-9.37	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

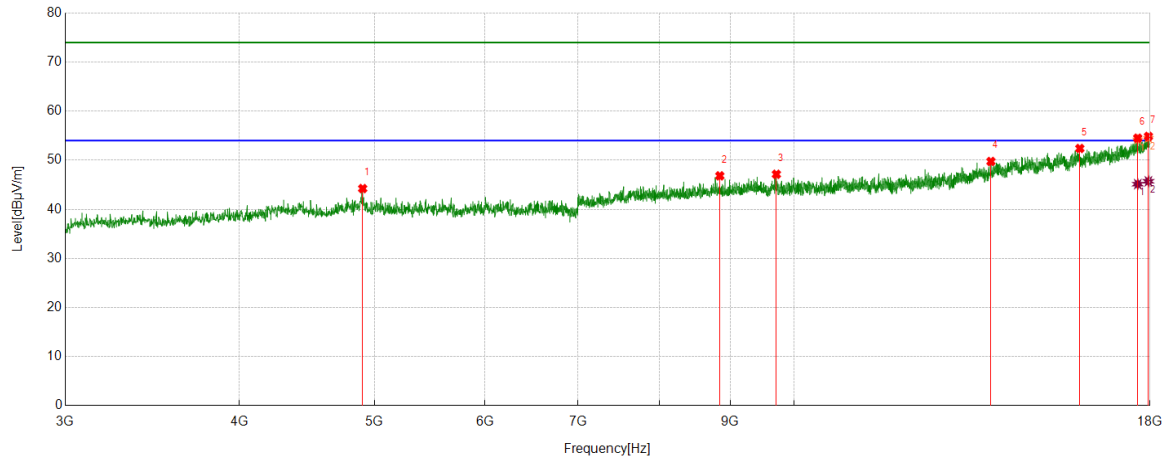

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	4903.3629	48.03	-3.80	44.23	74.00	-29.77	Horizontal
2	8845.1056	44.13	2.69	46.82	74.00	-27.18	Horizontal
3	9711.4639	43.50	3.64	47.14	74.00	-26.86	Horizontal
4	13840.7301	39.41	10.34	49.75	74.00	-24.25	Horizontal
5	16031.0039	38.03	14.37	52.40	74.00	-21.60	Horizontal
6	17639.955	36.66	17.84	54.50	74.00	-19.50	Horizontal
7	17953.1191	36.47	18.39	54.86	74.00	-19.14	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17639.955	27.29	17.84	45.13	54.00	-8.87	Horizontal
2	17953.1191	27.32	18.39	45.71	54.00	-8.29	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

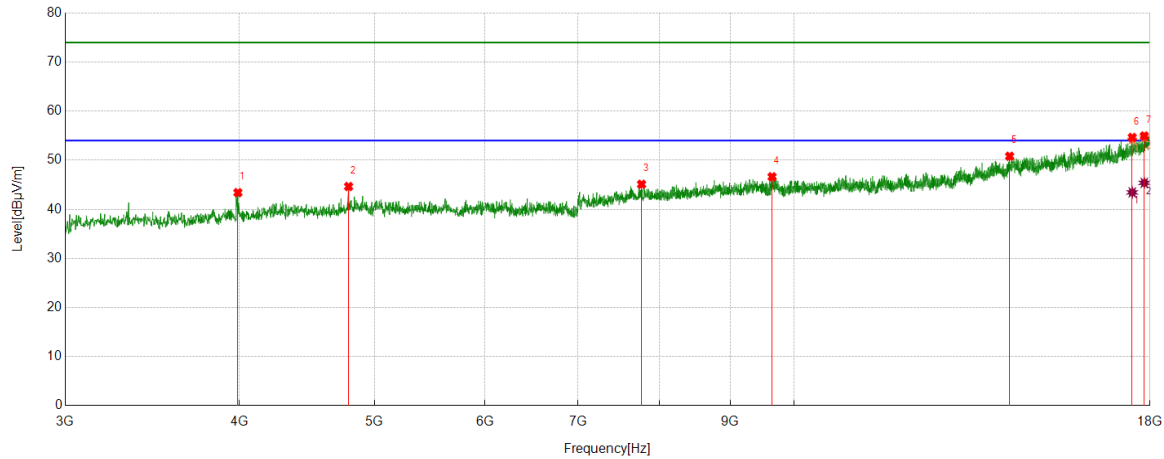

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	3990.1238	50.51	-7.11	43.40	74.00	-30.60	Vertical
2	4790.8489	48.12	-3.47	44.65	74.00	-29.35	Vertical
3	7772.4716	43.80	1.30	45.10	74.00	-28.90	Vertical
4	9642.0803	43.02	3.61	46.63	74.00	-27.37	Vertical
5	14275.7845	38.89	11.92	50.81	74.00	-23.19	Vertical
6	17480.5601	37.47	17.17	54.64	74.00	-19.36	Vertical
7	17831.2289	36.67	18.26	54.93	74.00	-19.07	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	17480.5601	26.28	17.17	43.45	54.00	-10.55	Vertical
2	17831.2289	27.13	18.26	45.39	54.00	-8.61	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.