

TEST REPORT

Reference No..... : WTX23X10215772W008
FCC ID : 2BAHU2023024
Applicant : DIALN PRODUCTS INC
Address : 8312 Page Ave, St. Louis, Missouri, 63130, USA
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : Smart Phone
Model No..... : Nova
Standards : **FCC PART15 SUBPART B**
Date of Receipt sample : 2023-10-09
Date of Test..... : 2023-10-09 to 2023-11-02
Date of Issue : 2023-11-02
Test Report Form No. : WTX_FCC PART15B_001
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

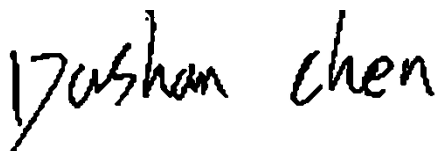

Dashan Chen

Approved by:



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND OPERATION MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	10
3. CONDUCTED EMISSIONS	11
3.1 TEST PROCEDURE.....	11
3.2 BASIC TEST SETUP BLOCK DIAGRAM.....	11
3.3 ENVIRONMENTAL CONDITIONS	11
3.4 SUMMARY OF TEST RESULTS	11
4. RADIATED EMISSION	14
4.1 TEST PROCEDURE.....	14
4.2 BLOCK DIAGRAM OF TEST SETUP	14
4.3 TEST RECEIVER SETUP	15
4.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	15
4.5 ENVIRONMENTAL CONDITIONS	15
4.6 SUMMARY OF TEST RESULTS	15
APPENDIX PHOTOGRAPHS.....	28

Report version

Version No.	Date of issue	Description
Rev.00	2023-11-02	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Smart Phone
Trade Name:	DIALN
Model No.:	Nova
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	DC3.85V
Battery Capacity:	4000mAh
Rated Power:	/
Adapter Model:	TPA-46050200UU Input:AC100-220V 50/60Hz 0.3A Output:DC5V2.0A
Lowest Internal Frequency:	26MHz
Highest Internal Frequency:	5825MHz
Classification of ITE:	Class B

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15 Subpart B:Unintentional Radiators.

ANSI C63.4-2014:American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List			
Test Mode	Description	Remark	Power Supply Mode
TM1	Charging And Playing	Connect to the Adapter;	AC120V 60Hz for adapter
TM2	Downloading	Connect to the Notebook;	AC120V 60Hz for PC
TM3	Camera	Camera On	DC3.85V
TM4	FM	Worst case FM 98MHz	DC3.85V
TM5	GPS	Receive 1575.42MHz	DC3.85V
TM6	GSM 850	Receiver	DC3.85V
TM7	WCMDA Band 5	Receiver	DC3.85V
TM8	LTE Band 5	Receiver	DC3.85V

EUT Cable List and Details				
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite	With / Without Chip
USB Cable	0.95	Shielded	With	/

Special Cable List and Details				
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite	With / Without Chip
Earphone Cable	1.0	Unshielded	Without Ferrite	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	TianYi 100-14IBD	PF0F4ABV

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz ±3.74dB
		0.15-30MHz ±3.34dB
Radiated Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-18GHz ±3.92dB

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
☐ Chamber A: Below 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2023-02-25	2024-02-24
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2023-02-25	2024-02-24
Amplifier	HP	8447F	2805A03475	2023-02-25	2024-02-24
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-20	2026-03-19
☐ Chamber A: Above 1GHz					
Amplifier	C&D	PAP-1G18	14918	2023-02-25	2024-02-24
Horn Antenna	ETS	3117	00086197	2021-03-19	2024-03-18
☐ Chamber B: Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2023-02-25	2024-02-24
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2024-04-08
Amplifier	Agilent	8447D	2944A10457	2023-02-25	2024-02-24
☒ Chamber C: Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2024-05-27
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
Amplifier	HP	8447F	2944A03869	2023-02-25	2024-02-24
☒ Chamber C: Above 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
Amplifier	Tonscend	TAP01018050	AP22E806235	2023-02-25	2024-02-24
DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2021-03-19	2024-03-18
Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2023-02-25	2024-02-24
☐ Conducted Room 1#					
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2023-02-25	2024-02-24
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2023-02-25	2024-02-24

Reference No.: WTX23X10215772W008

AC LISN	Schwarz beck	NSLK8126	8126-279	2023-02-25	2024-02-24
☒ Conducted Room 2#					
EMI Test Receiver	Rohde & Schwarz	ESPI	10129	2023-02-25	2024-02-24
LISN	Rohde & Schwarz	ENV 216	100097	2023-02-25	2024-02-24

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 1#)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 2#)*	SKET	EMC-I	V2.0

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

Description of Test	Result
§15.107(a) Conducted Emission	Compliant
§15.109(a) Radiated Emission	Compliant


N/A: not applicable

3. Conducted Emissions

3.1 Test Procedure

The test is conducted under the description of ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.2 Basic Test Setup Block Diagram

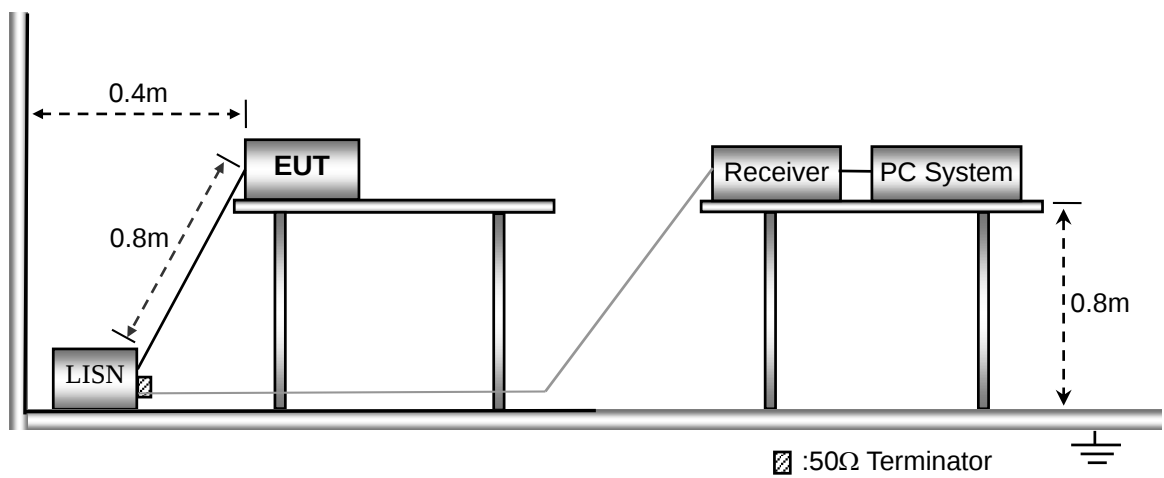


3.3 Environmental Conditions

Temperature:	23.5 °C
Relative Humidity:	54 %
ATM Pressure:	1014 mbar

3.4 Summary of Test Results


Please find the results below:

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

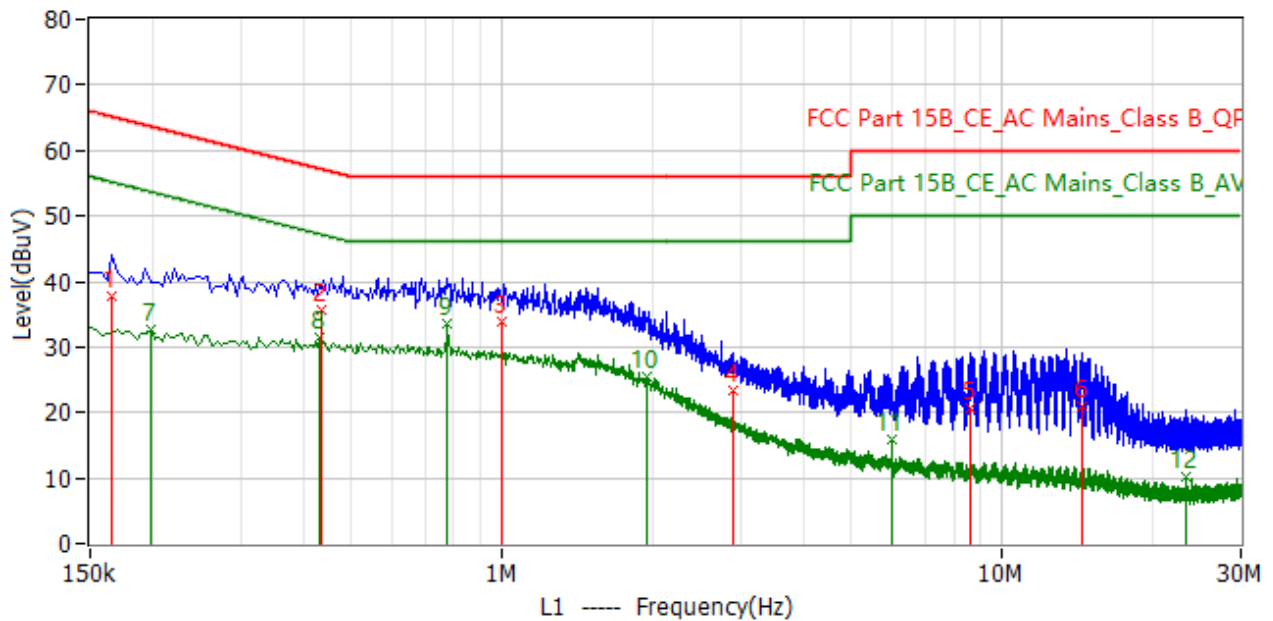

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector
1	166.000kHz	65.2	37.7	-27.4	16.9	20.8	QP
2	434.000kHz	57.2	35.7	-21.5	14.9	20.8	QP
3	998.000kHz	56.0	34.0	-22.0	13.2	20.8	QP
4	2.902MHz	56.0	23.4	-32.6	2.5	20.9	QP
5	8.634MHz	60.0	20.7	-39.3	-0.1	20.8	QP
6	14.446MHz	60.0	21.0	-39.0	0.3	20.7	QP
7*	198.000kHz	53.7	32.7	-21.0	12.1	20.6	AV
8*	430.000kHz	47.3	31.4	-15.9	10.6	20.8	AV
9*	778.000kHz	46.0	33.7	-12.3	12.9	20.8	AV
10*	1.950MHz	46.0	25.6	-20.4	4.8	20.8	AV
11*	6.030MHz	50.0	16.0	-34.0	-4.8	20.8	AV
12*	23.202MHz	50.0	10.2	-39.8	-9.9	20.1	AV

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

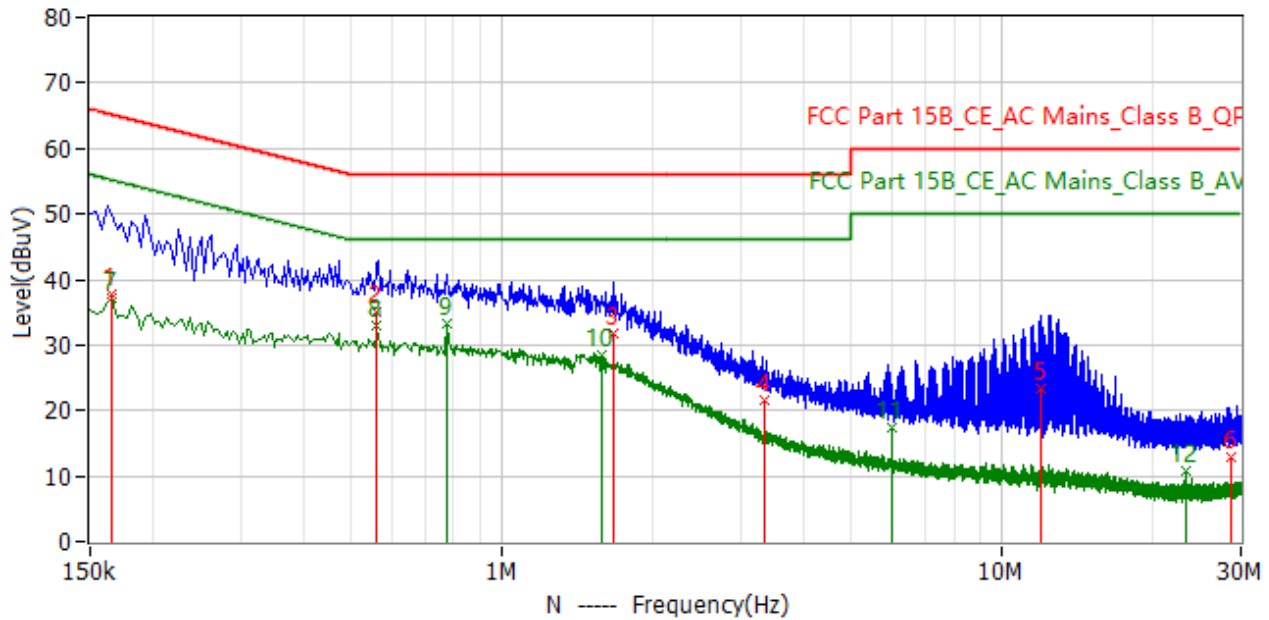

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector
1	166.000kHz	65.2	37.7	-27.4	16.9	20.8	QP
2	558.000kHz	56.0	35.2	-20.8	14.5	20.7	QP
3	1.674MHz	56.0	31.9	-24.1	11.1	20.8	QP
4	3.342MHz	56.0	21.5	-34.5	0.6	20.9	QP
5	11.950MHz	60.0	23.4	-36.6	2.6	20.8	QP
6	28.678MHz	60.0	12.9	-47.1	-7.7	20.6	QP
7*	166.000kHz	55.2	37.2	-18.0	16.4	20.8	AV
8*	562.000kHz	46.0	32.9	-13.1	12.2	20.7	AV
9*	778.000kHz	46.0	33.4	-12.6	12.6	20.8	AV
10*	1.578MHz	46.0	28.5	-17.5	7.7	20.8	AV
11*	6.030MHz	50.0	17.3	-32.7	-3.5	20.8	AV
12*	23.202MHz	50.0	10.8	-39.2	-9.3	20.1	AV


4. RADIATED EMISSION

4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

4.2 Block Diagram of Test Setup

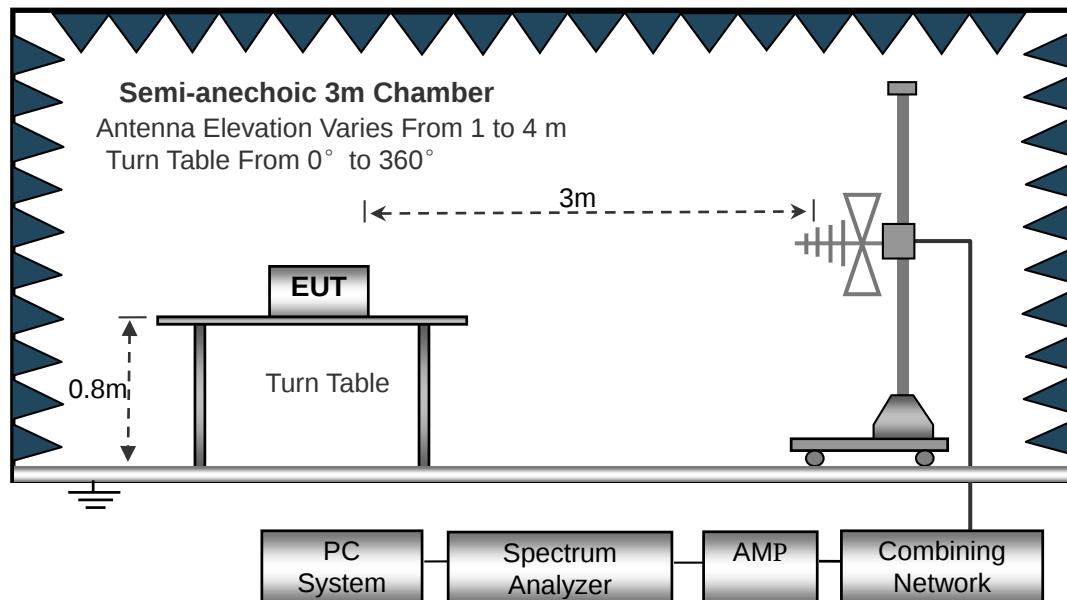

4.3 Test Receiver Setup

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

4.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Correct} \\ \text{Correct} = \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.5 Environmental Conditions


Temperature:	23.5°C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar

4.6 Summary of Test Results

Please find the results below:


Below 1GHz

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

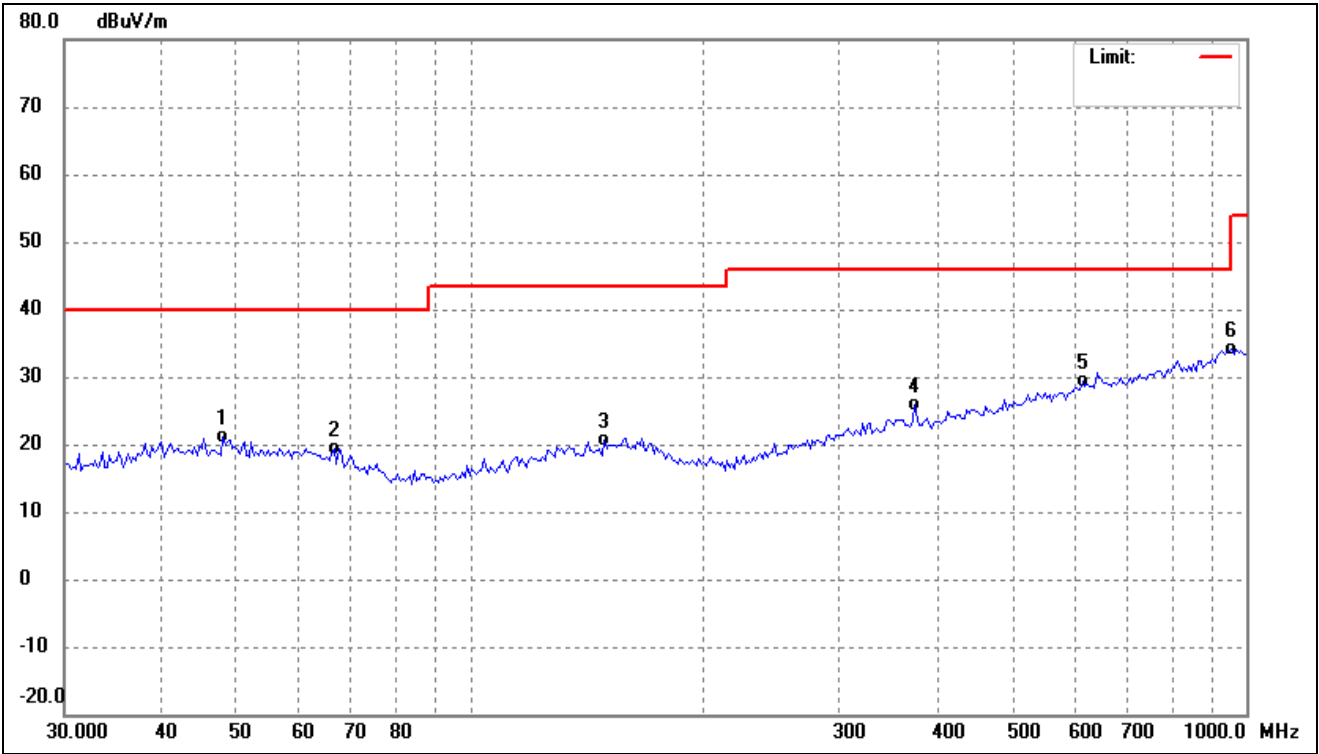


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.0392	29.40	-8.23	21.17	40.00	-18.83	-	-	QP
2	66.8395	29.63	-10.18	19.45	40.00	-20.55	-	-	QP
3	148.9175	29.20	-8.68	20.52	43.50	-22.98	-	-	QP
4	373.8862	32.42	-6.50	25.92	46.00	-20.08	-	-	QP
5	615.7743	31.01	-1.53	29.48	46.00	-16.52	-	-	QP
6	958.7135	31.79	2.26	34.05	46.00	-11.95	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

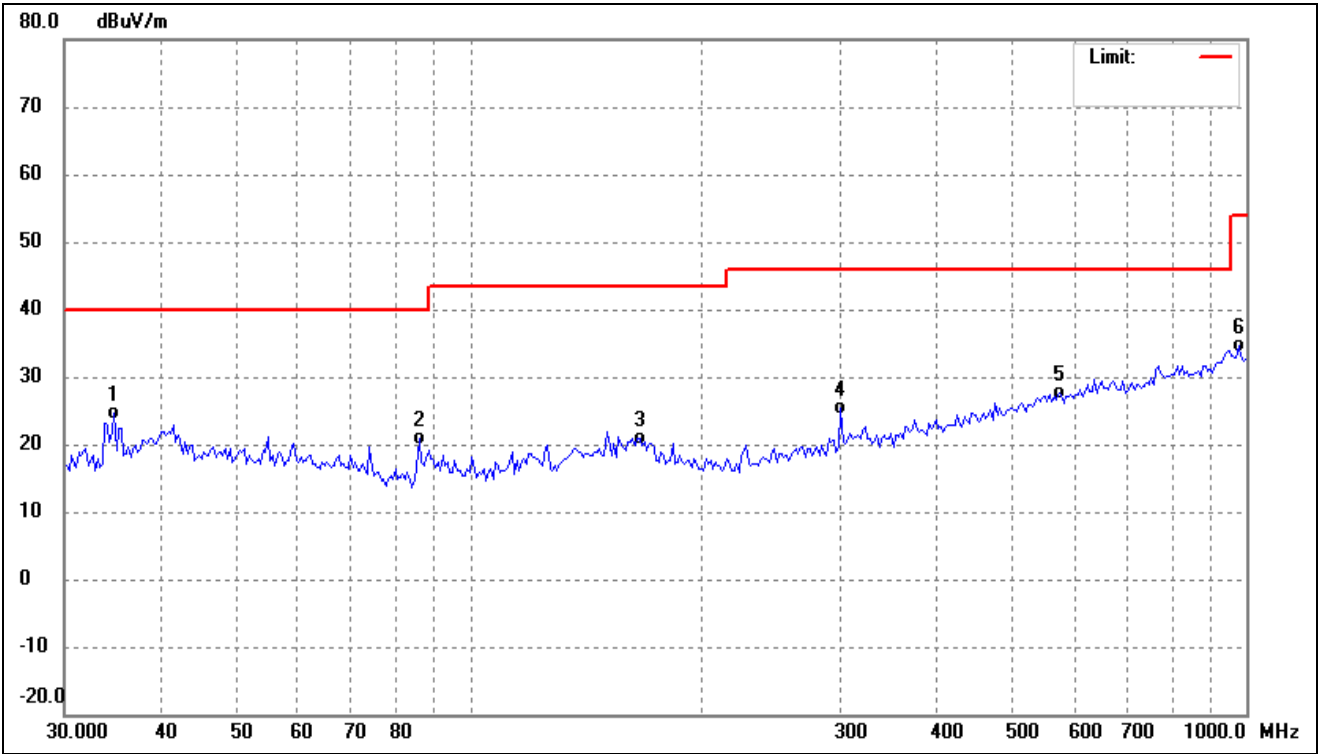


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	34.7705	34.20	-9.59	24.61	40.00	-15.39	-	-	QP
2	86.0796	33.81	-13.04	20.77	40.00	-19.23	-	-	QP
3	165.4716	29.68	-8.76	20.92	43.50	-22.58	-	-	QP
4	300.6988	33.73	-8.24	25.49	46.00	-20.51	-	-	QP
5	573.9882	29.91	-2.27	27.64	46.00	-18.36	-	-	QP
6	979.1392	32.25	2.28	34.53	54.00	-19.47	-	-	QP

Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

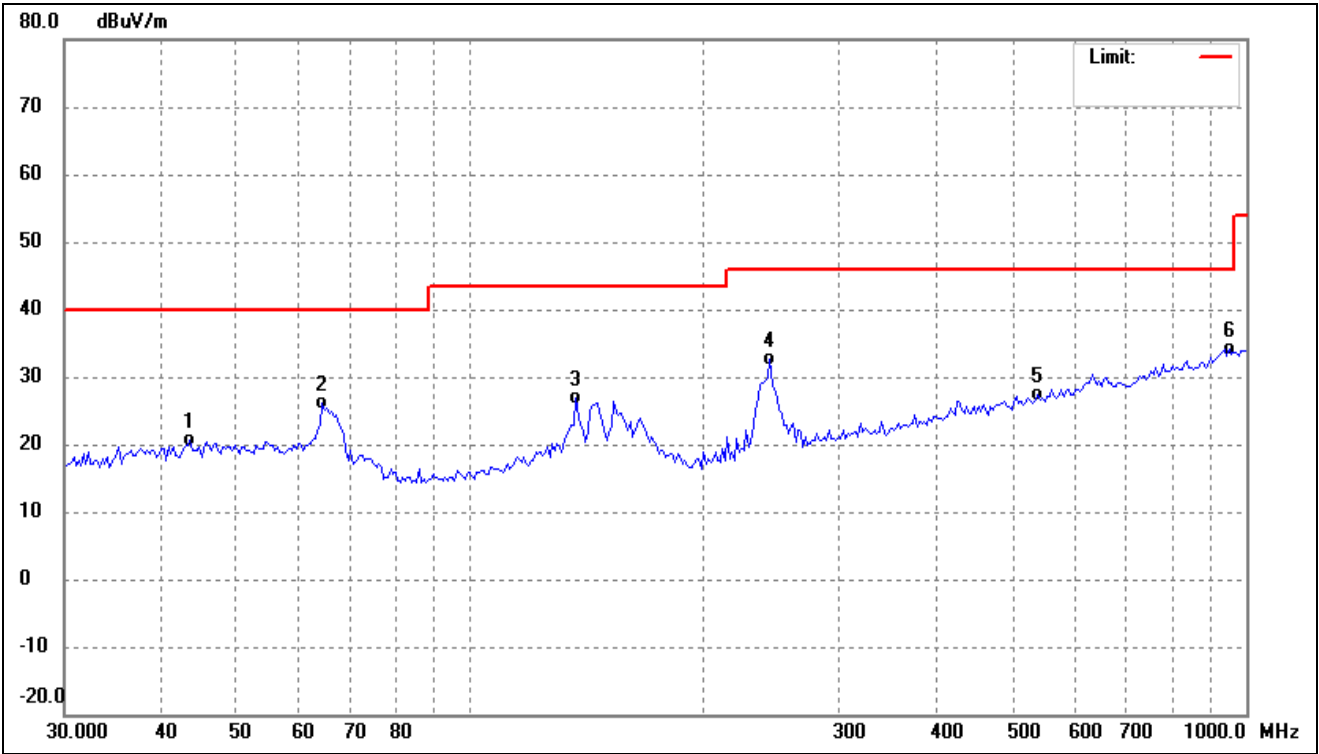


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.5381	29.04	-8.47	20.57	40.00	-19.43	-	-	QP
2	64.5319	35.87	-9.76	26.11	40.00	-13.89	-	-	QP
3	136.8747	36.45	-9.56	26.89	43.50	-16.61	-	-	QP
4	243.5431	42.93	-10.42	32.51	46.00	-13.49	-	-	QP
5	538.8107	30.56	-3.15	27.41	46.00	-18.59	-	-	QP
6	952.0001	31.92	2.25	34.17	46.00	-11.83	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

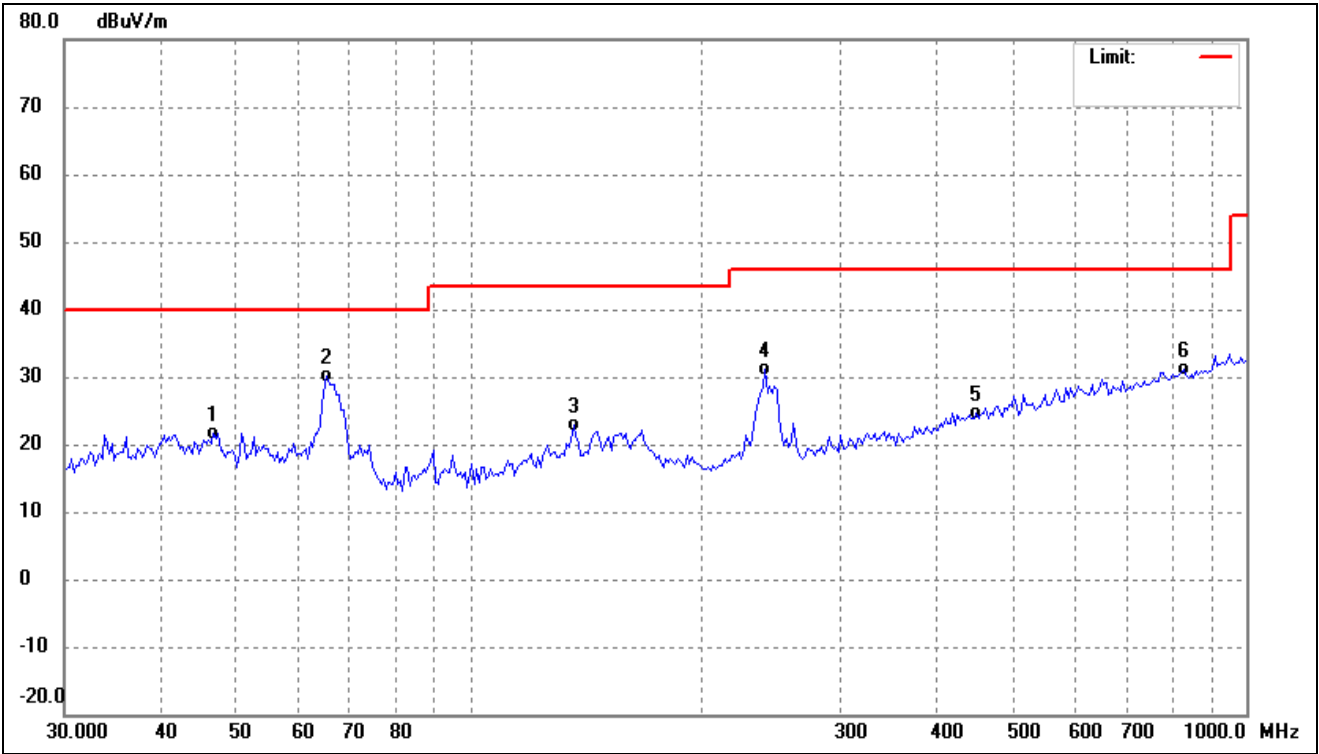


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.7077	30.00	-8.34	21.66	40.00	-18.34	-	-	QP
2	65.4452	40.08	-9.93	30.15	40.00	-9.85	-	-	QP
3	135.9163	32.54	-9.61	22.93	43.50	-20.57	-	-	QP
4	240.1442	41.63	-10.54	31.09	46.00	-14.91	-	-	QP
5	448.8361	29.23	-4.61	24.62	46.00	-21.38	-	-	QP
6	833.0127	30.44	0.59	31.03	46.00	-14.97	-	-	QP

Test mode:	TM3	Polarity:	Horizontal
------------	-----	-----------	------------

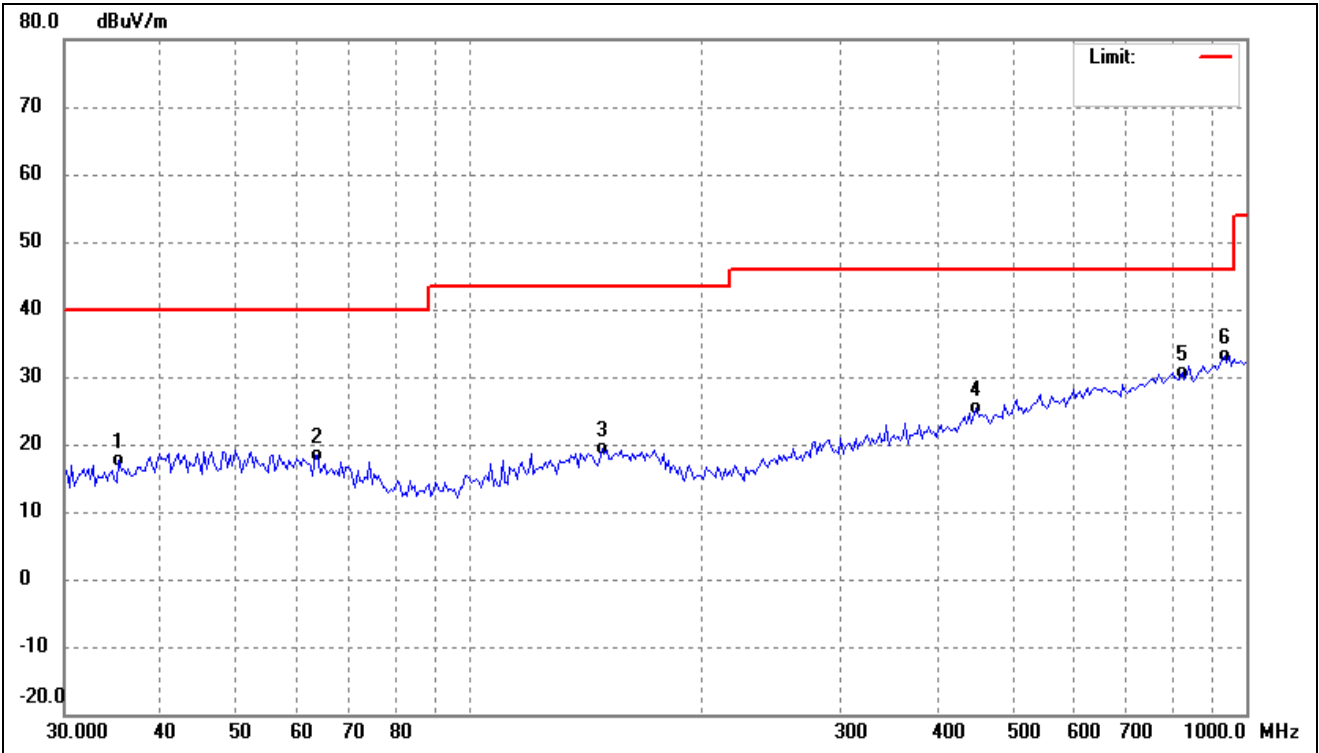


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	35.2625	27.10	-9.50	17.60	40.00	-22.40	-	-	QP
2	63.6312	27.97	-9.59	18.38	40.00	-21.62	-	-	QP
3	147.8746	28.07	-8.77	19.30	43.50	-24.20	-	-	QP
4	448.8361	29.96	-4.61	25.35	46.00	-20.65	-	-	QP
5	827.1794	30.19	0.54	30.73	46.00	-15.27	-	-	QP
6	938.7139	31.20	2.01	33.21	46.00	-12.79	-	-	QP

Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

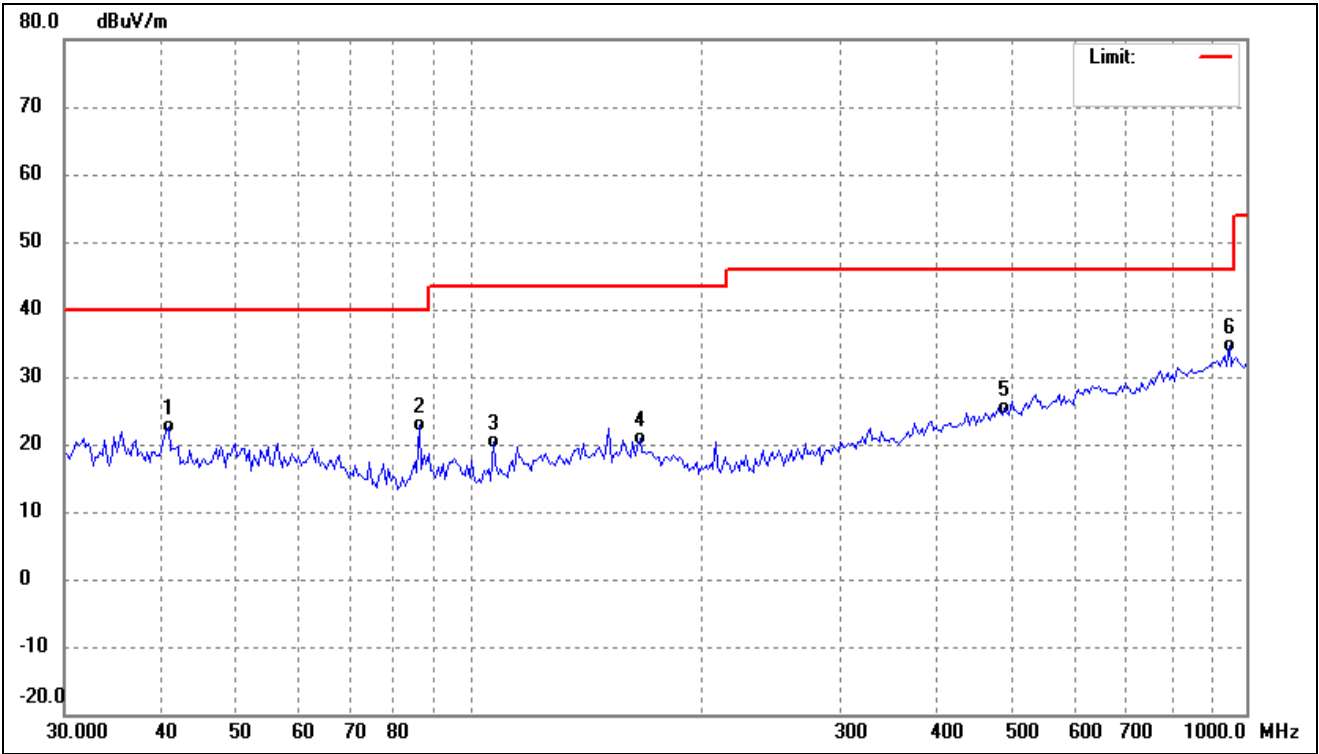


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.8698	31.21	-8.47	22.74	40.00	-17.26	-	-	QP
2	86.0796	36.01	-13.04	22.97	40.00	-17.03	-	-	QP
3	107.0306	32.14	-11.85	20.29	43.50	-23.21	-	-	QP
4	165.4716	29.66	-8.76	20.90	43.50	-22.60	-	-	QP
5	488.3263	29.48	-4.06	25.42	46.00	-20.58	-	-	QP
6	952.0000	32.40	2.25	34.65	46.00	-11.35	-	-	QP

Test mode:	TM4	Polarity:	Horizontal
------------	-----	-----------	------------

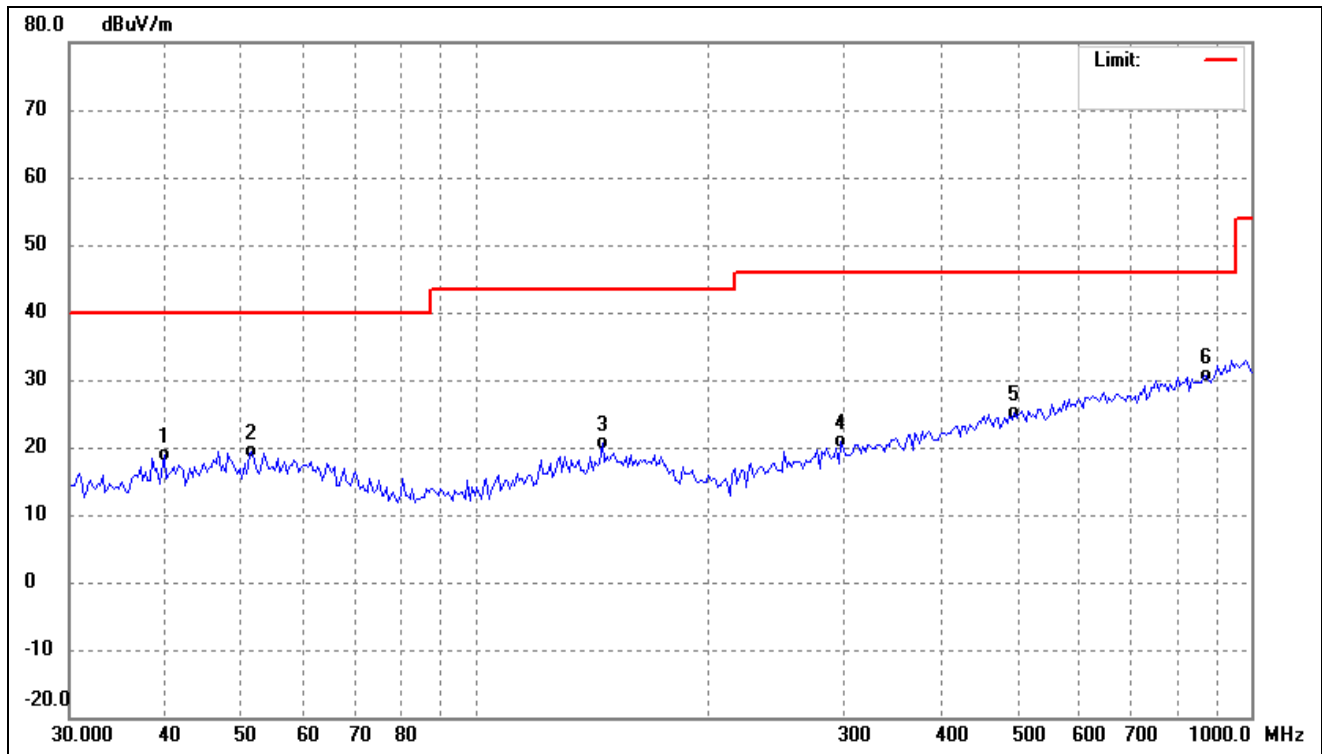


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.7370	27.48	-8.54	18.94	40.00	-21.06	-	-	QP
2	51.5364	27.54	-8.24	19.30	40.00	-20.70	-	-	QP
3	145.8109	29.49	-8.95	20.54	43.50	-22.96	-	-	QP
4	296.5022	29.33	-8.38	20.95	46.00	-25.05	-	-	QP
5	495.2379	29.17	-3.97	25.20	46.00	-20.80	-	-	QP
6	875.0132	29.57	0.97	30.54	46.00	-15.46	-	-	QP

Test mode:	TM4	Polarity:	Vertical
------------	-----	-----------	----------

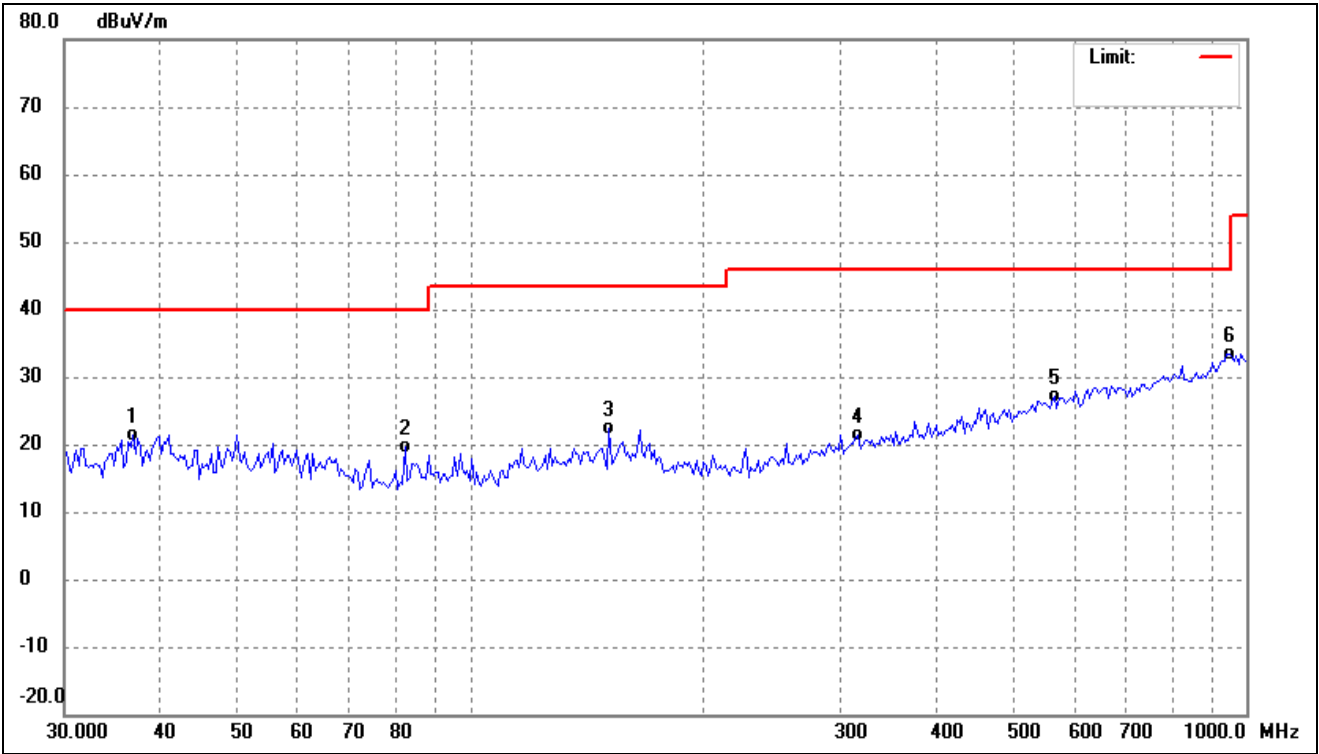


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.7811	30.47	-9.17	21.30	40.00	-18.70	-	-	QP
2	82.5257	32.58	-13.00	19.58	40.00	-20.42	-	-	QP
3	151.0251	31.11	-8.61	22.50	43.50	-21.00	-	-	QP
4	315.8600	29.31	-7.81	21.50	46.00	-24.50	-	-	QP
5	565.9775	29.63	-2.47	27.16	46.00	-18.84	-	-	QP
6	952.0000	31.07	2.25	33.32	46.00	-12.68	-	-	QP

Test mode:	TM5	Polarity:	Horizontal
------------	-----	-----------	------------

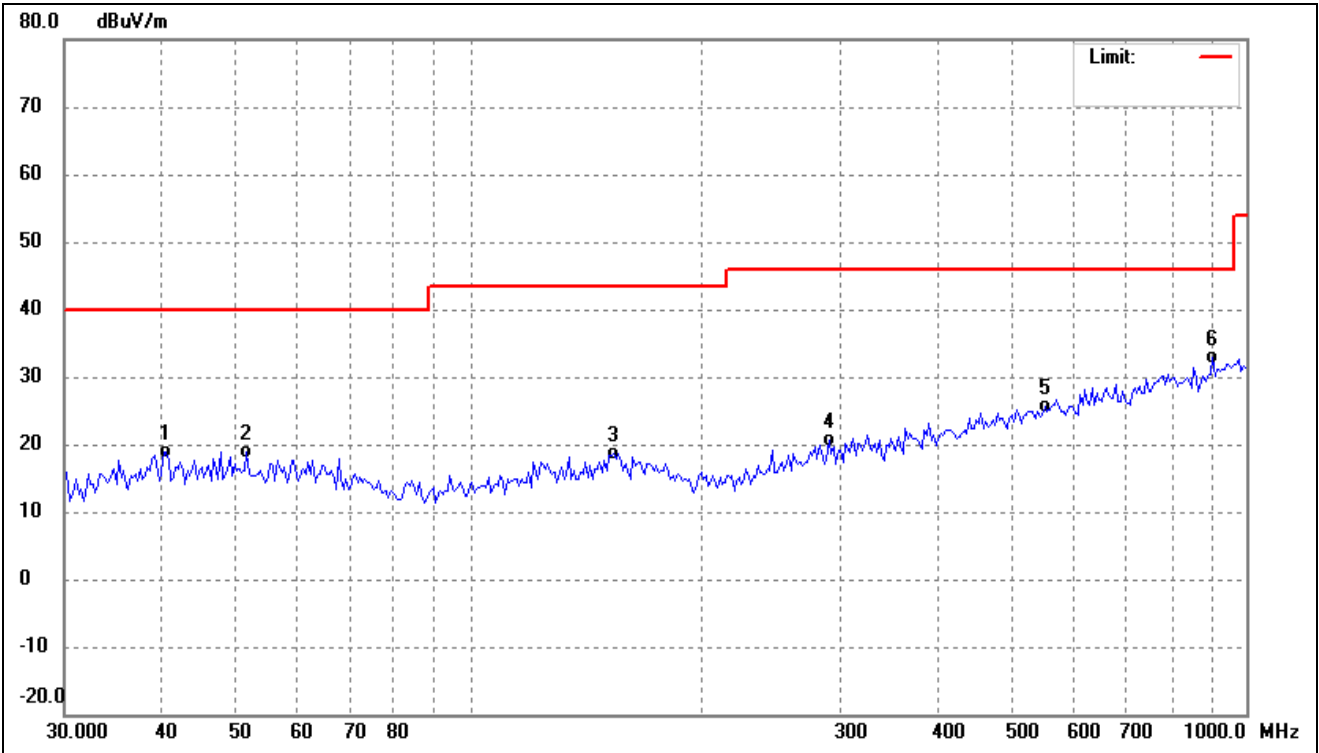

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.5836	27.29	-8.48	18.81	40.00	-21.19	-	-	QP
2	51.5364	27.13	-8.24	18.89	40.00	-21.11	-	-	QP
3	153.1627	27.20	-8.61	18.59	43.50	-24.91	-	-	QP
4	290.3169	29.16	-8.59	20.57	46.00	-25.43	-	-	QP
5	550.2902	28.36	-2.84	25.52	46.00	-20.48	-	-	QP
6	906.3040	31.56	1.32	32.88	46.00	-13.12	-	-	QP


Test mode:	TM5	Polarity:	Vertical
------------	-----	-----------	----------

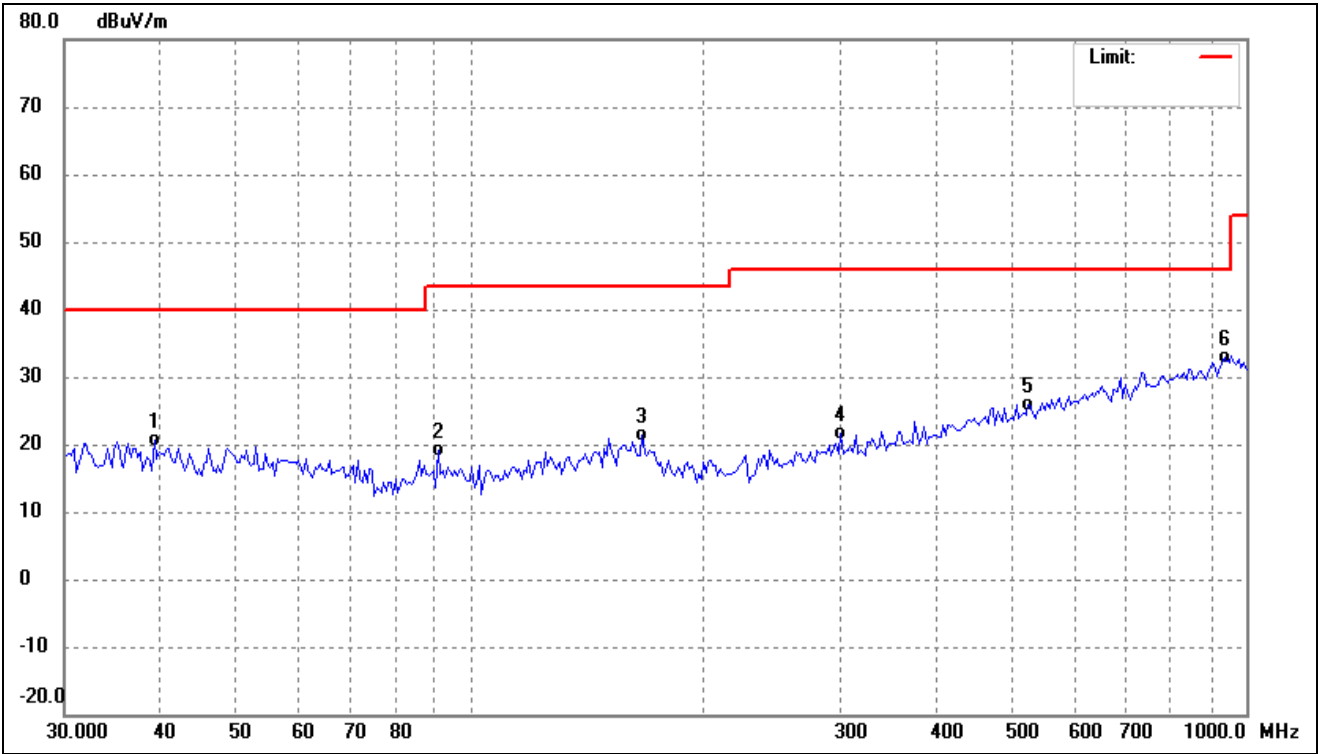

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.1824	29.40	-8.65	20.75	40.00	-19.25	-	-	QP
2	91.0574	32.10	-13.04	19.06	43.50	-24.44	-	-	QP
3	166.6385	30.08	-8.79	21.29	43.50	-22.21	-	-	QP
4	300.6988	29.99	-8.24	21.75	46.00	-24.25	-	-	QP
5	523.8763	29.46	-3.53	25.93	46.00	-20.07	-	-	QP
6	938.7139	30.97	2.01	32.98	46.00	-13.02	-	-	QP


Above 1GHz

Test mode:	TM1 (worst case)	Polarity:	Horizontal
------------	------------------	-----------	------------

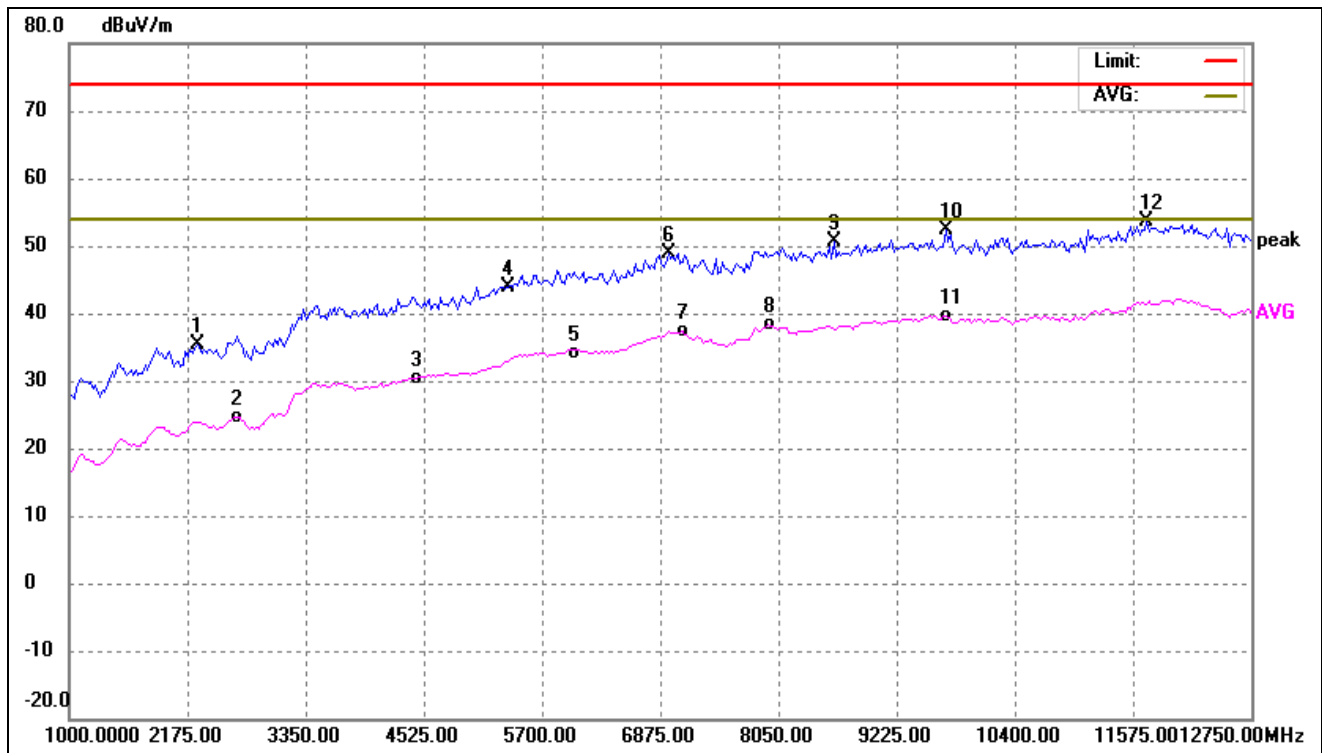

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	2271.543	54.51	-19.10	35.41	74.00	-38.59	-	-	peak
2	2648.297	42.92	-18.35	24.57	54.00	-29.43	-	-	AVG
3	4390.782	43.75	-13.47	30.28	54.00	-23.72	-	-	AVG
4	5356.212	54.61	-10.64	43.97	74.00	-30.03	-	-	peak
5	5921.343	43.18	-8.94	34.24	54.00	-19.76	-	-	AVG
6	6957.415	54.86	-5.90	48.96	74.00	-25.04	-	-	peak
7	7098.697	43.23	-5.94	37.29	54.00	-16.71	-	-	AVG
8	7946.393	43.46	-5.17	38.29	54.00	-15.71	-	-	AVG
9	8605.711	55.76	-5.13	50.63	74.00	-23.37	-	-	peak
10	9712.425	55.67	-3.40	52.27	74.00	-21.73	-	-	peak
11	9712.425	43.08	-3.40	39.68	54.00	-14.32	-	-	AVG
12	11713.928	54.06	-0.37	53.69	74.00	-20.31	-	-	peak

Test mode:	TM1 (worst case)	Polarity:	Vertical
------------	------------------	-----------	----------

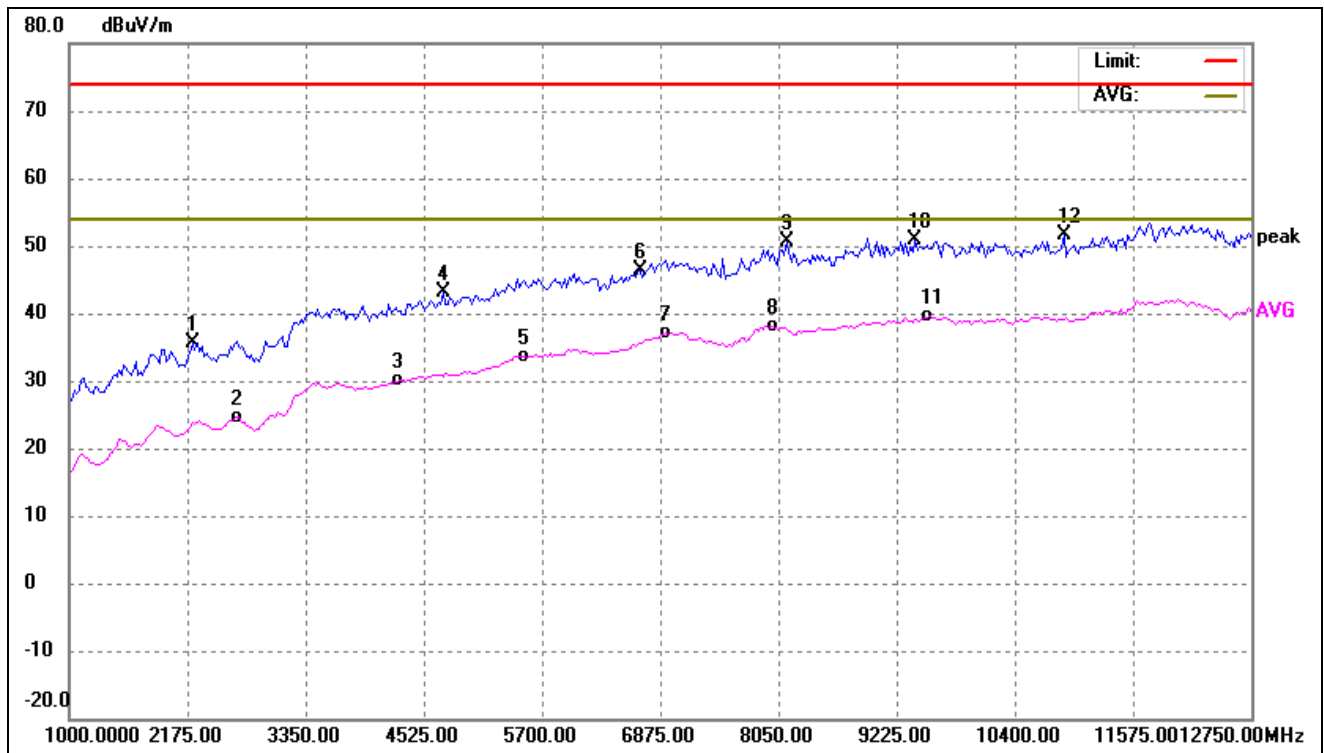

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	2224.449	54.82	-19.19	35.63	74.00	-38.37	-	-	peak
2	2671.844	42.91	-18.30	24.61	54.00	-29.39	-	-	AVG
3	4296.593	43.86	-13.78	30.08	54.00	-23.92	-	-	AVG
4	4720.441	55.97	-12.78	43.19	74.00	-30.81	-	-	peak
5	5497.495	43.65	-9.94	33.71	54.00	-20.29	-	-	AVG
6	6674.850	53.57	-7.27	46.30	74.00	-27.70	-	-	peak
7	6933.868	43.16	-6.01	37.15	54.00	-16.85	-	-	AVG
8	7969.940	43.16	-5.07	38.09	54.00	-15.91	-	-	AVG
9	8134.770	55.58	-5.07	50.51	74.00	-23.49	-	-	peak
10	9406.313	54.51	-3.56	50.95	74.00	-23.05	-	-	peak
11	9547.595	42.95	-3.38	39.57	54.00	-14.43	-	-	AVG
12	10889.780	54.40	-2.78	51.62	74.00	-22.38	-	-	peak

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****