

Antenna specification

Antenna Sample Confirmation From

|                                                |                                     |                   |           |                       |              |
|------------------------------------------------|-------------------------------------|-------------------|-----------|-----------------------|--------------|
| Name of supplier                               | ShenZhen Aihui Technology Co. , Ltd |                   |           |                       |              |
| Customer name                                  | Ju ren                              |                   |           |                       |              |
| Sample name                                    | G62                                 |                   |           |                       |              |
| model                                          |                                     |                   |           |                       |              |
| Sample size                                    |                                     |                   |           |                       |              |
| Inspection item                                | Performance test                    | Visual inspection | Structure | In the news           | Test results |
|                                                |                                     |                   |           |                       |              |
| Notes                                          |                                     |                   |           |                       |              |
| Quality Audit                                  |                                     | Project Audit     |           | Business confirmation |              |
| The following is to be completed by the client |                                     |                   |           |                       |              |

|                            |                  |
|----------------------------|------------------|
| Customer<br>feedback       |                  |
| Customer<br>signature/seal | <div>date:</div> |

Antenna Test Report

|                                                 |       |                   |        |
|-------------------------------------------------|-------|-------------------|--------|
| Test Unit: Shenzhen Aihui Technology Co. , Ltd. |       |                   |        |
| Materials                                       | FPC   |                   |        |
| Antenna<br>form                                 | PIFA  | Polarization mode | Linear |
| Application                                     | W/G/B |                   |        |

# Shenzhen Aihui Technology Co. , Ltd.

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                |           |     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|-----------|-----|
| scenario                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                |           |     |
| Working band                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 2400Mhz-2500Mhz<br>5100Mhz-5850Mhz<br>1575Mhz  | VSWR      | ≤2  |
| Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Max: 2W                                        | Impedance | 50Ω |
| dBi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | ≥ 1dB ±0.5DB                                   |           |     |
| Test Equipment                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | HPE5071C、Shielding Room、3D automatic turntable |           |     |
| <p><b>Antenna Description::</b></p> <p><b>1. Grounding processing and picture description: no</b></p> <p><b>2. Need to change the motherboard to match: no</b></p> <ul style="list-style-type: none"><li>● Test voltage: 3.6V, check the antenna contact is good before testing.</li><li>● The RF cable of the integrated tester is kept in a natural state and can not be curled.</li></ul> <p>Specification:test the specified power level, all indicators must conform to the specifications.</p> |                                                |           |     |

1. Project Image
2. Test Fixture
3. Antenna matching circuit
4. S11 test
5. Antenna passive efficiency and gain
6. Darkroom test equipment and data
7. Schematic diagram of antenna assembly
8. Antenna environment handling
9. Antenna mass production index
10. Structural drawing


## 1.Project Image

The final verification antenna performance prototype in our company for at least one year, easy to analyze and solve the problem of antenna mass production, to ensure the quality of antenna shipment


## 2.Test Fixture

Objective: to test the passive parameters of antenna as accurately as possible. Making

Method: the handset is made of a 50 ohm coaxial cable, one end of which is connected to the test point of the back end of the matching circuit of the handset motherboard (front end of the RF test hole) , and the other end is connected to the SMA joint. The diagram is as follows:

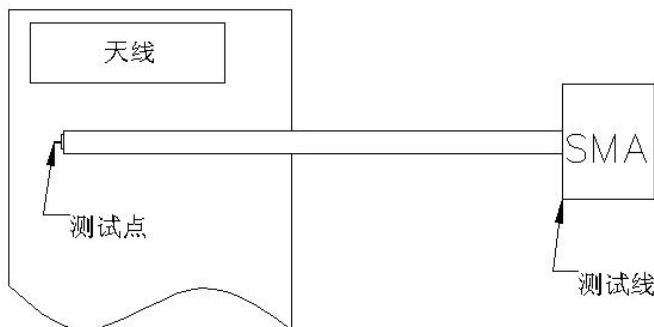

## 3、 Antenna matching circuit

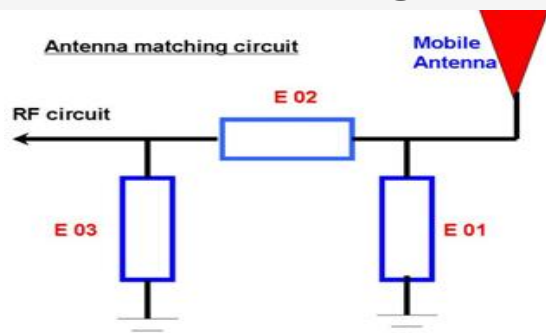


**Modify**

| E01 | E02 | E03 |
|-----|-----|-----|
| No  | No  | No  |

Note: The match is unmodified.

## 4.S11 test

4.0 4.0s11 test method description of test equipment: Network Analyzer (E5071C) test method: a 50 ohm CABLE is used to export from the instrument test port. The SMA connector for connecting the handset is calibrated using a calibration piece, record the echo loss and standing wave ratio corresponding to the relevant frequency points. The test schematic is as follows:

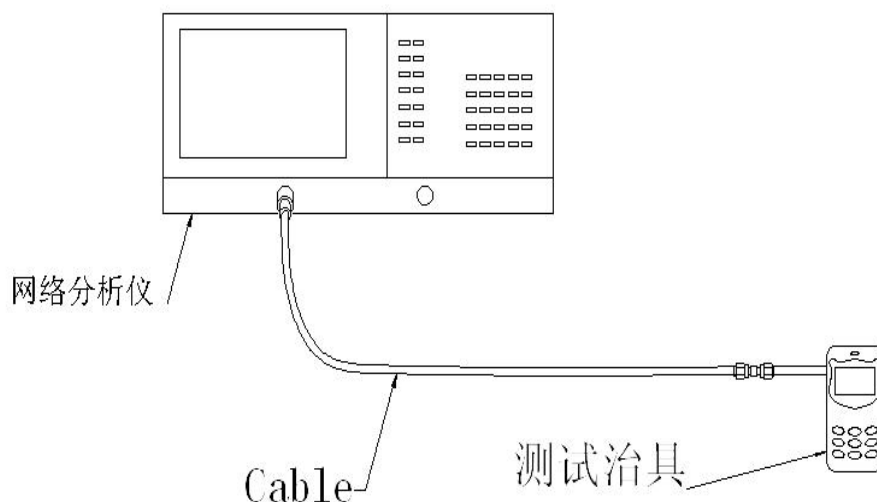


## 5.Darkroom test equipment and data

### 6.Test Equipment

Test system: shielded darkroom


The temperature was  $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$  and the humidity was  $50\% \pm 15\%$


Test equipment: when testing passive data, use the Network analyzer AGILENT E5071C to test active data, use the omnibus CMW500




7.Active antenna test data


|                        |                |            |
|------------------------|----------------|------------|
| BT & WIFI 2400-2500Mhz |                |            |
| Freq(MHz)              | Efficiency (%) | Gain (dBi) |
| 2400                   | 34.55          | 0.59       |
| 2410                   | 31.05          | 0.49       |
| 2420                   | 32.01          | 0.63       |
| 2430                   | 31.92          | 0.78       |
| 2440                   | 34.11          | 0.91       |
| 2450                   | 32.16          | 0.55       |
| 2460                   | 32.66          | 0.63       |
| 2470                   | 31.44          | 0.47       |
| 2480                   | 30.52          | 0.26       |
| 2490                   | 31.63          | 0.37       |
| 2500                   | 30.63          | 0.51       |

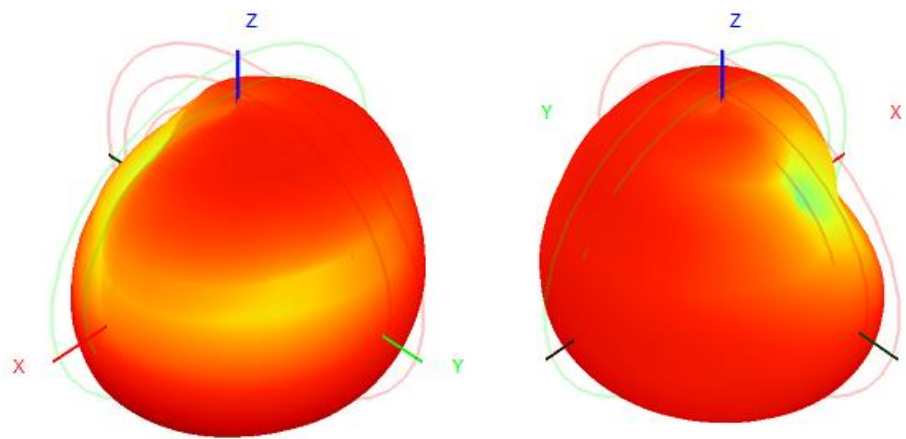

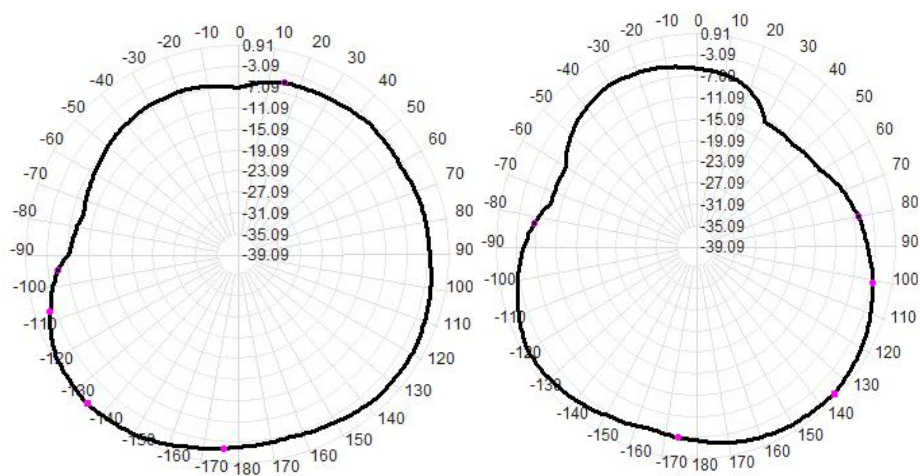

| WiFi 5100-5850Mhz |                |            |
|-------------------|----------------|------------|
| Freq(MHz)         | Efficiency (%) | Gain (dBi) |
| 5100              | 33.36          | 0.11       |
| 5200              | 34.15          | 0.26       |
| 5300              | 32.63          | -0.92      |
| 5400              | 31.96          | -0.47      |
| 5500              | 30.58          | -0.63      |
| 5600              | 31.63          | 0.20       |
| 5700              | 32.11          | 0.15       |
| 5800              | 31.63          | 0.21       |
| 5850              | 31.91          | 0.19       |

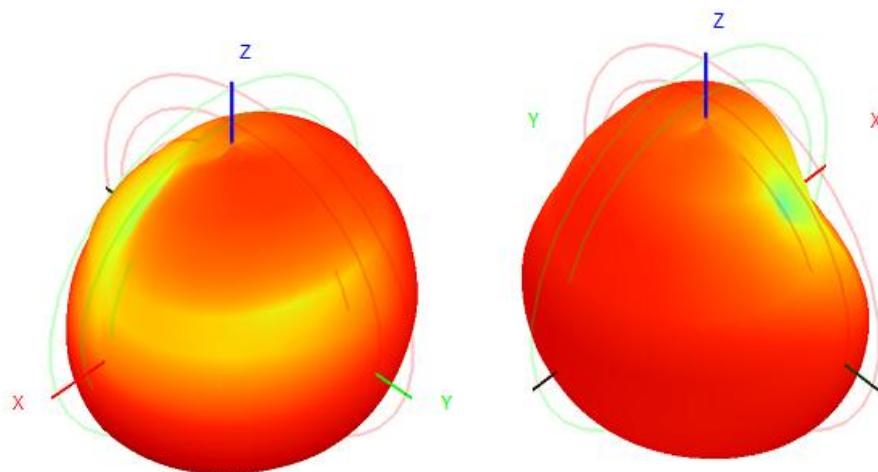

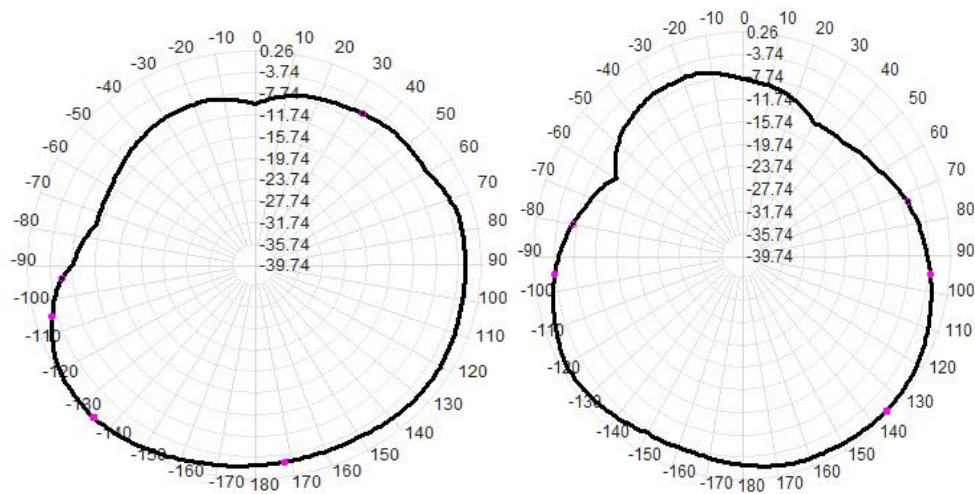

6.The panel matches the change schematic

/

7.Antenna environment handling

/

The original environment, we do not do processing

8.Antenna mass production index


When the antenna is mass-produced, the standing wave ratio is taken as the mass-produced test standard.

Based on the differences of the project itself, the following criteria are given:

| Frequency                    | Standard for volume production                                             |
|------------------------------|----------------------------------------------------------------------------|
| 2400 MHZ -2500MHZ            | VSWR (Mass Production performance) & LT; VSWR(recognition performance) 0.5 |
| 5100 MHZ -5800MHZ<br>1575MHZ | VSWR (Mass Production performance) & LT; VSWR(recognition performance) 0.5 |

## 10. Structural drawings

# Shenzhen Aihui Technology Co. , Ltd.

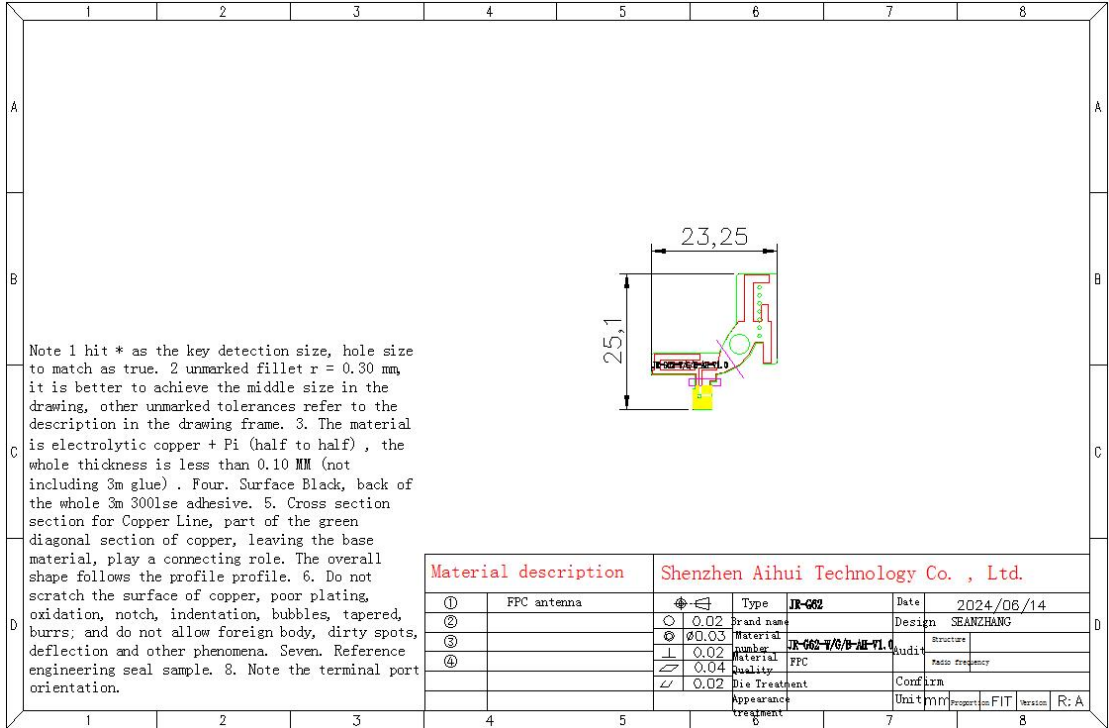

Address: 402TEL: 0755-23203435fax: 0755-23203435, Block C, Juxin Science and Technology Industrial Park, Nanchang community, xixiang, Baoan District, Shenzhen