

TEST REPORT

**This laboratory is accredited by National Radio Research
Agency Laboratory and National Voluntary Laboratory
Accreditation Program.**

The tests reported herein have been performed in accordance with
its terms of accreditation.

Test Report No. : LR500112301C
Issue Date : January 13, 2023
Applied Standard : FCC Part 15, Subpart B
Trade Name : Fiberfox Inc.
Equipment Name : Optical Fiber Identifier
Model Name : SFI-10B
Additional Model name : -
Serial Number : Identification
FCC ID : 2BAJ4SFI-10B

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This test report is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.



Revision history

Revision	Date of issue	Test report No.	Description
0	13.01.2023	LR500112301C	Initial

>>TABLE OF CONTENTS<<

LTA Certification.....	4
General information's	6
1- Brief Information	7
2- Test Site Description	9
3- Test Procedure.....	11
4- List of Equipment Used For the Tests	14
5- EMISSION	15
5-1 Conducted Emissions	15
5-2 Radiated Emissions	16
Conclusions.....	18
Photograph of the measurements	19

LTA Certification

Applicant / Manufacturer

Company name : Fiberfox Inc.
Address : Kwang Yi B/D 2F, 80, Dongseo-daero 179beon-gil, Yuseong-gu, Daejeon, Republic of Korea
Telephone / Facsimile : +82-10-4595-7309 / +82-70-4820-6991

Factory

Company name : Fiberfox Inc.
Address : Kwang Yi B/D 2F, 80, Dongseo-daero 179beon-gil, Yuseong-gu, Daejeon, Republic of Korea

Equipment Under Test (EUT)

Equipment Name : Optical Fiber Identifier
Model name : SFI-10B
Additional Model name : -
Serial number : Identification
Intended environment : Industrial area
Date of receipt : December 23, 2022
EUT condition : Pre-production, not damaged
Test Mode : Operating mode, Bluetooth mode
Interface ports : -
Power rating : 3 V
Test Voltage : 3 V

Model Description

- NONE

Model Specification

- NONE

*** To be continued next page ***

LTA Certification –cont.-

Test Performed

Test started & completed : January 05- 06 2023
Location : LTA Co., Ltd.

Test Specification

Purpose of the test : Compliance test to the following standard
Applied standard : FCC Part 15, Subpart B
Classification : Class B
Deviations from Standard Test Method : N/A

Test Results

Measurement	Results*	Test method
Conducted Emissions	Not Applicable	ANSI C 63.4-2014
Radiated Emissions	Complies	ANSI C 63.4-2014

* : The compliance statement is based on nominal value only.

Modification performed by the lab.:

- N/A

Laboratory's Certificate

Report number : LR500112301C
Issue date : January 13, 2023

This test report is issued under the authority of:

The test was supervised by:



Young Kyu Shin, Technical Manager



Hyun Young Ahn, Test Engineer

The results in this report apply only to the sample(s) tested.

It is not allowed to copy this report even partly without the allowance of the test laboratory.

General information's

Purpose

This document is based on the Electromagnetic Interference (EMI) tests performed on the “**SFI-10B**”. The measurements were performed according to the measurement procedure described in ANSI C 63.4-2014. The tests were carried out in order to confirm whether the electromagnetic emissions from the EUT (Equipment Under Test), are within the Class B limits defined in FCC Part 15, Subpart B- “Section 15.107- Conducted limits” and “Section 15.109-Radiated emission limits”.

Test Performed

Company name : **LTA Co., Ltd.**
Address : 34, Songju-ro 236Beon-gil, Yangji-myeon, Cheoin-gu Yongin-si, Gyeonggi-do 449-822, Korea
Telephone : +82-31-323-6008
Facsimile : +82-31-323-6010

Measurement uncertainty

Conducted Emissions	(0.15 to 30 MHz) :	± 2.80 [dB] (k=2)
Radiated Emissions	(30 to 1,000 MHz) :	H : ± 4.42 [dB] (k=2) V : ± 4.70 [dB] (k=2)
	(1 GHz to 6 GHz) :	H : ± 5.88 [dB] (k=2) V : ± 5.91 [dB] (k=2)
	(6 GHz to 18 GHz) :	H : ± 6.13 [dB] (k=2) V : ± 6.16 [dB] (k=2)

The coverage factor k=2 yields approx. a 95% level of confidence for near-normal distribution typical of most measurement results.

Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2023-09-30	ECT accredited Lab.
KOREA				
RRA	U.S.A	KR0049	2023-04-08	RRA accredited Lab.
CANADA				
C-14948				
VCCI	JAPAN	T-12416	2023-09-10	VCCI registration
		R-14483	2023-10-15	
		G-10847	2024-12-13	
KOLAS	KOREA	KT551	2025-10-12	KOLAS accredited Lab.

1- Brief Information

1-1 Test Summary

Parameter	Applied Standard	Status (note 1)
I. Emission		
Conducted Emissions	FCC Part 15.107	NA
Radiated Emissions	FCC Part 15.109	C
Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable		
* The data in this test report are traceable to the national or international standards.		

Frequency range to be scanned:

0.15 MHz - 30 MHz as conducted measurement

30 MHz to 5th harmonic of the highest frequency or 40 GHz, whichever is lower as radiated measurement.

Bandwidth:

Measured by the CISPR quasi-peak function Bandwidth is 9 kHz in the frequency 0.15 MHz to 30 MHz and 120 kHz in the frequency 30 MHz to 1,000 MHz.

Measured by the Peak function Bandwidth is 1 MHz in the frequency 1 GHz to 40 GHz.

A sample calculation:

COR. F (correction factor)= Antenna factor + Cable loss- Amp.gain- Distance correction

Emission Level= meter reading + COR.F

1-2 Test mode of the EUT

The tests have been conducted with the following operational mode(s) of the EUT.

Operating mode

1-3 Modification

- NONE

1-4 List of EUT and ACCESSORY

EUT				
Equipment Name	Model Name	Serial No.	Manufacturer	Remarks
Optical Fiber Identifier	SFI-10B	N/A	Fiberfox Inc.	Device to be tested
ACCESSORY				
Equipment Name	Model Name	Serial No.	Manufacturer	Remarks
NOTEBOOK	SPARQ	N/A	Hanseong	-
Optical Converter #1	SFC2000-TS/I	N/A	SOLTECH	-
Optical Converter #2	SFC2000-TS/I	N/A	SOLTECH	-

1-5 Cable List

Cable List						
From		To		Length (m)	Shielding	
Type	I/O Port	Type	I/O Port		Cable	backshell
NOTEBOOK	DC IN	ADAPTER	DC OUT	1.0	YES	Plastic
NOTEBOOK	LAN	Optical Converter #2	LAN	1.0	YES	Plastic
Optical Converter #1	DC IN	ADAPTER	DC OUT	1.0	YES	Plastic
Optical Converter #1	Optical Port	Optical Converter #2	Optical Port	1.2	NO	Plastic
Optical Converter #2	DC IN	ADAPTER	DC OUT	1.0	YES	Plastic

2- Test Site Description


1-Facility

All the testing facilities are periodically serviced as a daily check for equipment and cables systems, an every 1 year facility check for the facilities and annual calibration for testing equipment according to ISO/IEC 17025. All the testing facilities are used as the same specifications shown below. There are descriptions both for radiated disturbance measurement and conducted disturbance measurement conformed by ANSI C 63.4.


The NSA measurement of the 10 m chamber was performed on January 15, 2022 according to ANSI C 63.4.


The SVSWR measurement of the 10 m chamber was performed on October 15, 2022 according to ANSI C 63.4.

2-1 Conducted Emissions

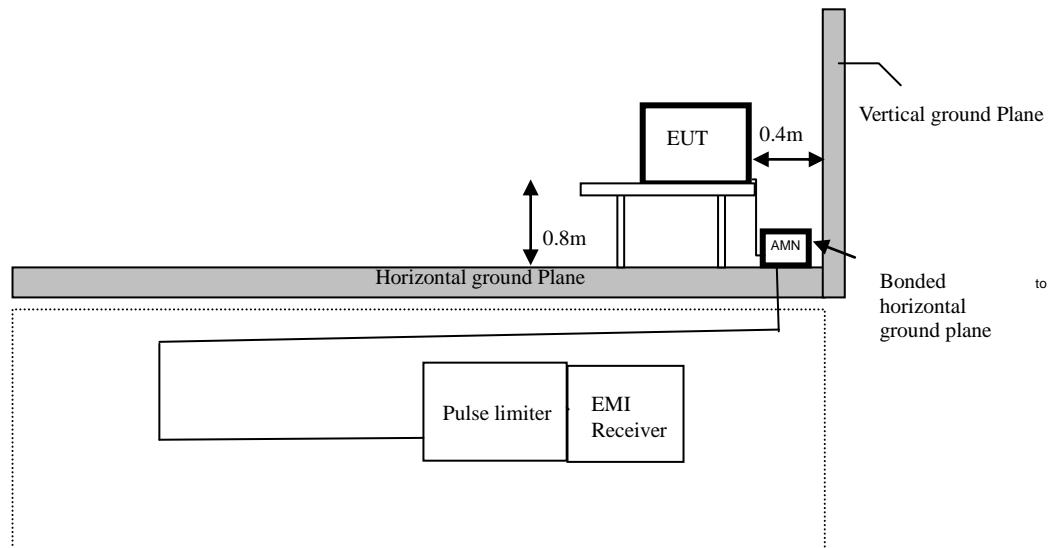

2-2 Radiated Emissions – Below 1 GHz

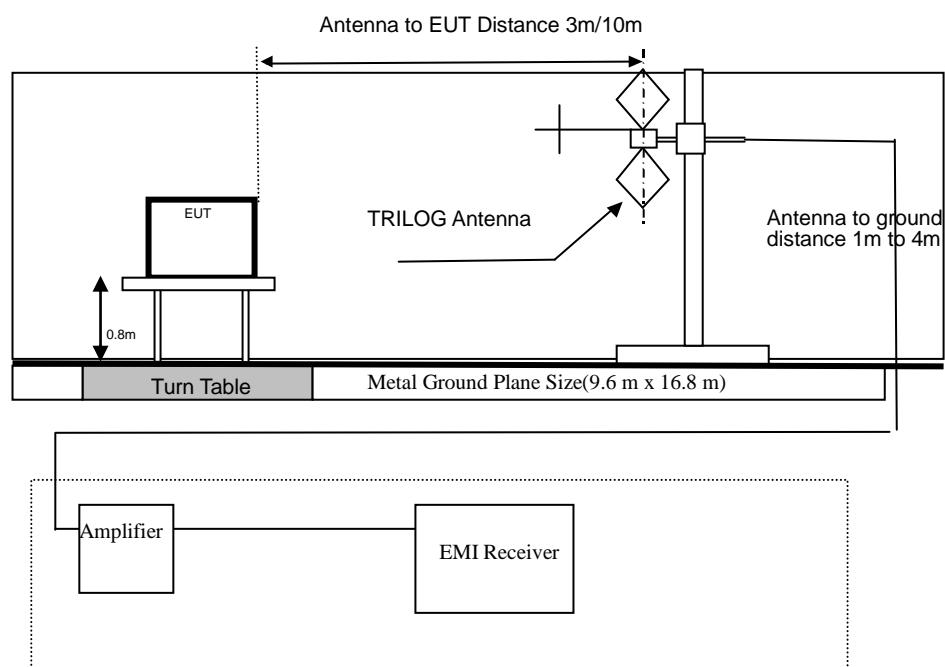

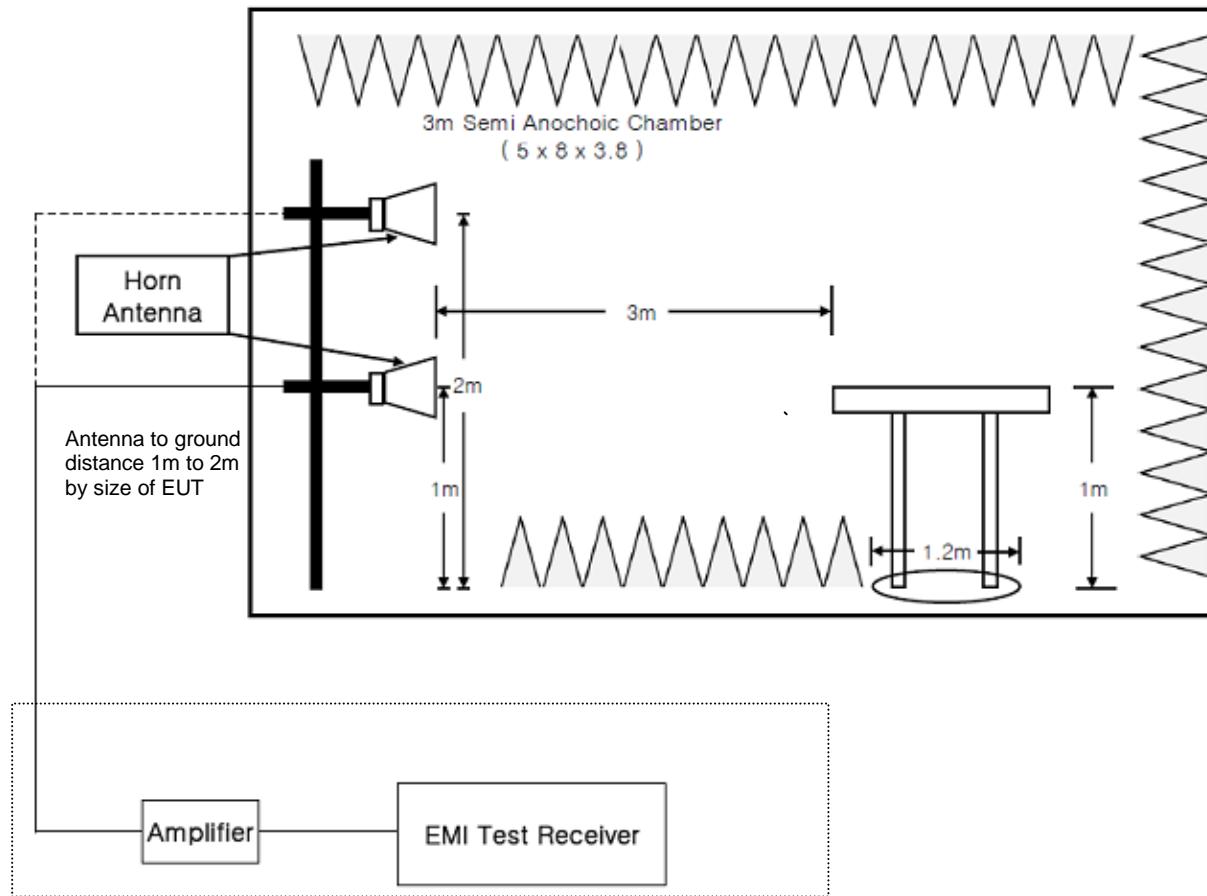2-3 Radiated Emissions – Above 1 GHz

3- Test Procedure

3-1 Conducted Emissions

- The measurement is carried out on an open site with horizontal and metallic ground plane.
- An AMN(Artificial Mains Network) with a nominal impedance ($50 \Omega / 50 \mu\text{H}$) as defined in ANSI C 63.4, shall be utilized.
- The AMN is grounded on a horizontal metal ground plane.
- Measurement is carried out using an EMI receiver with quasi-peak detectors and average detector.
(Refer to the List of test equipment used for the test.)
- The shortest distance between the EUT and the AMN is 0.8 m.
- The EUT is placed on the non-conducting table with 0.8 m height.
- Refer to "Brief Information"(page 7-8) about details of the EUT and configuration of the cables.
- Measurement is carried out as manual operation.
 - searching the maximum frequency point of the disturbance wave in each frequency range.
 - reading the disturbance level of quasi-peak, average and Line (L) and Neutral (N) in 9 kHz bandwidth by the EMI receiver.
 - calculating the measurement result with the following formula or equation.
(Result = Reading + Cor.F.(LISN Factor + Cable Loss + Pulse Limiter)
(ex) = $13.23 \text{ dB}\mu\text{V} + (9.63 \text{ dB} + 0.01 \text{ dB} + 9.86 \text{ dB})$
 = $32.73 \text{ dB}\mu\text{V}$

3-2 Radiated Emissions – Below 1 GHz

- Test site is met the requirements of ANSI C 63.4 and the distance between the EUT and the antenna is adjusted 3 m or 10 m.
- The turntable can be rotated 360 degrees.
- The antenna can be adjusted between 1 m and 4 m in height above the ground.
- The EUT is placed on the non-conducting table with 0.8 m height on the turntable.
- Measurements are carried out using an EMI receiver with quasi-peak detectors (120 kHz bandwidth).
- Refer to the list of test equipment used for the test.
- The TRILOG antenna are used as wideband antenna.
- The TRILOG antenna is used in the frequency range of 30 MHz to 1 000 MHz.
- A variable attenuator is used for verifying amplifier's linearity.
- Rotating the turntable and adjusting the height of the antenna are carried out by control buttons on the console.
- Refer to "Brief Information"(page 7-8) about details of the EUT and configuration of the cables.
- Measurement is carried out by a LTA operator as manual operation.
 - searching the worst direction with the maximum level of the disturbance wave in rotating the turntable 360 degrees at each searched frequency point.
 - setting the height of the antenna with the maximum level of the disturbance wave from 1 m to 4 m.
 - reading the disturbance level by the EMI receiver with quasi-peak detectors (120 kHz bandwidth) according to ANSI C 63.4.
 - measuring to vertical and horizontal polarization.
 - calculating the measurement result with the following formula or equation:
(Result = Reading + Cor.F (antenna factor + cable loss – PreAmp Gain)
(ex) = 50.6 dB μ V/m + (11.08 dB(1/m) + 1.31 dB - 27.32 dB)
= 35.67 dB μ V/m

3-3 Radiated Emissions – Above 1 GHz

- Test site is met the requirements of ANSI C 63.4 and the distance between the EUT and the antenna is adjusted 3 m.
- The turntable can be rotated 360 degrees.
- The antenna can be adjusted between 1 m and 4 m in height above the ground.
- The EUT is placed on the non-conducting table with 1 m height on the turntable.
- Measurements are carried out using an EMI receiver with peak and average detectors(1 MHz bandwidth).
- Refer to the list of test equipment used for the test.
- The HORN antenna are used as wideband antenna.
- The HORN antenna is used in the frequency range of 1 GHz to 18 GHz.
- A variable attenuator is used for verifying amplifier's linearity.
- Rotating the turntable and adjusting the height of the antenna are carried out by control buttons on the console.
- Refer to "Brief Information"(page 7-8) about details of the EUT and configuration of the cables.
- Measurement is carried out by a LTA operator as manual operation.
 - searching the worst direction with the maximum level of the disturbance wave in rotating the turntable 360 degrees at each searched frequency point.
 - setting the height of the antenna with the maximum level of the disturbance wave from 1 m to 4 m
 - reading the disturbance level by the EMI receiver with peak and average detectors (1 MHz bandwidth) according to ANSI C 63.4.
 - measuring to vertical and horizontal polarization.
 - calculating the measurement result with the following formula or equation:
(Result = Reading + Cor.F (antenna factor + cable loss – PreAmp Gain)
(ex) = 35.9 dB μ V/m + (23.92 dB(1/m) + 7.01 dB - 28.33 dB)
 = 38.5 dB μ V/m

4- List of Equipment Used For the Tests

Conducted Emissions

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input type="checkbox"/>	EMI TEST Receiver	ESR	Rohde & Schwarz	101499	2023.03.14	1 year
<input type="checkbox"/>	Pulse Limiter	ESH3-Z2	Rohde & Schwarz	100710	2023.03.14	1 year
<input type="checkbox"/>	LISN	ESH3-Z6	Rohde & Schwarz	100378	2023.08.29	1 year
<input type="checkbox"/>	LISN	ESH3-Z6	Rohde & Schwarz	101468	2023.08.29	1 year
<input type="checkbox"/>	LISN(main)	ENV216	Rohde & Schwarz	100408	2023.08.29	1 year
<input type="checkbox"/>	LISN(sub)	LT32C/10	AFJ	32031518210	2023.08.29	1 year
<input type="checkbox"/>	TEST PROGRAM	e3_ce 20181212a (V9)	AUDIX	-	-	-

Radiated Emissions – Below 1 GHz

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESCI7	Rohde & Schwarz	100772	2023.08.29	1 year
<input checked="" type="checkbox"/>	Amplifier	8447D	HP	10383	2023.08.29	1 year
<input checked="" type="checkbox"/>	BILOG Antenna	VULB 9168	SCHWARZBECK	775	2023.03.22	2 year
<input checked="" type="checkbox"/>	TEST PROGRAM	e3 20181212a (V9)	AUDIX	-	-	-

Radiated Emissions – Above 1 GHz

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input type="checkbox"/>	EMI TEST Receiver	ESCI7	Rohde & Schwarz	100772	2023.08.29	1 year
<input type="checkbox"/>	EMI TEST Receiver	ESU	Rohde & Schwarz	100092	2023.08.29	1 year
<input type="checkbox"/>	Amplifier	8449B	Agilent	3008A02126	2023.03.14	1 year
<input type="checkbox"/>	Amplifier	PAM-840A	COM-POWER	461314	2023.03.17	1 year
<input type="checkbox"/>	HORN ANTENNA	3116B	ETS	133350	2024.03.22	2 year
<input type="checkbox"/>	HORN ANTENNA	3116B	ETS	81109	2024.04.25	2 year
<input type="checkbox"/>	HORN ANTENNA	3115	ETS	114105	2023.05.12	2 year
<input type="checkbox"/>	TEST PROGRAM	e3 20181212a (V9)	AUDIX	-	-	-

5- EMISSION

5-1 Conducted Emissions

Not Applicable

5-2 Radiated Emissions

(Below 1 GHz) / V



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: SFI-10B

Temp/Humi: 17 'C / 27 % R.H.

Test Mode : Operating mode

Tested by: AHN H Y

Power : DC 3 V

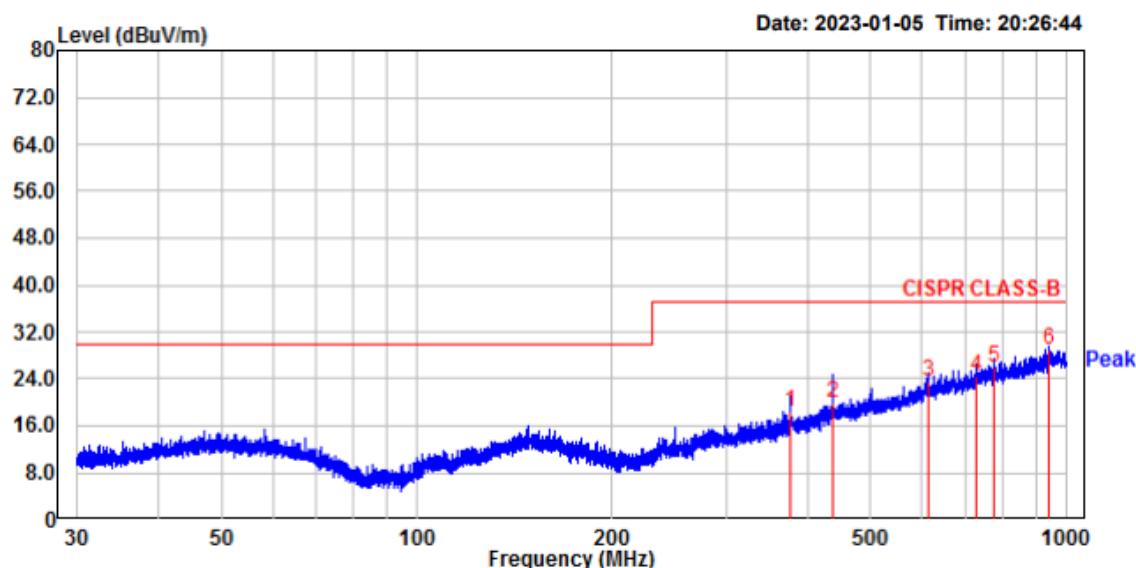

No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB	cm	deg	
1.	375.12	24.69	-6.41	18.28	37.00	18.72	105	249	vertical
2.	437.50	24.34	-4.41	19.93	37.00	17.07	204	0	vertical
3.	611.80	23.57	-0.12	23.45	37.00	13.55	395	12	vertical
4.	727.44	22.17	2.29	24.46	37.00	12.54	394	99	vertical
5.	775.52	22.94	3.12	26.06	37.00	10.94	144	22	vertical
6.	939.66	23.42	5.69	29.11	37.00	7.89	145	358	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

(Below 1 GHz) / H


4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: SFI-10B

Temp/Humi: 17 'C / 27 % R.H.

Test Mode : Operating mode

Tested by: AHN H Y

Power : DC 3 V

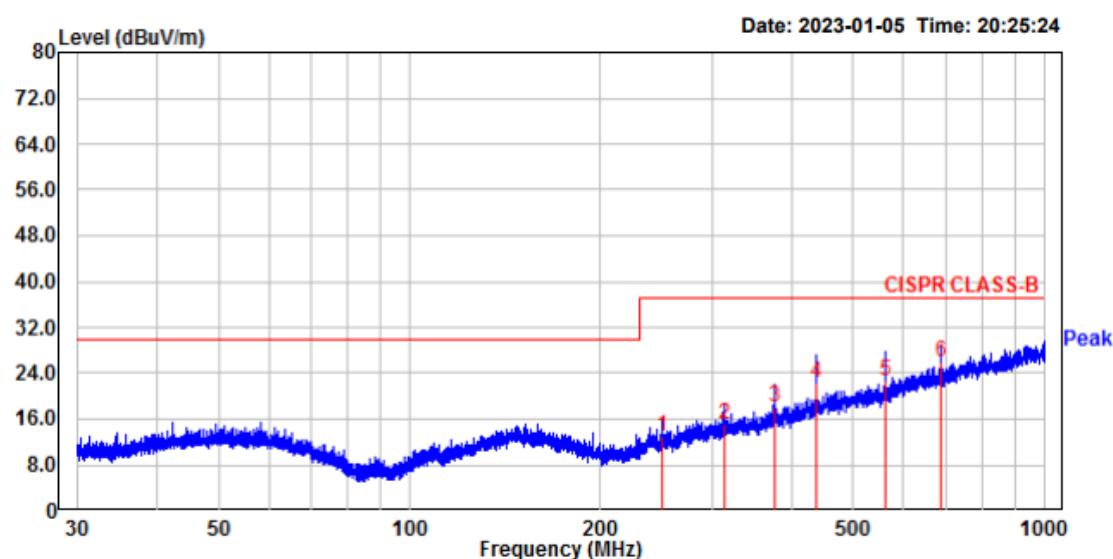

No.	Freq	Reading	C.F	Result QP	Limit	Margin	Height	Angle	Polarity
	MHz	dB μ V	dB	dB μ V/m	dB μ V/m	dB	cm	deg	
1.	250.08	23.66	-10.80	12.86	37.00	24.14	294	336	horizontal
2.	312.59	23.47	-8.35	15.12	37.00	21.88	274	206	horizontal
3.	375.12	24.66	-6.41	18.25	37.00	18.75	187	178	horizontal
4.	437.50	26.87	-4.41	22.46	37.00	14.54	176	348	horizontal
5.	562.66	24.54	-1.97	22.57	37.00	14.43	151	338	horizontal
6.	687.75	24.65	1.23	25.88	37.00	11.12	102	228	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Conclusions

Product models "**SFI-10B**" meets all of the Class B requirements of the FCC Part 15, Subpart B. Limits of radio disturbance characteristics of ITE).

(Refer to Test Specification and Test Results in the "LTA certification", page 4 and 5)

Photograph of the measurements

Conducted Emissions

Not Applicable

Not Applicable

Radiated Emissions - Below 1 GHz
