

Test Report 22-1-0097501T011a

Number of pages:	25	Date of Report:	2023-Nov-22
Testing company:	cetecom advanced GmbH Untertuerkheimer Str. 6-10 66117 Saarbruecken GERMANY	Applicant:	Servus Intralogistics GmbH
Product:	Transport Robot		
Model:	Transport Robot Generation 5		
FCC ID:	2BANM-TRGEN5 Contains FCC ID: XF6-M7DB7	IC:	30441-TRGEN5 Contains IC ID: 8407A-M7DB7
Testing has been carried out in accordance with:	FCC Regulations Title 47 CFR, Chapter I, Subchapter A, Part 15, Subpart C §15.225 ISED Regulations RSS-Gen, Issue 5 + Amendment 2 RSS-210, Issue 10 Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".each section under "Test method and limit".		
Tested Technology:	SRD / NFC 13.56MHz		
Test Results:	☒ The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Signatures:	Dipl.-Ing. (FH) Andreas Luckenbill M.Sc. Head of Compliance Testing Authorization of test report Timo Franke Test Manager Responsible of test report		

Table of Contents

Table of Annex.....	3
1 General information	4
1.1 Disclaimer and Notes.....	4
1.2 Attestation.....	4
1.3 Summary of Test Results	5
1.4 Summary of Test Methods	5
2 Administrative Data	6
2.1 Identification of the Testing Laboratory	6
2.2 General limits for environmental conditions.....	6
2.3 Test Laboratories sub-contracted.....	6
2.4 Organizational Items	6
2.5 Applicant's details	6
2.6 Manufacturer's details	6
2.7 Equipment under Test (EUT)	7
2.8 Untested Variant (VAR)	7
2.9 Auxiliary Equipment (AE).....	7
2.10 Connected cables (CAB).....	7
2.11 Software (SW).....	7
2.12 EUT set-ups.....	7
2.13 EUT operation modes	8
3 Equipment under test (EUT)	9
3.1 General Data of Main EUT as Declared by Applicant.....	9
3.2 Detailed Technical data of Main EUT as Declared by Applicant	9
3.3 Modifications on Test sample.....	9
4 Measurements.....	10
4.1 Radiated field strength emissions and emission mask	10
4.2 Radiated field strength emissions below 30 MHz	12
4.3 Radiated field strength emissions 30 MHz – 1 GHz	16
4.4 Occupied Channel Bandwidth 99%.....	18
4.5 Frequency stability	19
4.6 Equipment lists	22
5 Results from external laboratory	23
6 Opinions and interpretations.....	23
7 List of abbreviations	23
8 Measurement Uncertainty valid for conducted/radiated measurements	24
9 Versions of test reports (change history)	25

Table of Annex

Annex No.	Contents	Reference Description	Total Pages
Annex 1	Test result diagrams	TR22-1-0097501T011a-A1	83
Annex 2	Internal photographs of EUT	To be supplied by applicant	--
Annex 3	External photographs of EUT	TR22-1-0097501T011a_A3	4
Annex 4	Test set-up photographs	TR22-1-0097501T011a_A4	4
The listed attachments are separate documents.			

1 General information

1.1 Disclaimer and Notes

The test results of this test report relate exclusively to the test item specified in this test report as specified in chapter 2.7. cetecom advanced does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced.

The testing service provided by cetecom advanced has been rendered under the current "General Terms and Conditions for cetecom advanced".

cetecom advanced will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced test report include or imply any product or service warranties from cetecom advanced, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced.

All rights and remedies regarding vendor's products and services for which cetecom advanced has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at cetecom advanced.

Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

1.2 Attestation

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Industry Canada standards. All of the above requirements are met in accordance with enumerated standards.

1.3 Summary of Test Results

The EUT integrates a **RFID** transmitter. Other implemented wireless technologies were not considered within this test report.

Test case	Reference Clause FCC ☒	Reference Clause ISED ☒	Page	Remark	Result
Radiated field strength emissions and emission mask	§15.225(a)(b)(c)(d)	RSS-210, Issue 10, Annex B.6 (a)	10	--	PASSED
Radiated field strength emissions below 30 MHz	§15.209(a)	RSS-Gen: Issue 5 §8.9 Table 6	14	--	PASSED
Radiated field strength emissions 30 MHz – 1 GHz	§15.209(a)	RSS-Gen: Issue 5 §8.9 Table 5	16	--	PASSED
Occupied Channel Bandwidth 99%	§2.202(a) §2.1049(h)	RSS-Gen, Issue 5, §6.6	18	--	PASSED
Frequency stability	§2.1055 §15.225(e)	RSS-210, Issue 10, Annex B.6 (b)	19	--	PASSED
AC-Power Lines Conducted Emissions	§15.207	RSS-Gen Issue 5: §8.8, Table 4	--	--	NP

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

N/A

Test case does not apply to the test object.

NP

The test was not performed by the cetecom advanced laboratory.

Decision Rule: cetecom advanced GmbH follows [ILAC G8:2019 chapter 4.2.1 \(Simple Acceptance Rule\)](#).

1.4 Summary of Test Methods

Test case	Test method
Occupied Channel Bandwidth 99%	ANSI C63.10:2013, §6.9
Radiated field strength emissions below 30 MHz	ANSI C63.10-2013 §6.3, §6.4
Radiated field strength emissions 30 MHz- 1 GHz	ANSI C63.4-2014 §8.2.3, ANSI C63.10-2013 §6.3, § 6.5
Frequency stability tests	ANSI C63.10-2013; §6.8
AC-Power Lines Conducted Emissions	ANSI C63.4-2014 §7, ANSI C63.10-2013 § 6.2

2 Administrative Data

2.1 Identification of the Testing Laboratory

Company name:	cetecom advanced GmbH
Address:	Untertuerkheimer Str. 6-10 66117 Saarbruecken Germany
Responsible for testing laboratory:	Dipl.-Ing. (FH) Andreas Luckenbill M.Sc.
Accreditation scope:	DAkkS Webpage: FCC ISED
IC Lab company No. / CAB ID:	3462D / DE0005
Test location:	Im Teelbruch 116; 45219 Essen

2.2 General limits for environmental conditions

Temperature:	22±2 °C
Relative. humidity:	45±15% rH

2.3 Test Laboratories sub-contracted

Company name:	--
---------------	----

2.4 Organizational Items

Responsible test manager:	Timo Franke
Receipt of EUT:	2023-Apr-24
Date(s) of test:	2023-Apr- 14 to 2023-Mai-15
Version of template:	22.0901

2.5 Applicant's details

Applicant's name:	Servus Intralogistics GmbH
Address:	Dr. Walter Zumtobel Str. 2 6850 Dornbirn Austria
Contact Person:	Mr. Dominik Kresser
Contact Person's Email:	dominik.kresser@servus.info

2.6 Manufacturer's details

Manufacturer's name:	Servus Intralogistics GmbH
Address:	Dr. Walter Zumtobel Str. 2 6850 Dornbirn Österreich

2.7 Equipment under Test (EUT)

EUT No. *)	Sample No.	Product	Model	Type	SN	HW	SW
EUT 1	22-1-00975S08_C01	Transport Robot	Transport Robot Generation 5	N/A	N/A	1	2
EUT 2	22-1-00975S03_C01	PCB with wireless applications	344887 ARC-CPU-V3 HF-Board	N/A	344887	1.1	N/A

*) EUT short description is used to simplify the identification of the EUT in this test report.

2.8 Untested Variant (VAR)

VAR No. *)	Sample No.	Product	Model	Type	SN	HW	SW
------------	------------	---------	-------	------	----	----	----

*) The listed additional untested model variant(s) (VAR) is/are not object of evaluation of compliance. For further information please see Annex 5: Declaration of applicant of model differences.

If the table above does not show any other line than the headline, no untested variants are available.

2.9 Auxiliary Equipment (AE)

AE No. *)	Sample No.	Auxiliary Equipment	Model	SN	HW	SW
AE 1	22-1-00975S09_C01	RFID Antenna	n/a	n/a	n/a	n/a
AE 2	22-1-00975S06_C01	Notebook	HP Elitebook 850	0043	--	--

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report. If the table above does not show any other line than the headline, no AE was used during testing nor was taken into account for evaluation

2.10 Connected cables (CAB)

CAB No. *)	Sample No.	Cable Type	Connectors / Details	Length
CAB 1	22-1-00975S05_C01	USB Cable	--	180 cm

*) CAB short description is used to simplify the identification of the connected cables in this test report. If the table above does not show any other line than the headline, no cable was used during testing nor was taken into account for evaluation

2.11 Software (SW)

SW No. *)	Sample No.	SW Name	Description	SW Status
-----------	------------	---------	-------------	-----------

*) SW short description is used to simplify the identification of the used software in this test report. If the table above does not show any other line than the headline, no SW was used during testing nor was taken into account for evaluation.

2.12 EUT set-ups

set-up no. *)	Combination of EUT and AE	Description
SET. 1	EUT 1 + (CAB1 + AE2)	Used for Radiated emission measurements in anechoic-chamber. CAB1 and AE2 used temporary for operating set-up.
SET. 2	EUT 2 + AE 1 + (CAB1 + AE2)	Used for conducted measurements in climatic chamber. CAB1 and AE2 used temporary for operating set-up.

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

2.13 EUT operation modes

EUT operating mode no. *)	Operating modes	Additional information
OP. 1	Single Subcarrier modulated 100%	Continuous transmissions at 100% duty-cycle with help of software commands on AE2.

*) EUT operating mode no. is used to simplify the test report.

3 Equipment under test (EUT)

3.1 General Data of Main EUT as Declared by Applicant

Firmware	☐ for normal use	☒ Special version for test execution	
Power supply	☐ AC Mains	--	
	☐ DC Mains	-- V DC via -- Connector	
	☒ Battery	Lithium Ion battery	
Operational conditions	T _{nom} = 21 °C	T _{min} 0 °C	T _{max} = +75 °C
EUT sample type	Pre-Production		
Weight	67 kg		
Size [LxWxH]	90.0 cm x 88.0 cm x 25.0 cm		
Interfaces/Ports	--		
For further details refer Applicants Declaration & following technical documents			
Chapter10_Service Manual Max_EN.pdf			
GA_Max_XD10810-EN_R8_2020-05_Gesamt.pdf			

3.2 Detailed Technical data of Main EUT as Declared by Applicant

Frequency Band	13.110 MHz – 14.010 MHz		
Number of Channels (USA/Canada -bands)	1, nominal at 13.56 MHz		
Nominal Channel Bandwidth	n/a		
Type of Modulation Data Rate	ASK		
Other wireless options	☒ a/n/ac mode (not tested within this report) ☒ b/g/n mode (not tested within this report) ☐ Bluetooth EDR (not tested within this report) ☐ Cellular transceiver (2G/3G/4G/5G/GPS, not tested in this report)		
Max. Conducted Output Power	n/a		
Antenna Type	Loop Antenna		
Antenna Gain	n/a for loop antennas		
FCC label attached	No		
Test firmware / software and storage location	EUT		
For further details refer Applicants Declaration & following technical documents			
Description of Reference Document (supplied by applicant)	Version	Total Pages	
"NFC tests, IEA1565 – ARC4"	04/21/2023	9	

3.3 Modifications on Test sample

Additions/deviations or exclusions	--
------------------------------------	----

4 Measurements


4.1 Radiated field strength emissions and emission mask

4.1.1 Description of the general conducted test setup and methodology, see below example:

Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter "General Limit - Radiated field strength emissions below 30 MHz". The tests are performed in the semi anechoic room recognized by the regulatory commission.

Schematic:

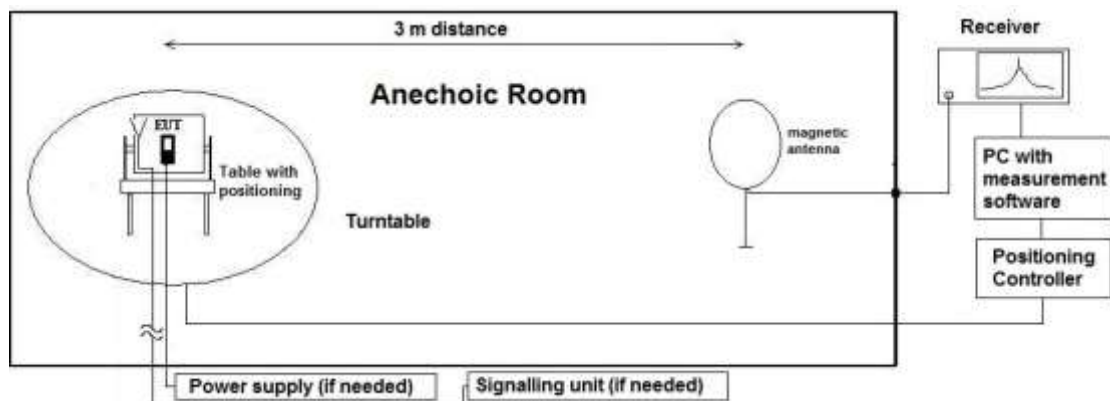

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page Fehler! Textmarke nicht definiert.)

4.1.2 Measurement Location

Test site	120901 - SAC - Radiated Emission <1GHz
-----------	--

4.1.3 Limit

Frequency Range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector	RBW [kHz]	Remark
13.553 – 13.567	15,848 at 30 m	84	PEAK	10	PEAK, TRACE max-hold mode, repetitive scan for exploratory measurements Quasi-Peak, for final measurement on critical frequencies ($f < 1\text{GHz}$)
13.410 – 13.553 and 13.567 – 13.710	334 at 30 m	50.47			
13.110 – 13.410 and 13.710 – 14.010	106 at 30 m	40.5			
$f \leq 13.110 - 14.010 \geq f$	30 at 30 m	29.5			

4.1.4 Result

Diagram	Channel	Mode	Maximum Level [dB μ V/m]	Result
2.01a	nominal	1	36.53	Passed
2.01b	nominal	1	35.67	Passed

Remark 1: for more information and graphical plot see annex A1 **TR22-1-0097501T011a-A1**


4.2 Radiated field strength emissions below 30 MHz

4.2.1 Description of the general test setup and methodology, see below example:

Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter "General Limit - Radiated field strength emissions below 30 MHz". The tests are performed in the semi anechoic room recognized by the regulatory commission.

Schematic:

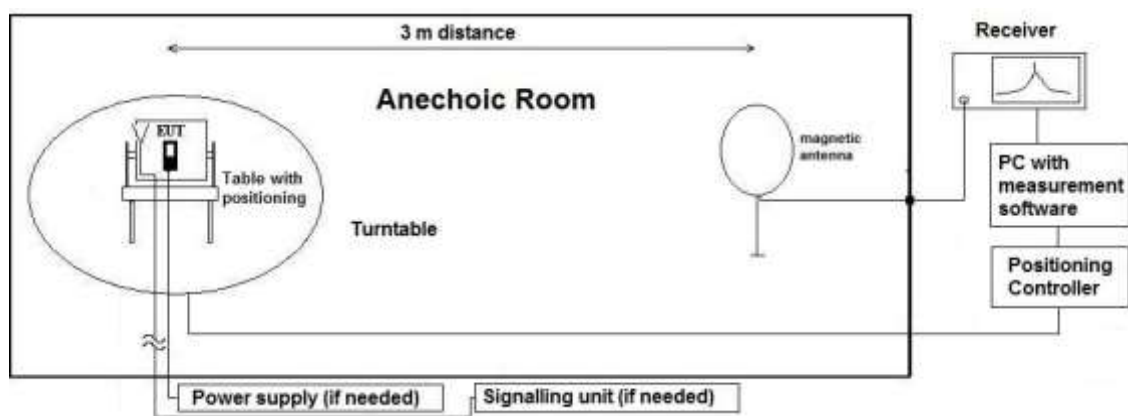

Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded.

The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

E_C = Electrical field – corrected value

E_R = Receiver reading

G_A = Gain of pre-amplifier (if used)

L_T = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

4.2.2 Sample calculation

Raw-Value [dBuV/m]	Antenna factor	Distance Correction [dB]	Cable Loss	Preamplifier	Resulting correction value [dB]	Final result [dBuV/m]	Remarks
19.83	18.9	-70.75	0.18	--	-51.67	-31.83	30 to 3 m correction used according ANSI C63.10-2013

Remark: This calculation is based on an example value at 458 kHz

4.2.3 Measurement Location

Test site	120901 - SAC3 - Radiated Emission <1GHz
-----------	---

4.2.4 Correction factors due to reduced meas. distance ($f < 30$ MHz):

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according Extrapolation formulas valid for EUT's with maximum dimension of $0.625 \times \text{Lambda}$. Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors

Frequency Range	f [kHz/MHz]	Lambda [m]	Far-Field Point [m]	Distance Limit accord. 15.209 [m]	1st Condition (dmeas < Dnear-field)	2nd Condition (Limit distance bigger dnear-field)	Distance Correction accord. Formula
kHz	9	33333.33	5305.17	300	fulfilled	not fulfilled	-80.00
	10	30000.00	4774.65		fulfilled	not fulfilled	-80.00
	20	15000.00	2387.33		fulfilled	not fulfilled	-80.00
	30	10000.00	1591.55		fulfilled	not fulfilled	-80.00
	40	7500.00	1193.66		fulfilled	not fulfilled	-80.00
	50	6000.00	954.93		fulfilled	not fulfilled	-80.00
	60	5000.00	795.78		fulfilled	not fulfilled	-80.00
	70	4285.71	682.09		fulfilled	not fulfilled	-80.00
	80	3750.00	596.83		fulfilled	not fulfilled	-80.00
	90	3333.33	530.52		fulfilled	not fulfilled	-80.00
	100	3000.00	477.47		fulfilled	not fulfilled	-80.00
	125	2400.00	381.97		fulfilled	not fulfilled	-80.00
	200	1500.00	238.73		fulfilled	fulfilled	-78.02
	300	1000.00	159.16		fulfilled	fulfilled	-74.49
	400	750.00	119.37		fulfilled	fulfilled	-72.00
	490	612.24	97.44		fulfilled	fulfilled	-70.23
	500	600.00	95.49	30	fulfilled	not fulfilled	-40.00
	600	500.00	79.58		fulfilled	not fulfilled	-40.00
	700	428.57	68.21		fulfilled	not fulfilled	-40.00
	800	375.00	59.68		fulfilled	not fulfilled	-40.00
	900	333.33	53.05		fulfilled	not fulfilled	-40.00
MHz	1.00	300.00	47.75		fulfilled	not fulfilled	-40.00
	1.59	188.50	30.00		fulfilled	not fulfilled	-40.00
	2.00	150.00	23.87		fulfilled	fulfilled	-38.02
	3.00	100.00	15.92		fulfilled	fulfilled	-34.49
	4.00	75.00	11.94		fulfilled	fulfilled	-32.00
	5.00	60.00	9.55		fulfilled	fulfilled	-30.06
	6.00	50.00	7.96		fulfilled	fulfilled	-28.47
	7.00	42.86	6.82		fulfilled	fulfilled	-27.13
	8.00	37.50	5.97		fulfilled	fulfilled	-25.97
	9.00	33.33	5.31		fulfilled	fulfilled	-24.95
	10.00	30.00	4.77		fulfilled	fulfilled	-24.04
	10.60	28.30	4.50		fulfilled	fulfilled	-23.53
	11.00	27.27	4.34		fulfilled	fulfilled	-23.21
	12.00	25.00	3.98		fulfilled	fulfilled	-22.45
	13.56	22.12	3.52		fulfilled	fulfilled	-21.39
	15.00	20.00	3.18		fulfilled	fulfilled	-20.51
	15.92	18.85	3.00		fulfilled	fulfilled	-20.00
	17.00	17.65	2.81		not fulfilled	fulfilled	-20.00
	18.00	16.67	2.65		not fulfilled	fulfilled	-20.00
	20.00	15.00	2.39		not fulfilled	fulfilled	-20.00
	21.00	14.29	2.27		not fulfilled	fulfilled	-20.00
	23.00	13.04	2.08		not fulfilled	fulfilled	-20.00
	25.00	12.00	1.91		not fulfilled	fulfilled	-20.00
	27.00	11.11	1.77		not fulfilled	fulfilled	-20.00
	29.00	10.34	1.65		not fulfilled	fulfilled	-20.00
	30.00	10.00	1.59		not fulfilled	fulfilled	-20.00

4.2.5 Limit

Radiated emissions limits, (3 meters)					
Frequency Range [MHz]	Limit [$\mu\text{V}/\text{m}$]	Limit [$\text{dB}\mu\text{V}/\text{m}$] *	Distance [m]	Detector	RBW [kHz]
0.009 – 0.09	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	0.2
0.09 – 0.11	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Quasi peak	0.2
0.11 – 0.15	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	0.2
0.15 – 0.49	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	9
0.49 – 1.705	24000 / f [kHz]	87.6 – 20Log(f) (kHz)	30	Quasi peak	9
1.705 - 30	30	29.5	30	Quasi peak	9

*Remark: In Canada same limits apply, just unit reference is different

4.2.6 Result

Diagram	Channel	Op.Mode	Maximum Level [$\text{dB}\mu\text{V}/\text{m}$] Frequency Range 0.009 – 30 MHz	Result
2.02	Nominal 13.56MHz	1	16.89@4.09MHz	Passed


Remark: for more information and graphical plot see annex A1 **TR22-1-0097501T011a-A1**

4.3 Radiated field strength emissions 30 MHz – 1 GHz

4.3.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant semi anechoic room (SAR) and fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

Schematic:

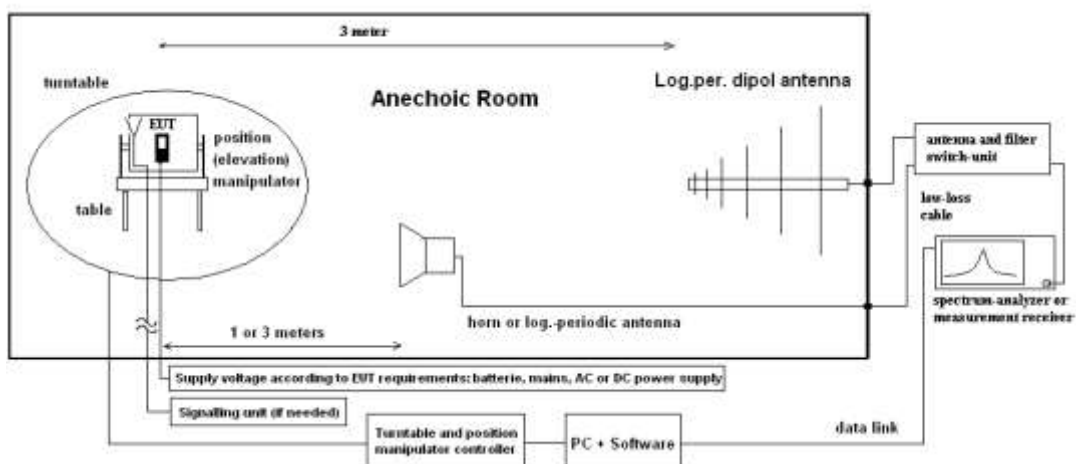

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 90°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

Measurement antenna: horizontal and vertical, heights: 1,0 m and 1,82 m as worst-case determined by an exploratory emission measurements. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by main-taining the EUT's worst-case operation mode, cable position, etc. either on 10m OATS or 3m semi-anechoic room.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height between 1 m and 4 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

E_C = Electrical field – corrected value

E_R = Receiver reading

G_A = Gain of pre-amplifier (if used)

L_T = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

4.3.2 Sample calculation

Raw-Value [dBuV/m]	Antenna factor	Distance Correction [dB]	Cable Loss	Preamplifier	Resulting correction value [dB]	Final result [dBuV/m]	Remarks
32.7	22.25	--	3.1	--	25.35	58.05	--

Remark: This calculation is based on an example value at 800.4 MHz

4.3.3 Measurement Location

Test site	120901 - SAC - Radiated Emission <1GHz
-----------	--

4.3.4 Limit

Radiated emissions limits, (3 meters)				
Frequency Range [MHz]	Limit [μV/m]	Limit [dBμV/m]	Detector	RBW / VBW [kHz]
30 - 88	100	40.0	Quasi peak	100 / 300
88 - 216	150	43.5	Quasi peak	100 / 300
216 - 960	200	46.0	Quasi peak	100 / 300
960 - 1000	500	54.0	Quasi peak	100 / 300

4.3.5 Result

Diagram	Channel	Op.Mode	Maximum Level [dBμV/m] Frequency Range 30 – 1000 MHz	Result
3.01_RSE_NFC	Nominal 13.56MHz	1	43.89@899.99MHz	Passed


Remark: for more information and graphical plot see annex A1 **TR22-1-0097501T011a-A1**

4.4 Occupied Channel Bandwidth 99%

4.4.1 Description of the general conducted test setup and methodology, see below example:

The EUT's RF-signal is coupled out by a suitable antenna coupling connector (1). The signal is first attenuated (2) then connected to spectrum-analyzer (4) for RF-conducted measurements. The specific attenuation loss is determined prior to the measurement within a set-up attenuation measurement. These are then taken into account by correcting the measurement readings of the spectrum-analyzer.

Schematic:

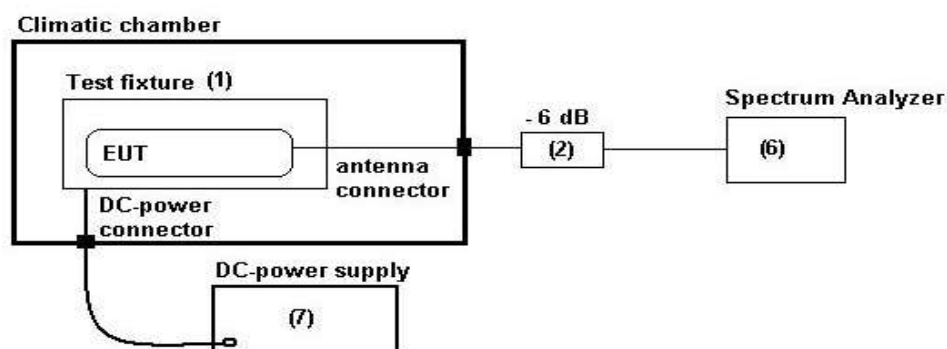

Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

EUT settings

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.

4.4.2 Measurement Location

Test site	120911 - Radio Laboratory 2
-----------	-----------------------------

4.4.3 Limit

When the occupied bandwidth limit is not stated in the applicable reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

4.4.4 Result

Diagram	Op.Mode	Channel	Frequency [MHz]	99% Occupied bandwidth [kHz]
D100	1	Nominal	13.56MHz	278.8

Remark: for more information and graphical plot see annex A1 **TR22-1-0097501T011a-A1**

4.5 Frequency stability

4.5.1 Description of the general test setup and methodology, see below example:


A sniffer antenna acts like a coupling antenna for measuring the fundamental frequency. This is placed at about 20cm away from the equipment. Also connecting cables at the equipment are avoided on the extent possible in order not to degrade the resonance frequency of the equipment and integral antenna.

If the equipment is capable of producing an un-modulated carrier then a trace with max-hold function was recorded. The maximum peak within the span was found, then the frequency deviation was recorded with the build-in frequency counter within the spectrum-analyze. The maximum resolution was chosen on the settings.

The frequency deviation was recorded at switching on point of the equipment and on 2 minutes, 5 minutes and 10 minutes after at in accordance with ANSI 63.10: 2013, Chapter 6.8

All measurements data are enclosed in annex measurements. Here only maximum frequency error is reported.

Schematic:

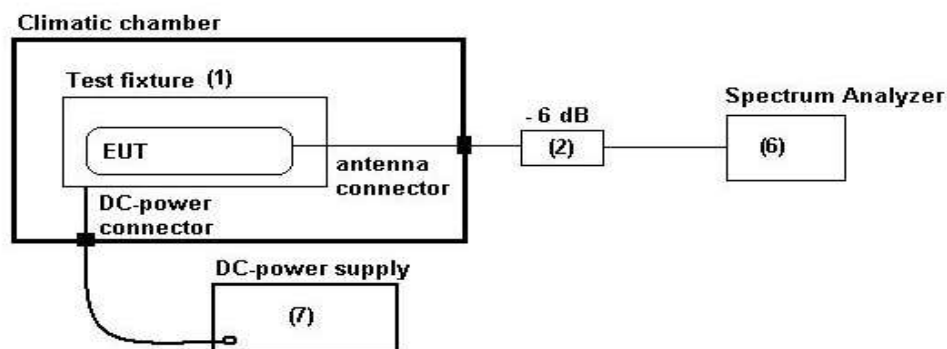

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

4.5.2 Measurement Location

Test site	120911 - Radio Laboratory 2
-----------	-----------------------------

4.5.3 Limit

Frequency Range [MHz]	Frequency tolerance			Remarks
	%	[ppm]	[Hz]	
13.553 – 13.567	±0.01	±100	±1355.99207	For voltage variation
13.553 – 13.567	±0.01	±100	±1355.99743	For temperature variation

Remark: for more information and graphical plot see annex A1 **TR22-1-0097501T011a-A1**

4.5.4 Results for variable voltage: set-up 2

DC power supply					
Nominal condition					
V _{nom} = 4.1 V (full battery) T _{nom} = 21°C	13.55989230	MHz	Limit-> 100ppm:	1355.98923	Hz
			f _{MIN} :	13.55853631	MHz
			f _{MAX} :	13.56124829	MHz
Extreme conditions regarding voltage					
Voltage	Frequency measured	Values for Frequency Error			
[V]	[MHz]	[Hz]	[%]	[ppm]	
V _{MAX}	26.00	13.5598919	-0.4000000	-0.000003	-0.03
	25.90	13.5598921	-0.2000000	-0.000001	-0.01
	25.80	13.5598921	-0.2000000	-0.000001	-0.01
	25.70	13.5598921	-0.2000000	-0.000001	-0.01
	25.60	13.5598921	-0.2000000	-0.000001	-0.01
	25.50	13.5598921	-0.2000000	-0.000001	-0.01
	25.40	13.5598922	-0.1000000	-0.000001	-0.01
	25.30	13.5598922	-0.1000000	-0.000001	-0.01
	25.20	13.5598922	-0.1000000	-0.000001	-0.01
	25.10	13.5598922	-0.1000000	-0.000001	-0.01
	25.00	13.5598922	-0.1000000	-0.000001	-0.01
	24.90	13.5598922	-0.1000000	-0.000001	-0.01
	24.80	13.5598922	-0.1000000	-0.000001	-0.01
	24.70	13.5598922	-0.1000000	-0.000001	-0.01
	24.60	13.5598922	-0.1000000	-0.000001	-0.01
	24.50	13.5598922	-0.1000000	-0.000001	-0.01
	24.40	13.5598922	-0.1000000	-0.000001	-0.01
	24.30	13.5598922	-0.1000000	-0.000001	-0.01
	24.20	13.5598923	0.0000000	0.000000	0.00
	24.10	13.5598923	0.0000000	0.000000	0.00
	24.00	13.5598923	0.0000000	0.000000	0.00
	23.90	13.5598922	-0.1000000	-0.000001	-0.01
	23.80	13.5598923	0.0000000	0.000000	0.00
	23.70	13.5598923	0.0000000	0.000000	0.00
	23.60	13.5598923	0.0000000	0.000000	0.00
	23.50	13.5598923	0.0000000	0.000000	0.00
	23.40	13.5598923	0.0000000	0.000000	0.00
	23.30	13.5598923	0.0000000	0.000000	0.00
	23.20	13.5598923	0.0000000	0.000000	0.00
	23.10	13.5598923	0.0000000	0.000000	0.00
	23.00	13.5598923	0.0000000	0.000000	0.00
	22.90	13.5598923	0.0000000	0.000000	0.00
	22.80	13.5598923	0.0000000	0.000000	0.00
	22.70	13.5598924	0.1000000	0.000001	0.01
	22.60	13.5598923	0.0000000	0.000000	0.00
	22.50	13.5598924	0.1000000	0.000001	0.01
	22.40	13.5598924	0.1000000	0.000001	0.01
	22.30	13.5598924	0.1000000	0.000001	0.01
	22.20	13.5598924	0.1000000	0.000001	0.01
	22.10	13.5598924	0.1000000	0.000001	0.01
V _{MIN}	22.00	13.5598924	0.1000000	0.000001	0.01

Remark: for more information and graphical plot see annex A1 TR22-1-0097501T011a-A1

4.5.5 Results for variable temperature: set-up 2

Nominal condition								
Vnom = 24.0V (DC Supply) Tnom = 21°C	Measured Reference frequency [MHz]	13.5599302	Limit-> 100 ppm:	1355.99302	Hz	f _{MIN} :	13.558574	MHz
						f _{MAX} :	13.561286	MHz
Extreme conditions - Temperature								
Temperature	Measurement period after power-up the EUT	Frequency measured	Values for Frequency Error			Abs. Maximum Value	Absolute Maximum value	Verdict
			[Hz]	[%]	[ppm]			
Tmax=75°C	on StartUp	13.5598978	-32.4000000	-0.000239	-2.39	2.39		
	2 Minutes	13.5599176	-12.6000000	-0.000093	-0.93			
	5 Minutes	13.5599272	-3.0000000	-0.000022	-0.22			
	10 Minutes	13.5599134	-16.8000000	-0.000124	-1.24			
T=70°C	on StartUp	13.5598820	-48.2000000	-0.000355	-3.55	3.55		
	2 Minutes	13.5598934	-36.8000000	-0.000271	-2.71			
	5 Minutes	13.5599006	-29.6000000	-0.000218	-2.18			
	10 Minutes	13.5598936	-36.6000000	-0.000270	-2.70			
T=60°C	on StartUp	13.5598736	-56.6000000	-0.000417	-4.17	4.17		
	2 Minutes	13.5598744	-55.8000000	-0.000412	-4.12			
	5 Minutes	13.5598758	-54.4000000	-0.000401	-4.01			
	10 Minutes	13.5598745	-55.7000000	-0.000411	-4.11			
T=50°C	on StartUp	13.5598801	-50.1000000	-0.000369	-3.69	4.52		
	2 Minutes	13.5598709	-59.3000000	-0.000437	-4.37			
	5 Minutes	13.5598689	-61.3000000	-0.000452	-4.52			
	10 Minutes	13.5598689	-61.3000000	-0.000452	-4.52			
T=40°C	on StartUp	13.5598938	-36.4000000	-0.000268	-2.68	3.42		
	2 Minutes	13.5598861	-44.1000000	-0.000325	-3.25			
	5 Minutes	13.5598840	-46.2000000	-0.000341	-3.41			
	10 Minutes	13.5598838	-46.4000000	-0.000342	-3.42			
T=30°C	on StartUp	13.5599352	5.0000000	0.000037	0.37	1.41		
	2 Minutes	13.5599190	-11.2000000	-0.000083	-0.83			
	5 Minutes	13.5599126	-17.6000000	-0.000130	-1.30			
	10 Minutes	13.5599111	-19.1000000	-0.000141	-1.41			
T=20°C	10 Minutes	13.5599302	0.0000000	0.000000	0.00	0.00		
T=10°C	StartUp	13.5599952	65.0000000	0.000479	4.79	4.79		
	2 Minutes	13.5599829	52.7000000	0.000389	3.89			
	5 Minutes	13.5599792	49.0000000	0.000361	3.61			
	10 Minutes	13.5599782	48.0000000	0.000354	3.54			
T=0°C	StartUp	13.5600031	72.9000000	0.000538	5.38	5.38		
	2 Minutes	13.5600017	71.5000000	0.000527	5.27			
	5 Minutes	13.5600001	69.9000000	0.000515	5.15			
	10 Minutes	13.5599998	69.6000000	0.000513	5.13			

Remark: for more information and graphical plot see annex A1 TR22-1-0097501T011a-A1

4.6 Equipment lists

ID	Description	Manufacturer	SerNo	CheckType	Last Check	Interval	Next Check
	120901 - SAC3 - Radiated Emission <1GHz			calchk	cal: 2015-Jul-21 chk: 2021-Jul-27	cal: 10Y chk: 12M	cal: 2025-Jul-21 chk: 2022-Jul-27
20341	Digital Multimeter Fluke 112	Fluke Deutschland GmbH / Glottertal	81650455	cal	cal: 2022-May-18	cal: 24M	cal: 2024-May-18
20442	Semi Anechoic Chamber	ETS-Lindgren GmbH / Taufkirchen	-	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20482	filter matrix Filter matrix SAR 1	CETECOM GmbH	-	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20574	Biconilog Hybrid Antenna BTA-L	Frankonia GmbH / Heideck	980026L	cal	cal: 2022-Jun-15	cal: 36M	cal: 2025-Jun-15
20620	Test Receiver ESU26	Rohde & Schwarz Messgerätebau GmbH / Memmingen	100362	cal	cal: 2023-May-24	cal: 12M	cal: 2024-May-24
20885	Power Supply EA3632A	Agilent Technologies Deutschland GmbH	75305850	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
25038	Loop Antenna HFH2-Z2	Rohde & Schwarz Messgerätebau GmbH / Memmingen	879824/13	cal	cal: 2022-Jul-04	cal: 24M	cal: 2024-Jul-04
	120911 - Radio Laboratory 2						
20431	Near-Field Probe Set Model 7405	EMCO Elektronik GmbH	9305-2457	cpu	--	--	--
20457	Power Supply EA-3013 S	EA Elektro-Automatik GmbH & Co. KG	9624680	cnn	--	--	--
20468	Digital Multimeter Fluke 112	Fluke Deutschland GmbH	90090455	cal	Cal: 2021-Jun-01	36M	2022-Dec-29
20632	Thermocouple Data Logger HH806AWE	Omega Engineering Inc. / Stamford	080248	chk	Cal: 2015-Mai-19	--	--
20869	Climatic Chamber VT4002	Vötsch Industrietechnik GmbH, a schunk company / Balingen-Frommern	521/79152	chk	--	--	--
20690	Spectrum Analyzer FSU	Rohde & Schwarz Messgerätebau GmbH	100302/026	cal	2023-Mai-25	24M	2025-Mai-25

Tools used in 'P1M1'

4.6.1 Legend

Note / remarks	Interval of calibration & Verification
12M	12 months
24M	24 months
36M	36 months
10Y	10 Years

Abbreviation Check Type	Description
cnn	Calibration and verification not necessary
cal	Calibration
calchk	Calibration plus intermediate Verification
chk	Verification
cpu	Verification before usage

5 Results from external laboratory

None	-
------	---

6 Opinions and interpretations

None	-
------	---

7 List of abbreviations

None	-
------	---

8 Measurement Uncertainty valid for conducted/radiated measurements

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved. For uncertainty determination, each component used in the concrete measurement set-up was taken in account and its contribution to the overall uncertainty according its statistical distribution calculated.

Measurement type	Frequency range of measurement		Calculated Uncertainty based on confidence level of 95.54%	Remarks
	Start [MHz]	Stop [MHz]		
Magnetic field strength	0.009	30	4.86	Magnetic loop antenna, Pre-amp on
RF-Output power (eirp) Unwanted emissions (eirp) [dB]	30	100	4.57	without Pre-Amp
	30	100	4.91	with PreAmp
	100	1000	4.02	without Pre-Amp
	100	1000	4.26	with PreAmp
	1000	18000	4.36	without Pre-Amp
	1000	18000	5.23	with PreAmp
	18000	33000	4.92	Schwarzbeck BBHA9170 (#20302) Antenna set-up non-waveguide antenna)
	33000	50000	4.17	Set-up for Q-Band (WR-22), non-wave guide antenna
	40000	60000	4.69	Set-up U-Band (WR-19), non-waveguide antenna
	50000	75000	4.06	External Mixer set-up V-Band (WR-15)
	75000	110000	4.17	External Mixer set-up W-Band (WR-6)
	90000	140000	5.49	External Mixer set-up F-Band (WR-8)
	140000	225000	6.22	External Mixer set-up G-Band (WR-5)
	225000	325000	7.04	External Mixer set-up (WR-3)
	325000	500000	8.84	External Mixer set-up (WR-2.2)
Radiated Blocking [dB]	1000	18000	2.85	Typical set-up with microwave generator and antenna, value for 7GHz calculated
	18000	33000	4.66	Typical set-up with microwave generator and antenna
	33000	50000	3.48	WR-22 set-up
	50000	75000	3.73	WR-15 set-up
	75000	110000	4.26	WR-6 set-up
Frequency Error [kHz]	40000	77000	276.19	calculated for 77 GHz (FMCW) carrier
	6000	7000	33.92	calculated for 6.5GHz UWB Ch.5
TS 8997 conducted Parameters	30	6000	1.11	1. Power measurement with Fast-sampling-detector
	30	6000	1.20	2. Power measurement with Spectrum-Analyzer
	30	6000	1.20	3. Power Spectrum-Density measurement
	30	7500	1.20	4. Conducted Spurious emissions:
	0.009	30	2.56	5. Conducted Spurious emissions:
	2.4	2.48	1.95 ppm	6a. Bandwidth / 2-Marker Method for 2.4GHz ISM
	5.18	5.825	7.180 ppm	6b. Bandwidth / 2-Marker Method for 5GHz WLAN
	5.18	5.825	1.099 ppm	7 Frequency (Marker method) for 5GHz WLAN
	30	6000	0.11561µs	8 Medium-Utilization factor / Timing
	30	6000	1.85	9 Blocking-Level of companion device
	30	6000	1.62	9 Blocking Generator level
Conducted emissions	0.009	30	3.57	

9 Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2023-Nov-22
--	--	--
--	--	--

End Of Test Report