



Specification For Approval

Type	Helical ANT
Model Name	TSH433-447RP-87mm
Application	SRT-8000T(중계기)
Issued Date	2022. 04. 29

Charge	Inspector	Approval
동민		

SAE HAN ANTENNA CO.,LTD

301-1107,Ssangyong Techno Park 3,36-1 Samjeong-Dong, Ojeong-Gu, Bucheon-Si, Gyeonggi-Do, Korea

TEL : 82.32.624.2630 FAX : 82.32.624.2632



Model Name	Application	Rev	Page
TSH433-447RP-87mm	SRT-8000T(중계기)	0.0	2 / 9

CONTENTS

1. Revision History	3
2. Specification	 4
3. Electrical Specification Test	
3.1 V.S.W.R	5
3.2 Beam Pattern	7
4. Drawing	9



1. Revision History

[illegible]



Model Name	Application	Rev	Page
TSH433-447RP-87mm	SRT-8000T(중계기)	0.0	4 / 9

2. Specification

2.1. Electrical Specification

Item	Spec	
Center Frequency	433MHz	447MHz
Frequency Range	430MHz – 450MHz	430MHz – 450MHz
V.S.W.R	Less Than 2.0	Less Than 2.0
Average Gain(dBi)	-1.0dBi (Max)	-1.4dBi (Max)
Peak Gain(dBi)	3.16dBi (Max)	2.6dBi (Max)
Radiation pattern	Omni-directional	Omni-directional
Polarization	Linear Vertical	Linear Vertical
Impedance	Nominal 50 Ω	Nominal 50 Ω

2.2. Mechanical Specification

Item	Spec	Remarks
Dimensions(L)	111mm	(Drawing reference)
Connector	SHAFT	
Color	Black,NI	
Operating Temperature	-45℃ ~ +85℃	
Weight	8g $\pm$ 0.3g	

2.3. Major Materials of Parts

Item	Type	Remarks
Element	SWC(cu)	
Sleeve	Keyflex	
Shaft	Brass(NI)	



Model Name	Application	Rev	Page
TSH433-447RP-87mm	SRT-8000T(중계기)	0.0	5 / 9


3. V.S.W.R Test

3.1.1 Test method

① Network Analyzer Spec

Equipment	Model	Specification
Network Analyzer	HP8753ES	· Freq. Range : 300KHz ~ 6GHz
Calibration Kit	HP85032B	· DC ~ 6GHz (SMA-Type)

② Network Analyzer test method

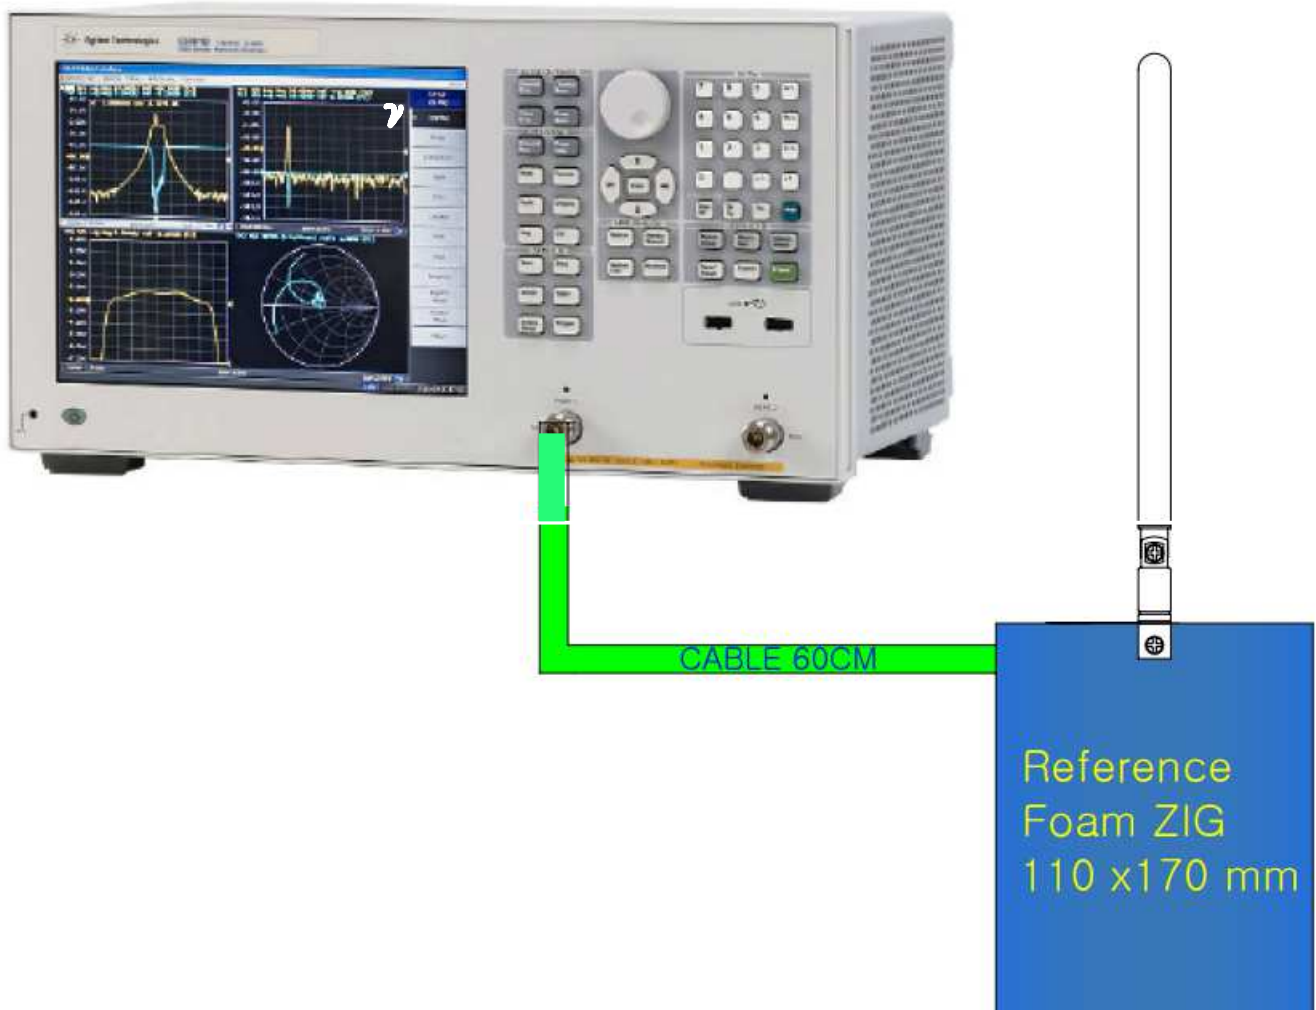




Model Name	Application	Rev	Page
TSH433-447RP-87mm	SRT-8000T(중계기)	0.0	6 / 9

3. Electrical Specification

3.1.2 V.S.W.R

DATA

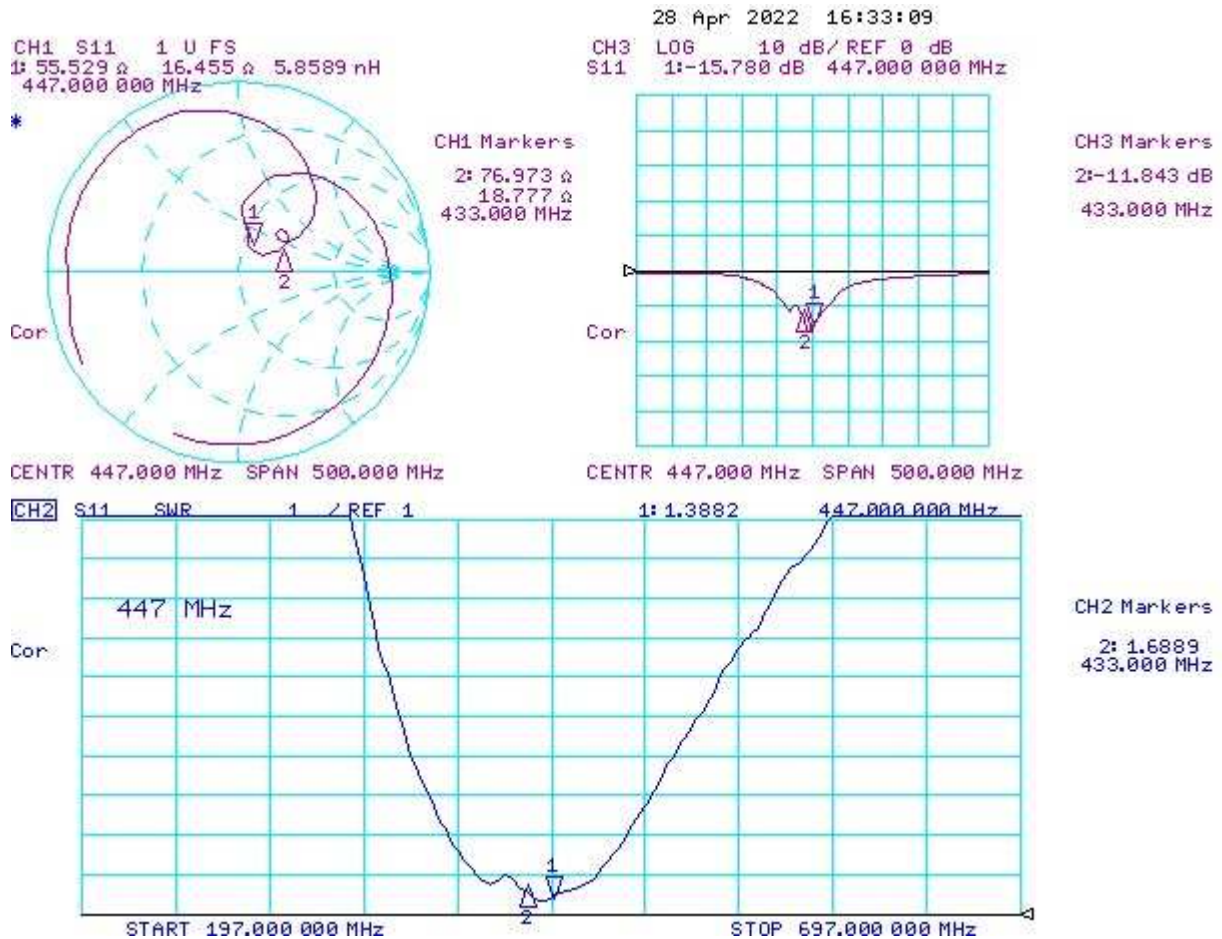




Model Name	Application	Rev	Page
TSH433-447RP-87mm	SRT-8000T(중계기)	0.0	7 / 9

3.2.1 Gain & Beam Pattern Test

① Chamber Spec

Section	Specification
Chamber Size	6(L)m X 3(W)m X 3(H)m
Frequency Range	400MHz – 6GHz (Far Field)
Quiet Zone	1m X 1 m @ 1GHz
Type	Rectangular
Antenna weight	< 50 kg




② Chamber Test method

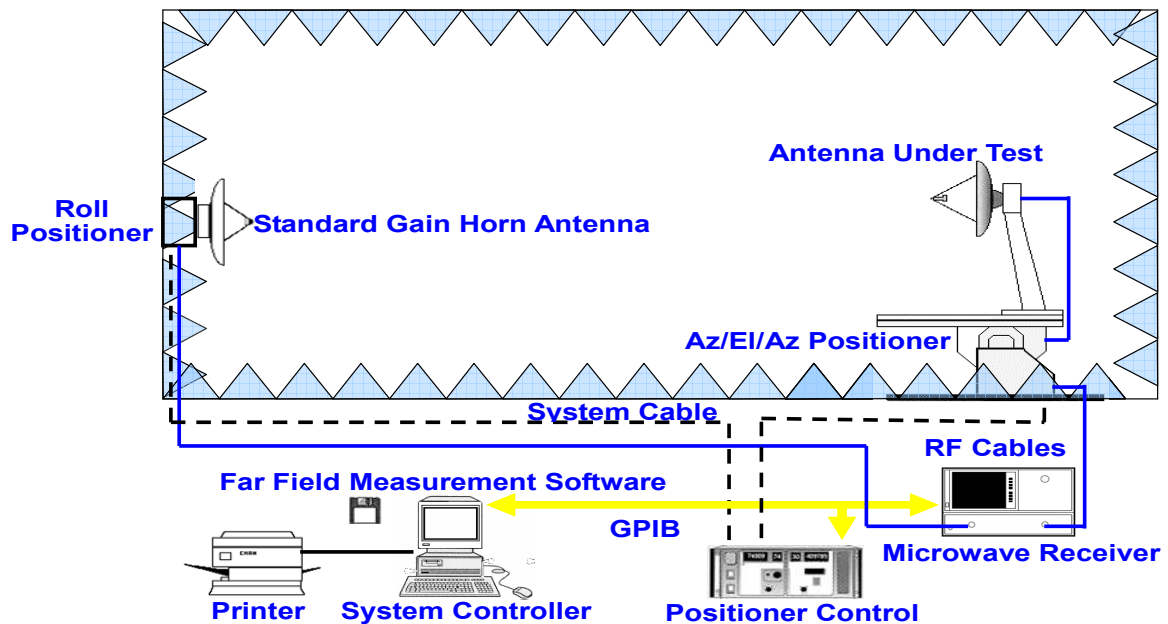





3.2.2 Gain & Beam Pattern



No.	Freq.	θ -Pol(H)		Peak[dBi]	θ [deg]	ϕ [deg]	H($\theta=90$)			
		Eff.[%]	Avg.[dBi]				Avg.[dBi]	Peak[dBi]	ϕ [deg]	BW[deg]
1	430.000	75.76	-1.21	3.10	90.00	255.00	2.65	3.10	255.00	999.00
2	433.000	78.70	-1.04	3.16	90.00	255.00	2.81	3.16	255.00	999.00
3	435.000	80.77	-0.93	3.24	90.00	255.00	2.93	3.24	255.00	999.00
4	437.000	81.31	-0.90	3.26	90.00	255.00	2.96	3.26	255.00	999.00
5	440.000	78.46	-1.05	3.06	90.00	255.00	2.82	3.06	255.00	999.00
6	442.000	75.14	-1.24	2.86	90.00	255.00	2.64	2.86	255.00	999.00
7	445.000	72.79	-1.38	2.71	90.00	255.00	2.51	2.71	255.00	999.00
8	447.000	72.27	-1.41	2.67	90.00	255.00	2.49	2.67	255.00	999.00
9	450.000	69.14	-1.60	2.48	90.00	90.00	2.30	2.48	90.00	999.00

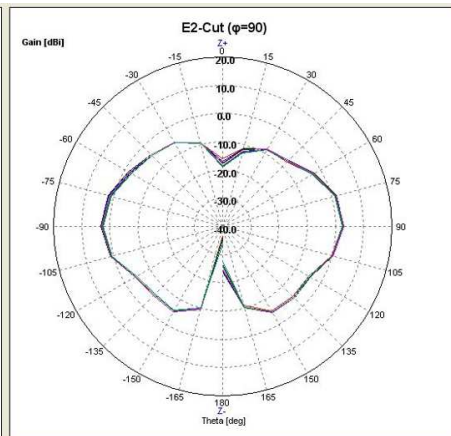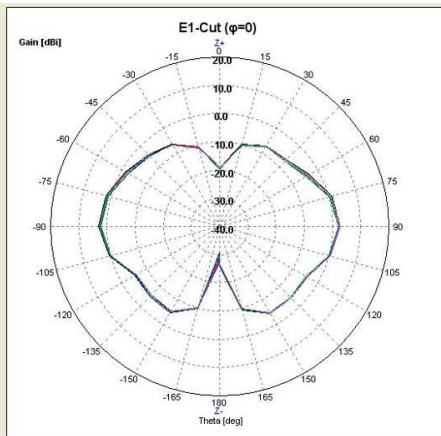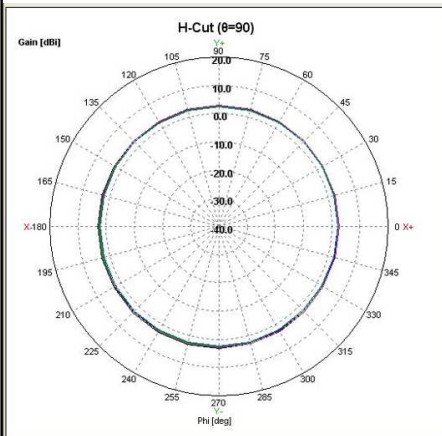



430.000MHz





433.000MHz



435.000MHz



437.000MHz






Model Name	Application	Rev	Page
TSH433-447RP-87mm	SRT-8000T(중계기)	0.0	9 / 9

4. Drawing

CONTROLLED DRAWING
This drawing is the property of SAEHAN ANT.
Expressed technical contents are
not to be reproduced or loaned without
written permission from SAE HAN ANT.

NO	DESCRIPTION	MATERIAL	SIZE	PART NO	Q'TY
1	SLEEVE	KEYFLEX / BLACK	φ6.0×87.0mm		1
2	SHAFT LOD	BRASS / NI	φ6.0×20.0mm		1
3	SHAFT BASE	BRASS / NI	φ6.0×22.5mm		1
4	SCREW	SWC/ NI	M2.6-4.5mm		1
5	WASHER	PHOSPHOR BRONZE	φ4.0X0.2T		2

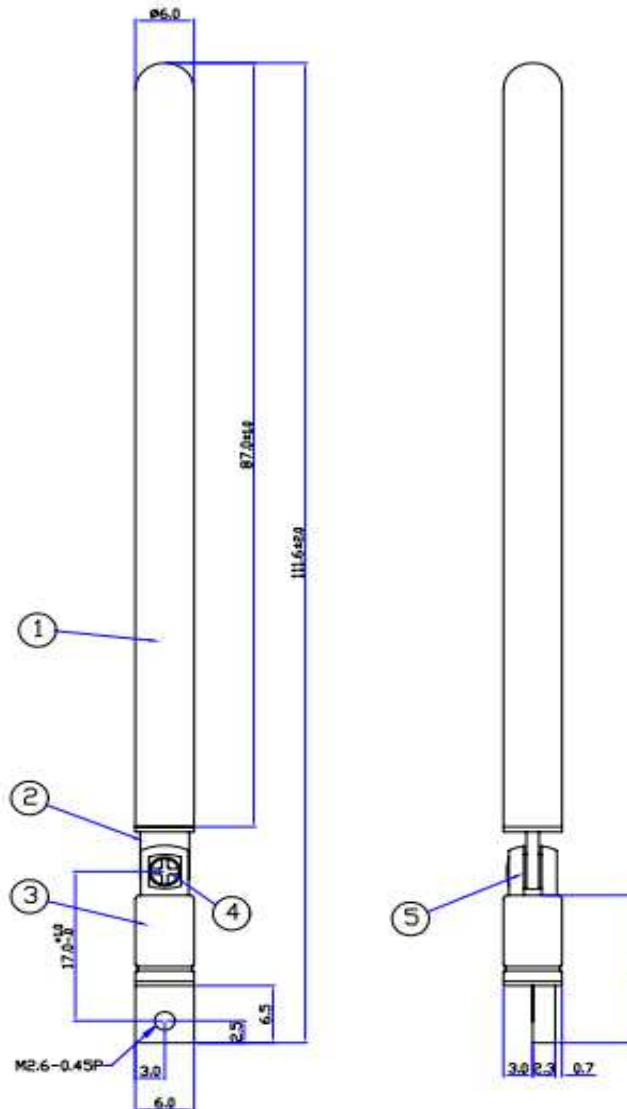

UNLESS OTHERWISE SPECIFIED TOLERANCES	6			SAEHAN ANTENNA			NAME OF TITLE	
	5						HELICAL ANTENNA	
0 ~ 4	± 0.1	4		SCALE	UNITS	DATE	MODEL No.	
4 ~ 16	± 0.15	3		1 / 1	mm	2022.04.26	TSH433-447RP-87mm	
16 ~ 63	± 0.2	2		DRAWN/DESIGNED	CHECKED	APPROVED	DRAWING/PART No.	
63 ~ 250	± 0.3	1		HWANG J.D.M			APPROVED No.	
250 ~	± 0.5	NO	DATE	DESCRIPTION OF REVISION	SIGN		USE FREQUENCY (MHz)	
							433/447MHz	