


## Product specification

### Quick Reference Date

|                            |                                    |  |
|----------------------------|------------------------------------|--|
|                            | Antenna module on the system board |  |
| Frequenc Range             | 2400 ~2500GHz                      |  |
| Ant. Port Input Pwr. (dBm) | 0 (Typ. BT class 2 output power)   |  |
| Tot. Rad. Pwr. (dBm)       | -1.2 (Input pwr – loss pwr)        |  |
| Peak EIRP(dBm)             | 0                                  |  |
| Directivity (dBi)          | 1 (all direction antenna)          |  |
| Efficiency (dB)            | 1.0%                               |  |
| Gain (dBi)                 | 0 (Avg Gain XY-plane)              |  |
| Maximum Power (dBm)        | 0 (XY-plane)                       |  |
| Minimum Power (dBm)        | 0(XY-plane)                        |  |
| Avg. Power (dBm)           | 0(XY-plane)                        |  |
| Input Impendence(ohm)      | 50                                 |  |
| Polarization Type          | V ertical& Horizontal              |  |
| V .S.W .R                  | <6                                 |  |

All the technical data and information contained herein are subject to change without prior notice

### Antenna Layout & module on the system board

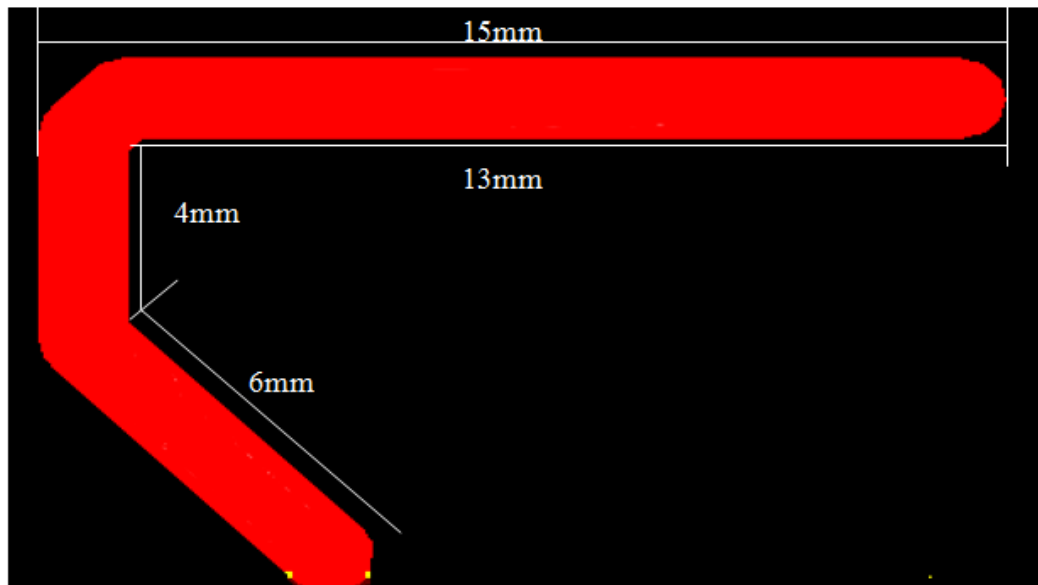


### Antenna Gain


Gain Table

| Unit in dBi @2.44GHz | XY-plane |      | XZ-plane |      | YZ-plane |      | Efficiency |
|----------------------|----------|------|----------|------|----------|------|------------|
|                      | Peak     | Avg. | Peak     | Avg. | Peak     | Avg. |            |
| Module Board         | 0        | 0    | 0        | 0    | 0        | 0    | 0          |


Return Loss

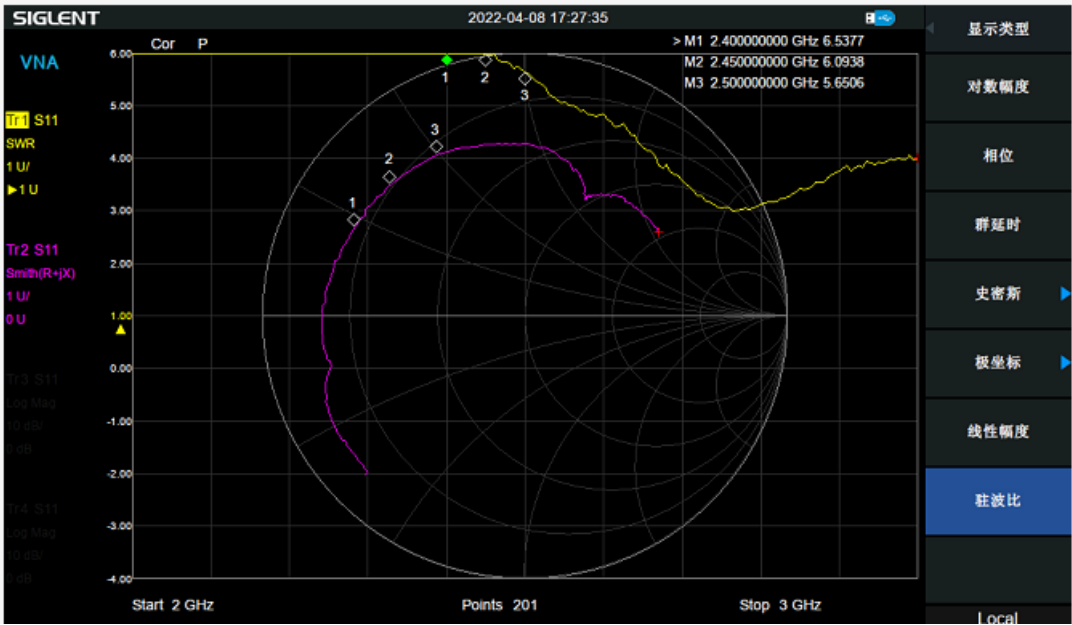


### 3D radiation pattern diagram

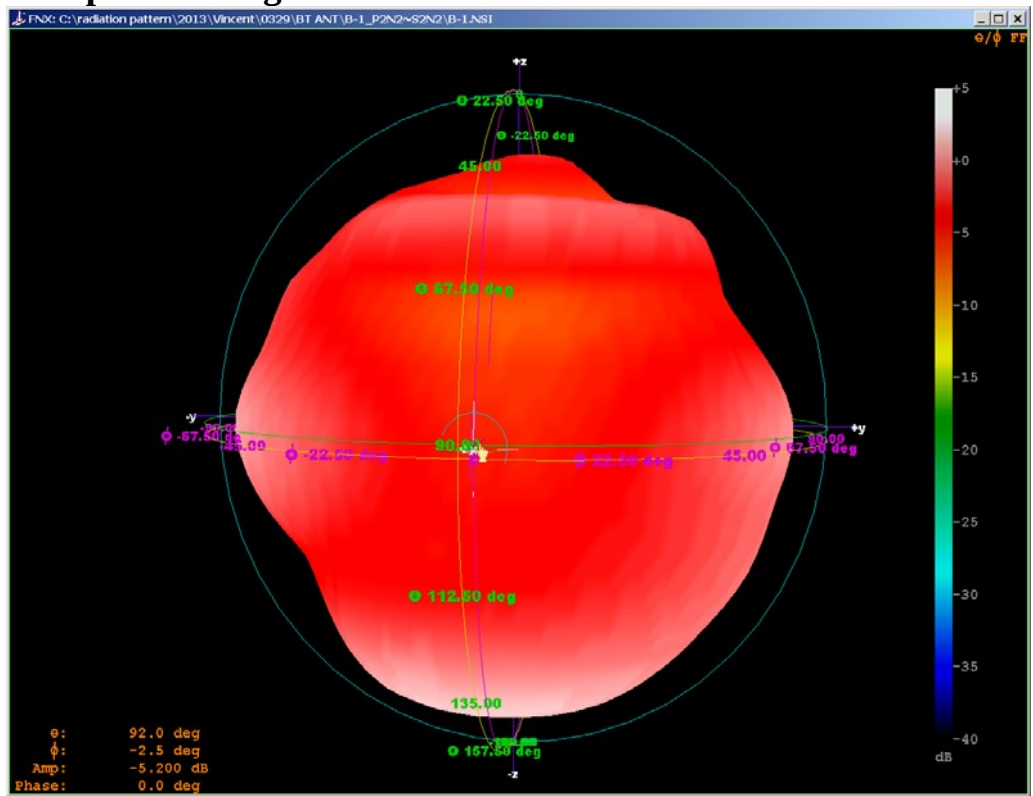

### XY-plane

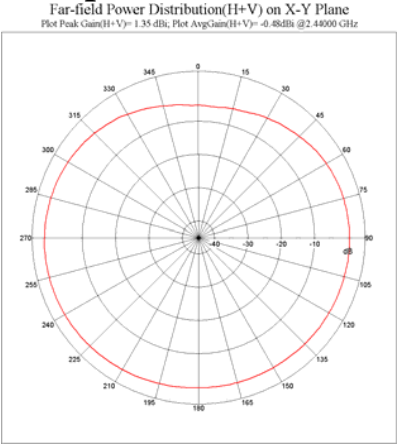

### XZ-plane

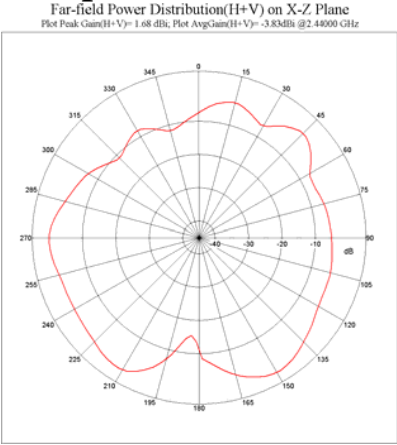

### YZ-plane

