

SPECIFICATION FOR APPROVAL

CUSTOMER:	
CUST P/N:	
FINE P/N:	A11-50-6.5UH Single coil 0.08*105P*10TS
DESC:	Φ50MMX5.0MMX0.8MM PC40 material
DATE:	2023/3/15
Version:	A.0.05

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVE
Chen Xiao Ying	Chen Xiao Ying	Zhou wen tao	

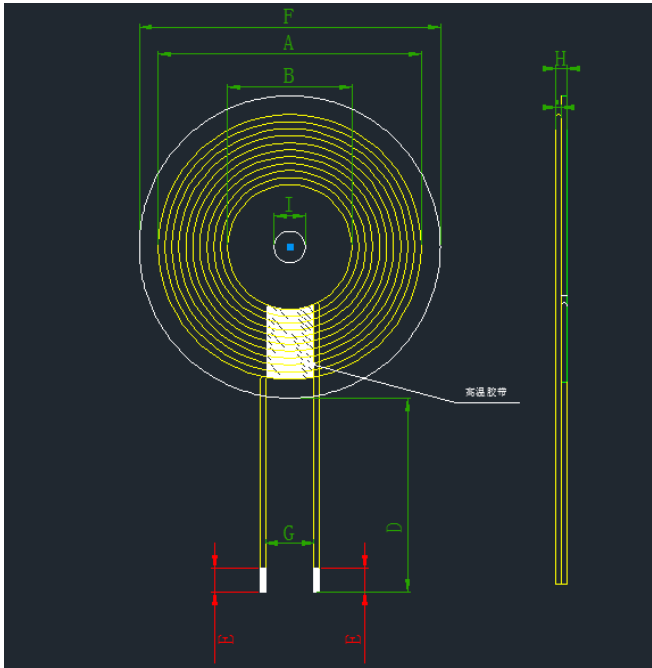
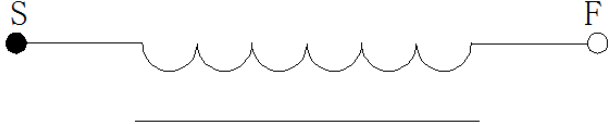
Dong Guang hao hui electronic technology ltd.

Factory Address: Su ken villege, changping town, DongGuang city, GuangDong, China

Version Change History

[illegible]

SPECIFICATION

DESC	Φ20.5x40-6.5uH-0.08x105-15mm-	Rev: A.0	CUST:	XXX	
			CUST P/N:		
<div>(mm)</div> <div></div> <div>SCHEMATIC DIAGRAM:</div> <div></div>			A	40.0±1.5	
			B	20.5±0.5	
			C	1.25 Max	
			D	15±2	
			E	4±2	
			F	49±1	
			G	10.0 ref	
			H	2.2 Max	
			I	5.3 ref	
			Remark:		
1.Cross Leading wire;					
2.Mount with hard magnetic isolation sheet.					

Winding Specification:					
NO.	TERMINAL		WIRE	Turns	Winding Direction
1	S	F	0.08*105P	10Ts	CCW

ELECTRICAL CHARACTERISTICS:					
TEMPERATURE:25±10°C, RELATIVE HUMIDITY:65±20%					
NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±20% coil only	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.5uH ±10% with magnetic isolation sheet	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤50mΩ		LCZ METER 502B

PREPARED BY/DATE	CHECKED BY/DATE
Chen Xiao Ying 2023/3/15	Zhou wen tao 2023/3/15