



# RF Test Report

Report No: FCS202304035W01

Issued for

Applicant:	Kronotech Srl
Address:	Viale Ungheria, 125 Udine 33100 Italy
Product Name:	Panel Reader PHI22
Brand Name:	Kronotech
Model Name:	3223N
Series Model:	N/A
FCC ID:	2BAQJ-2842
Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 <a href="http://www.FCS-lab.com">http://www.FCS-lab.com</a>	

## TEST RESULT CERTIFICATION

Applicant's Name..... : Kronotech Srl  
Address ..... : Viale Ungheria,125 Udine 33100 Italy  
Manufacture's Name..... : Kronotech Srl  
Address ..... : Viale Ungheria,125 Udine 33100 Italy

### Product Description

Product Name..... : Panel Reader PHI22  
Brand Name ..... : Kronotech  
Model Name..... : 3223N  
Series Model..... : N/A  
Test Standards..... : FCC Rules and Regulations Part 15 Subpart C, Section 225  
Test Procedure..... : ANSI C63.10:2013

This device described above has been tested FCS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of FCS, this document may be altered or revised by FCS, personal only, and shall be noted in the revision of the document..

### Date of Test.....:

Date (s) of performance of tests.: Apr 06, 2023~May 17, 2023

Date of Issue .....: May 17, 2023

Test Result .....: Pass

Tested by : 

(Scott Shen)

Reviewed by : 

(Duke Qian)

Approved by : 

(Jack Wang)



## 目录

Revision History .....	4
1. SUMMARY OF TEST RESULTS .....	5
2. GENERAL INFORMATION .....	7
3.RADIATED EMISSION MEASUREMENT .....	11
4.20 DB BANDWIDTH TEST .....	19
5 FREQUENCY STABILITY MEASUREMEN .....	21
6 ANTENNA REQUIREMENT .....	23

### Revision History

Rev.	Issue Date	Effect Page	Contents
00	May 17, 2023	All	Initial Issue

## 1. SUMMARY OF TEST RESULTS

Test Summary			
FCC part No.	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	--
15.225(d) &15.209	Radiated Emission	PASS	--
15.225(a)	Field Strength of Fundamental Emissions	PASS	
2.1049	20dB Bandwidth	PASS	
15.225(e)	Frequency Stability	PASS	
15.203	Antenna Requirement	PASS	--

### NOTE:

- (1)" N/A" denotes test is not applicable in this Test Report
- (2) All tests are according to ANSI C63.10-2013

## 1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number:	514908
Designation number:	CN0127
A2LA accreditation number:	5545.01

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.71$ dB
2	Unwanted Emissions, conducted	$\pm 2.98$ dB
3	Conducted Emission (9KHz-150KHz)	$\pm 4.13$ dB
4	Conducted Emission (150KHz-30MHz)	$\pm 4.74$ dB
5	All emissions, radiated(<1G) 30MHz-1000MHz	$\pm 3.2$ dB
6	All emissions, radiated (1GHz -18GHz)	$\pm 3.66$ dB
7	All emissions, radiated (18GHz -40GHz)	$\pm 4.31$ dB

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Panel Reader PHI22
Trade Name	Kronotech
Model Name	3223N
Series Model	N/A
Model Difference	N/A
Frequency	13.56MHZ
Modulation	ASK
Antenna type	Internal antenna
Power Supply	DC 5V
Hardware version number	2
Software version number	2.01
Connecting I/O Port(s)	Please refer to the User's Manual

#### Note:


1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	NA	NA	internal Antenna	N/A	0.0	Antenna

## 2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Configuration and peripherals

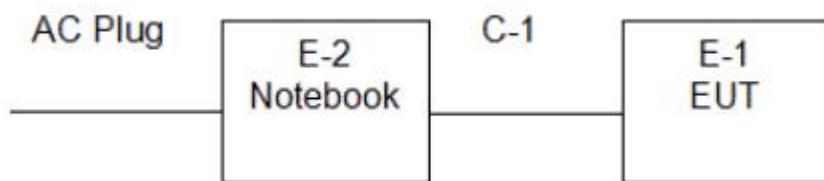

### Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range: 21-25°C

Humidity range: 40-75%

Pressure range: 86-106kPa

### 2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

#### Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-2	Notebook	Lenovo	5896	N/A	N/A
C-1	DC Cable	N/A	N/A	N/A	N/A

#### Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

#### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

## 2.4 EQUIPMENTS LIST

### Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2022.08.30	2023.08.29
Signal Analyzer	R&S	FSV40-N	FCS-E012	2022.08.30	2023.08.29
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2022.08.30	2023.08.29
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2022.08.30	2023.08.29
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2022.08.30	2023.08.29
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2022.08.30	2023.08.29
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2022.08.30	2023.08.29
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2022.08.30	2023.08.29
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2022.08.30	2023.08.29
Temperature & Humidity	HTC-1	victor	FCS-E005	2022.08.30	2023.08.29

### Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2022.08.30	2023.08.29
LISN	R&S	ENV216	FCS-E007	2022.08.30	2023.08.29
LISN	ETS	3810/2NM	FCS-E009	2022.08.30	2023.08.29
Temperature & Humidity	HTC-1	victor	FCS-E008	2022.08.30	2023.08.29

### RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
Spectrum Analyzer	Keysight	N9020A	FCS-E015	2022.08.30	2023.08.29
Spectrum Analyzer	Agilent	E4447A	MY50180039	2022.08.30	2023.08.29
Spectrum Analyzer	R&S	FSV-40	101499	2022.08.30	2023.08.29

### 3.RADIATED EMISSION MEASUREMENT

#### 3.1 LIMIT

FCC §15.225(A), (B), (C) , (D)

#### LIMITS OF RADIATED EMISSION MEASUREMENT

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

4. For above 1000 MHz, limit field strength of harmonics: 54dB $\mu$ V/m@3m (AV) and 74dB $\mu$ V/m@3m (PK).

#### LIMITS OF FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL

Frequency range (MHz)	Field Strength@30m		Field Strength@3m dB $\mu$ V/m
	$\mu$ V/m	dB $\mu$ V/m	
Below 13.110	30	29.5	69.5
13.110 ~ 13.410	106	40.5	80.5
13.410 ~ 13.553	334	50.5	90.5
13.553 ~13.567	15.848	84	124
13.567 ~ 13.710	334	50.5	90.5
13.710 ~14.010	106	40.5	80.5
Above 14.010	30	29.5	69.5

#### NOTE:

1. Field Strength (dB $\mu$ V/m) = 20\*log[Field Strength ( $\mu$ V/m)].
2. In the emission tables above, the tighter limit applies at the band edges.

According to FCC section 15.225, for <30 MHz, Radiated emissions were measured according to ANSI C63.4. The EUT was set to transmit at the highest output power. The EUT was set 10 meter away from the measuring antenna. The loop antenna was positioned 1 meter above the ground from the center of the loop. The measuring bandwidth was set to 10 KHz. (Note: During testing the receive antenna was rotated about its axis to maximize the emission from the EUT) There was no detected Restricted bands and Radiated suprious emission below 30MHz. The 30m limit was converted to 3m Limit using square factor(x) as it was found by measurements as follows; 3 m Limit(dBuV/m) = $20\log(X)+40\log(30/3)=20\log(15848)+40\log(30/3)=124\text{dBuV}$

### 3.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.3 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

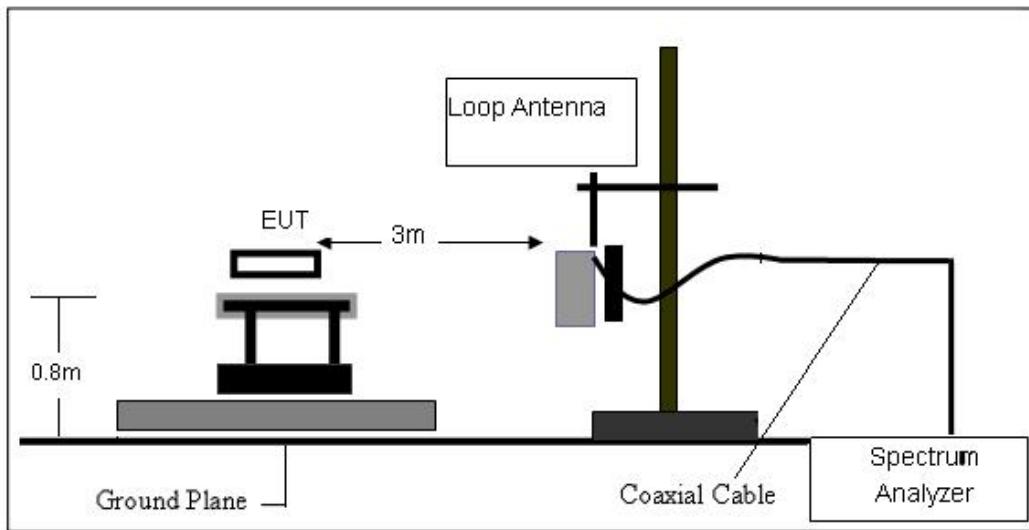

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

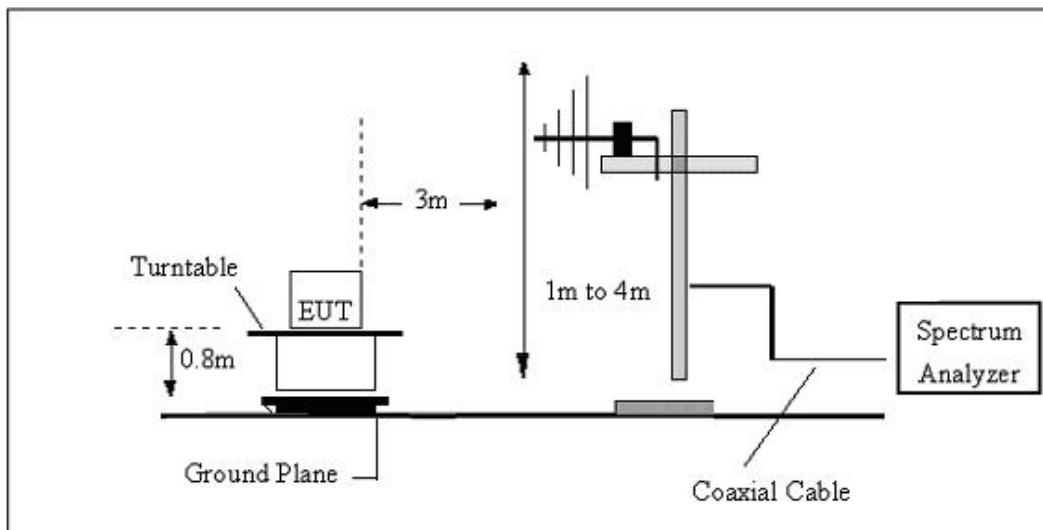


#### (C) Radiated Emission Test-Up Frequency Above 1GHz

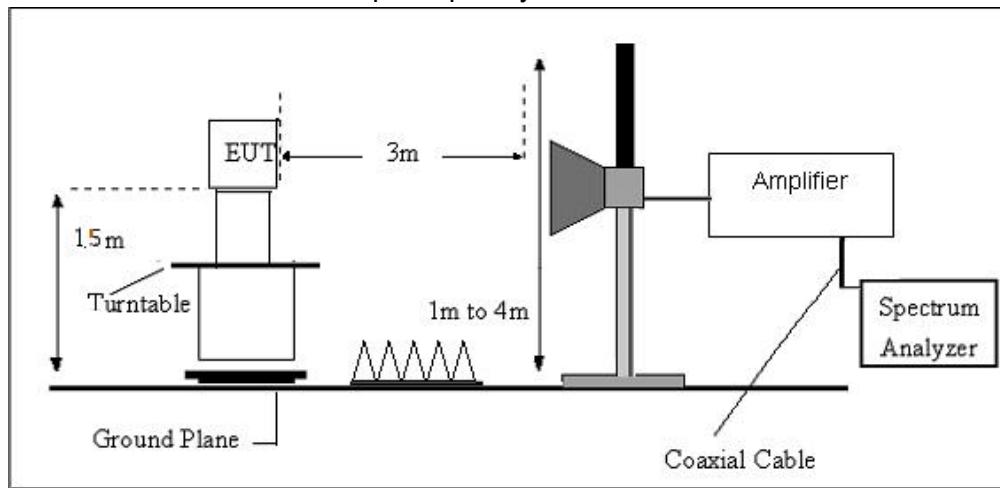

## 3.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Mode:	ASK	Test Voltage:	DC 5V

For field strength of the fundamental signal

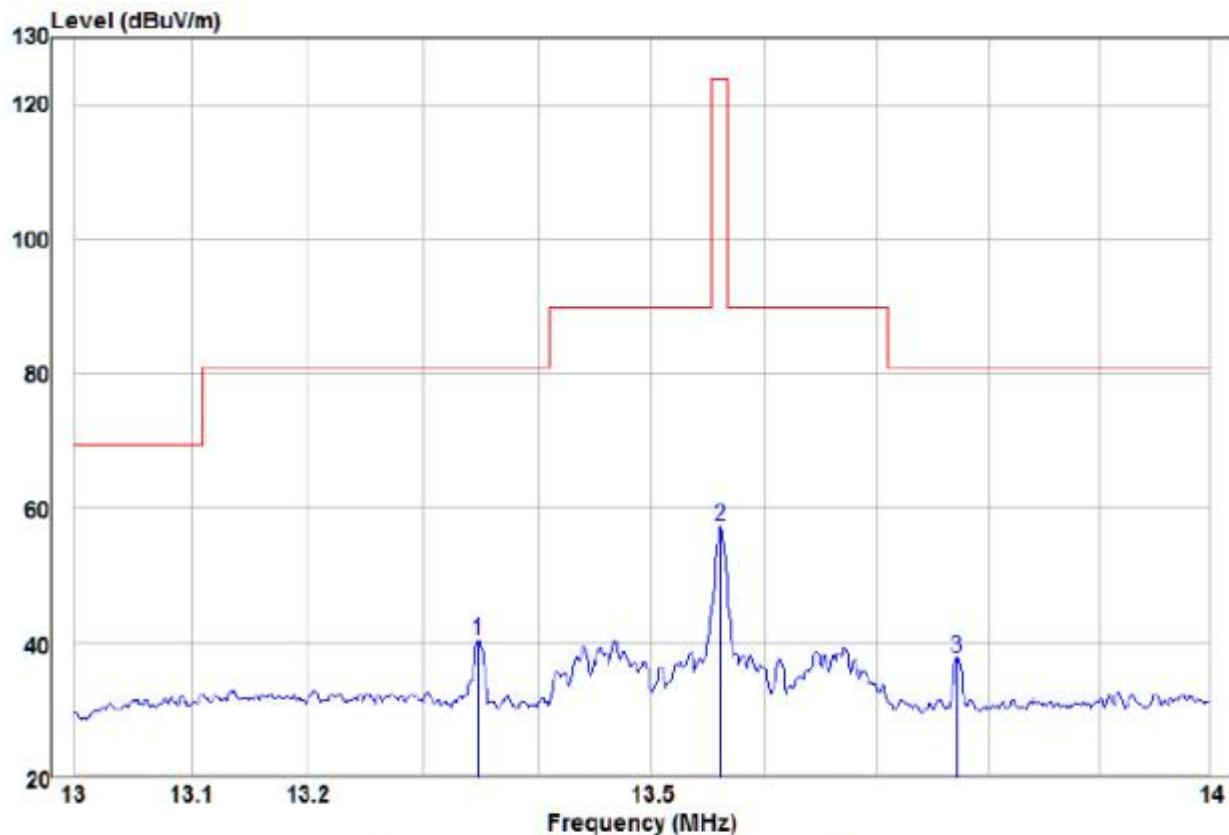


Freq	Read		Limit Level	Line	Over Limit	Remark	Pol/Phase
	Freq	Level Factor					
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 pp	13.35	20.43	19.93	40.36	81.00	-40.64	Peak HORIZONTAL
2	13.56	37.32	19.92	57.24	124.00	-66.76	Peak HORIZONTAL
3	13.77	17.94	19.92	37.86	81.00	-43.14	Peak HORIZONTAL

Note: peak emission were reported


For spurious emission

9kHz – 150KHz:

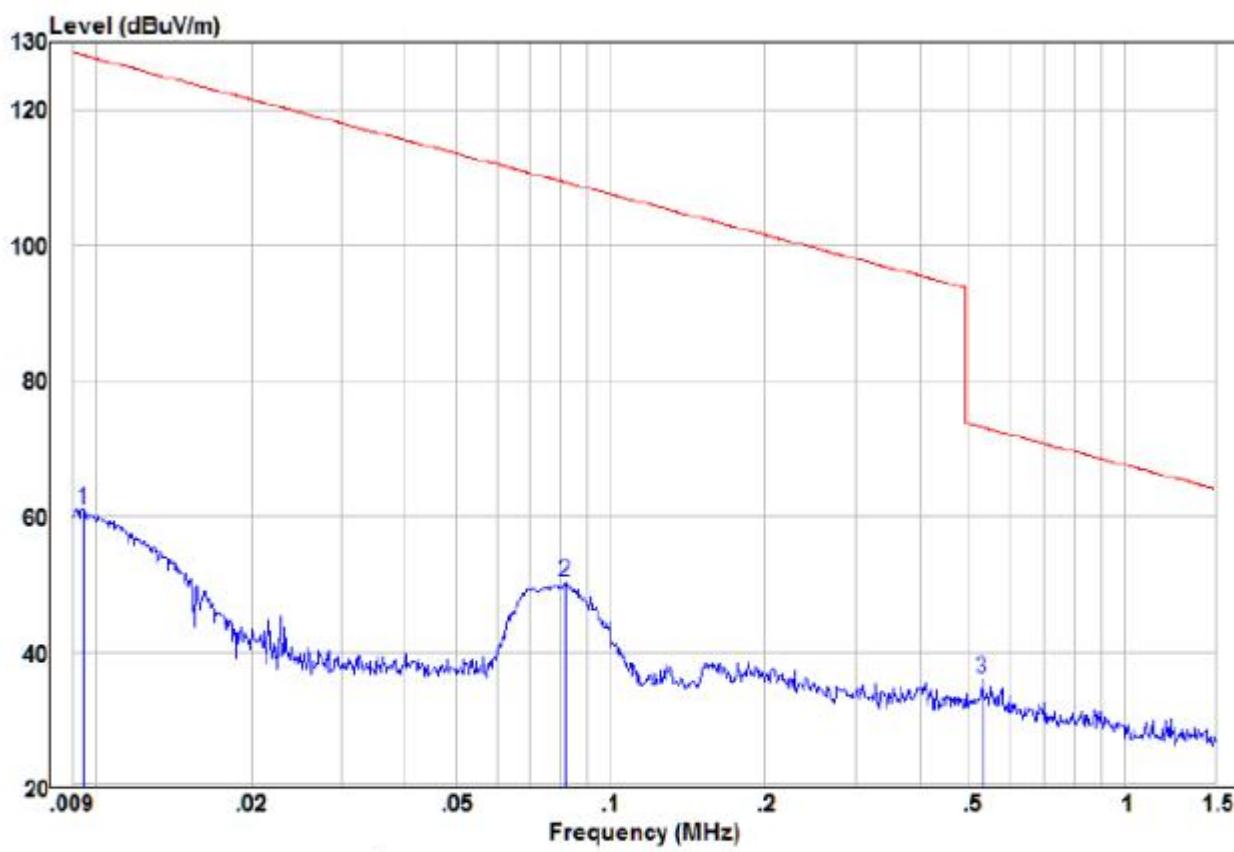

Freq	Read		Limit		Over Line	Over Limit	Remark	Pol/Phase
	Freq	Level	Factor	Level				
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	0.01	41.36	19.69	61.05	128.10	-67.05	AVG	HORIZONTAL
2	0.08	30.60	19.67	50.27	109.36	-59.09	AVG	HORIZONTAL
3 pp	0.53	16.17	19.71	35.88	73.15	-37.27	QP	HORIZONTAL

150KHz-30MHz:

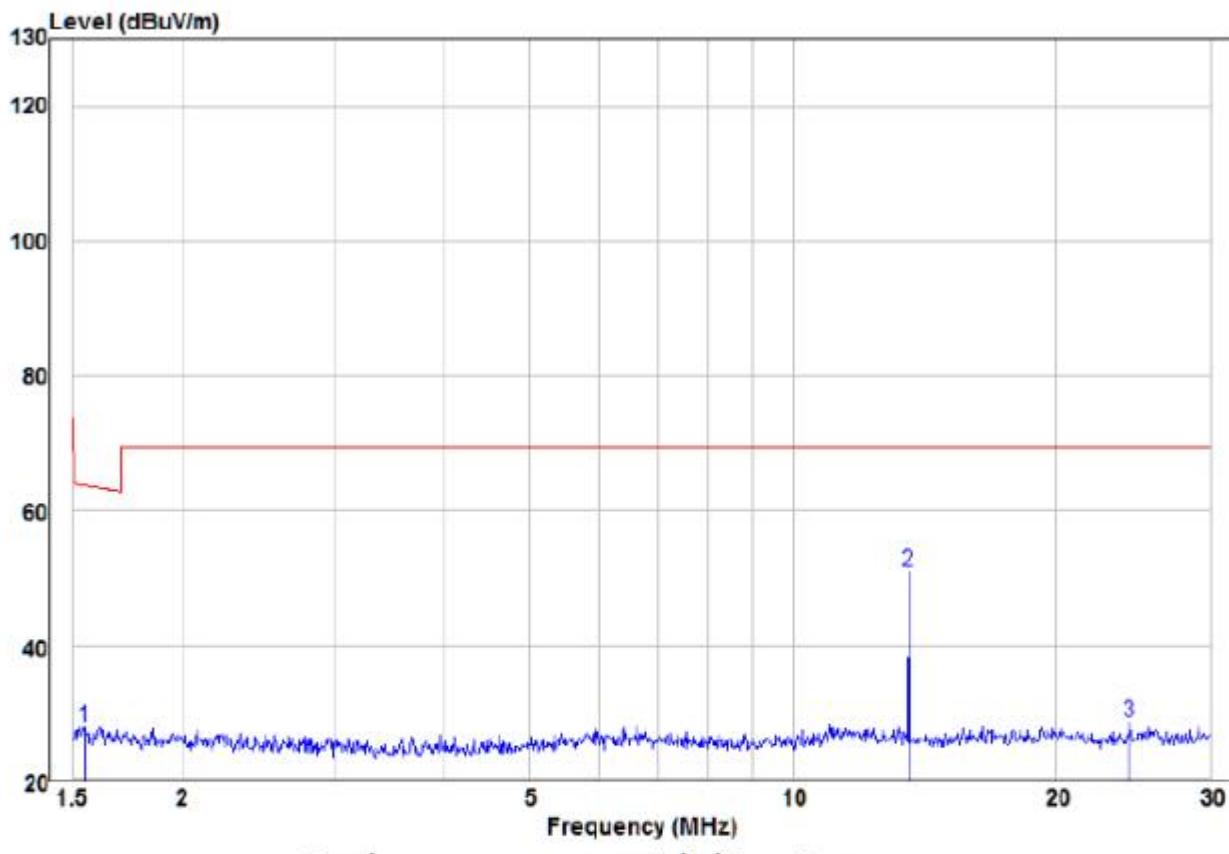

Freq	Read		Limit Level	Line	Over Limit	Remark	Pol/Phase
	Level	Factor					
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	1.55	8.13	19.96	28.09	63.85	-35.76	QP
2 pp	13.56	31.13	19.92	51.05	69.50	-18.45	QP
3	24.32	8.52	20.16	28.68	69.50	-40.82	QP

1. 13.56 MHz is fundamental signal which can be ignored.
2. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
3. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);
4. Limit line = specific limits (dB $\mu$ V) + distance extrapolation factor

(30MHZ-1000MHZ)

Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 5V	Phase:	Horizontal
Test Mode:	ASK		



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dB	Detector
1		36.8953	35.68	-16.72	18.96	40.00	-21.04 QP
2		103.0800	31.44	-13.72	17.72	43.50	-25.78 QP
3		244.2321	31.16	-11.54	19.62	46.00	-26.38 QP
4		287.9904	31.76	-9.85	21.91	46.00	-24.09 QP
5		480.5276	33.40	-5.90	27.50	46.00	-18.50 QP
6	*	796.1830	30.64	3.01	33.65	46.00	-12.35 QP

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 5V	Phase:	Vertical
Test Mode:	ASK		



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dB	Detector
1		38.4809	29.77	-14.48	15.29	40.00	-24.71 QP
2		113.7143	30.66	-15.21	15.45	43.50	-28.05 QP
3		183.2005	30.71	-10.48	20.23	43.50	-23.27 QP
4		480.5276	32.74	-5.90	26.84	46.00	-19.16 QP
5		701.7610	30.61	0.32	30.93	46.00	-15.07 QP
6	*	952.0937	33.74	3.77	37.51	46.00	-8.49 QP

## 4.20 DB BANDWIDTH TEST

### 4.1 TEST PROCEDURE

FCC §2.1049&15.215(C)

Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency.

The 20dB bandwidth is measured with a spectrum analyzer connected via a receiver antenna placed near the EUT

while the EUT is operating in transmission mode.

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth

RBW  $\geq$  1% of the 20 dB bandwidth


VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

## 4.2 TEST SETUP

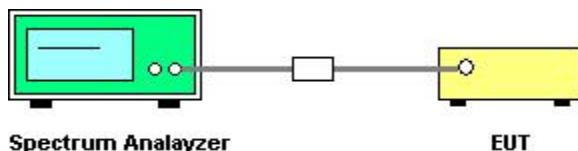


## 4.3 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	ASK	Test Voltage:	DC 5V

Frequency	20dB Bandwidth (MHz)	FL(MHz)	FH(MHz)	Limit(MHz)	Result
13.56 MHz	0.437	13.340	13.777	13.110-14.010	PASS

## 20dB Bandwidth

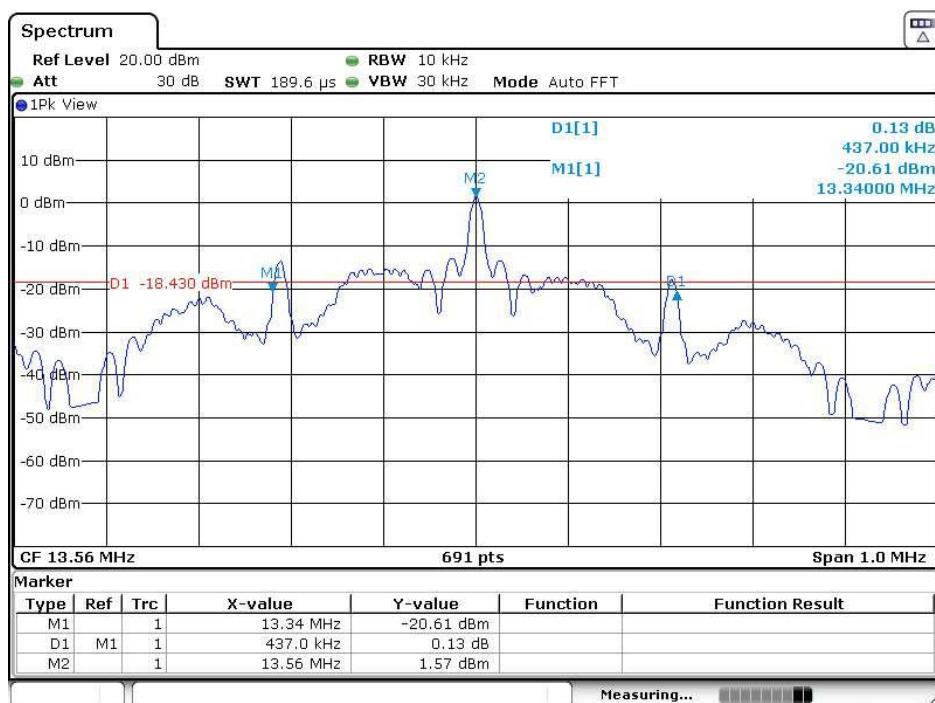

## 5 FREQUENCY STABILITY MEASUREMEN

### 5.1 LIMIT

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery

### 5.2 TEST PROCEDURE

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The fc is declaring of channel frequency. Then the frequency error formula is  $(fc-f)/fc \times 10^6$  ppm and the limit is less than  $\pm 100$  ppm.
6. Extreme temperature rule is -20°C~50°C.

### 5.3 TEST RESULTS

Test Frequency: 13.56MHz			Temperature: 20°C	
Supply Voltage (V) DC	Test Result (MHz)	Deviation (kHz)	Limit ±0.01% (kHz)	Result
4.25	13.55972	-0.28	1.3560	Pass
5	13.55971	-0.29	1.3560	Pass
5.75	13.55973	-0.27	1.3560	Pass

Test Frequency: 13.56MHz			Normal Voltage: 5 Vdc	
Temperature (°C)	Test Result (MHz)	Deviation (kHz)	Limit ±0.01% (kHz)	Result
-20	13.55982	-0.18	1.3560	Pass
-10	13.55979	-0.21	1.3560	
0	13.55976	-0.24	1.3560	
10	13.55976	-0.24	1.3560	
20	13.55978	-0.22	1.3560	
30	13.55982	-0.18	1.3560	
40	13.55976	-0.24	1.3560	
50	13.55981	-0.19	1.3560	

Note: Deviation (KHz) = (Test Result-13.56MHz)\*1000

## 6 ANTENNA REQUIREMENT

### 6.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 6.2 EUT ANTENNA

The antennas used for this product are internal antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 0.0dBi.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*