

FCC/ISED - TEST REPORT

Report Number	: 68.940.23.0014.01	Date of Issue: 2023-05-25
Model	: ZSJ-1708-01	
Product Type	: Remote Controller	
Applicant	: Shenzhen Infell Electronics Co., Ltd.	
Address	: Room 301, Building 2, Jingheyuan Industrial Zone, 2004 Xuegang Road, Gangtou Community, Bantian Street, Longgang District, 518129 Shenzhen, China	
Production Facility	: Shenzhen Infell Electronics Co., Ltd.	
Address	: Room 301, Building 2, Jingheyuan Industrial Zone, 2004 Xuegang Road, Gangtou Community, Bantian Street, Longgang District, 518129 Shenzhen, China	
Test Result	: ■ Positive <input type="checkbox"/> Negative	
Total pages including Appendices	: 18	

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation chapter A-3.4.

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test.....	4
4	Summary of Test Standards.....	5
5	Summary of Test Results.....	6
6	General Remarks	7
7	Systems test configuration	8
8	Test Setups	9
9	Test Methodology.....	10
9.1	Radiated Emission.....	10
9.2	Bandwidth Measurement	15
9.3	Deactivation Time	16
10	Test Equipment List	17
11	System Measurement Uncertainty	18

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13, Zhiheng Wisdomland Business Park,
Guankou Erlu, Nantou, Nanshan District,
Shenzhen, 518052 China

FCC Designation Number: CN5009

FCC Registration No.: 514049

IC Registration No.: 10320A

Telephone: 86 755 8828 6998
Fax: 86 755 8828 5299

3 Description of the Equipment Under Test

Product / PMN: Remote Controller

Model no. / HVIN: ZSJ-1708-01

FCC ID: 2BAREINF13590495422

IC: 30329-INFELL

Ratings: 3.0VDC(Powered by 2*AAA Batteries)

RF Transmission Frequency: 433.92MHz

Modulation: FSK

Antenna Type: PCB Antenna

Antenna Gain: -2.0dBi for 433.92 MHz

Description of the EUT: The Equipment Under Test (EUT) is a Remote Controller supports 433.92MHz SRD functions.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2021 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 5 Amendment 2, February 2021	General Requirements and Information for the Certification of Radio Apparatus
RSS-210 Issue 10, Amendment, April 2020	RSS-210 – Licence-Except Radio Apparatus: Category I Equipment

All the test methods were according to ANSI C63.10.

5 Summary of Test Results

Technical Requirements					
FCC Part 15 Subpart C, RSS-210 Issue 10					
Test Condition			Pages	Test Site	Test Result
§15.207	RSS-GEN A8.8	Conducted emission AC power port	--	--	Not Applicable
§15.205, §15.209, 15.35 (c) §15.231 (b)	RSS-210 A.1.2	Radiated Emission, 30MHz to 4.5GHz	10	Site 1	Pass
§15.231(c)	RSS-210 A.1.3	Bandwidth Measurement	15	Site 1	Pass
§15.231 (a) (1)	RSS-210 A.1.1(a)	Deactivation Time	16	Site 1	Pass
§15.203	RSS-Gen 6.8	Antenna requirement	--	See Note 2	Pass

Note 1: N/A=Not Applicable.

Note 2: The EUT uses a monopole antenna, which gain is -2dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2BAREINF13590495422 complies with 15.209, 15.231 of the FCC Part 15.

This submittal(s) (test report) is intended for IC: 30329-INFELL complies with RSS-Gen Issue 5 and RSS-210 issue 10.

SUMMARY:

All tests according to the regulations cited on page 5 were

- Performed

- **Not** Performed

The Equipment Under Test

- **Fulfills** the general approval requirements.

- **Does not** fulfill the general approval requirements.

Sample Received Date: 2023-03-29

Testing Start Date: 2023-03-29

Testing End Date: 2023-05-25

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch

Reviewed by:






Jessie He
EMC Project Manager

Dawi Xu
EMC Project Manager

Prepared by:

Tested by:



Carry Cai
EMC Test Engineer

7 Systems test configuration


Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.	REMARK
---	---	---	---
---	---	---	---


8 Test Setups

7.1 Radiated test setups


Below 1GHz

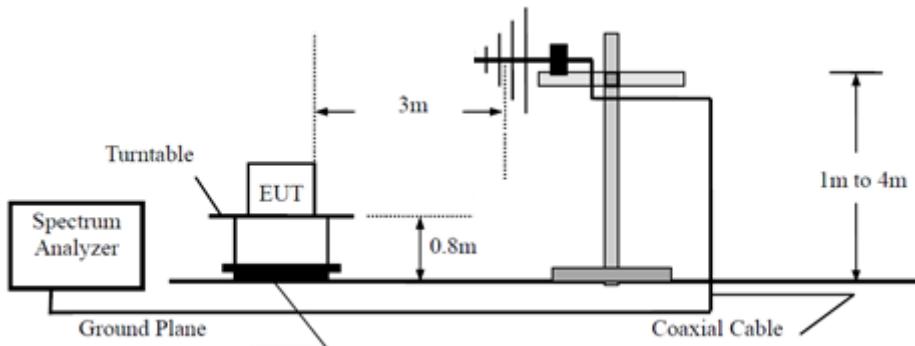


Above 1GHz

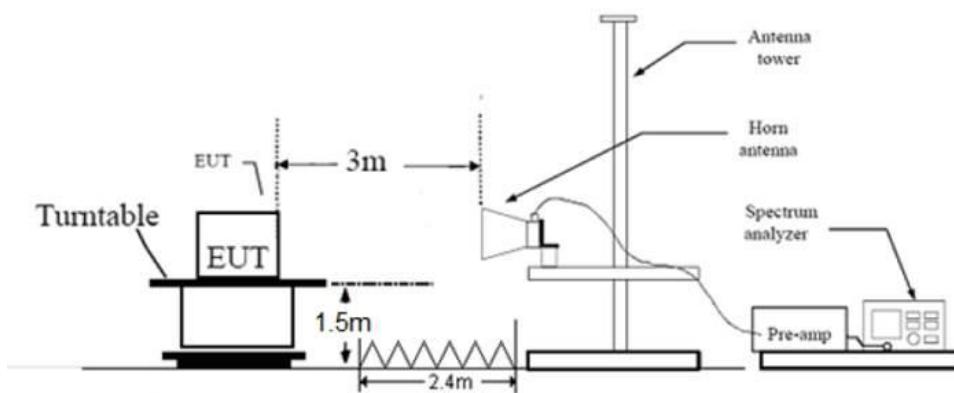

7.2 Conducted RF test setups



7.3 AC Power Line Conducted Emission test setups

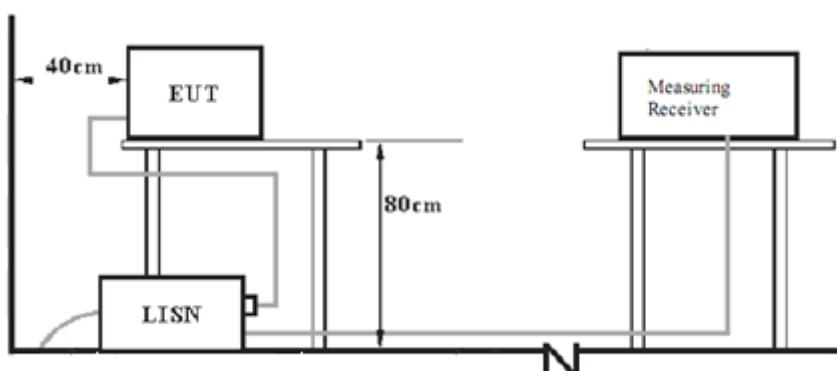

9 Test Methodology

9.1 Radiated Emission

Test Method

- 1: The EUT was place on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 100 KHz to 120KHz, VBW \geq RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 1MHz, VBW \geq RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

- a) RBW = 1MHz.
- b) VBW \ [3 \times RBW].
- c) Detector = RMS (power averaging), if [span / (# of points in sweep)] \ RBW / 2. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
- g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

- 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
- 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
- 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Limit

According to §15.231 (b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field Strength of Fundamental (Microvolts /meter)	Field Strength of spurious emissions ((Microvolts /meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	1,250 to 3,370 *	125 to 375 *
174-260	3,750	375
260-470 ✓	3,750 to 12, 500*	375 to 1,250*
Above 470	12,500	1,250

* Linear interpolations

(1) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Radiated Emission									
Value	Emissions Frequency MHz	E-Field Polarity	PK Emission dB μ V/m	Corr.	Average Factor dB	AV Emission dB μ V/m	Limit dB μ V/m	Margin	Emission Type
Below 1GHz									
PK	433.92	H	51.91	22.09	/	/	100.82	49.82	Fundamental
AV	433.92	H	/	/	-9.85	42.06	80.82	38.97	Fundamental
PK	433.92	V	46.31	22.09	/	/	100.82	54.51	Fundamental
AV	433.92	V	-	/	-9.85	36.46	80.82	44.57	Fundamental
PK	867.86	H	39.12	29.05	/	/	80.82	41.17	Spurious
AV	867.86	H	/	/	-9.85	29.27	60.82	31.76	Spurious
PK	867.86	V	33.88	29.05	/	/	80.82	46.94	Spurious
AV	867.86	V	/	/	-9.85	24.03	60.82	37.00	Spurious
Above 1GHz									
PK	4996.50*	H	50.46	6.54	/	/	80.82	32.27	Spurious
AV	4996.50*	H	/	/	-9.85	40.61	60.82	39.80	Spurious
PK	2443.50	V	41.76	-4.43	/	/	80.82	39.06	Spurious
AV	5766.00	V	/	/	-9.85	31.91	60.82	39.12	Spurious

Remark:

1: AV Emission Level= PK Emission Level+20log(duty cycle)

2: Data of measurement within this frequency range shown "/" in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.

3: "*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.

4: Level= Reading Level + Correction Factor


Correction Factor = Antenna Factor + Cable Loss- Amplifier Gain

(The Reading Level is recorded by software which is not shown in the sheet)


Duty Cycle =(0.406*18+1.2*7)(ms)/48.7(ms) =32.2%

Duty Cycle Factor =20log (Duty Cycle) =-9.85

Spurious radiated emissions for transmitter

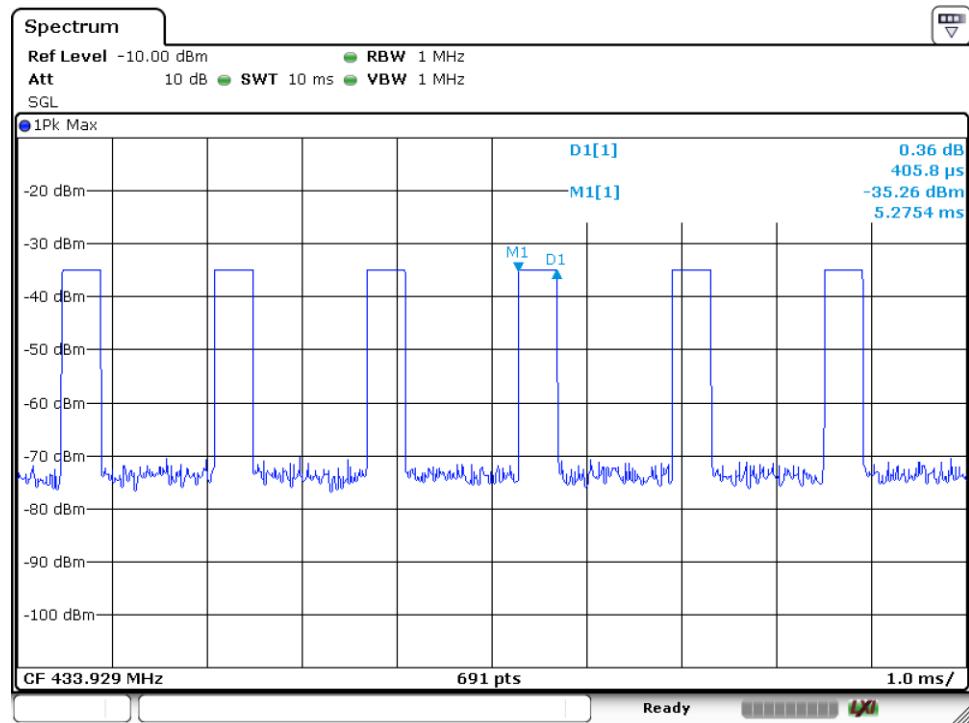


Date: 26.APR.2023 15:43:21

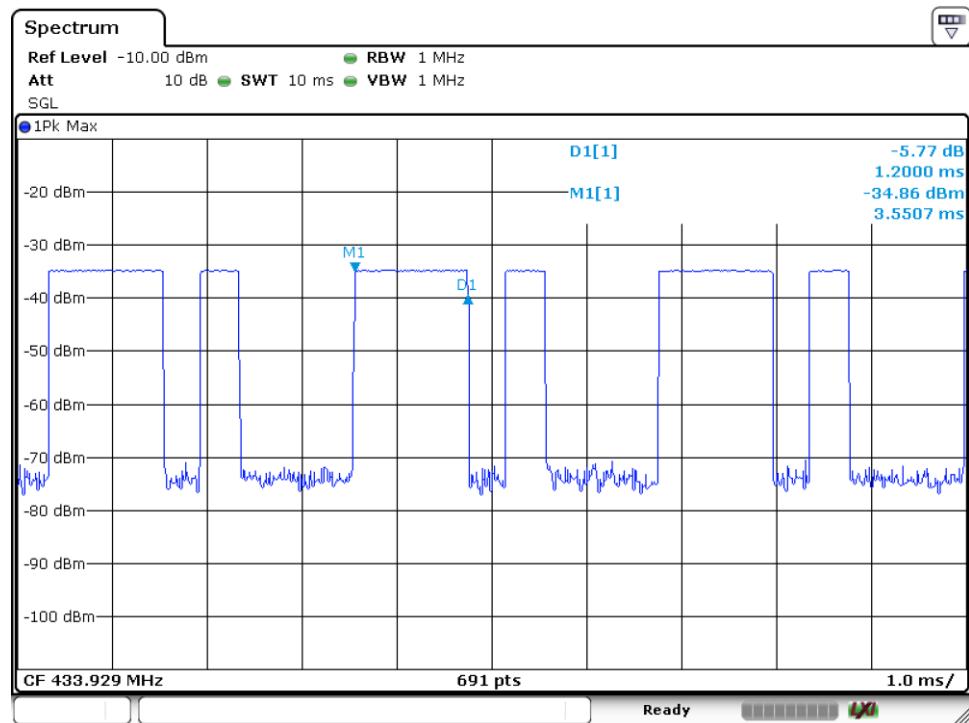


Date: 26.APR.2023 15:43:50

Spurious radiated emissions for transmitter

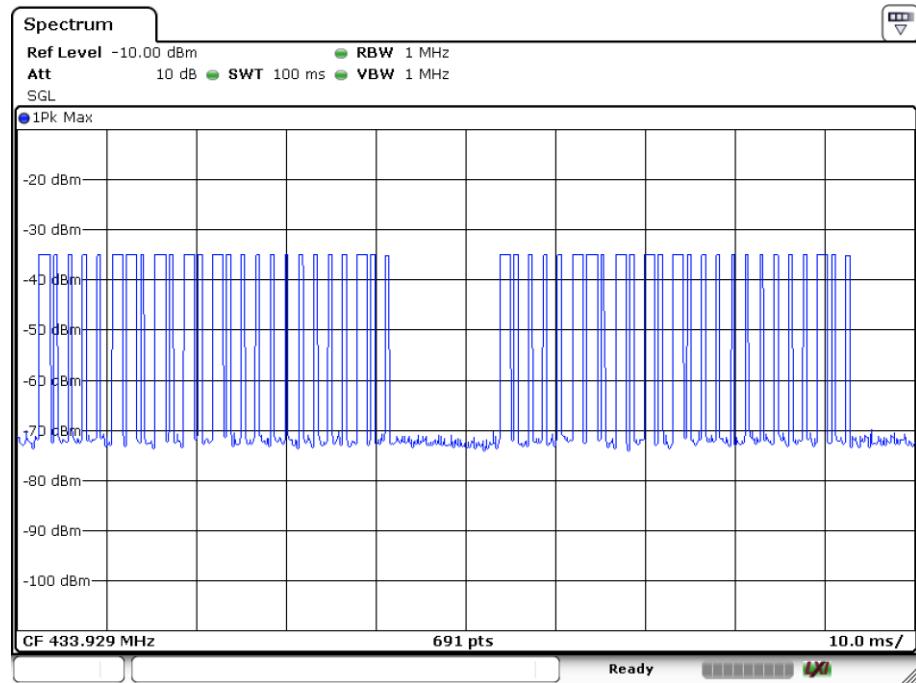

Date: 26.APR.2023 15:41:55

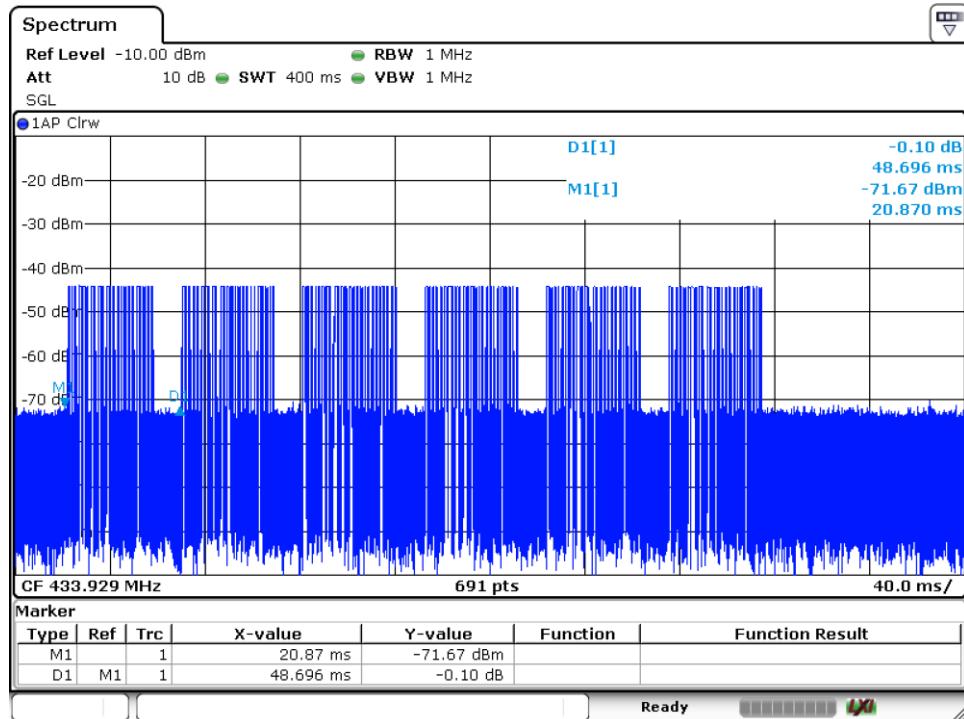

Date: 13.JUN.2023 13:26:39

9.2 Bandwidth Measurement

Test Method


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. For devices operating above 900MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

The limit for the EUT = $0.25\% * 433.92 \text{ MHz} = 1085 \text{ kHz}$

Test Result

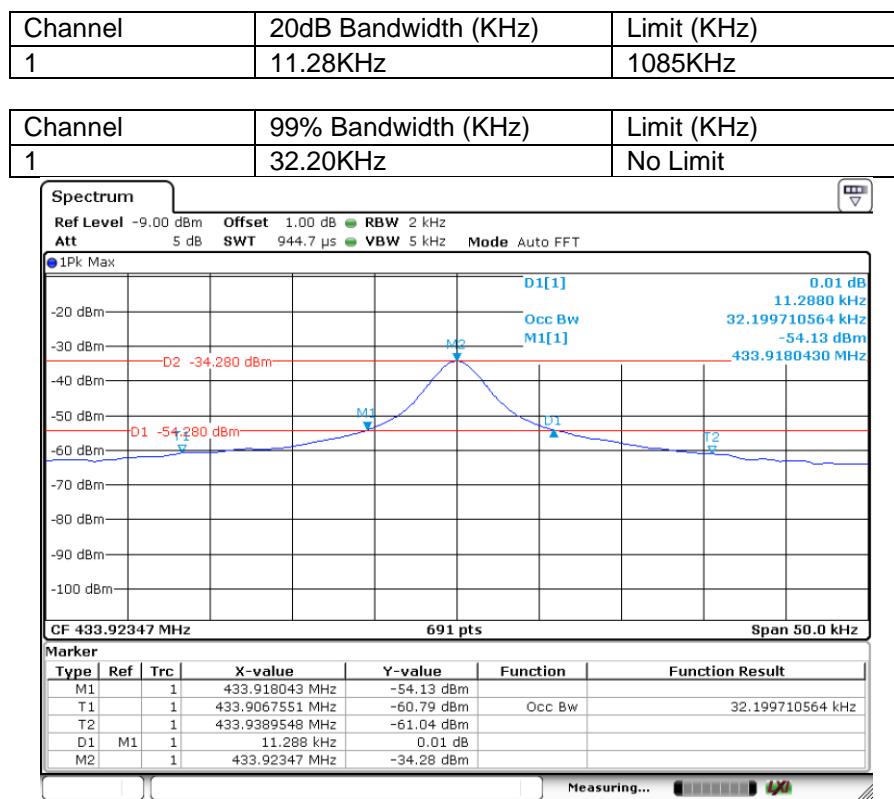

Date: 26.APR.2023 15:37:39

9.3 Deactivation Time

Test Method

1. Place the EUT in the chamber and set it in transmitting mode.
2. Set center frequency of spectrum analyzer=operating frequency.
3. Set the spectrum analyzer as RBW=120 KHz, VBW=1MHz, Span=0Hz.
4. Repeat above procedures until all frequency measured was complete.

Limit


According to FCC Part 15.231 (a), the transmitter shall be complied the following requirements:
 (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

Test Result

Channel	Frequency	Deactivation Time	Result
1	433.92MHz	295ms	Pass

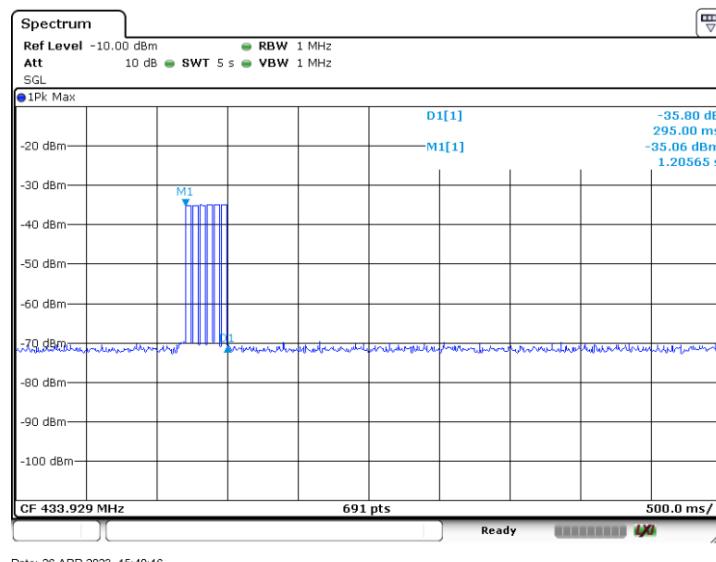

10 Test Equipment List

Radiated Emission Test 2#

Description	Manufacturer	Model no.	Equipment ID	Serial no.	Cal interval (year)	Cal. due date
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2023-5-28
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2024-3-5
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2023-5-9
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2023-5-28
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-002	100746	1	2023-5-28
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2023-7-12
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2023-7-27
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2023-5-27
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	2	2023-5-28
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version 10.35.02	N/A	N/A

RF Conducted Test

Description	Manufacturer	Model no.	Equipment ID	Serial no.	Cal interval (year)	Cal. due date
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2023-5-27

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 30MHz-1000MHz	Horizontal: 4.59dB; Vertical: 4.75dB;
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 1000MHz-18000MHz	Horizontal: 5.08dB; Vertical: 5.09dB;
Uncertainty for Conducted RF test with TS 8997	RF Power Conducted: 1.31dB Frequency test involved: 0.6×10^{-8} or 1%

Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2021, clause 4.4.3 and 4.5.1.

---THE END OF REPORT---