


	802. 11	Channel	TRP (db)	TIS (dbm)
WIFI	11A (5G)	CH36	10.53	
		CH64	10.31	
		CH165	10.04	-70.52
	11B(2.4G)	CH1	13.11	
		CH7	13.35	
		CH13	13.56	-83.01


Passive Test		
Freq	Effi	Gain
(MHz)	(%%)	(dBi)
2400.0	55.2%	3.11
2420.0	54.5%	3.05
2440.0	53.7%	3.02
2460.0	54.2%	3.04
2480.0	55.1%	3.13
2500.0	55.8%	3.09

Passive Test		
Freq	Effi	Gain
(MHz)	(%%)	(dBi)
5100.0	51.1%	3.08
5150.0	50.6%	3.02
5200.0	50.2%	3.10
5250.0	49.5%	3.15
5300.0	48.7%	3.23
5350.0	49.3%	3.41
5400.0	47.9%	3.28
5450.0	45.3%	3.21
5500.0	44.2%	3.12
5550.0	45.3%	3.37
5600.0	46.0%	3.65
5650.0	45.7%	3.92
5700.0	45.2%	4.25
5750.0	44.6%	4.06
5800.0	44.1%	4.11

2400MHz-2500MHz



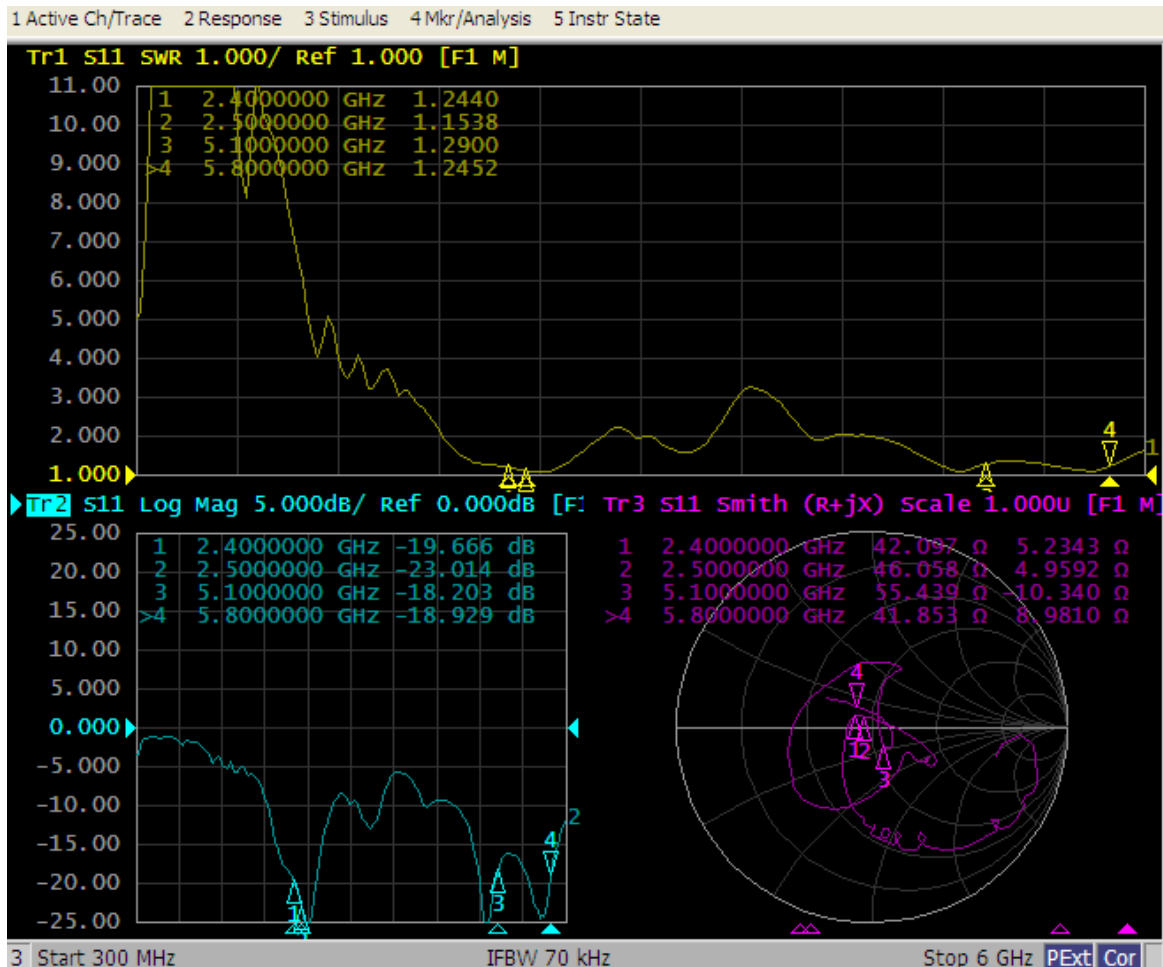


2400MHz-2500MHz



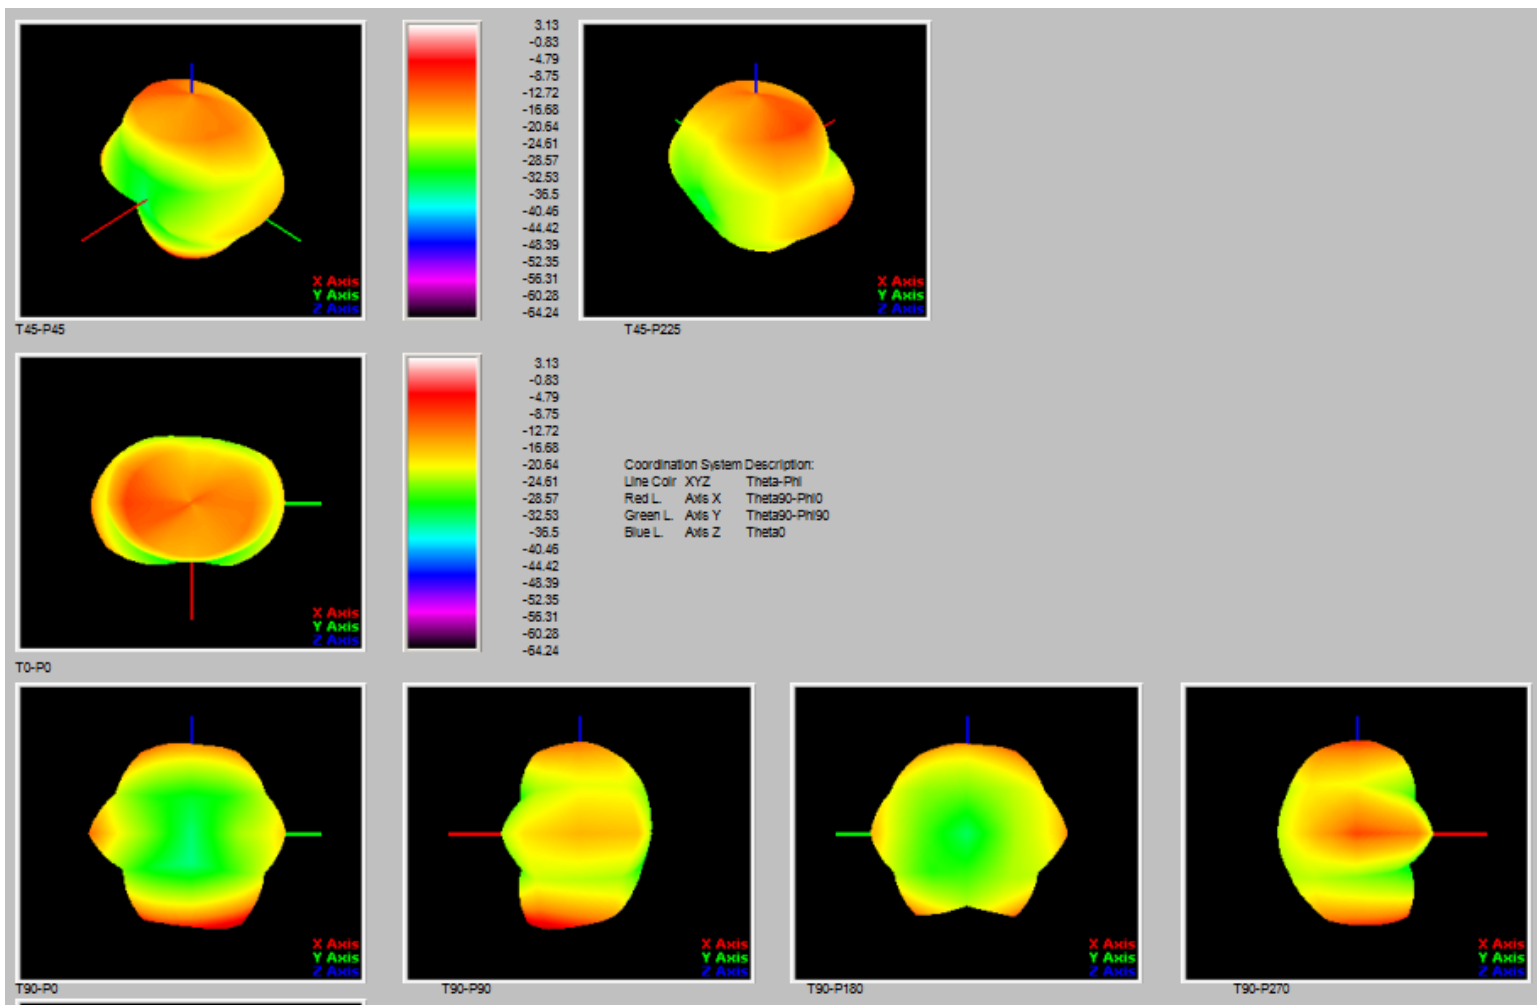


2400MHz-2500MHz


Horizontal:

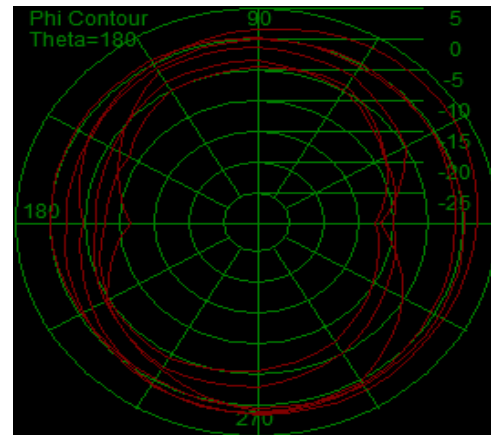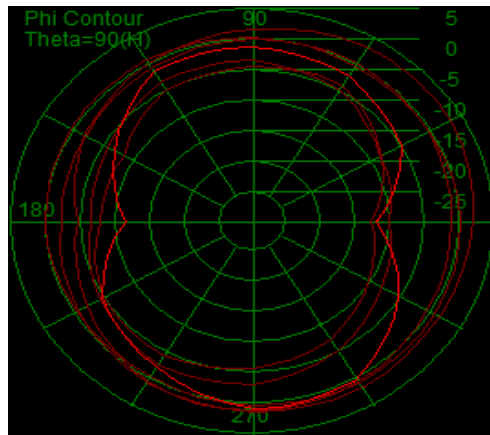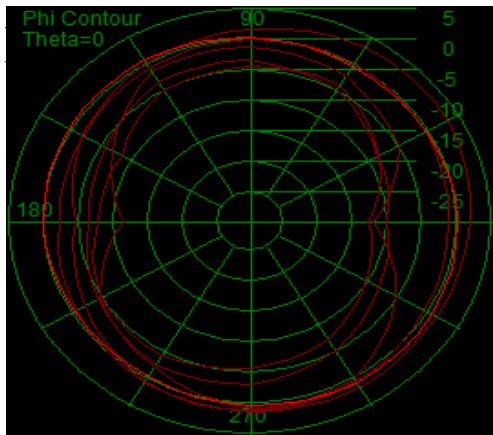

Vertical:

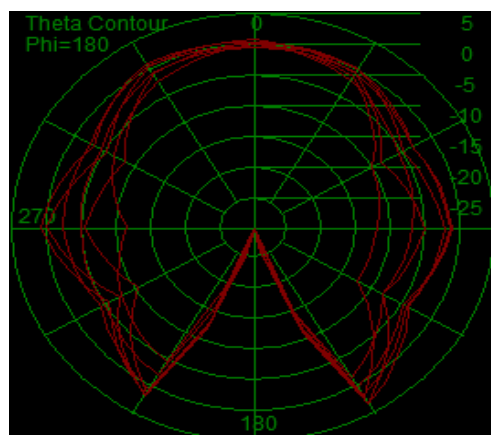
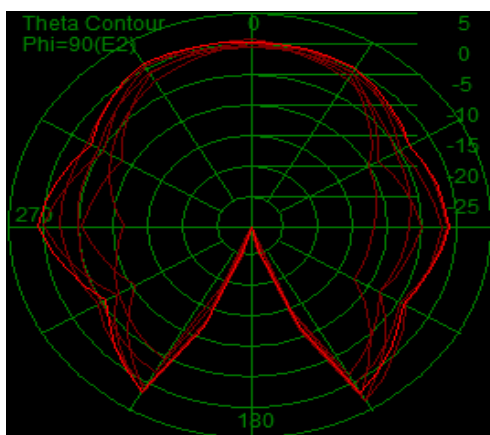
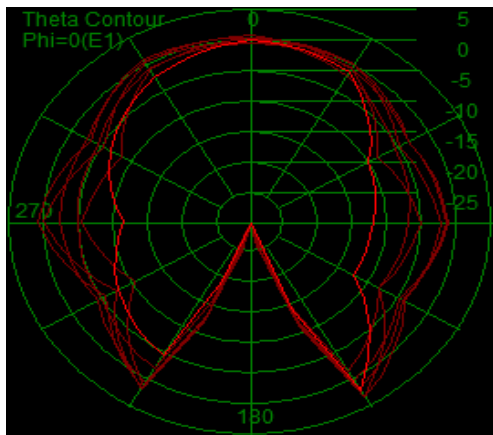


5100MHz-5800MHz



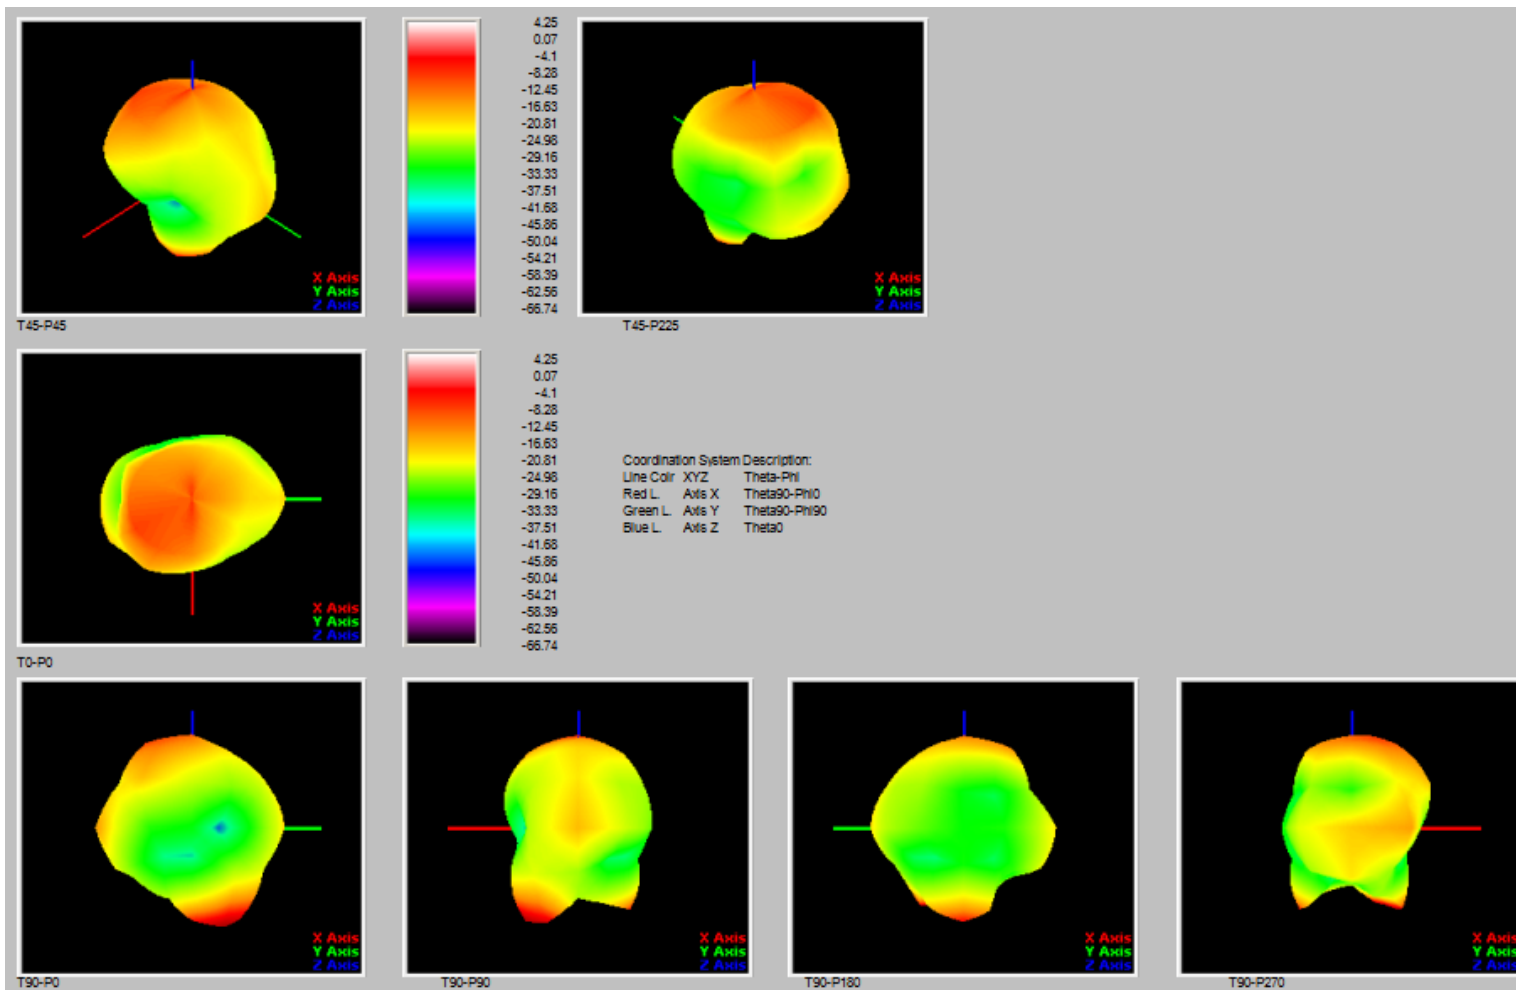


5100MHz-5800MHz


Horizontal:

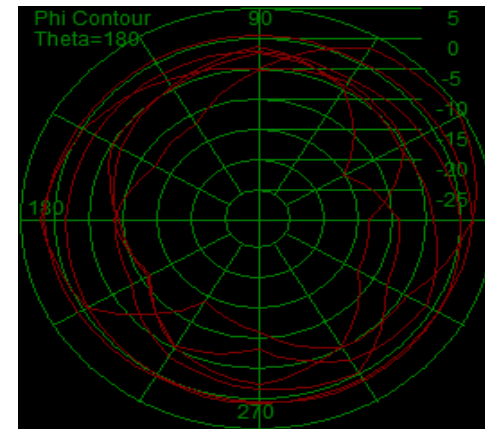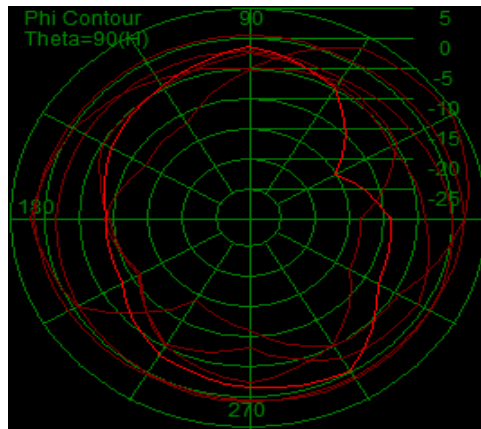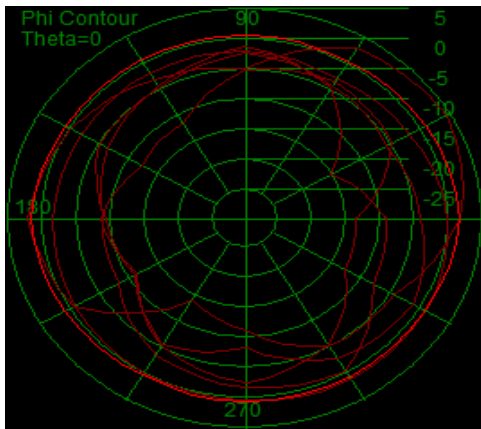

Vertical:

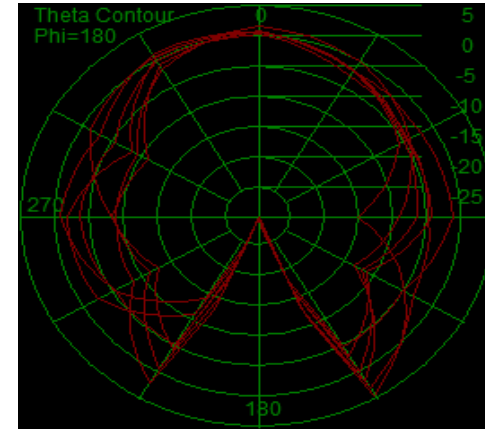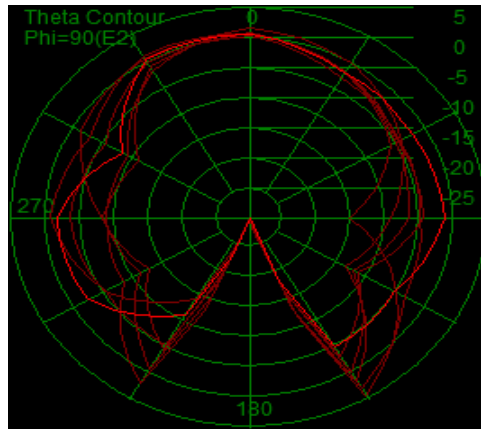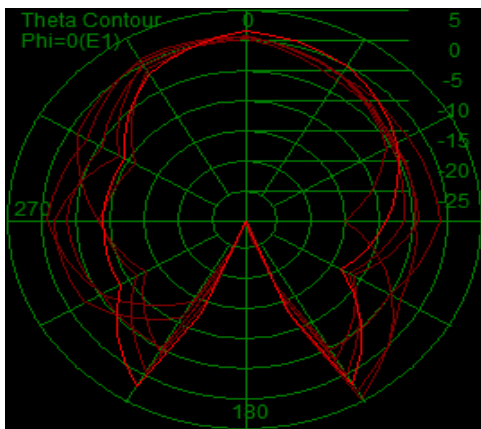

- Shenzhen Yusheng Communication Equipment Co., Ltd.
- Room 411, Building 2, Nantai Yunchuanggu Park, southeast of the intersection of Guangming Avenue and Dongchang Road, Tangwei Community, Fenghuang Street, Guangming District, Shenzhen

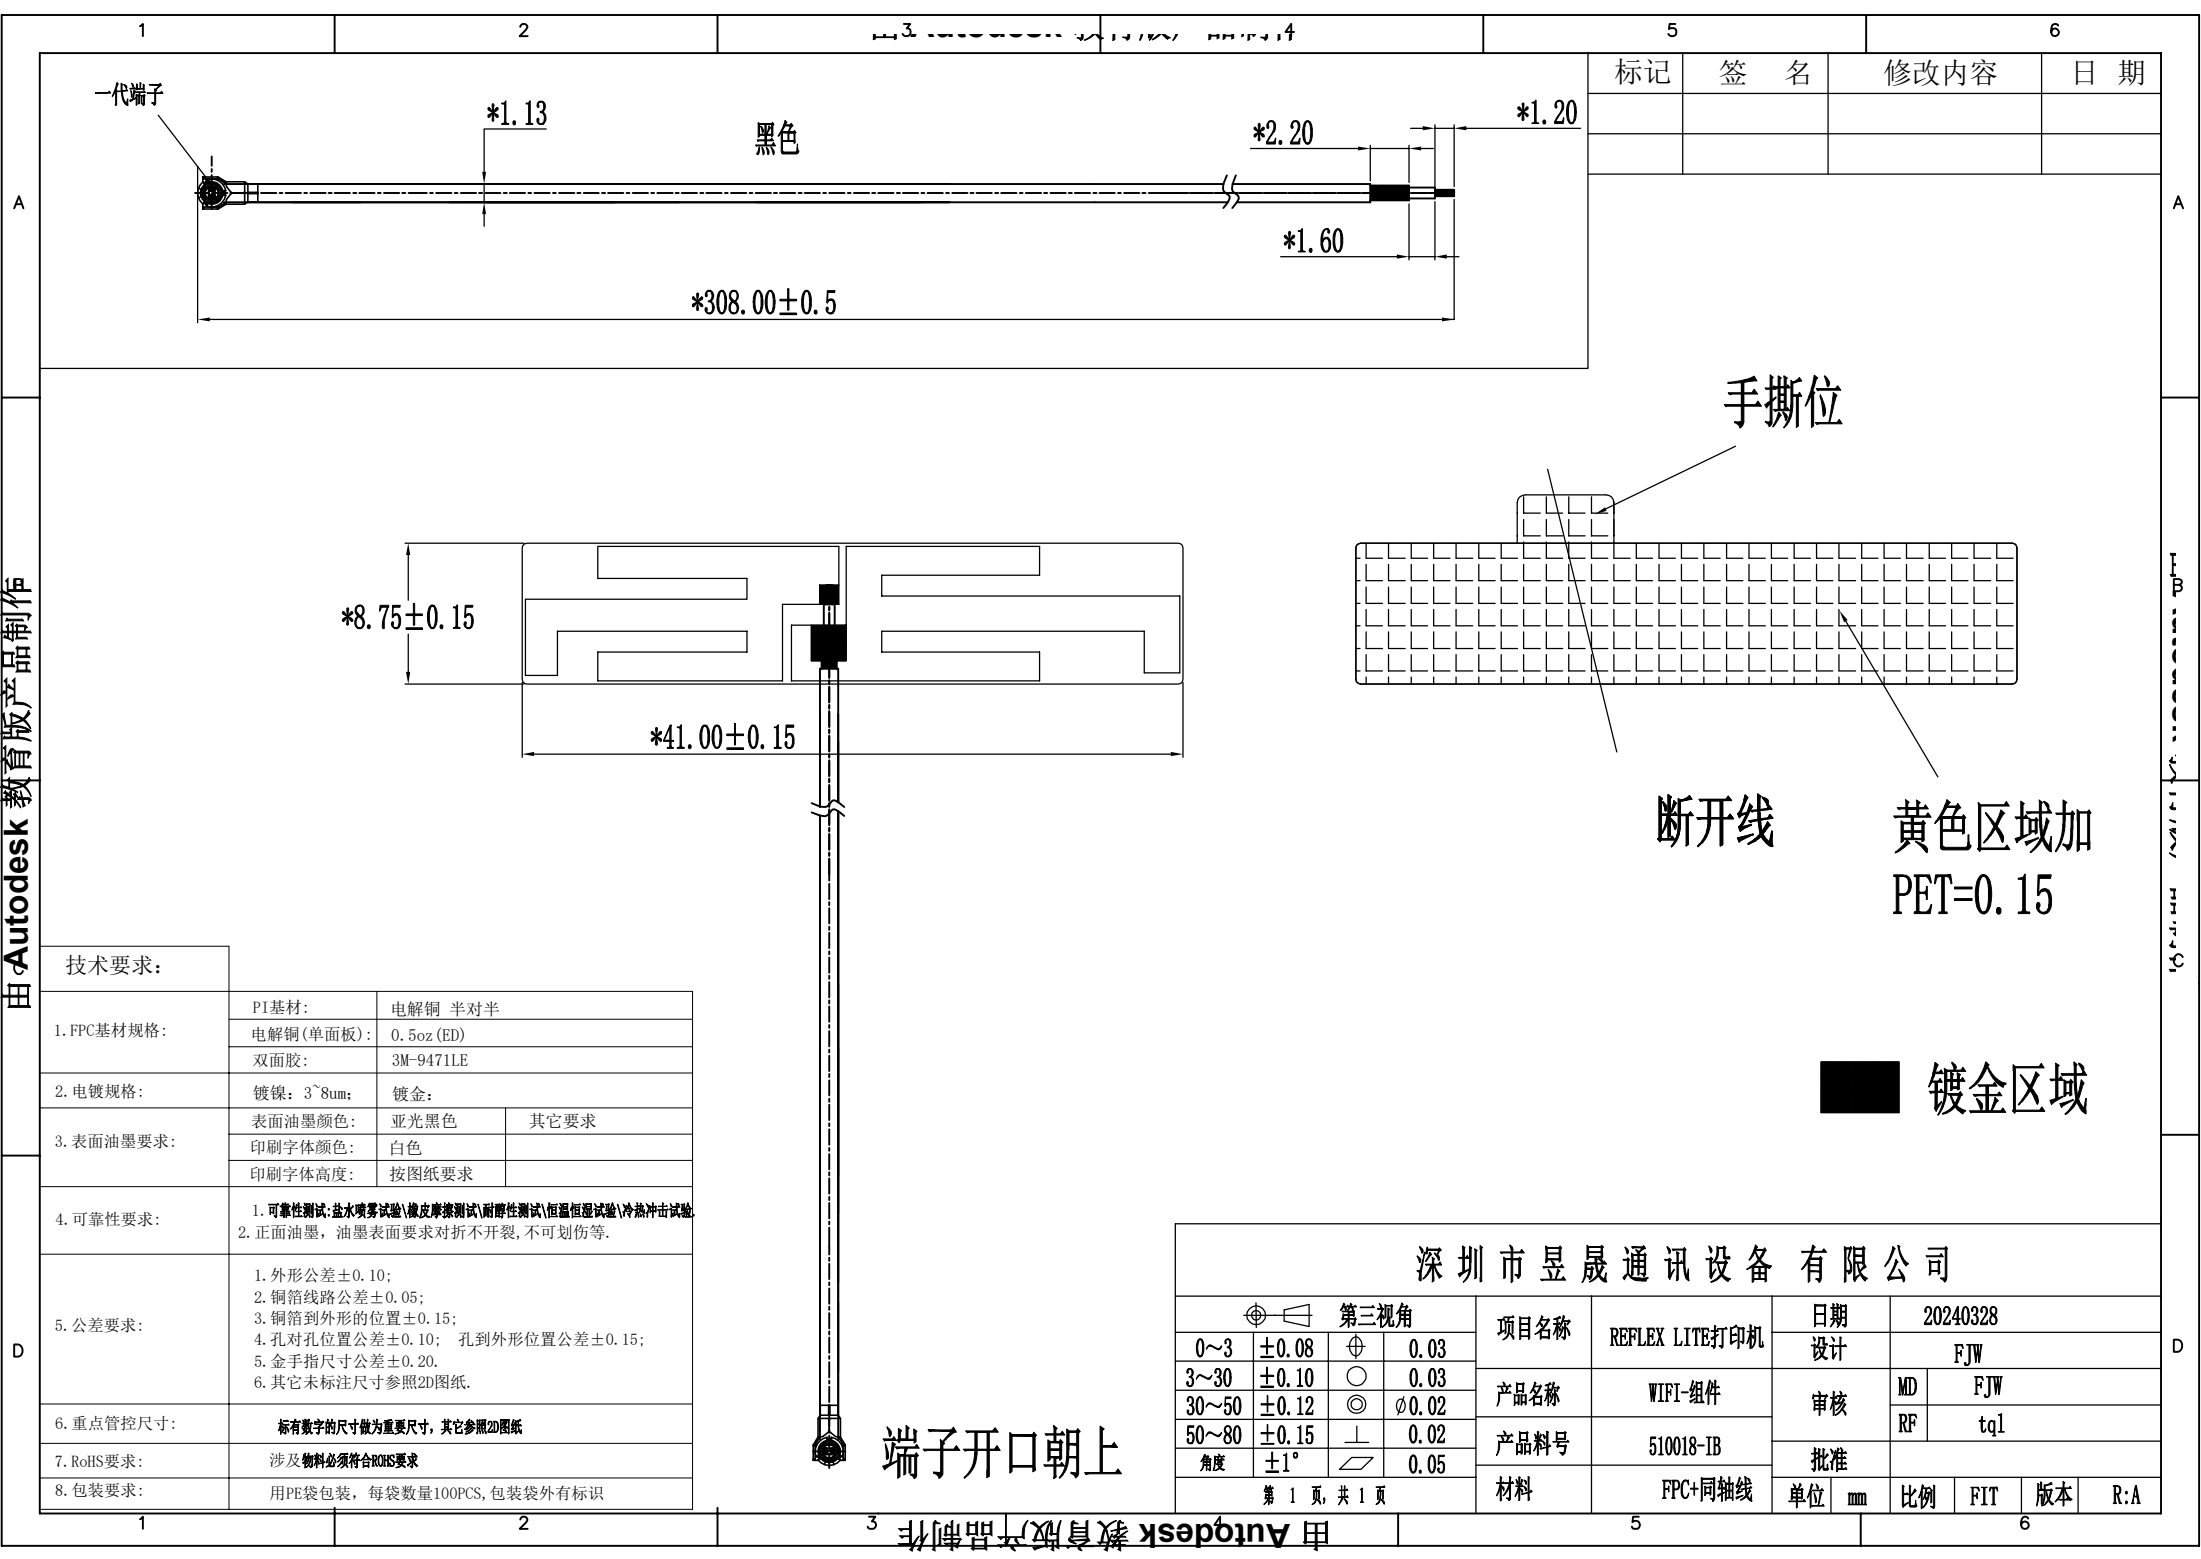

由Autodesk教育版产品制作

D

A

由Autodesk教育版产品制作

D