



FCC Part 15C Test Report

FCC ID: 2BASB-PKM8710ECF

Applicant: Realsil Microelectronics (suzhou) co. Ltd.

Address: No.128, West Shenhu Road, Suzhou Industrial Park, Jiangsu Province

Manufacturer: Realsil Microelectronics (suzhou) co. Ltd.

Address: No.128, West Shenhu Road, Suzhou Industrial Park, Jiangsu Province

EUT: Wireless module

Trade Mark: N/A

Model Number: PKM8710ECF-C53-F20

Date of Receipt: Nov. 03, 2024

Test Date: Nov. 03, 2024 - Mar. 03, 2025

Date of Report: Mar. 03, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 C 15.247
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-241101026ER

Prepared (Test Engineer): Alisa Song

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	6
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	7
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	7
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	7
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	8
3 . EMC EMISSION TEST	9
3.1 CONDUCTED EMISSION MEASUREMENT	9
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	9
3.1.2 TEST PROCEDURE	9
3.1.3 DEVIATION FROM TEST STANDARD	9
3.1.4 TEST SETUP	10
3.1.5 EUT OPERATING CONDITIONS	10
3.1.6 TEST RESULTS	10
3.2 RADIATED EMISSION MEASUREMENT	13
3.2.1 RADIATED EMISSION LIMITS	13
3.2.2 TEST PROCEDURE	14
3.2.3 DEVIATION FROM TEST STANDARD	14
3.2.4 TEST SETUP	14
3.2.5 EUT OPERATING CONDITIONS	15
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	16
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	17
3.2.8 TEST RESULTS (1GHZ~25GHZ)	19
3.3 RADIATED BAND EMISSION MEASUREMENT	33
3.3.1 TEST REQUIREMENT:	33
3.3.2 TEST PROCEDURE	33
3.3.3 DEVIATION FROM TEST STANDARD	33
3.3.4 TEST SETUP	34
3.3.5 EUT OPERATING CONDITIONS	34
3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	49
3.4.1 APPLICABLE STANDARD	49
3.4.2 TEST PROCEDURE	49
3.4.3 DEVIATION FROM STANDARD	49



Table of Contents	Page
3.4.4 TEST SETUP	49
3.4.5 EUT OPERATION CONDITIONS	49
3.4.6 TEST RESULTS	49
4 . AVERAGE OUTPUT POWER	59
4.1 APPLIED PROCEDURES / LIMIT	59
4.1.1 TEST PROCEDURE	59
4.1.2 DEVIATION FROM STANDARD	59
4.1.3 TEST SETUP	59
4.1.4 EUT OPERATION CONDITIONS	59
4.1.5 TEST RESULTS	60
5 . POWER SPECTRAL DENSITY TEST	68
5.1 APPLIED PROCEDURES / LIMIT	68
5.1.1 TEST PROCEDURE	68
5.1.2 DEVIATION FROM STANDARD	68
5.1.3 TEST SETUP	68
5.1.4 EUT OPERATION CONDITIONS	68
5.1.5 TEST RESULTS	69
6 . 6DB BANDWIDTH TEST	77
6.1 APPLIED PROCEDURES / LIMIT	77
6.1.1 TEST PROCEDURE	77
6.1.2 DEVIATION FROM STANDARD	77
6.1.3 TEST SETUP	77
6.1.4 EUT OPERATION CONDITIONS	77
6.1.5 TEST RESULTS	78
7 . ANTENNA REQUIREMENT	93
7.1 STANDARD REQUIREMENT	93
7.2 EUT ANTENNA	93
8 . TEST SEUUP PHOTO	93
9 . EUT PHOTO	93



1.. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.205, 15.209, 15.247(d)	Radiated Spurious Emission	PASS	
15.205, 15.247(d)	Band Edge Emission& Conducted Spurious Emissions	PASS	
15.247(b)	Average Output Power	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Test lab: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1
Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

1.1. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$
8	6dB Bandwidth	$\pm 0.2\%$
9	Power Spectral Density	$\pm 2.45\text{dBm}$



2.. GENERAL INFORMATION

2.1. GENERAL DESCRIPTION OF EUT

Product Name:	Wireless module
Trademark	N/A
Model No.:	PKM8710ECF-C53-F20
Model Difference	N/A
Operation Frequency:	802.11b/g/n/ax(20MHz): 2412~2472MHz
Channel numbers:	802.11b/g/n/ax(20MHz): 13CH
Channel separation:	5MHz
Modulation technology:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11ax(OFDM): BPSK,QPSK,16-QAM,64-QAM, 256-QAM
Rate of Transmitter	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n/ax: up to 150Mbps
Antenna Type:	PCB Antenna
Antenna gain:	4.5 dBi
Power Supply:	DC 3.3V

Note:

1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.The EUT's all information provided by client.

2. Channel List(802.11b/g/n/ax(20MHz))

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452	13	2472
02	2417	06	2437	10	2457	/	/
03	2422	07	2442	11	2462	/	/
04	2427	08	2447	12	2467	/	/

RU	RU Allocation No. [Subcarrier Range]								
RU26	0 [-121:-96]	1 [-95:-70]	2 [-68:-43]	3 [-42:-17]	4 [-16:-4,4:16]	5 [17:42]	6 [43:68]	7 [70:95]	8 [96:121]
RU52	37 [-121:-70]		38 [-68:-17]		/	38 [17:68]		40 [70:121]	
RU106	53 [-122:-17]				/	54 [17:122]			
Note: BW=20MHz									



2.2. DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11/ CH12/ CH13
Mode 2	802.11g CH1/ CH6/ CH11/ CH12/ CH13
Mode 3	802.11n/ax HT20 CH1/ CH6/ CH11/ CH12/ CH13
Mode 4	RU26 CH1/ CH6/ CH11/ CH12/ CH13
Mode 5	RU52 CH1/ CH6/ CH11/ CH12/ CH13
Mode 6	RU106 CH1/ CH6/ CH11/ CH12/ CH13
Mode 7	Link Mode
For Conducted Emission	
Final Test Mode	Description
Mode 7	Link Mode
For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11/ CH12/ CH13
Mode 2	802.11g CH1/ CH6/ CH11/ CH12/ CH13
Mode 3	802.11n/ax HT20 CH1/ CH6/ CH11/ CH12/ CH13
Mode 4	RU26 CH1/ CH6/ CH11/ CH12/ CH13
Mode 5	RU52 CH1/ CH6/ CH11/ CH12/ CH13
Mode 6	RU106 CH1/ CH6/ CH11/ CH12/ CH13
Mode 7	Link Mode


Note: 1. The measurements are performed at the highest, middle, lowest available channels.

2. During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.




2.3. BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test

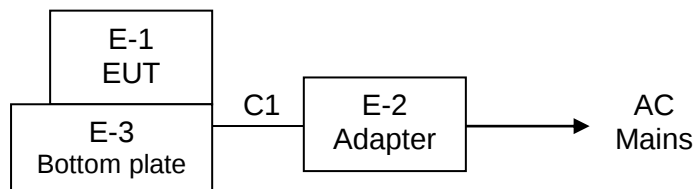

Power Line Conducted Emission test

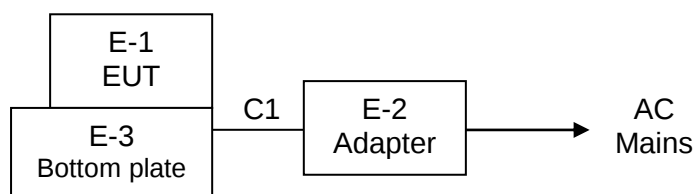

2.4. DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Wireless module	PKM8710ECF-C53-F20	N/A	EUT
E-2	Adapter	HW-0501000E	N/A	
E-3	Bottom plate	PKE8720DF-C13-F10	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C1	No	No	0.5m	Mini USB Line

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5. TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting						
Test software Version						
Test program: AmebaLite_mptool						
Mode	802.11b	802.11g	802.11n/ax HT20	RU26	RU52	RU106
Data Rate	1Mbps	6Mbps	MSC0	MSC0	MSC0	MSC0
Power Setting of Softwave	60	60	60	60	60	60



2.6. EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 02, 2024	Nov. 01, 2025
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 02, 2024	Nov. 01, 2025
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 01, 2024	Oct. 31, 2025
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 01, 2024	Oct. 31, 2025
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 01, 2024	Oct. 31, 2025
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 01, 2024	Oct. 31, 2025
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 01, 2024	Oct. 31, 2025
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 01, 2024	Oct. 31, 2025
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 01, 2024	Oct. 31, 2025
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 01, 2024	Oct. 31, 2025
17	Power Meter	Ceyear	2438PA/PB	/	Nov. 01, 2024	Oct. 31, 2025
18	Peak/continuous wave power probe	Ceyear	81702F	/	Nov. 01, 2024	Oct. 31, 2025

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
3	LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3.. EMC EMISSION TEST

3.1. CONDUCTED EMISSION MEASUREMENT

3.1.1. POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.50	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2. TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3. DEVIATION FROM TEST STANDARD

No deviation

3.1.4. TEST SETUP

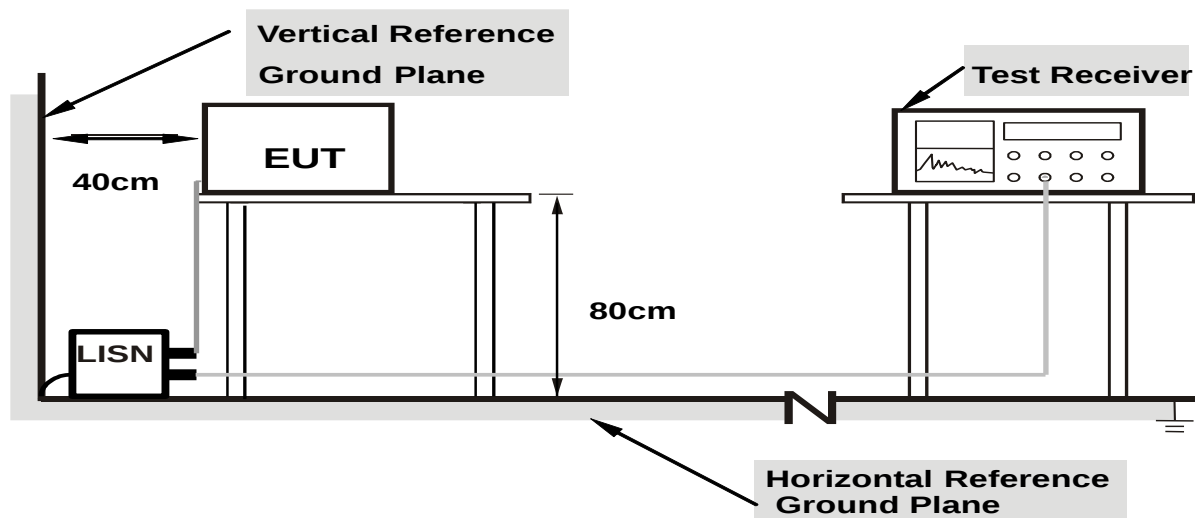

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5. EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

3.1.6. TEST RESULTS



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 7

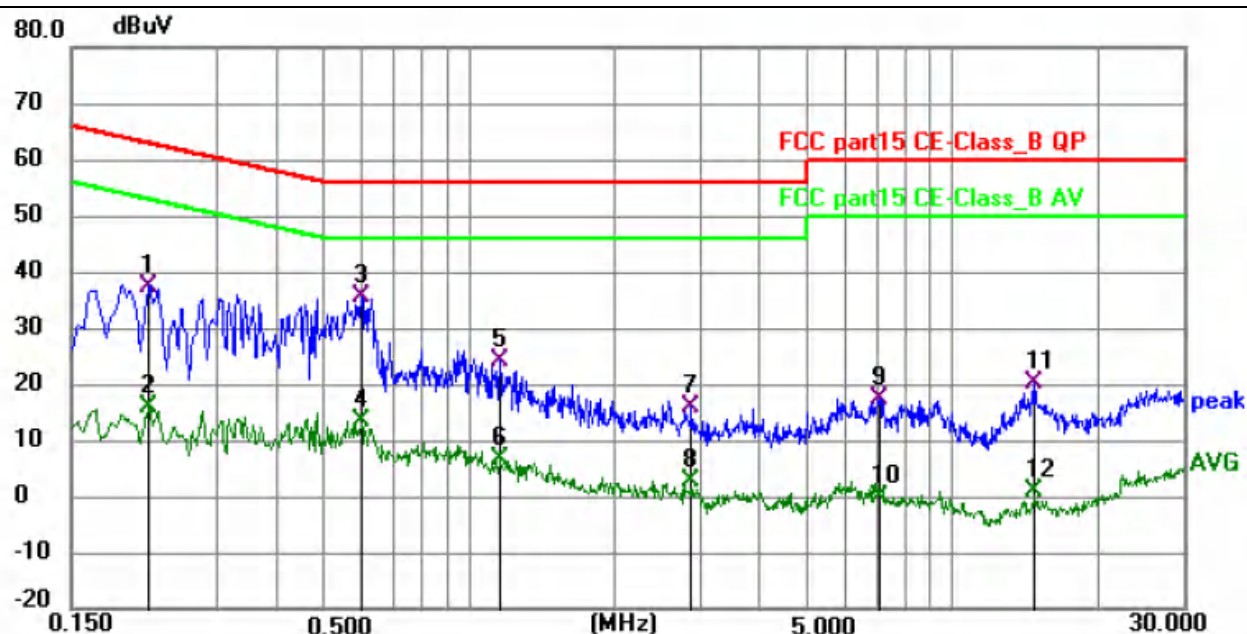


Remark:

 $\text{Margin} = \text{Limit} - \text{Level}$, $\text{Correct Factor} = \text{Cable lose} + \text{LISN insertion loss}$, $\text{Level} = \text{Reading} + \text{Correct factor}$

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2174	27.28	10.11	37.39	62.92	-25.53	QP	P	
2	0.2174	5.66	10.11	15.77	52.92	-37.15	AVG	P	
3 *	0.5955	25.57	10.14	35.71	56.00	-20.29	QP	P	
4	0.5955	3.10	10.14	13.24	46.00	-32.76	AVG	P	
5	1.1580	14.02	10.04	24.06	56.00	-31.94	QP	P	
6	1.1580	-3.35	10.04	6.69	46.00	-39.31	AVG	P	
7	2.8814	5.86	10.12	15.98	56.00	-40.02	QP	P	
8	2.8814	-7.49	10.12	2.63	46.00	-43.37	AVG	P	
9	7.0663	6.51	10.79	17.30	60.00	-42.70	QP	P	
10	7.0663	-11.09	10.79	-0.30	50.00	-50.30	AVG	P	
11	14.7570	8.58	11.66	20.24	60.00	-39.76	QP	P	
12	14.7570	-10.91	11.66	0.75	50.00	-49.25	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 7

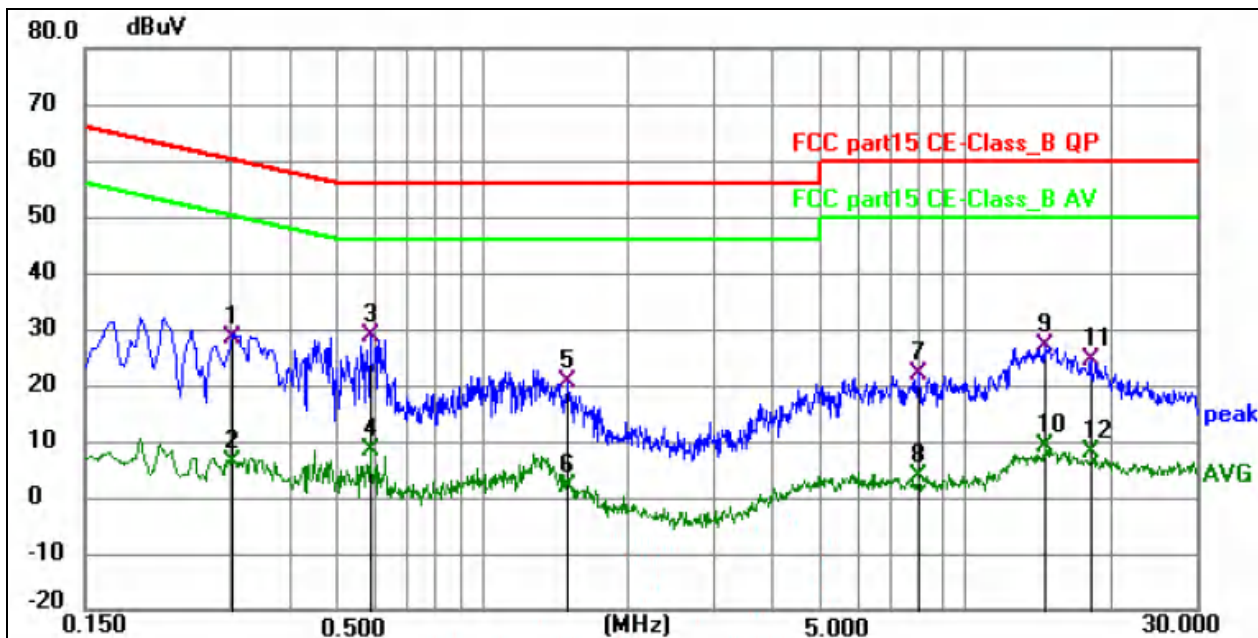

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3030	18.25	10.20	28.45	60.16	-31.71	QP	P	
2	0.3030	-4.10	10.20	6.10	50.16	-44.06	AVG	P	
3 *	0.5865	18.53	10.17	28.70	56.00	-27.30	QP	P	
4	0.5865	-1.82	10.17	8.35	46.00	-37.65	AVG	P	
5	1.5090	10.54	10.08	20.62	56.00	-35.38	QP	P	
6	1.5090	-8.23	10.08	1.85	46.00	-44.15	AVG	P	
7	8.0160	11.22	10.89	22.11	60.00	-37.89	QP	P	
8	8.0160	-7.31	10.89	3.58	50.00	-46.42	AVG	P	
9	14.5905	15.27	11.55	26.82	60.00	-33.18	QP	P	
10	14.5905	-2.48	11.55	9.07	50.00	-40.93	AVG	P	
11	18.2085	12.74	11.81	24.55	60.00	-35.45	QP	P	
12	18.2085	-3.69	11.81	8.12	50.00	-41.88	AVG	P	



3.2. RADIATED EMISSION MEASUREMENT

3.2.1. RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.2.2. TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre.
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3. DEVIATION FROM TEST STANDARD


No deviation

3.2.4. TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

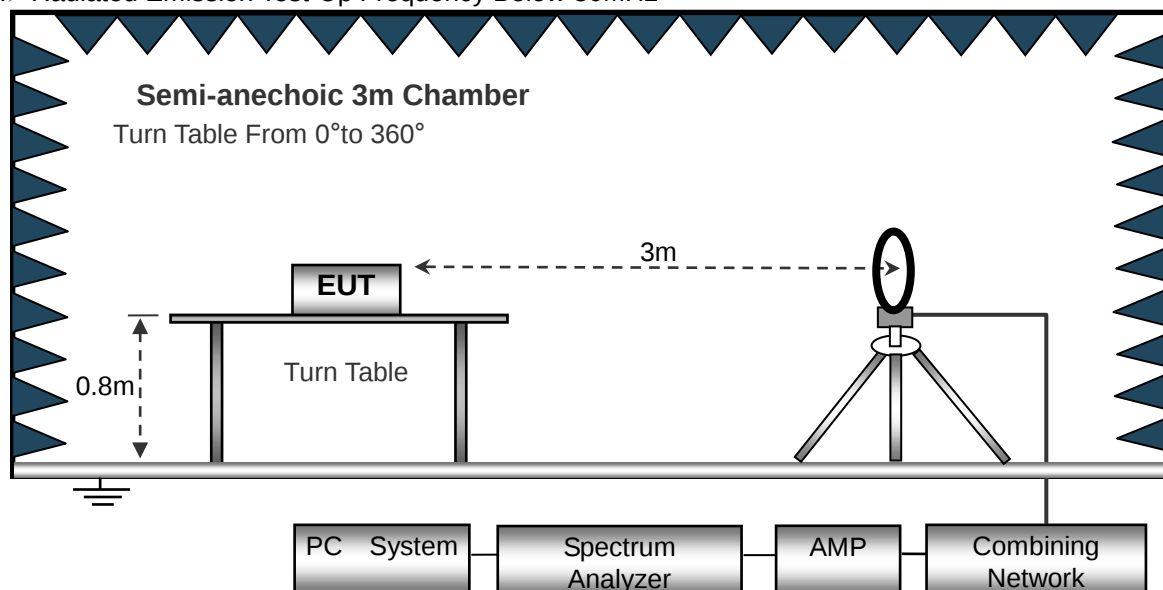

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

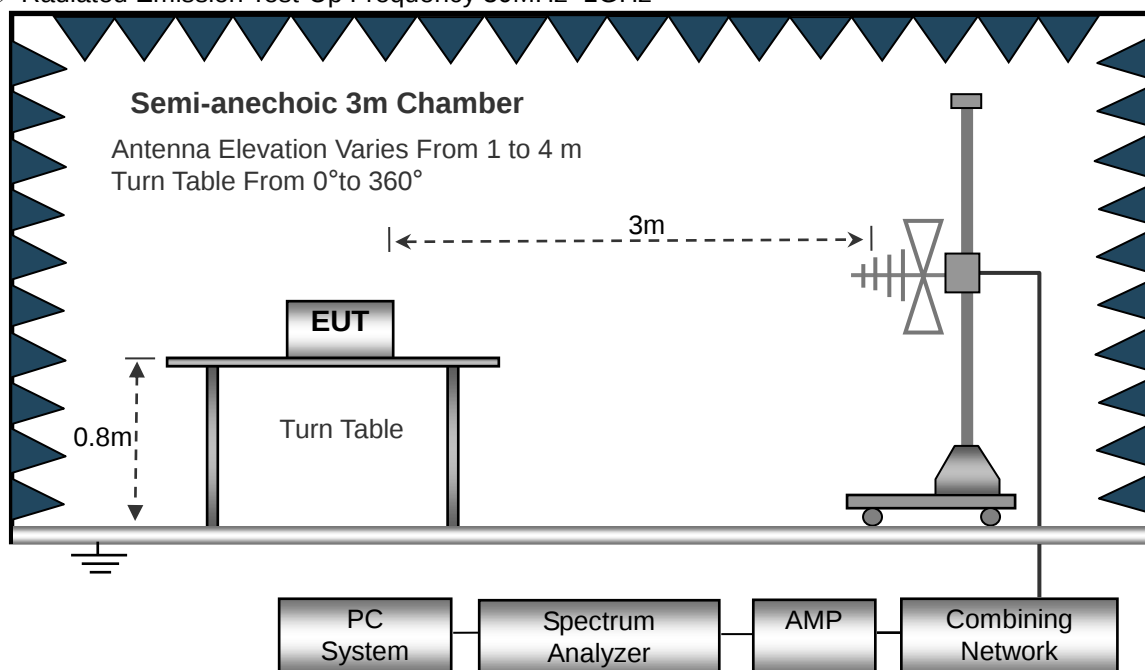

(C) Radiated Emission Test-Up Frequency Above 1GHz

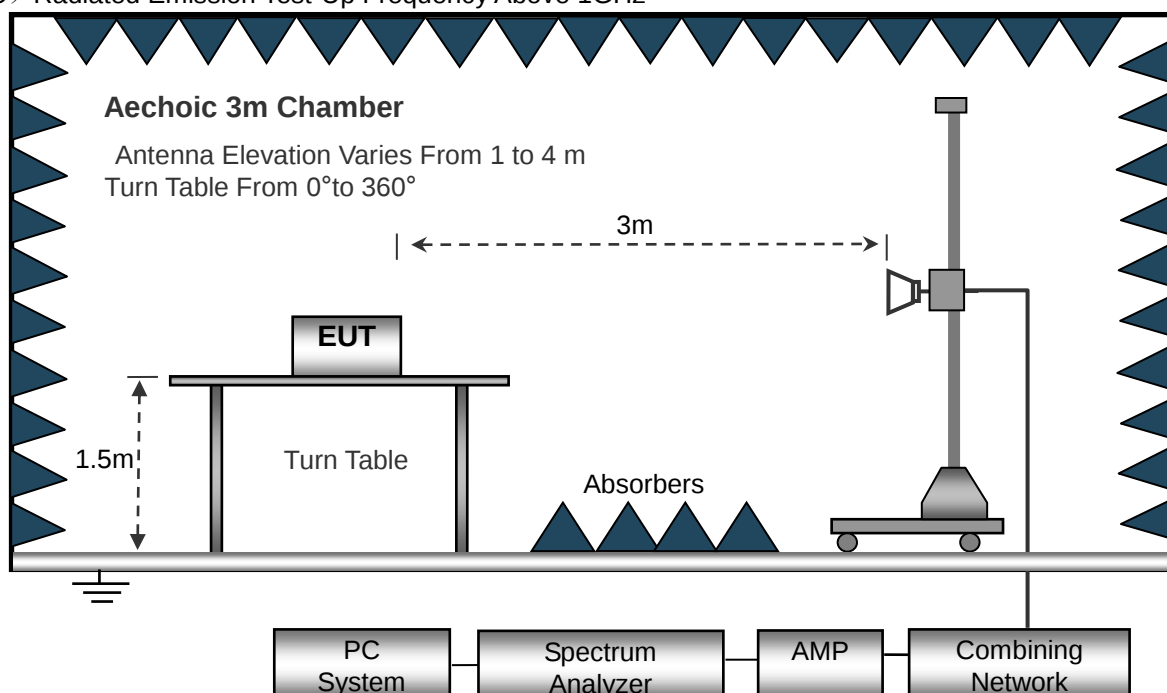

3.2.5. EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6. TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 7	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

**3.2.7. TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 7		

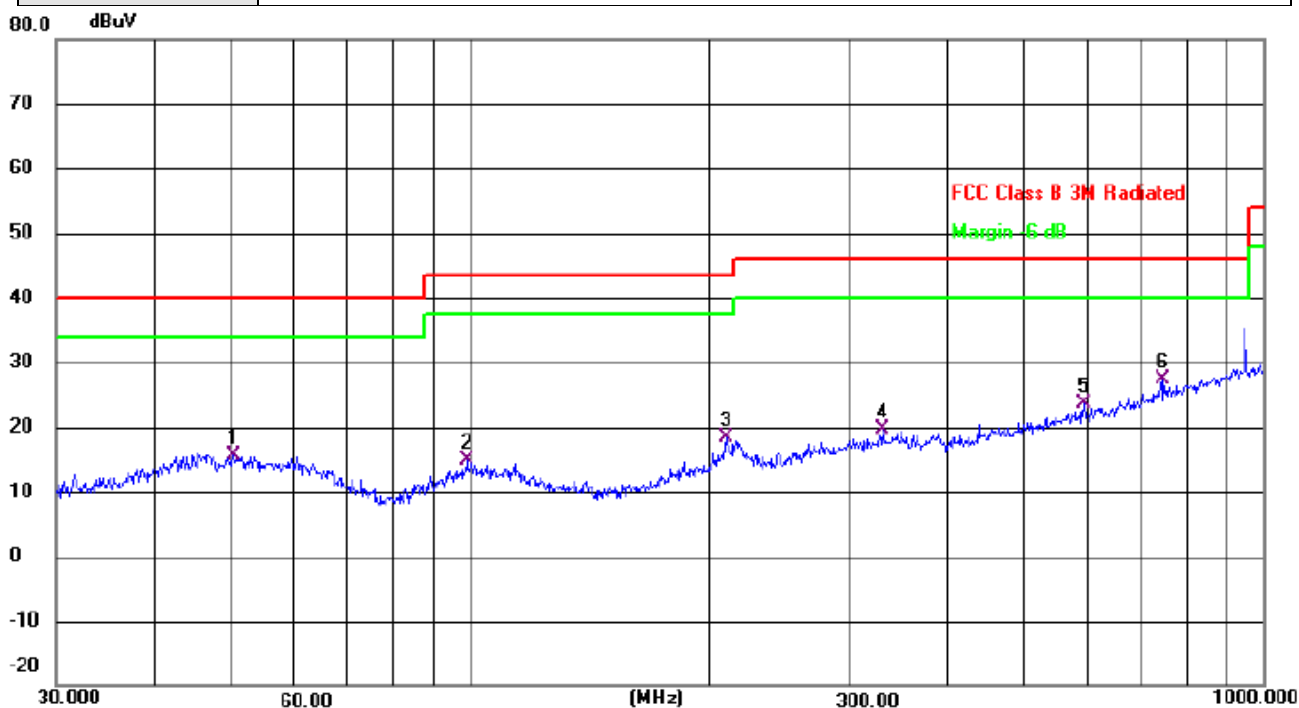

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	dB	Detector
1		50.2323	28.46	-12.85	15.61	40.00	-24.39	QP
2		98.8324	29.84	-15.07	14.77	43.50	-28.73	QP
3		210.0481	32.76	-14.42	18.34	43.50	-25.16	QP
4		330.1947	30.86	-11.12	19.74	46.00	-26.26	QP
5		593.0496	29.14	-5.44	23.70	46.00	-22.30	QP
6	*	744.8659	30.57	-3.25	27.32	46.00	-18.68	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 7		

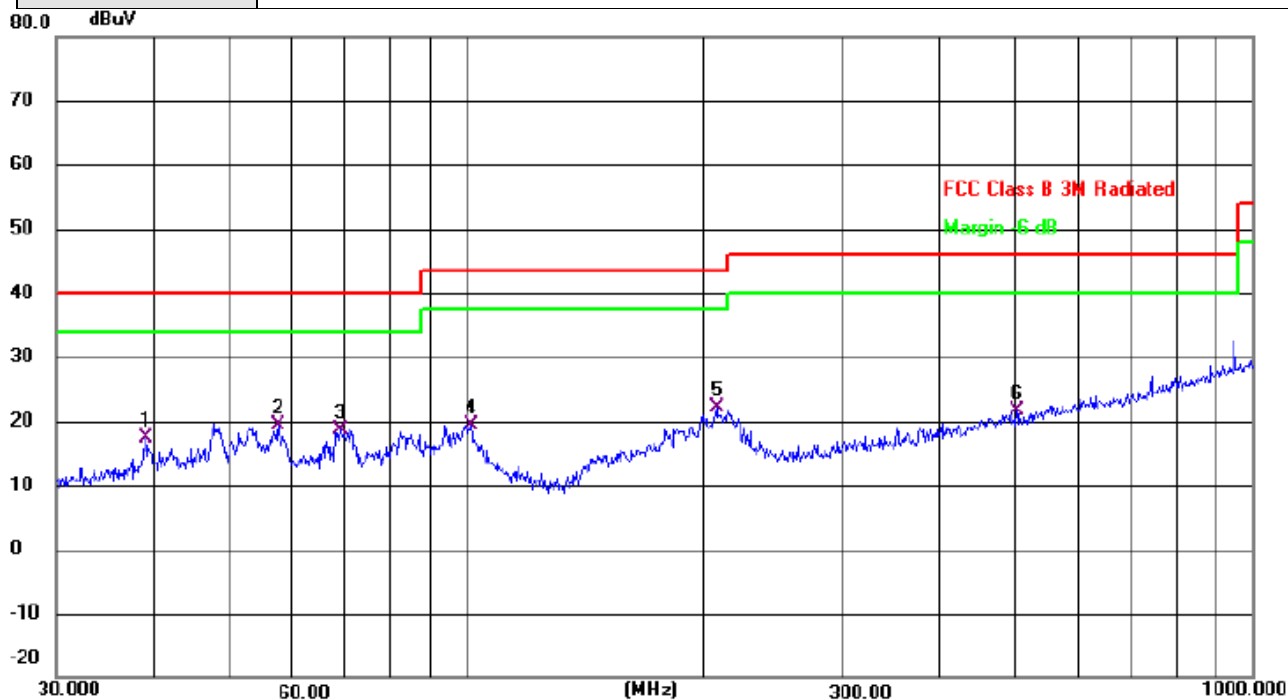

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	dB	Detector
1		39.0242	31.77	-14.32	17.45	40.00	-22.55	QP
2	*	57.5938	32.95	-13.55	19.40	40.00	-20.60	QP
3		69.1140	35.33	-16.65	18.68	40.00	-21.32	QP
4		101.2883	34.10	-14.80	19.30	43.50	-24.20	QP
5		207.8500	36.80	-14.60	22.20	43.50	-21.30	QP
6		501.1788	29.02	-7.37	21.65	46.00	-24.35	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;

**3.2.8. TEST RESULTS (1GHZ~25GHZ)**

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	4824	67.25	50.65	6.88	31.29	54.77	74	-19.23	PK
V	4824	55.14	50.65	6.88	31.29	42.66	54	-11.34	AV
V	7236	66.92	49.98	7.16	36.63	60.73	74	-13.27	PK
V	7236	46.18	49.98	7.16	36.63	39.99	54	-14.01	AV
V	16087	48.66	51.53	11.34	41.52	49.99	74	-24.01	PK
H	4824	66.14	50.65	6.88	31.29	53.66	74	-20.34	PK
H	4824	55.62	50.65	6.88	31.29	43.14	54	-10.86	AV
H	7236	69.57	49.98	7.16	36.63	63.38	74	-10.62	PK
H	7236	45.36	49.98	7.16	36.63	39.17	54	-14.83	AV
H	16087	48.94	51.53	11.34	41.52	50.27	74	-23.73	PK
operation frequency:2437									
V	4874	67.26	50.67	6.89	31.38	54.86	74	-19.14	PK
V	4874	55.58	50.67	6.89	31.38	43.18	54	-10.82	AV
V	7311	69.63	50.02	7.24	36.63	63.48	74	-10.52	PK
V	7311	46.24	50.02	7.24	36.63	40.09	54	-13.91	AV
V	16087	48.25	51.53	11.34	41.52	49.58	74	-24.42	PK
H	4874	66.38	50.67	6.89	31.38	53.98	74	-20.02	PK
H	4874	55.26	50.67	6.89	31.38	42.86	54	-11.14	AV
H	7311	69.55	50.02	7.24	36.63	63.4	74	-10.6	PK
H	7311	47.34	50.02	7.24	36.63	41.19	54	-12.81	AV
H	16087	48.28	51.53	11.34	41.52	49.61	74	-24.39	PK
operation frequency:2462									
V	4924	68.23	50.79	6.83	31.36	55.75	74	-18.25	PK
V	4924	55.34	50.79	6.83	31.36	43.16	54	-10.84	AV
V	7386	69.58	50.11	7.25	36.58	62.99	74	-11.01	PK
V	7386	46.16	50.11	7.25	36.58	40.14	54	-13.86	AV
V	16087	49.34	51.53	11.34	41.52	50.57	74	-23.43	PK
H	4924	67.87	50.79	6.83	31.36	55.06	74	-18.94	PK
H	4924	55.23	50.79	6.83	31.36	42.68	54	-11.32	AV
H	7386	67.68	50.11	7.25	36.58	61.11	74	-12.89	PK
H	7386	48.15	50.11	7.25	36.58	41.94	54	-12.06	AV
H	16087	49.63	51.53	11.34	41.52	50.47	74	-23.53	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2467									
V	4934	67.63	50.65	6.88	31.29	55.15	74	-18.85	PK
V	4934	55.14	50.65	6.88	31.29	42.66	54	-11.34	AV
V	7401	66.38	49.98	7.16	36.63	60.19	74	-13.81	PK
V	7401	46.46	49.98	7.16	36.63	40.27	54	-13.73	AV
V	17269	48.85	51.53	11.34	41.52	50.18	74	-23.82	PK
H	4934	66.24	50.65	6.88	31.29	53.76	74	-20.24	PK
H	4934	55.69	50.65	6.88	31.29	43.21	54	-10.79	AV
H	7401	69.32	49.98	7.16	36.63	63.13	74	-10.87	PK
H	7401	45.96	49.98	7.16	36.63	39.77	54	-14.23	AV
H	17269	48.14	51.53	11.34	41.52	49.47	74	-24.53	PK
operation frequency:2472									
V	4944	67.32	50.67	6.89	31.38	54.92	74	-19.08	PK
V	4944	55.59	50.67	6.89	31.38	43.19	54	-10.81	AV
V	7416	69.41	50.02	7.24	36.63	63.26	74	-10.74	PK
V	7416	46.66	50.02	7.24	36.63	40.51	54	-13.49	AV
V	17304	48.74	51.53	11.34	41.52	50.07	74	-23.93	PK
H	4944	66.36	50.67	6.89	31.38	53.96	74	-20.04	PK
H	4944	55.48	50.67	6.89	31.38	43.08	54	-10.92	AV
H	7416	69.63	50.02	7.24	36.63	63.48	74	-10.52	PK
H	7416	47.27	50.02	7.24	36.63	41.12	54	-12.88	AV
H	17304	48.64	51.53	11.34	41.52	49.97	74	-24.03	PK



802.11g

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	4824	67.52	50.65	6.88	31.29	55.04	74	-18.96	PK
V	4824	55.14	50.65	6.88	31.29	42.66	54	-11.34	AV
V	7236	66.66	49.98	7.16	36.63	60.47	74	-13.53	PK
V	7236	46.58	49.98	7.16	36.63	40.39	54	-13.61	AV
V	16087	49.52	51.53	11.34	41.52	50.85	74	-23.15	PK
H	4824	69.45	50.65	6.88	31.29	56.97	74	-17.03	PK
H	4824	52.66	50.65	6.88	31.29	40.18	54	-13.82	AV
H	7236	66.27	49.98	7.16	36.63	60.08	74	-13.92	PK
H	7236	47.65	49.98	7.16	36.63	41.46	54	-12.54	AV
H	16087	47.93	51.53	11.34	41.52	49.26	74	-24.74	PK
operation frequency:2437									
V	4874	67.58	50.67	6.89	31.38	55.18	74	-18.82	PK
V	4874	55.69	50.67	6.89	31.38	43.29	54	-10.71	AV
V	7311	66.65	50.02	7.24	36.63	60.5	74	-13.5	PK
V	7311	46.81	50.02	7.24	36.63	40.66	54	-13.34	AV
V	16087	48.68	51.53	11.34	41.52	50.01	74	-23.99	PK
H	4874	66.26	50.67	6.89	31.38	53.86	74	-20.14	PK
H	4874	55.63	50.67	6.89	31.38	43.23	54	-10.77	AV
H	7311	65.68	50.02	7.24	36.63	59.53	74	-14.47	PK
H	7311	47.52	50.02	7.24	36.63	41.37	54	-12.63	AV
H	16087	48.74	51.53	11.34	41.52	50.07	74	-23.93	PK
operation frequency:2462									
V	4924	67.36	50.79	6.83	31.36	54.76	74	-19.24	PK
V	4924	55.23	50.79	6.83	31.36	42.63	54	-11.37	AV
V	7386	66.17	50.11	7.25	36.58	59.89	74	-14.11	PK
V	7386	47.52	50.11	7.25	36.58	41.24	54	-12.76	AV
V	16087	46.24	51.53	11.34	41.52	47.57	74	-26.43	PK
H	4924	66.26	50.79	6.83	31.36	53.66	74	-20.34	PK
H	4924	54.58	50.79	6.83	31.36	41.98	54	-12.02	AV
H	7386	65.22	50.11	7.25	36.58	58.94	74	-15.06	PK
H	7386	45.76	50.11	7.25	36.58	39.48	54	-14.52	AV
H	16087	47.34	51.53	11.34	41.52	48.67	74	-25.33	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2467									
V	4934	68.35	50.79	6.83	31.36	55.75	74	-18.25	PK
V	4934	55.68	50.79	6.83	31.36	43.16	54	-10.84	AV
V	7401	69.53	50.11	7.25	36.58	62.99	74	-11.01	PK
V	7401	46.38	50.11	7.25	36.58	40.14	54	-13.86	AV
V	17269	49.52	51.53	11.34	41.52	50.57	74	-23.43	PK
H	4934	67.53	50.79	6.83	31.36	55.06	74	-18.94	PK
H	4934	55.54	50.79	6.83	31.36	42.68	54	-11.32	AV
H	7401	67.58	50.11	7.25	36.58	61.11	74	-12.89	PK
H	7401	48.63	50.11	7.25	36.58	41.94	54	-12.06	AV
H	17269	49.94	51.53	11.34	41.52	50.47	74	-23.53	PK
operation frequency:2472									
V	4944	67.85	50.65	6.88	31.29	55.37	74	-18.63	PK
V	4944	55.63	50.65	6.88	31.29	43.15	54	-10.85	AV
V	7416	66.62	49.98	7.16	36.63	60.43	74	-13.57	PK
V	7416	46.21	49.98	7.16	36.63	40.02	54	-13.98	AV
V	17304	49.63	51.53	11.34	41.52	50.96	74	-23.04	PK
H	4944	69.81	50.65	6.88	31.29	57.33	74	-16.67	PK
H	4944	52.56	50.65	6.88	31.29	40.08	54	-13.92	AV
H	7416	66.85	49.98	7.16	36.63	60.66	74	-13.34	PK
H	7416	47.64	49.98	7.16	36.63	41.45	54	-12.55	AV
H	17304	47.36	51.53	11.34	41.52	48.69	74	-25.31	PK



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	4824	66.36	50.65	6.88	31.29	53.88	74	-20.12	PK
V	4824	55.67	50.65	6.88	31.29	43.19	54	-10.81	AV
V	7236	66.16	49.98	7.16	36.63	59.97	74	-14.03	PK
V	7236	46.58	49.98	7.16	36.63	40.39	54	-13.61	AV
V	16087	46.84	51.53	11.34	41.52	48.17	74	-25.83	PK
H	4824	66.76	50.65	6.88	31.29	54.28	74	-19.72	PK
H	4824	55.58	50.65	6.88	31.29	43.1	54	-10.9	AV
H	7236	64.85	49.98	7.16	36.63	58.66	74	-15.34	PK
H	7236	47.52	49.98	7.16	36.63	41.33	54	-12.67	AV
H	16087	47.63	51.53	11.34	41.52	48.96	74	-25.04	PK
operation frequency:2437									
V	4874	66.52	50.67	6.89	31.38	54.12	74	-19.88	PK
V	4874	54.36	50.67	6.89	31.38	41.96	54	-12.04	AV
V	7311	65.47	50.02	7.24	36.63	59.32	74	-14.68	PK
V	7311	47.85	50.02	7.24	36.63	41.7	54	-12.3	AV
V	16087	47.13	51.53	11.34	41.52	48.46	74	-25.54	PK
H	4874	65.97	50.67	6.89	31.38	53.57	74	-20.43	PK
H	4874	53.84	50.67	6.89	31.38	41.44	54	-12.56	AV
H	7311	65.66	50.02	7.24	36.63	59.51	74	-14.49	PK
H	7311	46.55	50.02	7.24	36.63	40.4	54	-13.6	AV
H	16087	46.66	51.53	11.34	41.52	47.99	74	-26.01	PK
operation frequency:2462									
V	4924	67.21	50.79	6.83	31.36	54.61	74	-19.39	PK
V	4924	54.18	50.79	6.83	31.36	41.58	54	-12.42	AV
V	7386	64.86	50.11	7.25	36.58	58.58	74	-15.42	PK
V	7386	46.65	50.11	7.25	36.58	40.37	54	-13.63	AV
V	16087	48.14	51.53	11.34	41.52	49.47	74	-24.53	PK
H	4924	67.36	50.79	6.83	31.36	54.76	74	-19.24	PK
H	4924	54.58	50.79	6.83	31.36	41.98	54	-12.02	AV
H	7386	65.53	50.11	7.25	36.58	59.25	74	-14.75	PK
H	7386	47.24	50.11	7.25	36.58	40.96	54	-13.04	AV
H	16087	47.48	51.53	11.34	41.52	48.81	74	-25.19	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2467									
V	4934	67.25	50.65	6.88	31.29	54.77	74	-19.23	PK
V	4934	55.63	50.65	6.88	31.29	43.15	54	-10.85	AV
V	7401	66.41	49.98	7.16	36.63	60.22	74	-13.78	PK
V	7401	46.42	49.98	7.16	36.63	40.23	54	-13.77	AV
V	17269	48.88	51.53	11.34	41.52	50.21	74	-23.79	PK
H	4934	66.26	50.65	6.88	31.29	53.78	74	-20.22	PK
H	4934	55.64	50.65	6.88	31.29	43.16	54	-10.84	AV
H	7401	69.36	49.98	7.16	36.63	63.17	74	-10.83	PK
H	7401	45.97	49.98	7.16	36.63	39.78	54	-14.22	AV
H	17269	48.16	51.53	11.34	41.52	49.49	74	-24.51	PK
operation frequency:2472									
V	4944	67.35	50.67	6.89	31.38	54.95	74	-19.05	PK
V	4944	55.25	50.67	6.89	31.38	42.85	54	-11.15	AV
V	7416	69.46	50.02	7.24	36.63	63.31	74	-10.69	PK
V	7416	46.67	50.02	7.24	36.63	40.52	54	-13.48	AV
V	17304	48.76	51.53	11.34	41.52	50.09	74	-23.91	PK
H	4944	66.34	50.67	6.89	31.38	53.94	74	-20.06	PK
H	4944	55.47	50.67	6.89	31.38	43.07	54	-10.93	AV
H	7416	69.66	50.02	7.24	36.63	63.51	74	-10.49	PK
H	7416	47.25	50.02	7.24	36.63	41.1	54	-12.9	AV
H	17304	48.96	51.53	11.34	41.52	50.29	74	-23.71	PK



802.11ax HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	4824	66.16	50.67	6.89	31.32	53.7	74	-20.3	PK
V	4824	55.17	50.67	6.89	31.32	42.71	54	-11.29	AV
V	7236	66.56	50.01	7.15	36.62	60.32	74	-13.68	PK
V	7236	46.24	50.01	7.15	36.62	40	54	-14	AV
V	16087	46.85	51.53	11.34	41.52	48.18	74	-25.82	PK
H	4824	66.16	50.67	6.89	31.32	53.7	74	-20.3	PK
H	4824	55.95	50.67	6.89	31.32	43.49	54	-10.51	AV
H	7236	64.83	50.01	7.15	36.62	58.59	74	-15.41	PK
H	7236	47.98	50.01	7.15	36.62	41.74	54	-12.26	AV
H	16087	47.84	51.53	11.34	41.52	49.17	74	-24.83	PK
operation frequency:2437									
V	4874	66.23	50.67	6.89	31.38	53.83	74	-20.17	PK
V	4874	54.68	50.67	6.89	31.38	42.28	54	-11.72	AV
V	7311	65.25	50.02	7.24	36.63	59.1	74	-14.9	PK
V	7311	46.16	50.02	7.24	36.63	40.01	54	-13.99	AV
V	16087	47.84	51.53	11.34	41.52	49.17	74	-24.83	PK
H	4874	65.66	50.67	6.89	31.38	53.26	74	-20.74	PK
H	4874	53.67	50.67	6.89	31.38	41.27	54	-12.73	AV
H	7311	65.46	50.02	7.24	36.63	59.31	74	-14.69	PK
H	7311	47.52	50.02	7.24	36.63	41.37	54	-12.63	AV
H	16087	46.84	51.53	11.34	41.52	48.17	74	-25.83	PK
operation frequency:2462									
V	4924	67.16	50.76	6.81	31.31	54.52	74	-19.48	PK
V	4924	54.88	50.76	6.81	31.31	42.24	54	-11.76	AV
V	7386	64.66	50.08	7.21	36.52	58.31	74	-15.69	PK
V	7386	47.85	50.08	7.21	36.52	41.5	54	-12.5	AV
V	16087	48.63	51.53	11.34	41.52	49.96	74	-24.04	PK
H	4924	67.91	50.76	6.81	31.31	55.27	74	-18.73	PK
H	4924	54.87	50.76	6.81	31.31	42.23	54	-11.77	AV
H	7386	65.93	50.08	7.21	36.52	59.58	74	-14.42	PK
H	7386	46.64	50.08	7.21	36.52	40.29	54	-13.71	AV
H	16087	47.56	51.53	11.34	41.52	48.89	74	-25.11	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2467									
V	4934	68.24	50.79	6.83	31.36	55.75	74	-18.25	PK
V	4934	55.63	50.79	6.83	31.36	43.16	54	-10.84	AV
V	7401	69.85	50.11	7.25	36.58	62.99	74	-11.01	PK
V	7401	46.34	50.11	7.25	36.58	40.14	54	-13.86	AV
V	17269	49.56	51.53	11.34	41.52	50.57	74	-23.43	PK
H	4934	67.85	50.79	6.83	31.36	55.06	74	-18.94	PK
H	4934	55.56	50.79	6.83	31.36	42.68	54	-11.32	AV
H	7401	67.51	50.11	7.25	36.58	61.11	74	-12.89	PK
H	7401	48.69	50.11	7.25	36.58	41.94	54	-12.06	AV
H	17269	49.95	51.53	11.34	41.52	50.47	74	-23.53	PK
operation frequency:2472									
V	4944	67.83	50.65	6.88	31.29	55.35	74	-18.65	PK
V	4944	55.85	50.65	6.88	31.29	43.37	54	-10.63	AV
V	7416	66.64	49.98	7.16	36.63	60.45	74	-13.55	PK
V	7416	46.26	49.98	7.16	36.63	40.07	54	-13.93	AV
V	17304	49.68	51.53	11.34	41.52	51.01	74	-22.99	PK
H	4944	69.65	50.65	6.88	31.29	57.17	74	-16.83	PK
H	4944	52.53	50.65	6.88	31.29	40.05	54	-13.95	AV
H	7416	66.87	49.98	7.16	36.63	60.68	74	-13.32	PK
H	7416	47.66	49.98	7.16	36.63	41.47	54	-12.53	AV
H	17304	47.37	51.53	11.34	41.52	48.7	74	-25.3	PK



RU26

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBUV)	(dB)	(dB)	(dB/m)	(dBUV/m)	(dBUV/m)	(dB)	
operation frequency:2412									
V	4824	67.54	50.65	6.88	31.29	55.06	74	-18.94	PK
V	4824	55.63	50.65	6.88	31.29	43.15	54	-10.85	AV
V	7236	66.48	49.98	7.16	36.63	60.29	74	-13.71	PK
V	7236	46.45	49.98	7.16	36.63	40.26	54	-13.74	AV
V	16087	48.83	51.53	11.34	41.52	50.16	74	-23.84	PK
H	4824	66.27	50.65	6.88	31.29	53.79	74	-20.21	PK
H	4824	55.63	50.65	6.88	31.29	43.15	54	-10.85	AV
H	7236	69.31	49.98	7.16	36.63	63.12	74	-10.88	PK
H	7236	45.98	49.98	7.16	36.63	39.79	54	-14.21	AV
H	16087	48.16	51.53	11.34	41.52	49.49	74	-24.51	PK
operation frequency:2437									
V	4874	67.21	50.67	6.89	31.38	54.81	74	-19.19	PK
V	4874	55.23	50.67	6.89	31.38	42.83	54	-11.17	AV
V	7311	69.47	50.02	7.24	36.63	63.32	74	-10.68	PK
V	7311	46.66	50.02	7.24	36.63	40.51	54	-13.49	AV
V	16087	48.74	51.53	11.34	41.52	50.07	74	-23.93	PK
H	4874	66.85	50.67	6.89	31.38	54.45	74	-19.55	PK
H	4874	55.46	50.67	6.89	31.38	43.06	54	-10.94	AV
H	7311	69.64	50.02	7.24	36.63	63.49	74	-10.51	PK
H	7311	47.23	50.02	7.24	36.63	41.08	54	-12.92	AV
H	16087	48.97	51.53	11.34	41.52	50.3	74	-23.7	PK
operation frequency:2462									
V	4924	68.63	50.79	6.83	31.36	55.75	74	-18.25	PK
V	4924	55.68	50.79	6.83	31.36	43.16	54	-10.84	AV
V	7386	69.41	50.11	7.25	36.58	62.99	74	-11.01	PK
V	7386	46.36	50.11	7.25	36.58	40.14	54	-13.86	AV
V	16087	49.57	51.53	11.34	41.52	50.57	74	-23.43	PK
H	4924	67.14	50.79	6.83	31.36	55.06	74	-18.94	PK
H	4924	55.53	50.79	6.83	31.36	42.68	54	-11.32	AV
H	7386	67.85	50.11	7.25	36.58	61.11	74	-12.89	PK
H	7386	48.63	50.11	7.25	36.58	41.94	54	-12.06	AV
H	16087	49.97	51.53	11.34	41.52	50.47	74	-23.53	PK
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2467									
V	4934	67.86	50.65	6.88	31.29	55.38	74	-18.62	PK
V	4934	55.87	50.65	6.88	31.29	43.39	54	-10.61	AV
V	7401	66.66	49.98	7.16	36.63	60.47	74	-13.53	PK
V	7401	46.22	49.98	7.16	36.63	40.03	54	-13.97	AV
V	17269	49.36	51.53	11.34	41.52	50.69	74	-23.31	PK
H	4934	69.65	50.65	6.88	31.29	57.17	74	-16.83	PK
H	4934	52.57	50.65	6.88	31.29	40.09	54	-13.91	AV
H	7401	66.63	49.98	7.16	36.63	60.44	74	-13.56	PK
H	7401	47.64	49.98	7.16	36.63	41.45	54	-12.55	AV
H	17269	47.38	51.53	11.34	41.52	48.71	74	-25.29	PK
operation frequency:2472									
V	4944	67.63	50.67	6.89	31.38	55.23	74	-18.77	PK
V	4944	55.14	50.67	6.89	31.38	42.74	54	-11.26	AV
V	7416	66.69	50.02	7.24	36.63	60.54	74	-13.46	PK
V	7416	46.52	50.02	7.24	36.63	40.37	54	-13.63	AV
V	17304	48.13	51.53	11.34	41.52	49.46	74	-24.54	PK
H	4944	66.64	50.67	6.89	31.38	54.24	74	-19.76	PK
H	4944	55.88	50.67	6.89	31.38	43.48	54	-10.52	AV
H	7416	65.63	50.02	7.24	36.63	59.48	74	-14.52	PK
H	7416	47.52	50.02	7.24	36.63	41.37	54	-12.63	AV
H	17304	48.23	51.53	11.34	41.52	49.56	74	-24.44	PK



RU52

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBUV)	(dB)	(dB)	(dB/m)	(dBUV/m)	(dBUV/m)	(dB)	
operation frequency:2412									
V	4824	67.63	50.65	6.88	31.29	55.15	74	-18.85	PK
V	4824	55.25	50.65	6.88	31.29	42.77	54	-11.23	AV
V	7236	66.41	49.98	7.16	36.63	60.22	74	-13.78	PK
V	7236	46.96	49.98	7.16	36.63	40.77	54	-13.23	AV
V	16087	48.85	51.53	11.34	41.52	50.18	74	-23.82	PK
H	4824	66.27	50.65	6.88	31.29	53.79	74	-20.21	PK
H	4824	55.62	50.65	6.88	31.29	43.14	54	-10.86	AV
H	7236	69.39	49.98	7.16	36.63	63.2	74	-10.8	PK
H	7236	45.94	49.98	7.16	36.63	39.75	54	-14.25	AV
H	16087	48.17	51.53	11.34	41.52	49.5	74	-24.5	PK
operation frequency:2437									
V	4874	67.26	50.67	6.89	31.38	54.86	74	-19.14	PK
V	4874	55.28	50.67	6.89	31.38	42.88	54	-11.12	AV
V	7311	69.46	50.02	7.24	36.63	63.31	74	-10.69	PK
V	7311	46.64	50.02	7.24	36.63	40.49	54	-13.51	AV
V	16087	48.85	51.53	11.34	41.52	50.18	74	-23.82	PK
H	4874	66.83	50.67	6.89	31.38	54.43	74	-19.57	PK
H	4874	55.44	50.67	6.89	31.38	43.04	54	-10.96	AV
H	7311	69.85	50.02	7.24	36.63	63.7	74	-10.3	PK
H	7311	47.26	50.02	7.24	36.63	41.11	54	-12.89	AV
H	16087	48.94	51.53	11.34	41.52	50.27	74	-23.73	PK
operation frequency:2462									
V	4924	68.68	50.79	6.83	31.36	55.75	74	-18.25	PK
V	4924	55.63	50.79	6.83	31.36	43.16	54	-10.84	AV
V	7386	69.45	50.11	7.25	36.58	62.99	74	-11.01	PK
V	7386	46.36	50.11	7.25	36.58	40.14	54	-13.86	AV
V	16087	49.51	51.53	11.34	41.52	50.57	74	-23.43	PK
H	4924	67.18	50.79	6.83	31.36	55.06	74	-18.94	PK
H	4924	55.56	50.79	6.83	31.36	42.68	54	-11.32	AV
H	7386	67.87	50.11	7.25	36.58	61.11	74	-12.89	PK
H	7386	48.65	50.11	7.25	36.58	41.94	54	-12.06	AV
H	16087	49.96	51.53	11.34	41.52	50.47	74	-23.53	PK
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBUV)	(dB)	(dB)	(dB/m)	(dBUV/m)	(dBUV/m)	(dB)	
operation frequency:2467									
V	4934	67.52	50.65	6.88	31.29	55.04	74	-18.96	PK
V	4934	55.86	50.65	6.88	31.29	43.38	54	-10.62	AV
V	7401	66.41	49.98	7.16	36.63	60.22	74	-13.78	PK
V	7401	46.26	49.98	7.16	36.63	40.07	54	-13.93	AV
V	17269	49.74	51.53	11.34	41.52	51.07	74	-22.93	PK
H	4934	69.63	50.65	6.88	31.29	57.15	74	-16.85	PK
H	4934	52.56	50.65	6.88	31.29	40.08	54	-13.92	AV
H	7401	66.68	49.98	7.16	36.63	60.49	74	-13.51	PK
H	7401	47.65	49.98	7.16	36.63	41.46	54	-12.54	AV
H	17269	47.33	51.53	11.34	41.52	48.66	74	-25.34	PK
operation frequency:2472									
V	4944	67.65	50.67	6.89	31.38	55.25	74	-18.75	PK
V	4944	55.16	50.67	6.89	31.38	42.76	54	-11.24	AV
V	7416	66.67	50.02	7.24	36.63	60.52	74	-13.48	PK
V	7416	46.56	50.02	7.24	36.63	40.41	54	-13.59	AV
V	17304	48.18	51.53	11.34	41.52	49.51	74	-24.49	PK
H	4944	66.66	50.67	6.89	31.38	54.26	74	-19.74	PK
H	4944	55.84	50.67	6.89	31.38	43.44	54	-10.56	AV
H	7416	65.89	50.02	7.24	36.63	59.74	74	-14.26	PK
H	7416	47.55	50.02	7.24	36.63	41.4	54	-12.6	AV
H	17304	48.29	51.53	11.34	41.52	49.62	74	-24.38	PK



RU106

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	4824	67.68	50.65	6.88	31.29	55.2	74	-18.8	PK
V	4824	55.24	50.65	6.88	31.29	42.76	54	-11.24	AV
V	7236	66.48	49.98	7.16	36.63	60.29	74	-13.71	PK
V	7236	46.93	49.98	7.16	36.63	40.74	54	-13.26	AV
V	16087	48.21	51.53	11.34	41.52	49.54	74	-24.46	PK
H	4824	66.26	50.65	6.88	31.29	53.78	74	-20.22	PK
H	4824	55.62	50.65	6.88	31.29	43.14	54	-10.86	AV
H	7236	69.37	49.98	7.16	36.63	63.18	74	-10.82	PK
H	7236	45.63	49.98	7.16	36.63	39.44	54	-14.56	AV
H	16087	48.15	51.53	11.34	41.52	49.48	74	-24.52	PK
operation frequency:2437									
V	4874	67.21	50.67	6.89	31.38	54.81	74	-19.19	PK
V	4874	55.27	50.67	6.89	31.38	42.87	54	-11.13	AV
V	7311	69.43	50.02	7.24	36.63	63.28	74	-10.72	PK
V	7311	46.65	50.02	7.24	36.63	40.5	54	-13.5	AV
V	16087	48.63	51.53	11.34	41.52	49.96	74	-24.04	PK
H	4874	66.85	50.67	6.89	31.38	54.45	74	-19.55	PK
H	4874	55.42	50.67	6.89	31.38	43.02	54	-10.98	AV
H	7311	69.96	50.02	7.24	36.63	63.81	74	-10.19	PK
H	7311	47.24	50.02	7.24	36.63	41.09	54	-12.91	AV
H	16087	48.98	51.53	11.34	41.52	50.31	74	-23.69	PK
operation frequency:2462									
V	4924	68.21	50.79	6.83	31.36	55.75	74	-18.25	PK
V	4924	55.66	50.79	6.83	31.36	43.16	54	-10.84	AV
V	7386	69.47	50.11	7.25	36.58	62.99	74	-11.01	PK
V	7386	46.63	50.11	7.25	36.58	40.14	54	-13.86	AV
V	16087	49.55	51.53	11.34	41.52	50.57	74	-23.43	PK
H	4924	67.13	50.79	6.83	31.36	55.06	74	-18.94	PK
H	4924	55.57	50.79	6.83	31.36	42.68	54	-11.32	AV
H	7386	67.52	50.11	7.25	36.58	61.11	74	-12.89	PK
H	7386	48.63	50.11	7.25	36.58	41.94	54	-12.06	AV
H	16087	49.97	51.53	11.34	41.52	50.47	74	-23.53	PK
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2467									
V	4934	67.63	50.65	6.88	31.29	55.15	74	-18.85	PK
V	4934	55.84	50.65	6.88	31.29	43.36	54	-10.64	AV
V	7401	66.63	49.98	7.16	36.63	60.44	74	-13.56	PK
V	7401	46.22	49.98	7.16	36.63	40.03	54	-13.97	AV
V	17269	49.78	51.53	11.34	41.52	51.11	74	-22.89	PK
H	4934	69.63	50.65	6.88	31.29	57.15	74	-16.85	PK
H	4934	52.57	50.65	6.88	31.29	40.09	54	-13.91	AV
H	7401	66.64	49.98	7.16	36.63	60.45	74	-13.55	PK
H	7401	47.62	49.98	7.16	36.63	41.43	54	-12.57	AV
H	17269	47.39	51.53	11.34	41.52	48.72	74	-25.28	PK
operation frequency:2472									
V	4944	67.21	50.67	6.89	31.38	54.81	74	-19.19	PK
V	4944	55.63	50.67	6.89	31.38	43.23	54	-10.77	AV
V	7416	66.67	50.02	7.24	36.63	60.52	74	-13.48	PK
V	7416	46.54	50.02	7.24	36.63	40.39	54	-13.61	AV
V	17304	48.12	51.53	11.34	41.52	49.45	74	-24.55	PK
H	4944	66.21	50.67	6.89	31.38	53.81	74	-20.19	PK
H	4944	55.82	50.67	6.89	31.38	43.42	54	-10.58	AV
H	7416	65.84	50.02	7.24	36.63	59.69	74	-14.31	PK
H	7416	47.53	50.02	7.24	36.63	41.38	54	-12.62	AV
H	17304	48.27	51.53	11.34	41.52	49.6	74	-24.4	PK



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


3.3.3 DEVIATION FROM TEST STANDARD

No deviation



3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

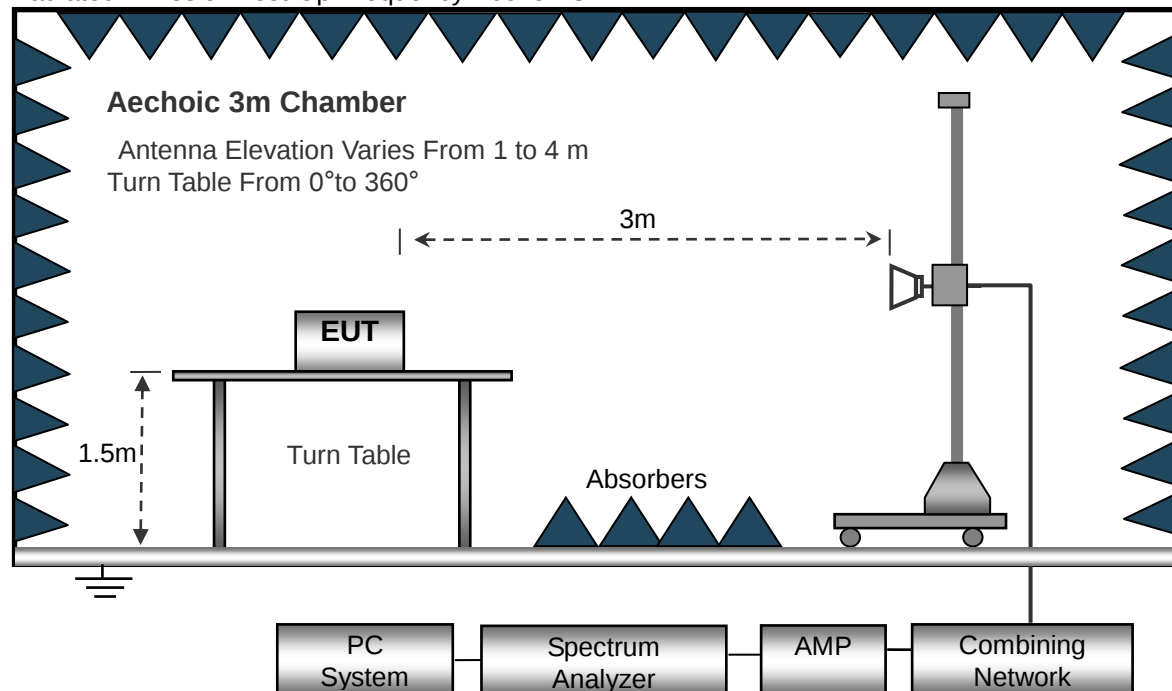

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.6 TEST RESULT

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	2390	76.58	52.12	2.73	27.38	54.57	74	-19.43	PK
V	2390	65.36	52.12	2.73	27.38	43.35	54	-10.65	AV
V	2400	76.25	52.16	2.78	27.41	54.28	74	-19.72	PK
V	2400	64.84	52.16	2.78	27.41	42.87	54	-11.13	AV
H	2390	76.32	52.12	2.73	27.38	54.31	74	-19.69	PK
H	2390	65.59	52.12	2.73	27.38	43.58	54	-10.42	AV
H	2400	76.52	52.16	2.78	27.41	54.55	74	-19.45	PK
H	2400	65.61	52.16	2.78	27.41	43.64	54	-10.36	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462									
V	2483.5	76.36	52.23	2.86	27.44	54.43	74	-19.57	PK
V	2483.5	65.21	52.23	2.86	27.44	43.28	54	-10.72	AV
V	2500	76.43	52.26	2.88	27.49	54.54	74	-19.46	PK
V	2500	64.38	52.26	2.88	27.49	42.49	54	-11.51	AV
H	2483.5	76.44	52.23	2.86	27.44	54.51	74	-19.49	PK
H	2483.5	65.33	52.23	2.86	27.44	43.4	54	-10.6	AV
H	2500	76.88	52.26	2.88	27.49	54.99	74	-19.01	PK
H	2500	65.63	52.26	2.88	27.49	43.74	54	-10.26	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2467									
V	2483.5	77.52	52.23	2.86	27.44	55.59	74	-18.41	PK
V	2483.5	65.21	52.23	2.86	27.44	43.28	54	-10.72	AV
V	2500	76.58	52.26	2.88	27.49	54.69	74	-19.31	PK
V	2500	65.63	52.26	2.88	27.49	43.74	54	-10.26	AV
H	2483.5	76.34	52.23	2.86	27.44	54.41	74	-19.59	PK
H	2483.5	66.48	52.23	2.86	27.44	44.55	54	-9.45	AV
H	2500	78.56	52.26	2.88	27.49	56.67	74	-17.33	PK
H	2500	67.84	52.26	2.88	27.49	45.95	54	-8.05	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2472									
V	2483.5	76.96	52.23	2.86	27.44	55.03	74	-18.97	PK
V	2483.5	65.84	52.23	2.86	27.44	43.91	54	-10.09	AV
V	2500	76.28	52.26	2.88	27.49	54.39	74	-19.61	PK
V	2500	64.66	52.26	2.88	27.49	42.77	54	-11.23	AV
H	2483.5	76.47	52.23	2.86	27.44	54.54	74	-19.46	PK
H	2483.5	65.96	52.23	2.86	27.44	44.03	54	-9.97	AV
H	2500	76.75	52.26	2.88	27.49	54.86	74	-19.14	PK
H	2500	65.98	52.26	2.88	27.49	44.09	54	-9.91	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	2390	76.54	52.12	2.73	27.38	54.53	74	-19.47	PK
V	2390	65.58	52.12	2.73	27.38	43.57	54	-10.43	AV
V	2400	76.26	52.16	2.78	27.41	54.29	74	-19.71	PK
V	2400	64.55	52.16	2.78	27.41	42.58	54	-11.42	AV
H	2390	76.26	52.12	2.73	27.38	54.25	74	-19.75	PK
H	2390	65.37	52.12	2.73	27.38	43.36	54	-10.64	AV
H	2400	76.53	52.16	2.78	27.41	54.56	74	-19.44	PK
H	2400	65.85	52.16	2.78	27.41	43.88	54	-10.12	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462									
V	2483.5	76.66	52.23	2.86	27.44	54.73	74	-19.27	PK
V	2483.5	65.64	52.23	2.86	27.44	43.71	54	-10.29	AV
V	2500	76.58	52.26	2.88	27.49	54.69	74	-19.31	PK
V	2500	65.33	52.26	2.88	27.49	43.44	54	-10.56	AV
H	2483.5	76.55	52.23	2.86	27.44	54.62	74	-19.38	PK
H	2483.5	65.12	52.23	2.86	27.44	43.19	54	-10.81	AV
H	2500	76.37	52.26	2.88	27.49	54.48	74	-19.52	PK
H	2500	65.63	52.26	2.88	27.49	43.74	54	-10.26	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2467									
V	2483.5	76.52	52.23	2.86	27.44	54.59	74	-19.41	PK
V	2483.5	65.63	52.23	2.86	27.44	43.7	54	-10.3	AV
V	2500	76.21	52.26	2.88	27.49	54.32	74	-19.68	PK
V	2500	65.85	52.26	2.88	27.49	43.96	54	-10.04	AV
H	2483.5	76.21	52.23	2.86	27.44	54.28	74	-19.72	PK
H	2483.5	65.63	52.23	2.86	27.44	43.7	54	-10.3	AV
H	2500	76.21	52.26	2.88	27.49	54.32	74	-19.68	PK
H	2500	65.74	52.26	2.88	27.49	43.85	54	-10.15	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2472									
V	2483.5	76.85	52.23	2.86	27.44	54.92	74	-19.08	PK
V	2483.5	65.47	52.23	2.86	27.44	43.54	54	-10.46	AV
V	2500	76.96	52.26	2.88	27.49	55.07	74	-18.93	PK
V	2500	64.21	52.26	2.88	27.49	42.32	54	-11.68	AV
H	2483.5	76.85	52.23	2.86	27.44	54.92	74	-19.08	PK
H	2483.5	65.66	52.23	2.86	27.44	43.73	54	-10.27	AV
H	2500	76.47	52.26	2.88	27.49	54.58	74	-19.42	PK
H	2500	65.85	52.26	2.88	27.49	43.96	54	-10.04	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	2390	76.65	52.12	2.73	27.38	54.64	74	-19.36	PK
V	2390	65.56	52.12	2.73	27.38	43.55	54	-10.45	AV
V	2400	77.37	52.16	2.78	27.41	55.4	74	-18.6	PK
V	2400	65.55	52.16	2.78	27.41	43.58	54	-10.42	AV
H	2390	77.56	52.12	2.73	27.38	55.55	74	-18.45	PK
H	2390	65.17	52.12	2.73	27.38	43.16	54	-10.84	AV
H	2400	76.26	52.16	2.78	27.41	54.29	74	-19.71	PK
H	2400	65.44	52.16	2.78	27.41	43.47	54	-10.53	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462									
V	2483.5	77.31	52.23	2.86	27.44	55.38	74	-18.62	PK
V	2483.5	65.14	52.23	2.86	27.44	43.21	54	-10.79	AV
V	2500	76.62	52.26	2.88	27.49	54.73	74	-19.27	PK
V	2500	65.69	52.26	2.88	27.49	43.8	54	-10.2	AV
H	2483.5	77.34	52.23	2.86	27.44	55.41	74	-18.59	PK
H	2483.5	65.53	52.23	2.86	27.44	43.6	54	-10.4	AV
H	2500	76.38	52.26	2.88	27.49	54.49	74	-19.51	PK
H	2500	66.33	52.26	2.88	27.49	44.44	54	-9.56	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2467									
V	2483.5	77.63	52.23	2.86	27.44	55.7	74	-18.3	PK
V	2483.5	65.21	52.23	2.86	27.44	43.28	54	-10.72	AV
V	2500	76.65	52.26	2.88	27.49	54.76	74	-19.24	PK
V	2500	65.48	52.26	2.88	27.49	43.59	54	-10.41	AV
H	2483.5	77.31	52.23	2.86	27.44	55.38	74	-18.62	PK
H	2483.5	65.58	52.23	2.86	27.44	43.65	54	-10.35	AV
H	2500	76.21	52.26	2.88	27.49	54.32	74	-19.68	PK
H	2500	66.63	52.26	2.88	27.49	44.74	54	-9.26	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2472									
V	2483.5	77.85	52.23	2.86	27.44	55.92	74	-18.08	PK
V	2483.5	65.58	52.23	2.86	27.44	43.65	54	-10.35	AV
V	2500	76.41	52.26	2.88	27.49	54.52	74	-19.48	PK
V	2500	64.28	52.26	2.88	27.49	42.39	54	-11.61	AV
H	2483.5	75.25	52.23	2.86	27.44	53.32	74	-20.68	PK
H	2483.5	65.71	52.23	2.86	27.44	43.78	54	-10.22	AV
H	2500	77.25	52.26	2.88	27.49	55.36	74	-18.64	PK
H	2500	66.25	52.26	2.88	27.49	44.36	54	-9.64	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ax HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	2390	76.64	52.12	2.73	27.38	54.63	74	-19.37	PK
V	2390	65.57	52.12	2.73	27.38	43.56	54	-10.44	AV
V	2400	77.26	52.16	2.78	27.41	55.29	74	-18.71	PK
V	2400	65.18	52.16	2.78	27.41	43.21	54	-10.79	AV
H	2390	77.56	52.12	2.73	27.38	55.55	74	-18.45	PK
H	2390	65.25	52.12	2.73	27.38	43.24	54	-10.76	AV
H	2400	76.88	52.16	2.78	27.41	54.91	74	-19.09	PK
H	2400	65.14	52.16	2.78	27.41	43.17	54	-10.83	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462									
V	2483.5	77.56	52.23	2.86	27.44	55.63	74	-18.37	PK
V	2483.5	65.67	52.23	2.86	27.44	43.74	54	-10.26	AV
V	2500	76.33	52.26	2.88	27.49	54.44	74	-19.56	PK
V	2500	65.31	52.26	2.88	27.49	43.42	54	-10.58	AV
H	2483.5	77.85	52.23	2.86	27.44	55.92	74	-18.08	PK
H	2483.5	65.83	52.23	2.86	27.44	43.9	54	-10.1	AV
H	2500	76.94	52.26	2.88	27.49	55.05	74	-18.95	PK
H	2500	66.48	52.26	2.88	27.49	44.59	54	-9.41	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2467									
V	2483.5	77.21	52.23	2.86	27.44	55.28	74	-18.72	PK
V	2483.5	65.74	52.23	2.86	27.44	43.81	54	-10.19	AV
V	2500	76.63	52.26	2.88	27.49	54.74	74	-19.26	PK
V	2500	65.21	52.26	2.88	27.49	43.32	54	-10.68	AV
H	2483.5	77.85	52.23	2.86	27.44	55.92	74	-18.08	PK
H	2483.5	65.81	52.23	2.86	27.44	43.88	54	-10.12	AV
H	2500	76.57	52.26	2.88	27.49	54.68	74	-19.32	PK
H	2500	66.25	52.26	2.88	27.49	44.36	54	-9.64	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2472									
V	2483.5	77.25	52.23	2.86	27.44	55.32	74	-18.68	PK
V	2483.5	65.47	52.23	2.86	27.44	43.54	54	-10.46	AV
V	2500	76.69	52.26	2.88	27.49	54.8	74	-19.2	PK
V	2500	64.55	52.26	2.88	27.49	42.66	54	-11.34	AV
H	2483.5	75.96	52.23	2.86	27.44	54.03	74	-19.97	PK
H	2483.5	65.57	52.23	2.86	27.44	43.64	54	-10.36	AV
H	2500	77.63	52.26	2.88	27.49	55.74	74	-18.26	PK
H	2500	66.74	52.26	2.88	27.49	44.85	54	-9.15	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



RU26

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	2390	76.12	52.12	2.73	27.38	54.11	74	-19.89	PK
V	2390	65.23	52.12	2.73	27.38	43.22	54	-10.78	AV
V	2400	76.68	52.16	2.78	27.41	54.71	74	-19.29	PK
V	2400	64.52	52.16	2.78	27.41	42.55	54	-11.45	AV
H	2390	76.23	52.12	2.73	27.38	54.22	74	-19.78	PK
H	2390	65.74	52.12	2.73	27.38	43.73	54	-10.27	AV
H	2400	76.25	52.16	2.78	27.41	54.28	74	-19.72	PK
H	2400	65.21	52.16	2.78	27.41	43.24	54	-10.76	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462									
V	2483.5	76.34	52.23	2.86	27.44	54.41	74	-19.59	PK
V	2483.5	65.74	52.23	2.86	27.44	43.81	54	-10.19	AV
V	2500	76.63	52.26	2.88	27.49	54.74	74	-19.26	PK
V	2500	64.24	52.26	2.88	27.49	42.35	54	-11.65	AV
H	2483.5	76.63	52.23	2.86	27.44	54.7	74	-19.3	PK
H	2483.5	65.52	52.23	2.86	27.44	43.59	54	-10.41	AV
H	2500	76.21	52.26	2.88	27.49	54.32	74	-19.68	PK
H	2500	65.69	52.26	2.88	27.49	43.8	54	-10.2	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2467									
V	2483.5	77.36	52.23	2.86	27.44	55.43	74	-18.57	PK
V	2483.5	65.55	52.23	2.86	27.44	43.62	54	-10.38	AV
V	2500	76.67	52.26	2.88	27.49	54.78	74	-19.22	PK
V	2500	65.63	52.26	2.88	27.49	43.74	54	-10.26	AV
H	2483.5	77.21	52.23	2.86	27.44	55.28	74	-18.72	PK
H	2483.5	65.52	52.23	2.86	27.44	43.59	54	-10.41	AV
H	2500	76.53	52.26	2.88	27.49	54.64	74	-19.36	PK
H	2500	66.27	52.26	2.88	27.49	44.38	54	-9.62	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2472									
V	2483.5	77.58	52.23	2.86	27.44	55.65	74	-18.35	PK
V	2483.5	65.85	52.23	2.86	27.44	43.92	54	-10.08	AV
V	2500	76.24	52.26	2.88	27.49	54.35	74	-19.65	PK
V	2500	65.25	52.26	2.88	27.49	43.36	54	-10.64	AV
H	2483.5	76.41	52.23	2.86	27.44	54.48	74	-19.52	PK
H	2483.5	66.44	52.23	2.86	27.44	44.51	54	-9.49	AV
H	2500	78.25	52.26	2.88	27.49	56.36	74	-17.64	PK
H	2500	67.25	52.26	2.88	27.49	45.36	54	-8.64	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



RU52

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	2390	76.52	52.12	2.73	27.38	54.51	74	-19.49	PK
V	2390	65.64	52.12	2.73	27.38	43.63	54	-10.37	AV
V	2400	77.14	52.16	2.78	27.41	55.17	74	-18.83	PK
V	2400	65.63	52.16	2.78	27.41	43.66	54	-10.34	AV
H	2390	77.52	52.12	2.73	27.38	55.51	74	-18.49	PK
H	2390	65.21	52.12	2.73	27.38	43.2	54	-10.8	AV
H	2400	76.63	52.16	2.78	27.41	54.66	74	-19.34	PK
H	2400	65.21	52.16	2.78	27.41	43.24	54	-10.76	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462									
V	2483.5	77.63	52.23	2.86	27.44	55.7	74	-18.3	PK
V	2483.5	65.22	52.23	2.86	27.44	43.29	54	-10.71	AV
V	2500	76.41	52.26	2.88	27.49	54.52	74	-19.48	PK
V	2500	65.56	52.26	2.88	27.49	43.67	54	-10.33	AV
H	2483.5	77.32	52.23	2.86	27.44	55.39	74	-18.61	PK
H	2483.5	65.21	52.23	2.86	27.44	43.28	54	-10.72	AV
H	2500	76.63	52.26	2.88	27.49	54.74	74	-19.26	PK
H	2500	66.74	52.26	2.88	27.49	44.85	54	-9.15	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2467									
V	2483.5	77.32	52.23	2.86	27.44	55.39	74	-18.61	PK
V	2483.5	65.59	52.23	2.86	27.44	43.66	54	-10.34	AV
V	2500	76.52	52.26	2.88	27.49	54.63	74	-19.37	PK
V	2500	65.66	52.26	2.88	27.49	43.77	54	-10.23	AV
H	2483.5	77.85	52.23	2.86	27.44	55.92	74	-18.08	PK
H	2483.5	65.54	52.23	2.86	27.44	43.61	54	-10.39	AV
H	2500	76.57	52.26	2.88	27.49	54.68	74	-19.32	PK
H	2500	66.26	52.26	2.88	27.49	44.37	54	-9.63	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2472									
V	2483.5	77.85	52.23	2.86	27.44	55.92	74	-18.08	PK
V	2483.5	65.79	52.23	2.86	27.44	43.86	54	-10.14	AV
V	2500	76.85	52.26	2.88	27.49	54.96	74	-19.04	PK
V	2500	65.69	52.26	2.88	27.49	43.8	54	-10.2	AV
H	2483.5	76.52	52.23	2.86	27.44	54.59	74	-19.41	PK
H	2483.5	66.66	52.23	2.86	27.44	44.73	54	-9.27	AV
H	2500	78.74	52.26	2.88	27.49	56.85	74	-17.15	PK
H	2500	67.59	52.26	2.88	27.49	45.7	54	-8.3	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



RU106

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	2390	76.52	52.12	2.73	27.38	54.51	74	-19.49	PK
V	2390	65.29	52.12	2.73	27.38	43.28	54	-10.72	AV
V	2400	76.64	52.16	2.78	27.41	54.67	74	-19.33	PK
V	2400	64.58	52.16	2.78	27.41	42.61	54	-11.39	AV
H	2390	76.63	52.12	2.73	27.38	54.62	74	-19.38	PK
H	2390	65.72	52.12	2.73	27.38	43.71	54	-10.29	AV
H	2400	76.28	52.16	2.78	27.41	54.31	74	-19.69	PK
H	2400	65.26	52.16	2.78	27.41	43.29	54	-10.71	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462									
V	2483.5	76.21	52.23	2.86	27.44	54.28	74	-19.72	PK
V	2483.5	65.78	52.23	2.86	27.44	43.85	54	-10.15	AV
V	2500	76.66	52.26	2.88	27.49	54.77	74	-19.23	PK
V	2500	64.27	52.26	2.88	27.49	42.38	54	-11.62	AV
H	2483.5	76.66	52.23	2.86	27.44	54.73	74	-19.27	PK
H	2483.5	65.63	52.23	2.86	27.44	43.7	54	-10.3	AV
H	2500	76.47	52.26	2.88	27.49	54.58	74	-19.42	PK
H	2500	65.63	52.26	2.88	27.49	43.74	54	-10.26	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2467									
V	2483.5	77.25	52.23	2.86	27.44	55.32	74	-18.68	PK
V	2483.5	65.59	52.23	2.86	27.44	43.66	54	-10.34	AV
V	2500	76.54	52.26	2.88	27.49	54.65	74	-19.35	PK
V	2500	65.61	52.26	2.88	27.49	43.72	54	-10.28	AV
H	2483.5	77.89	52.23	2.86	27.44	55.96	74	-18.04	PK
H	2483.5	65.52	52.23	2.86	27.44	43.59	54	-10.41	AV
H	2500	76.44	52.26	2.88	27.49	54.55	74	-19.45	PK
H	2500	66.27	52.26	2.88	27.49	44.38	54	-9.62	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2472									
V	2483.5	77.68	52.23	2.86	27.44	55.75	74	-18.25	PK
V	2483.5	65.52	52.23	2.86	27.44	43.59	54	-10.41	AV
V	2500	76.77	52.26	2.88	27.49	54.88	74	-19.12	PK
V	2500	65.52	52.26	2.88	27.49	43.63	54	-10.37	AV
H	2483.5	76.36	52.23	2.86	27.44	54.43	74	-19.57	PK
H	2483.5	66.47	52.23	2.86	27.44	44.54	54	-9.46	AV
H	2500	78.52	52.26	2.88	27.49	56.63	74	-17.37	PK
H	2500	67.85	52.26	2.88	27.49	45.96	54	-8.04	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

3.4.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

3.4.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

Set the RBW = 100KHz.

Set the VBW = 300KHz.

Sweep time = auto couple.

Detector function = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

3.4.3 DEVIATION FROM STANDARD

No deviation.

3.4.4 TEST SETUP





3.4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.4.6 TEST RESULTS





802.11b

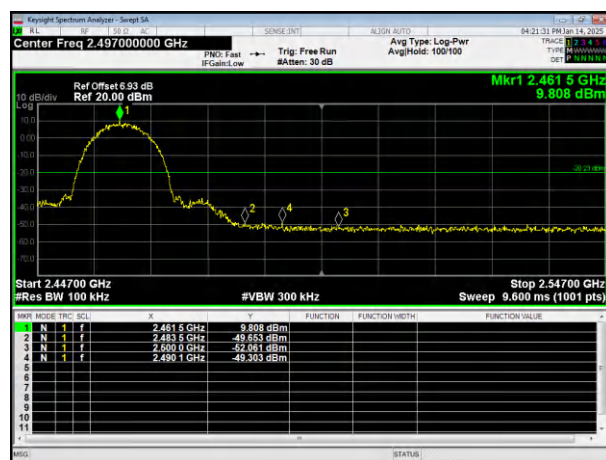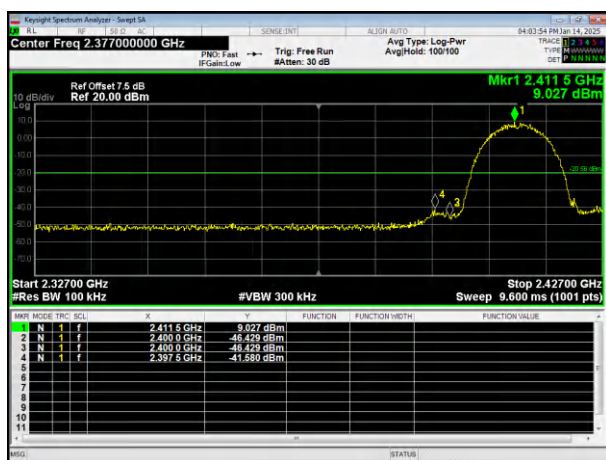

2412MHz

2462MHz

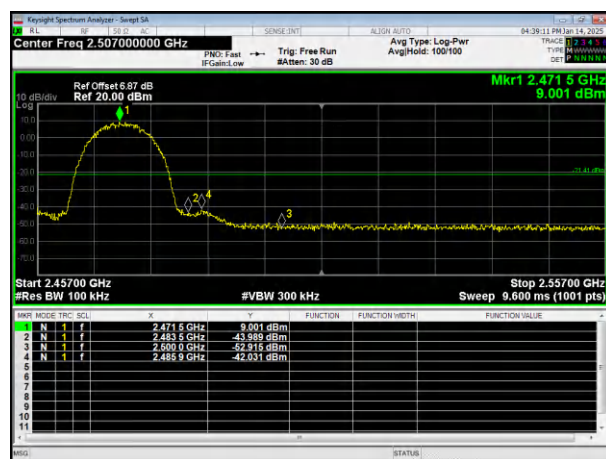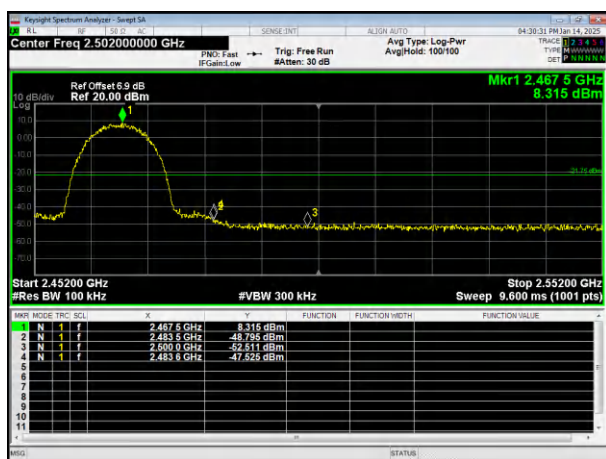


2467MHz

2472MHz



802.11g

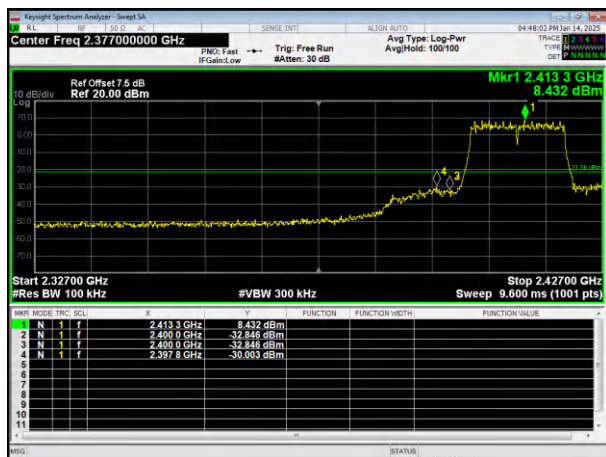

2412MHz

2462MHz





2467MHz



2472MHz



802.11n HT20

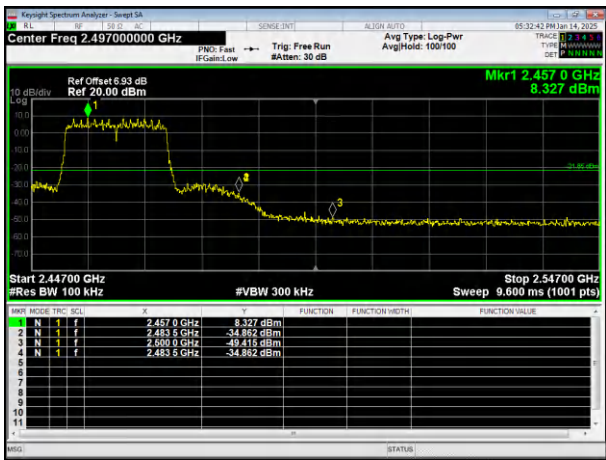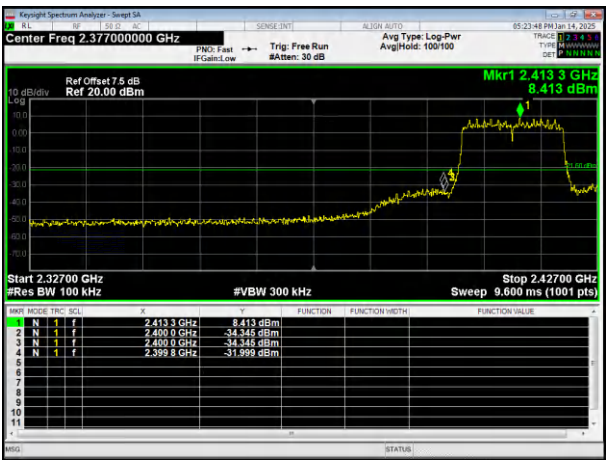

2412MHz

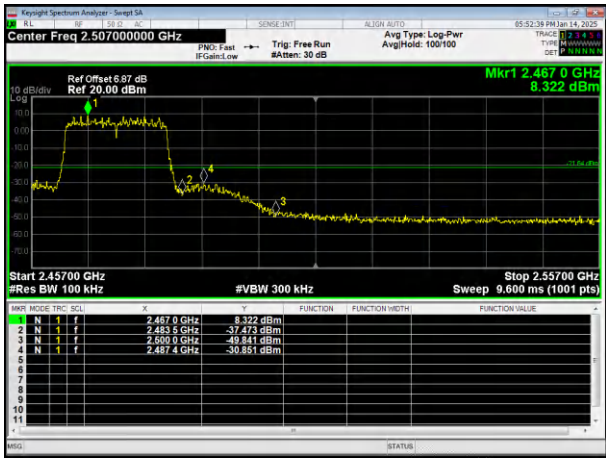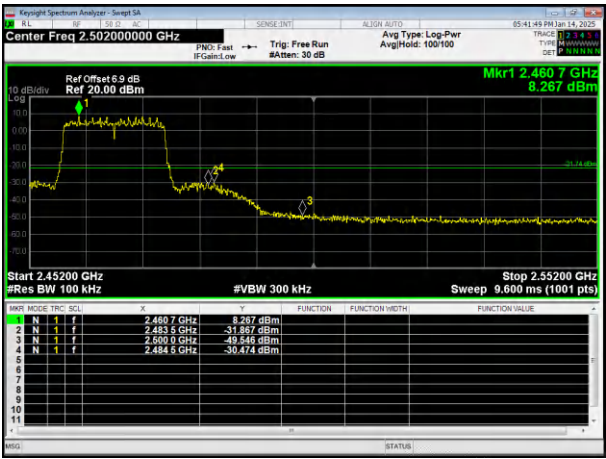


2462MHz

2467MHz

2472MHz




802.11ax HT20

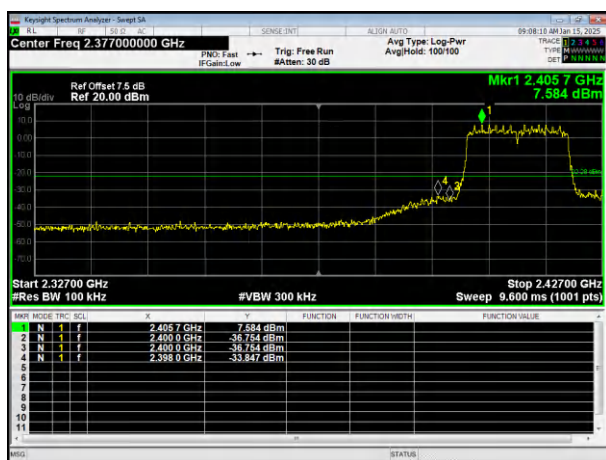

2412MHz

2462MHz

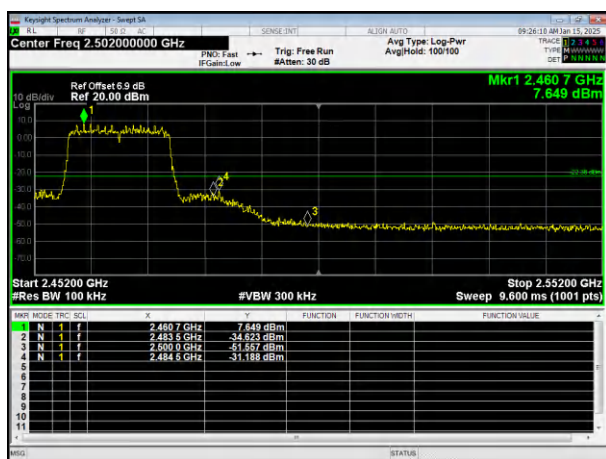


2467MHz


2472MHz




RU106

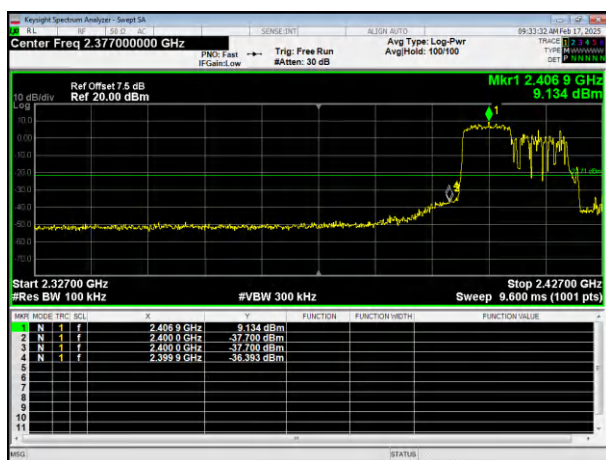


2412MHz

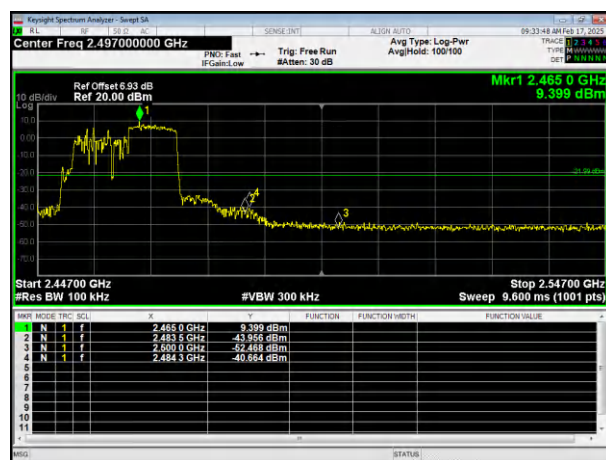

2462MHz

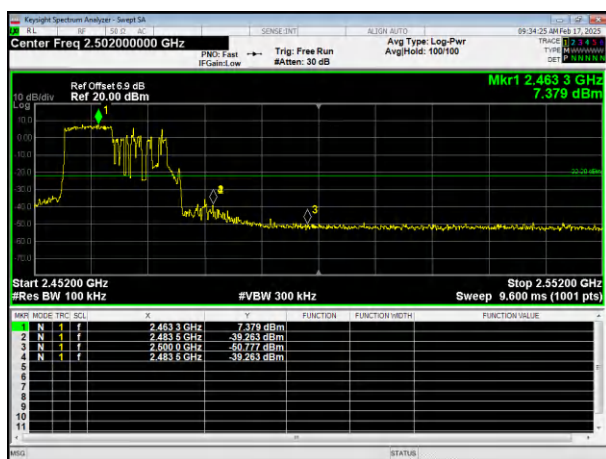


2467MHz

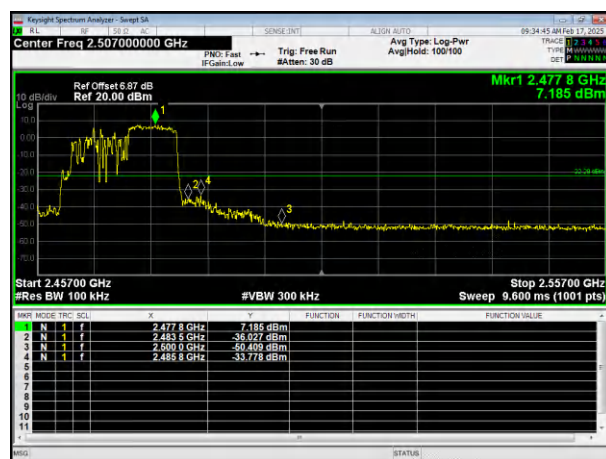

2472MHz




RU26

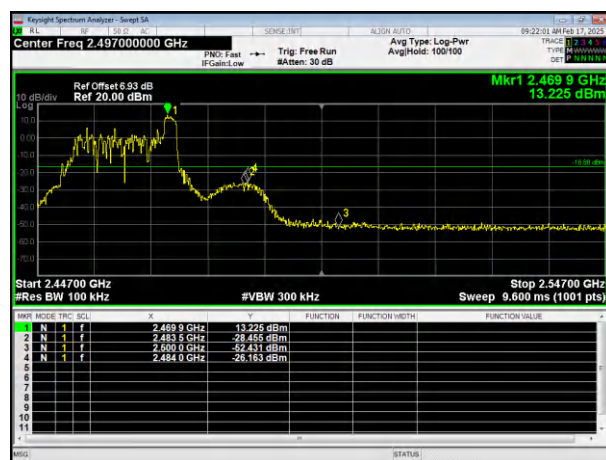

2412MHz

2462MHz

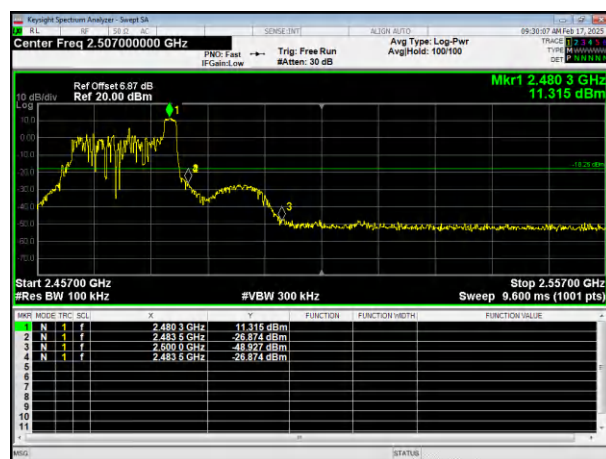


2467MHz



2472MHz



RU52

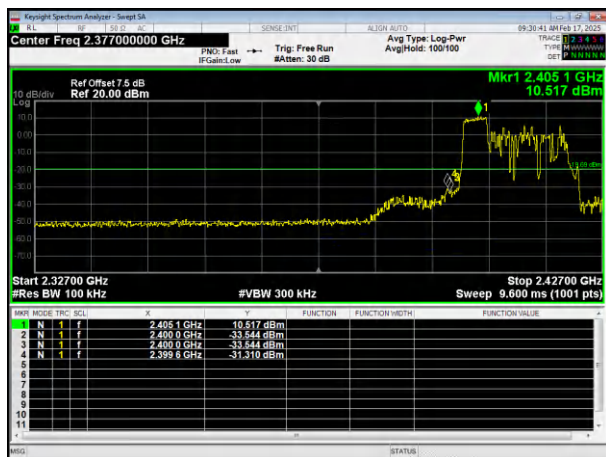

2412MHz

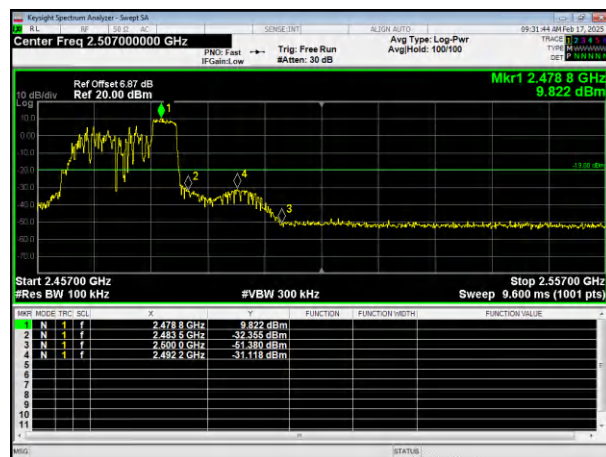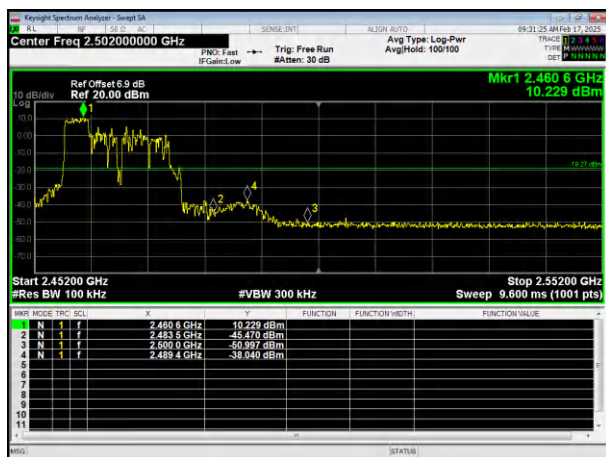

2467MHz

2462MHz


2472MHz



For Conducted


During the test, pre-scan the all modulation, and found the 802.11b mode which it is worse case.

Test channel: 2412MHz

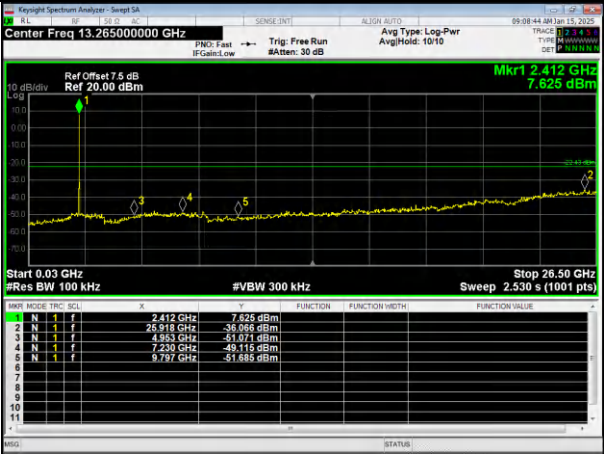


0.03GHz~26.5GHz

Test channel: 2437MHz

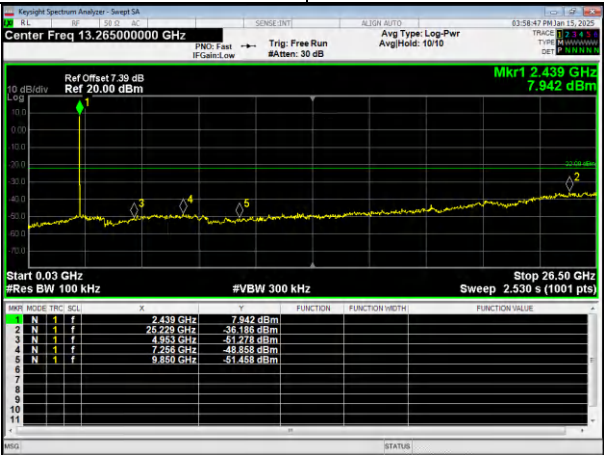

0.03GHz~26.5GHz

Test channel: 2462MHz

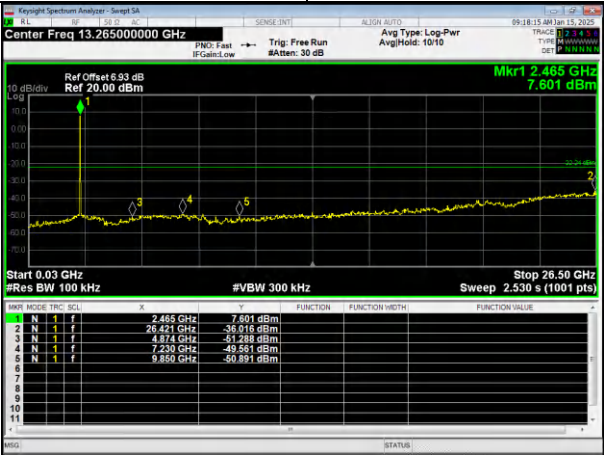


0.03GHz~26.5GHz



Test channel:


2467MHz

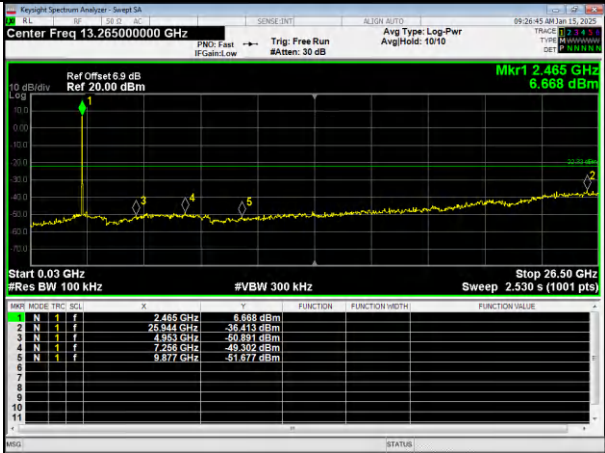

0.03GHz~26.5GHz

Test channel:

2472MHz

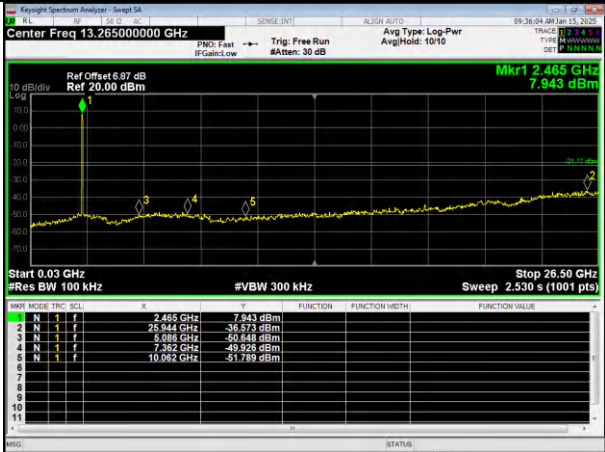

0.03GHz~26.5GHz



4.. AVERAGE OUTPUT POWER

4.1. APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(3)	Average Output Power	1 watt or 30dBm	2400-2483.5	PASS

4.1.1. TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Set span to at least 1.5 times the OBW.
- Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- If transmit duty cycle < 98%, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at the maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- Trace average at least 100 traces in power averaging (rms) mode.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

4.1.2. DEVIATION FROM STANDARD

No deviation.

4.1.3. TEST SETUP




4.1.4. EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**4.1.5. TEST RESULTS**



Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	AC 120V/60Hz

Mode	Test Channel	Average Output Power (dBm)	LIMIT (dBm)
802.11ax HT20	2412	18.239	30.00
	2437	19.159	30.00
	2462	17.219	30.00
	2467	14.469	30.00
	2472	12.414	30.00
802.11b	2412	19.162	30.00
	2437	19.06	30.00
	2462	18.999	30.00
	2467	18.148	30.00
	2472	16.069	30.00
802.11g	2412	19.106	30.00
	2437	19.185	30.00
	2462	19.014	30.00
	2467	15.715	30.00
	2472	13.437	30.00
802.11n HT20	2412	18.244	30.00
	2437	19.024	30.00
	2462	17.205	30.00
	2467	14.504	30.00
	2472	12.385	30.00
RU106	2412	17.64	30.00
	2437	19.171	30.00
	2462	15.049	30.00
	2467	15.321	30.00
	2472	6.821	30.00
RU26	2412	12.963	30.00
	2437	19.874	30.00
	2462	10.451	30.00
	2467	10.426	30.00
	2472	0.417	30.00
RU52	2412	12.666	30.00
	2437	18.621	30.00
	2462	14.448	30.00
	2467	14.344	30.00
	2472	3.121	30.00







802.11b

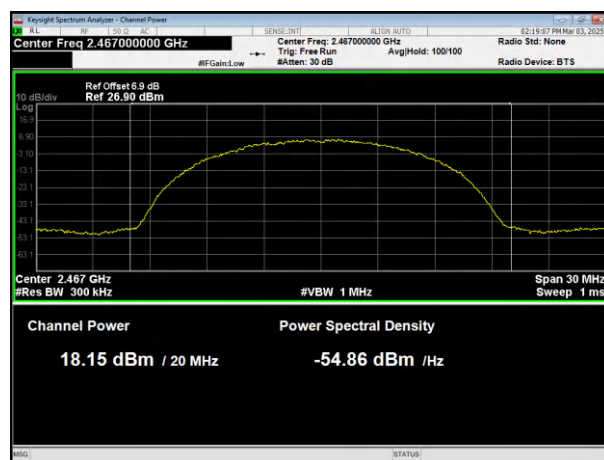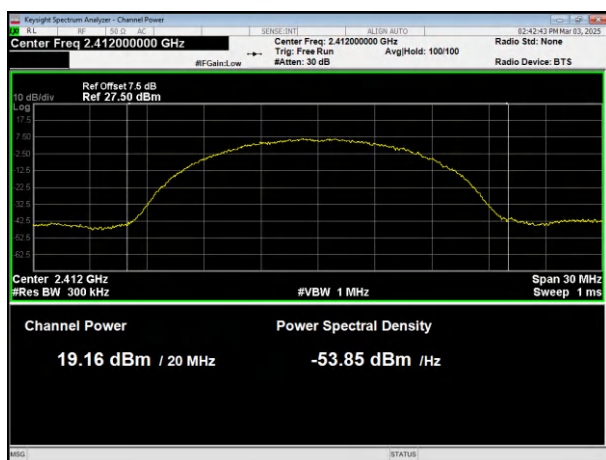


2412MHz

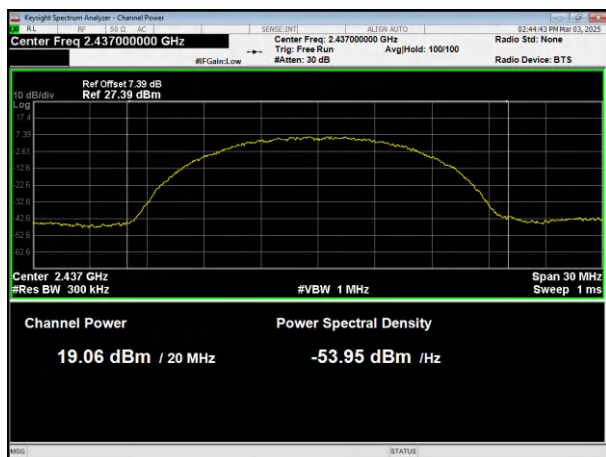

2467MHz

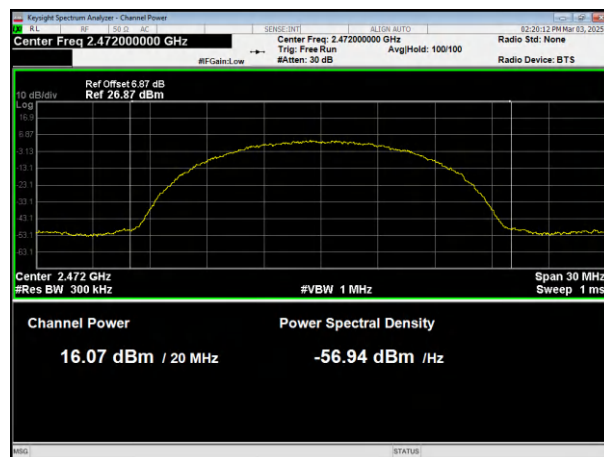

2437MHz


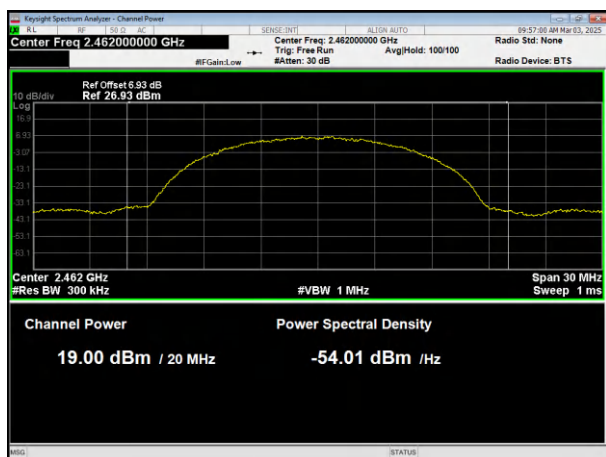


2472MHz


2462MHz




802.11g

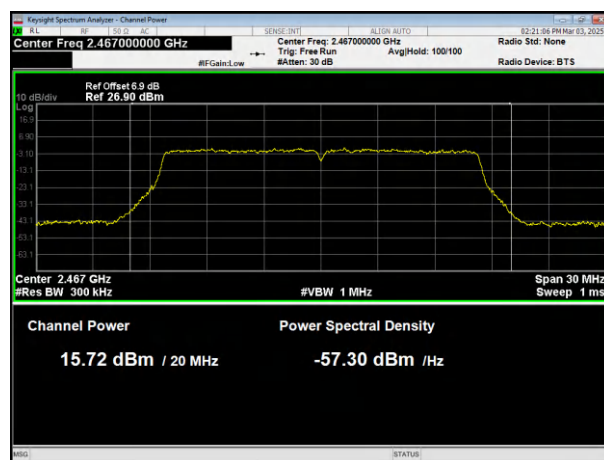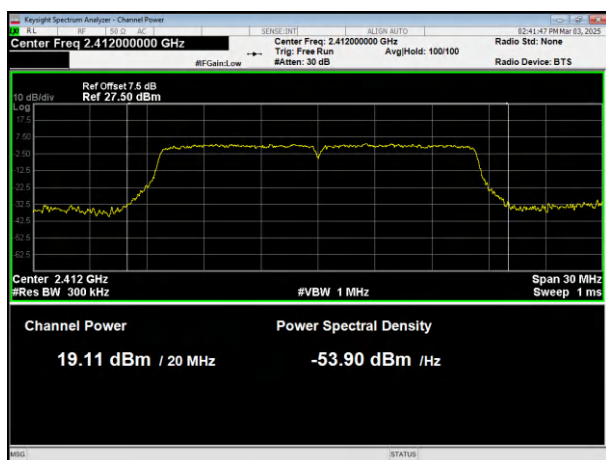


2412MHz

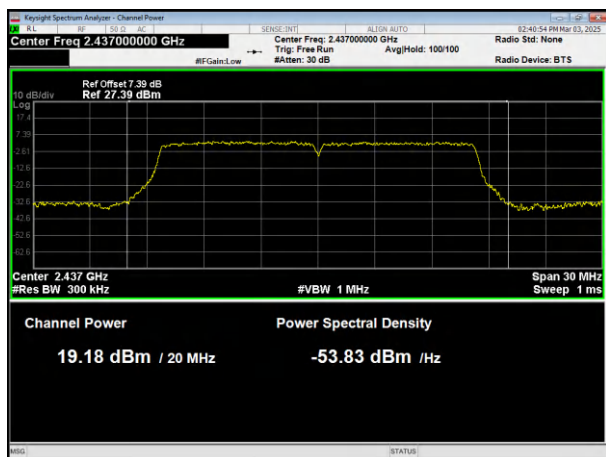

2467MHz

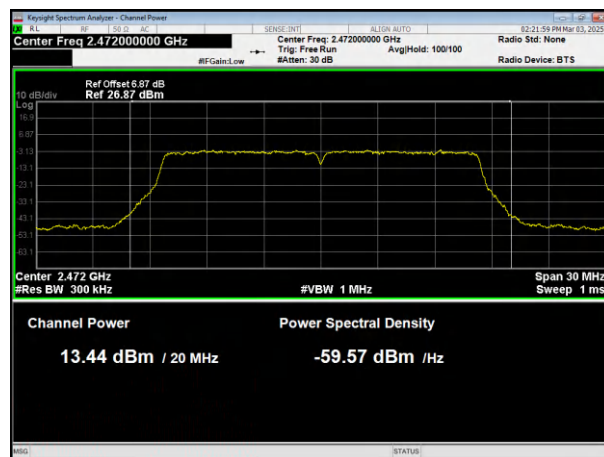

2437MHz


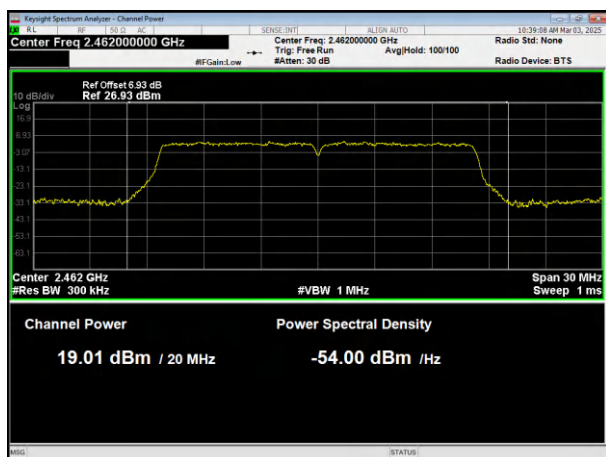


2472MHz


2462MHz




802.11n HT20

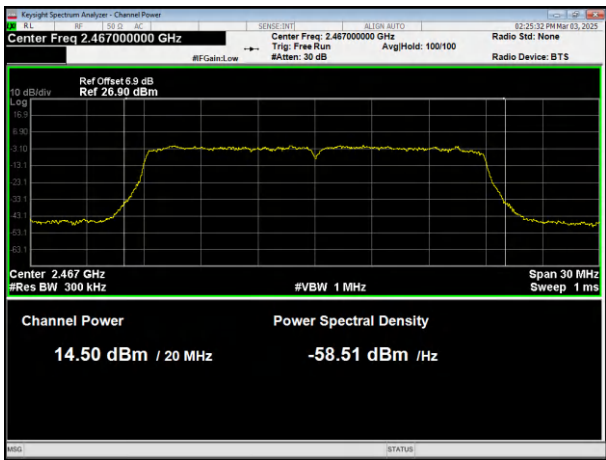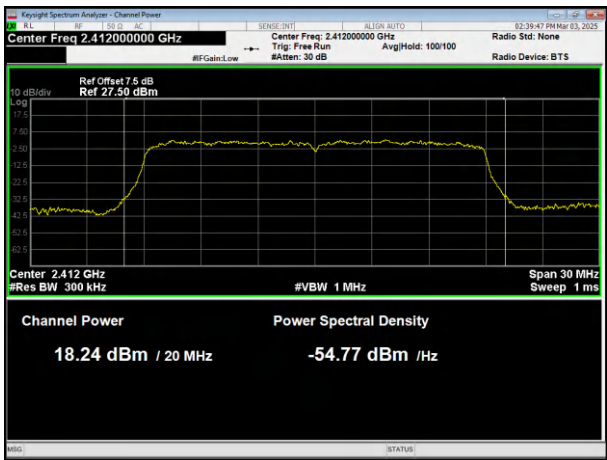


2412MHz

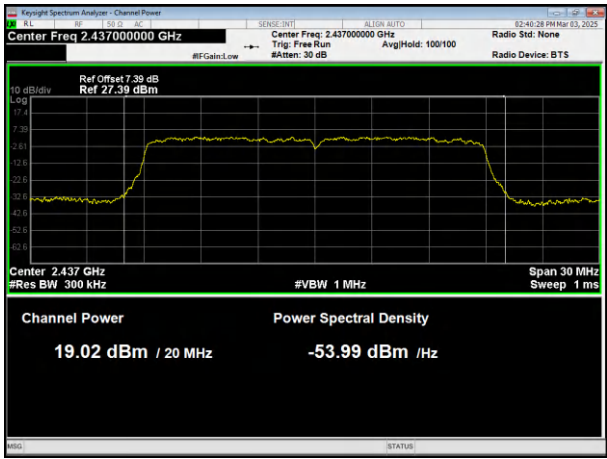

2467MHz

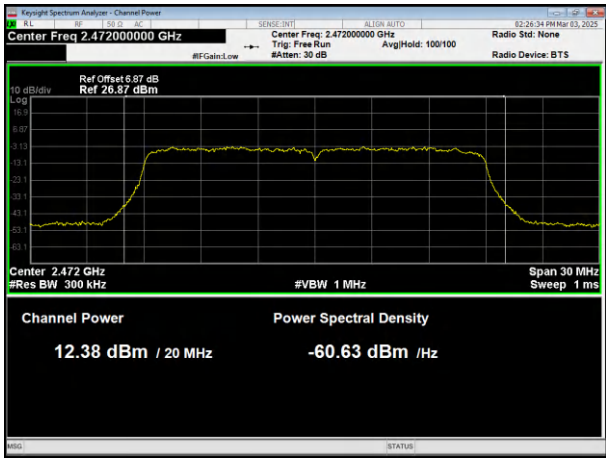

2437MHz





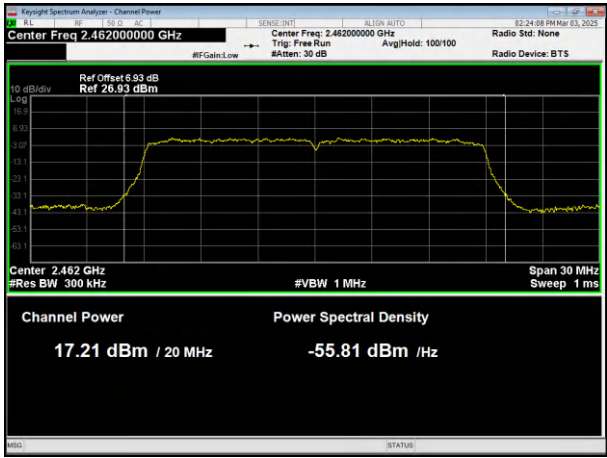


2472MHz




2462MHz

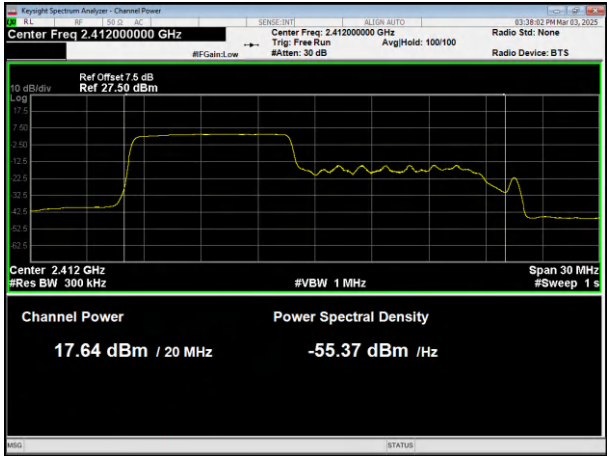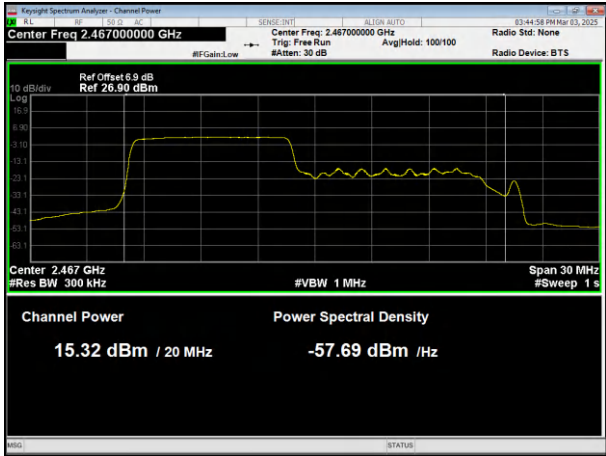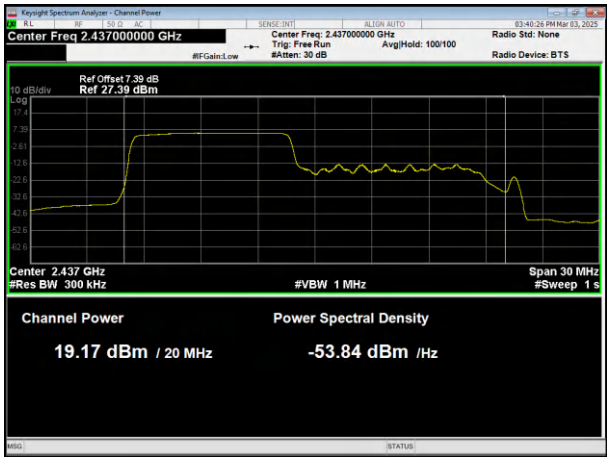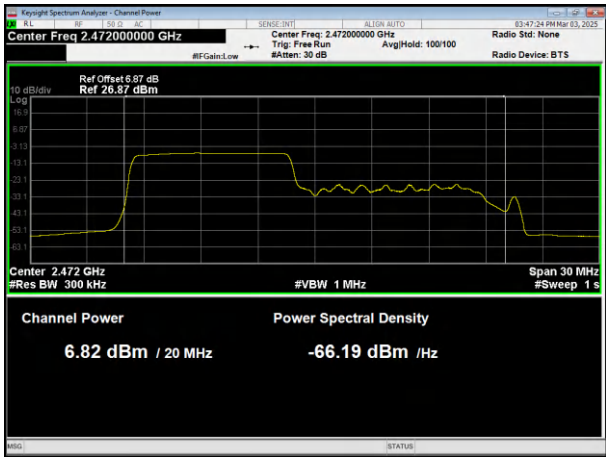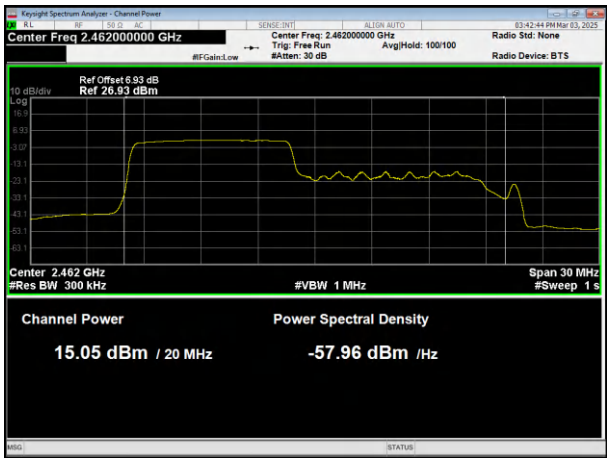


RU106	
	
2412MHz	2467MHz
	
2437MHz	2472MHz
	
2462MHz	




RU26

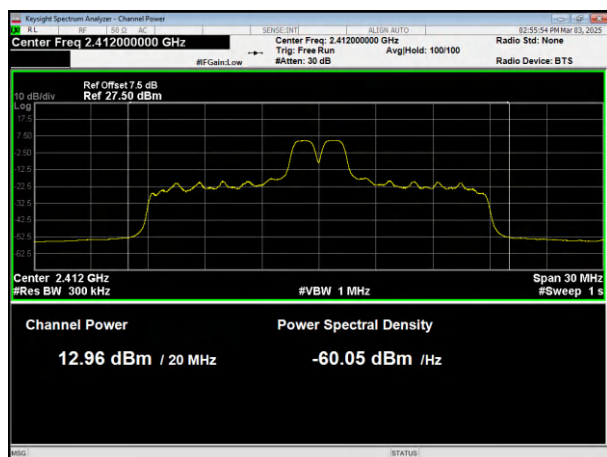


2412MHz

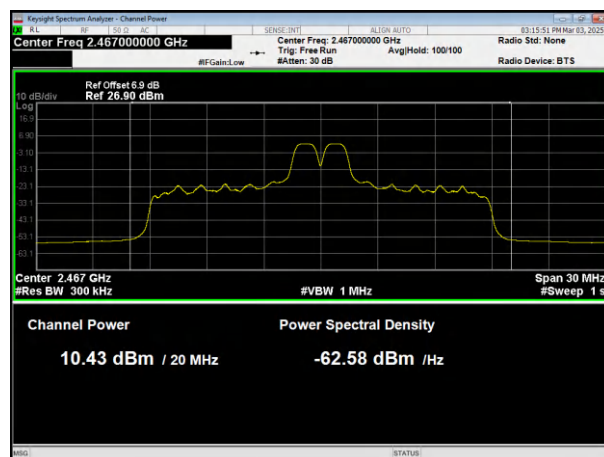


2467MHz

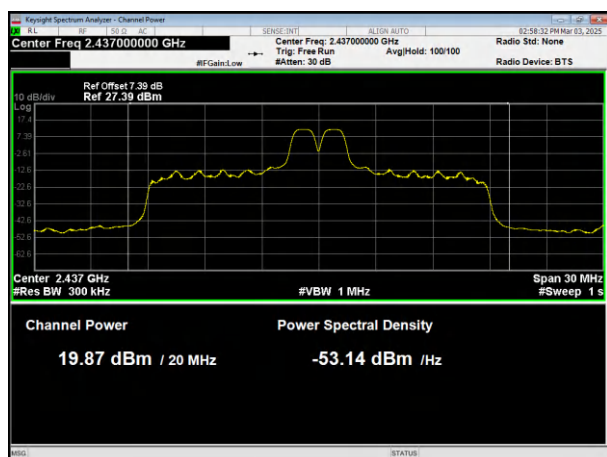

2437MHz

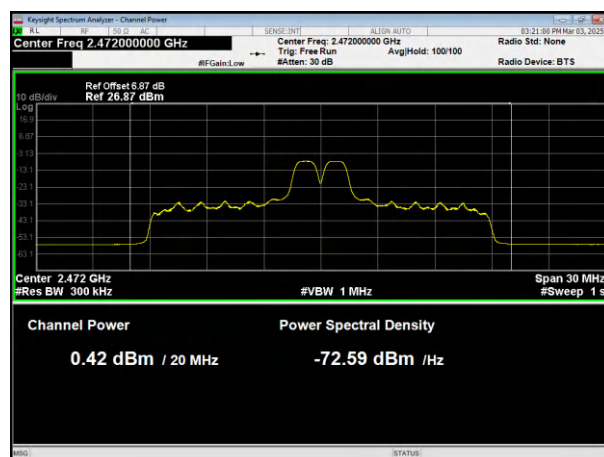

2472MHz

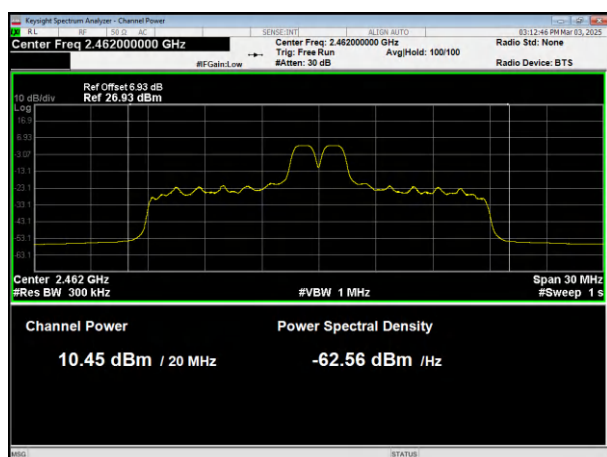

2462MHz



5.. POWER SPECTRAL DENSITY TEST

5.1. APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	$RBW \geq 3kHz$
VB	$VBW \geq 3RBW$
Detector	power averaging (rms) or sample detector (when rms not available).
Trace	rms/average
Sweep Time	Auto

5.1.1. TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

5.1.2. DEVIATION FROM STANDARD

No deviation.

5.1.3. TEST SETUP



5.1.4. EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.1.5. TEST RESULTS**


Mode	Test Channel	Reading Level (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11ax HT20	2412	-11.116	8	PASS
	2437	-11.121	8	PASS
	2462	-11.413	8	PASS
	2467	-11.326	8	PASS
	2472	-10.404	8	PASS
802.11b	2412	-12.265	8	PASS
	2437	-12.711	8	PASS
	2462	-12.093	8	PASS
	2467	-12.75	8	PASS
	2472	-11.814	8	PASS
802.11g	2412	-9.495	8	PASS
	2437	-10.156	8	PASS
	2462	-10.684	8	PASS
	2467	-10.401	8	PASS
	2472	-9.92	8	PASS
802.11n HT20	2412	-10.724	8	PASS
	2437	-11.269	8	PASS
	2462	-10.605	8	PASS
	2467	-11.145	8	PASS
	2472	-12.558	8	PASS
RU106	2412	-12.822	8	PASS
	2437	-11.836	8	PASS
	2462	-12.221	8	PASS
	2467	-12.395	8	PASS
	2472	-12.157	8	PASS
RU26	2412	-7.666	8	PASS
	2437	-7.763	8	PASS
	2462	-7.737	8	PASS
	2467	-8.002	8	PASS
	2472	-8.58	8	PASS
RU52	2412	-10.112	8	PASS
	2437	-10.131	8	PASS
	2462	-10.528	8	PASS
	2467	-10.532	8	PASS
	2472	-10.535	8	PASS




802.11ax HT20

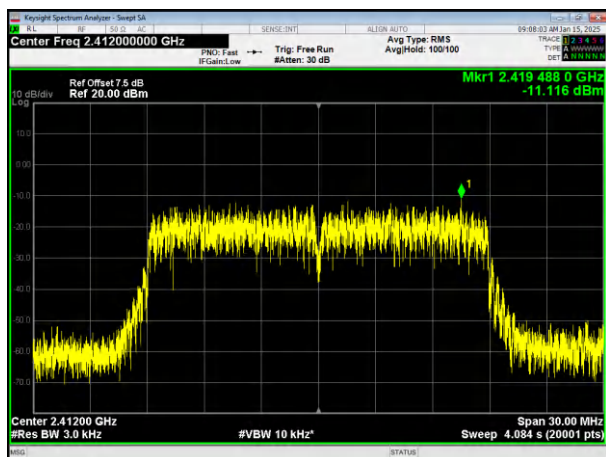


2412MHz

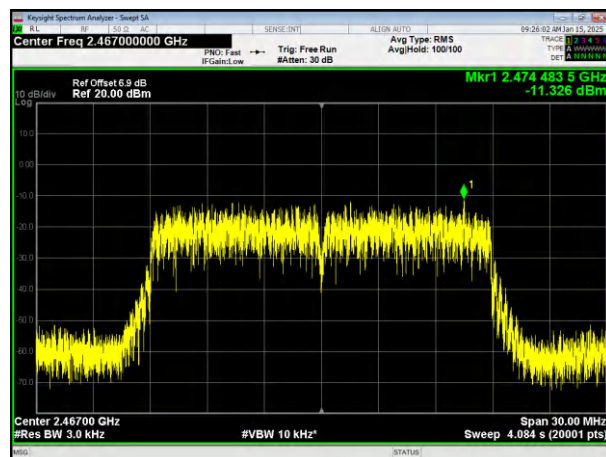


2467MHz

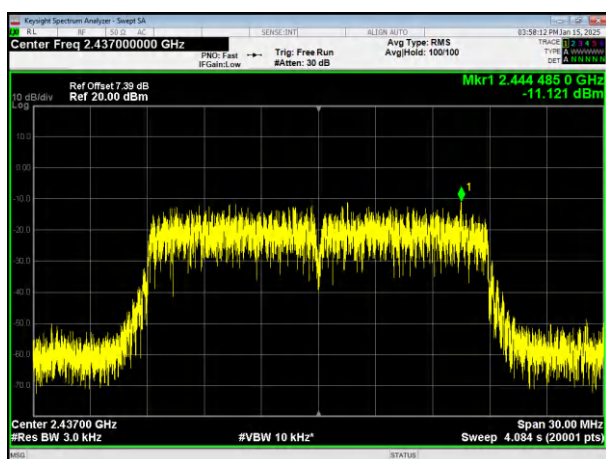

2437MHz

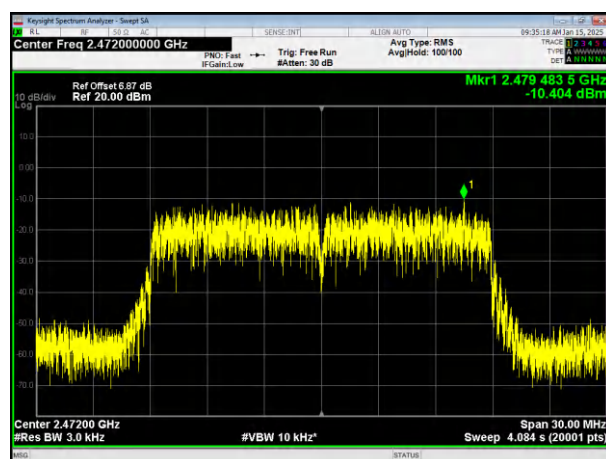


2472MHz

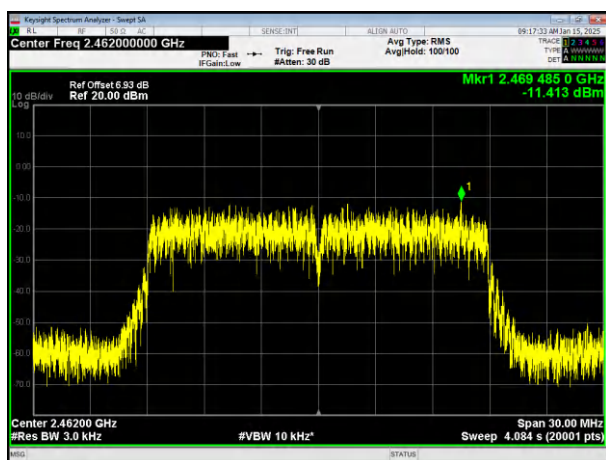


2462MHz




802.11b

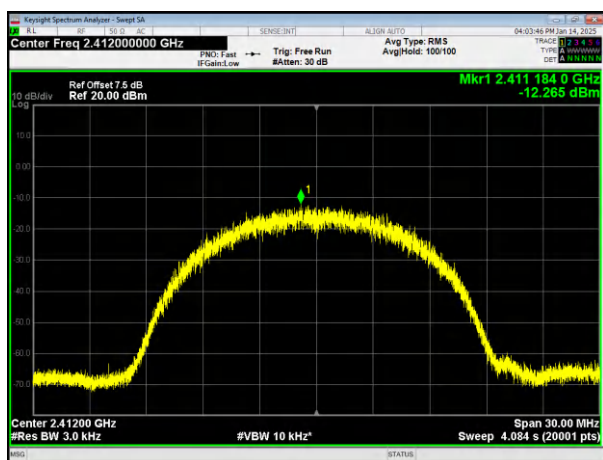


2412MHz

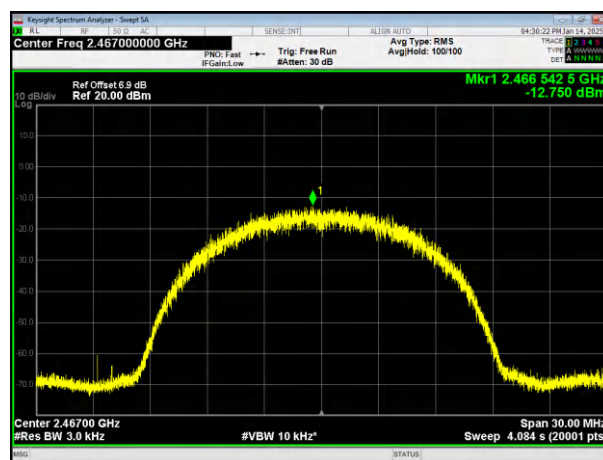


2467MHz

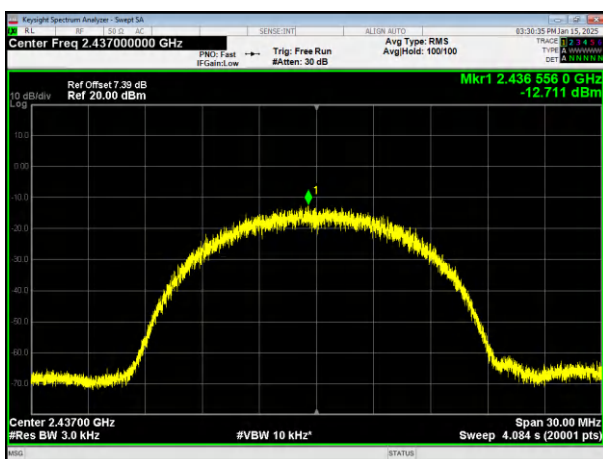

2437MHz

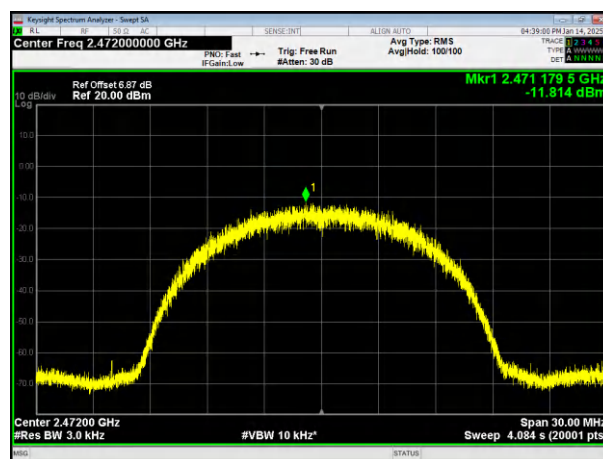


2472MHz

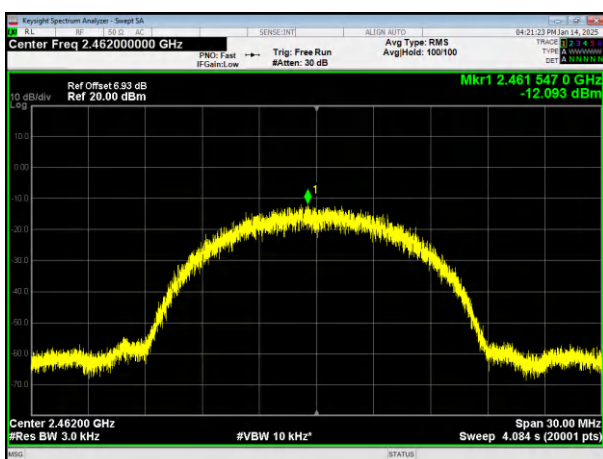


2462MHz




802.11g

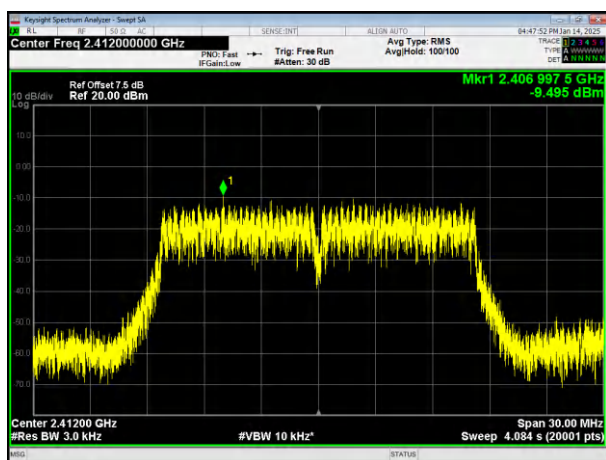


2412MHz

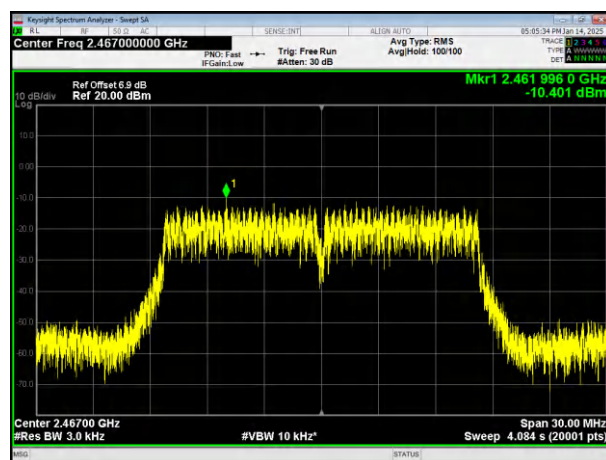


2467MHz

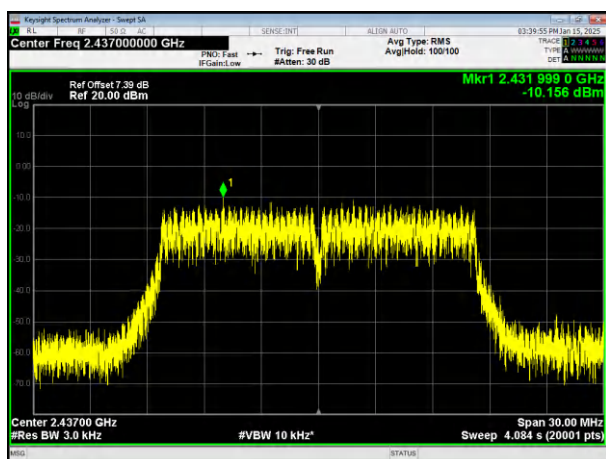

2437MHz

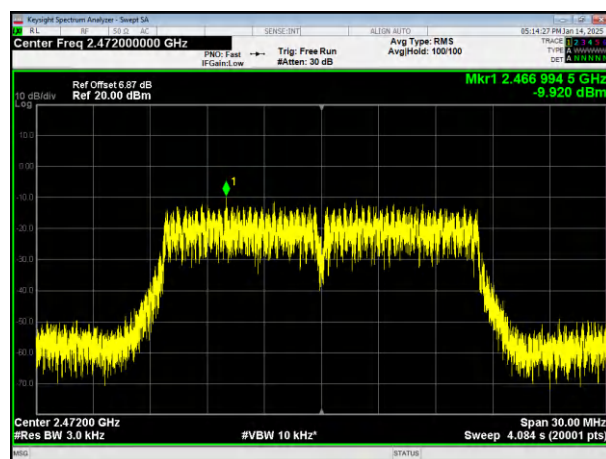



2472MHz

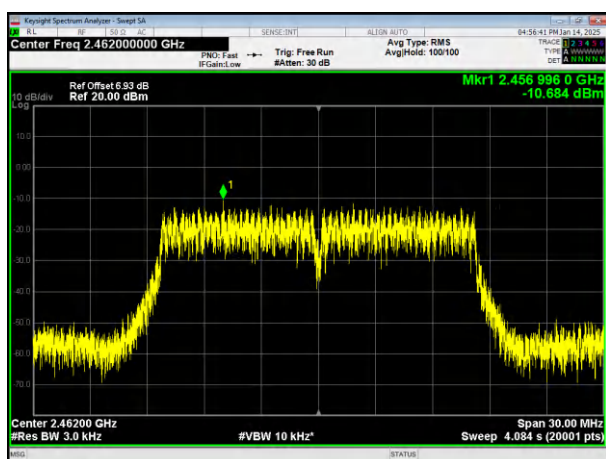


2462MHz




802.11n HT20

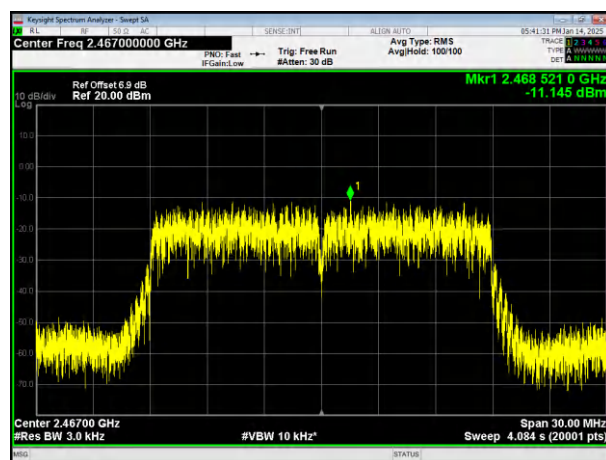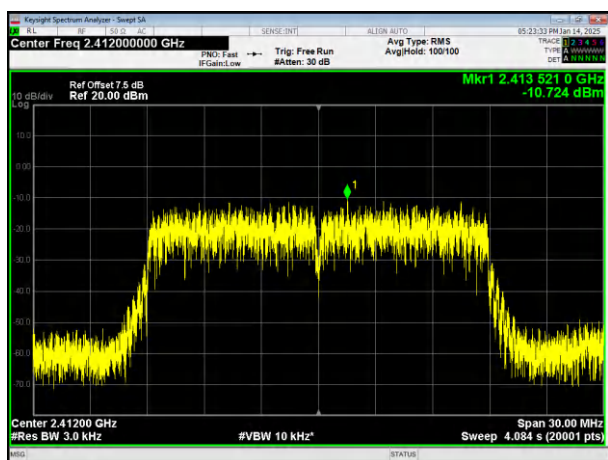


2412MHz

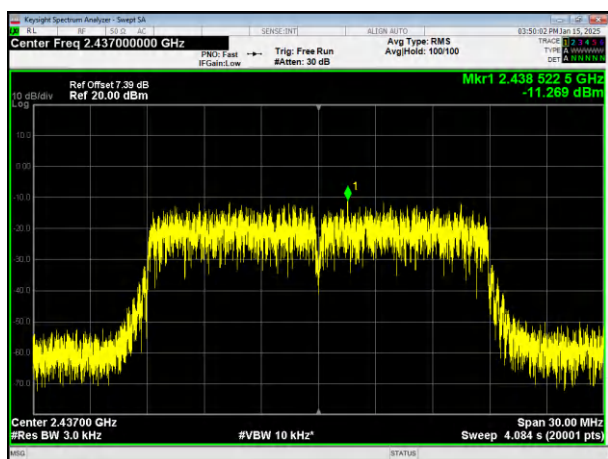

2467MHz

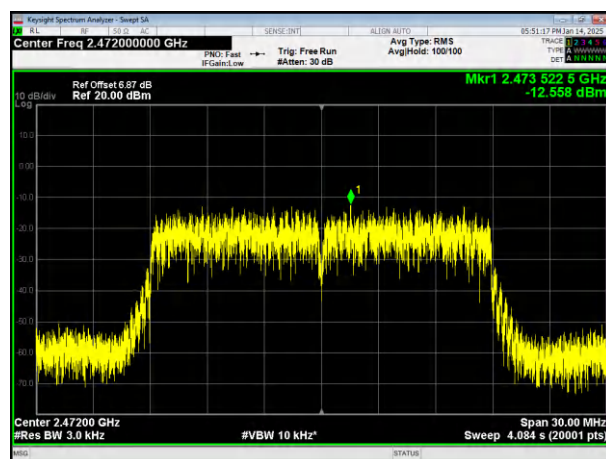

2437MHz

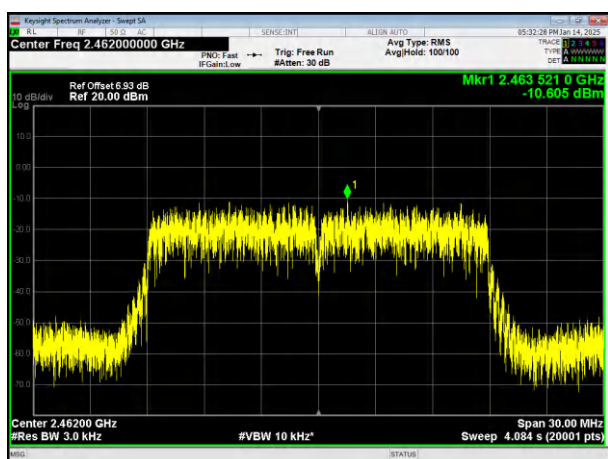


2472MHz


2462MHz




RU106

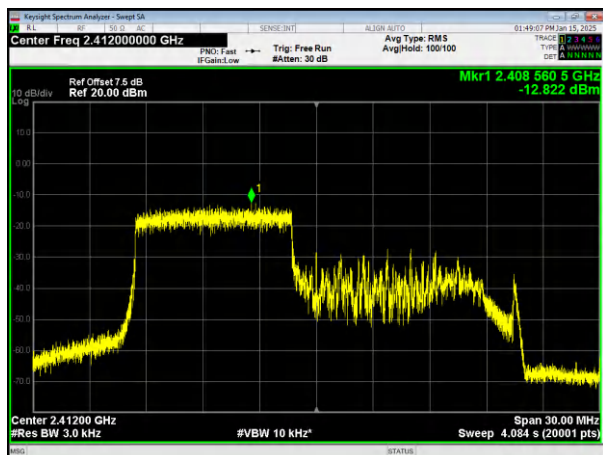


2412MHz

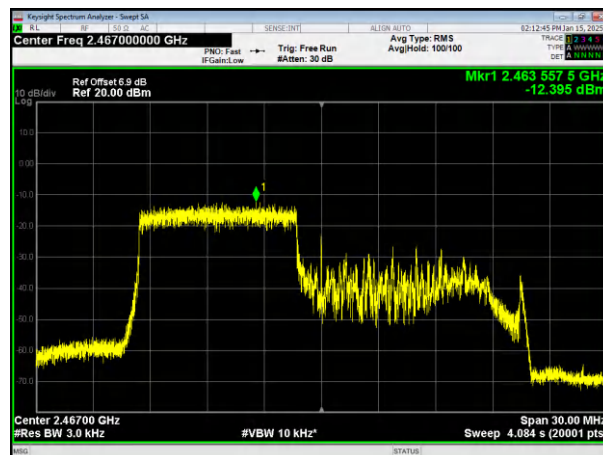


2467MHz

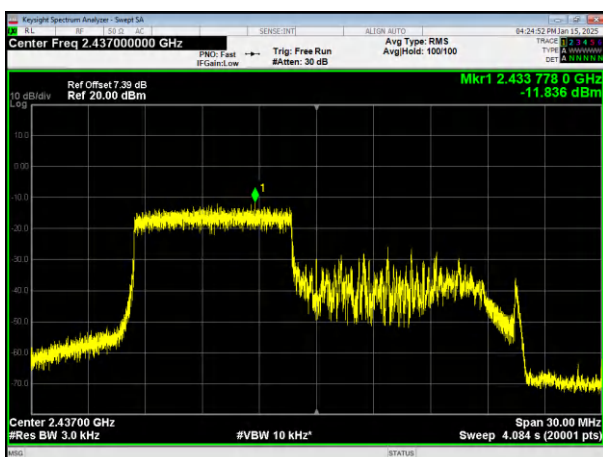

2437MHz

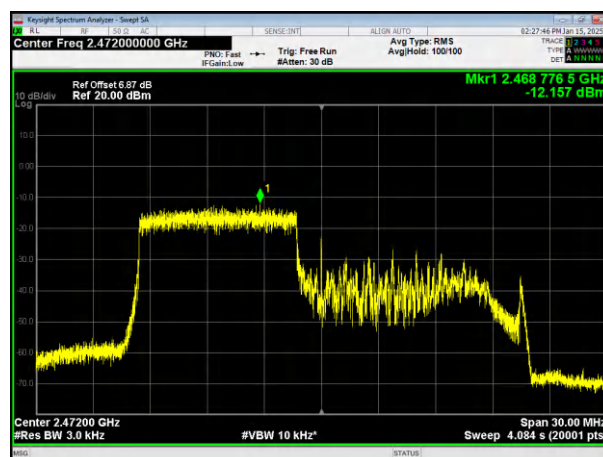


2472MHz

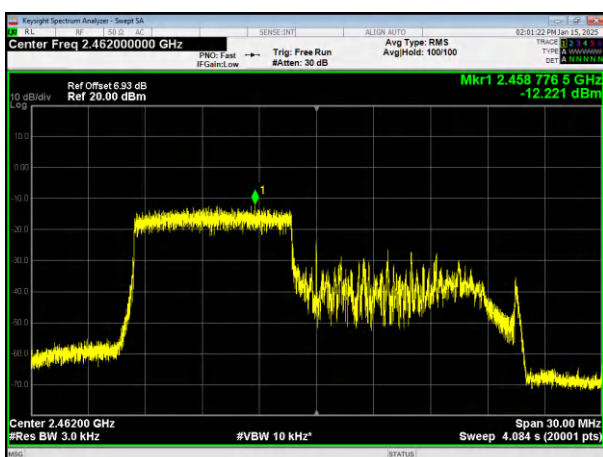


2462MHz




RU26

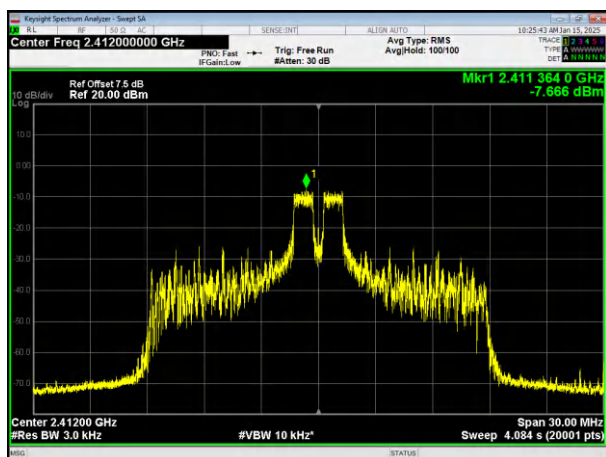


2412MHz

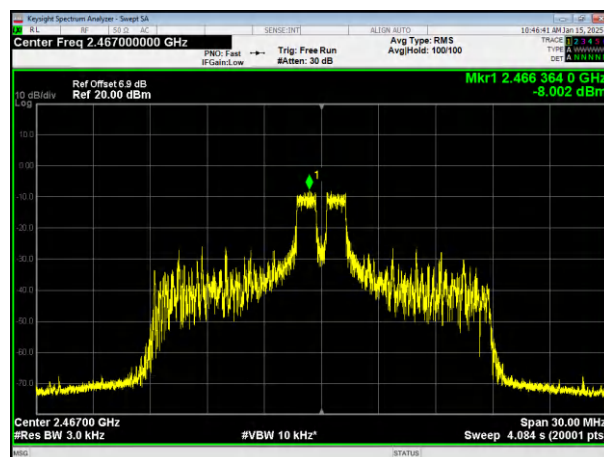


2467MHz

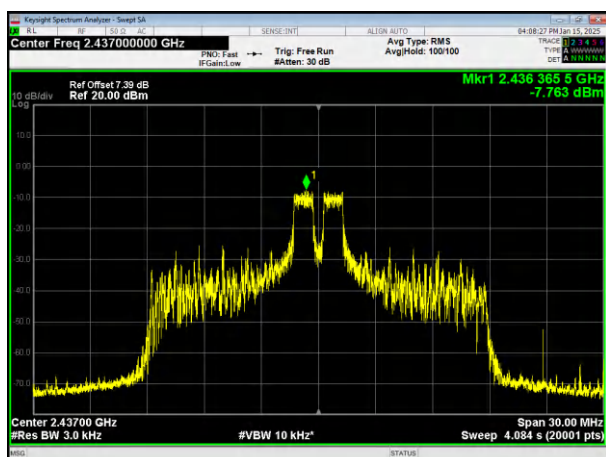

2437MHz

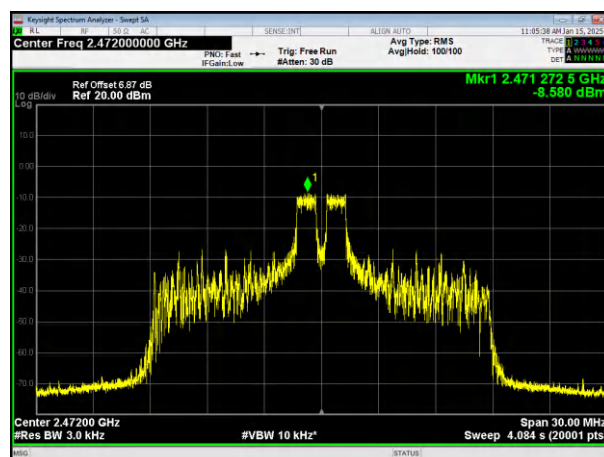

2472MHz

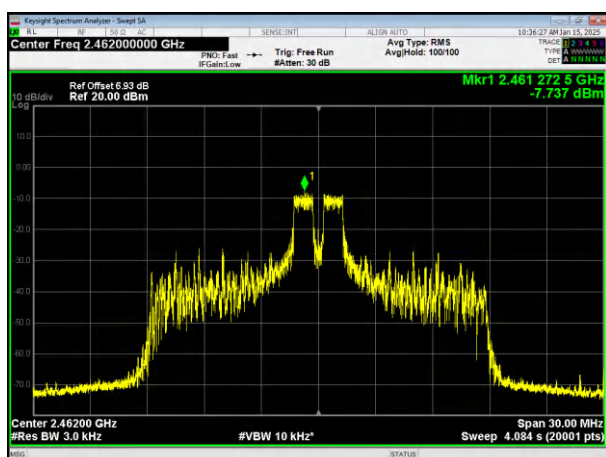

2462MHz