

FCC CERTIFICATION TEST REPORT

FOR

Applicant	:	Dayton Audio
Address	:	705 Pleasant Valley Drive, Springboro, OH 45066
Equipment under Test	:	8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Model No.	:	Matrix 88
Trade Mark	:	Dayton Audio
FCC ID	:	2BASU-MATRIX88
Manufacturer	:	Integrity Electronic Co. Ltd.
Address	:	No. 68, Huang He Road, Feng Huang Gang, Tang Xia Town, Dong Guan City, Guangdong Province

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	6
2.	General Test Information	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT	7
2.3.	Assistant equipment used for test.....	7
2.4.	Block diagram of EUT configuration for test.....	8
2.5.	Deviations of test standard.....	8
2.6.	Test environment conditions	8
2.7.	Test laboratory	8
2.8.	Measurement uncertainty.....	9
3.	Equipment Used During Test.....	10
4.	6dB Bandwidth	12
4.1.	Block diagram of test setup.....	12
4.2.	Limits	12
4.3.	Test procedure	12
4.4.	Test result.....	13
4.5.	Test graphs	13
5.	99% Bandwidth	18
5.1.	Block diagram of test setup.....	18
5.2.	Limits	18
5.3.	Test procedure	18
5.4.	Test Result	18
5.5.	Test Graphs.....	19
6.	Conducted Output Power.....	24
6.1.	Block diagram of test setup.....	24
6.2.	Limits	24
6.3.	Test procedure	24
6.4.	Test result average	25
7.	Power Spectral Density.....	26
7.1.	Block diagram of test setup.....	26
7.2.	Limits	26
7.3.	Test procedure	26
7.4.	Test result.....	27
7.5.	Test graphs	27
8.	Band Edge Compliance (Conducted Method)	32

8.1.	Block diagram of test setup.....	32
8.2.	Limits	32
8.3.	Test procedure	32
8.4.	Test result.....	33
8.5.	Test graphs	33
9.	RF Conducted Spurious Emissions	36
9.1.	Block diagram of test setup.....	36
9.2.	Limits	36
9.3.	Test procedure	36
9.4.	Test result.....	37
9.5.	Test graphs	37
10.	Radiated Spurious Emissions	50
10.1.	Block diagram of test setup.....	50
10.2.	Limit.....	51
10.3.	Test procedure	52
10.4.	Test result.....	54
11.	Radiated Band Edge Compliance.....	63
11.1.	Block diagram of test setup.....	63
11.2.	Limit.....	63
11.3.	Test procedure	63
11.4.	Test result.....	63
12.	Power Line Conducted Emission	80
12.1.	Block diagram of test setup.....	80
12.2.	Power Line Conducted Emission Limits	80
12.3.	Test procedure	80
12.4.	Test result.....	81
13.	Antenna Requirements	84
13.1.	Limit.....	84
13.2.	Result	84
14.	Test Setup Photograph	85
15.	Photos of the EUT	87

Test Report Declare

Applicant	:	Dayton Audio
Address	:	705 Pleasant Valley Drive, Springboro, OH 45066
Equipment under Test	:	8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Model No	:	Matrix 88
Trade Mark	:	Dayton Audio
Manufacturer	:	Integrity Electronic Co. Ltd.
Address	:	No. 68, Huang He Road, Feng Huang Gang, Tang Xia Town, Dong Guan City, Guangdong Province

Test Standard Used: FCC Rules and Regulations Part 15 Subpart C

Test procedure used: ANSI C63.10:2013

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No:	DDT-RE22122617-2E02		
Date of Receipt:	May 10, 2023	Date of Test:	May 10, 2023 ~ May 27, 2023

Prepared By:

Tiger Mo

Tiger Mo/Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	May 27, 2023	

1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
6dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.247(a)(2)	PASS
Conducted Output Power	FCC Part 15: 15.247(b)(3)	PASS
Power Spectral Density	FCC Part 15:15.247(e)	PASS
Band-edge and Spurious Emissions (Conducted)	FCC Part 15: 15.247(d)	PASS
Radiated Spurious Emissions	FCC Part 15: 15.205 FCC Part 15: 15.209 FCC Part 15: 15.247(d)	PASS
Radiated Band Edge Compliance	FCC Part 15: 15.205 FCC Part 15: 15.209 FCC Part 15: 15.247(d)	PASS
Power Line Conducted Emission	FCC Part 15: 15.207(a)	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

2. General Test Information

2.1. Description of EUT

EUT Name	: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Model Number	: Matrix 88
EUT function description	: Please reference user manual of this device
Power supply	: AC 100~240V, 50/60Hz
Radio Technology	: IEEE 802.11b/g/n
Operation frequency	: IEEE 802.11b: 2412MHz-2462MHz IEEE 802.11g: 2412MHz-2462MHz IEEE 802.11n HT20: 2412MHz-2462MHz IEEE 802.11n HT40: 2422MHz-2452MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Transmitter rate	: IEEE 802.11b: up to 11 Mbps IEEE 802.11g: up to 54 Mbps IEEE 802.11n HT20: up to 72.2 Mbps IEEE 802.11n HT40: up to 150 Mbps
Antenna Type	: Dipole antenna Maximum PK gain: 2.48 dBi
Sample Number	: S22122617-01

Note 1: EUT is the ab. of equipment under test.

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Remark
N/A	N/A	N/A	N/A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Dell Laptops	Dell	I7-1255U MX550	N/A	N/A

2.4. Block diagram of EUT configuration for test



Test software: QATool_Dbg.exe.exe

The test software was used to control EUT work in Continuous Tx mode and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, channel, and data rate information				
Mode	Setting Tx Power	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
	ANT1			
IEEE 802.11b	1E	1	LCH: CH1	2412
	1E	1	MCH: CH6	2437
	1E	1	HCH: CH11	2462
IEEE 802.11g	1A	6	LCH: CH1	2412
	1A	6	MCH: CH6	2437
	1A	6	HCH: CH11	2462
IEEE 802.11n HT20	1A	MCS 0	LCH: CH1	2412
	1A	MCS 0	MCH: CH6	2437
	1A	MCS 0	HCH: CH11	2462
IEEE 802.11n HT40	1A	MCS 0	LCH: CH3	2422
	1A	MCS 0	MCH: CH6	2437
	1A	MCS 0	HCH: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.5. Deviations of test standard

No Deviation

2.6. Test environment conditions

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz); 1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz); 1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 × 10 ⁻⁸ (Antenna couple method) 5.5 × 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz); 1.40 dB (3.6 GHz ≤ f < 8 GHz) 1.66 dB (8 GHz ≤ f < 26.5 GHz)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10 ⁻⁸
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz) 3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	


3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☑RF Connected Test (Tonscend RF Measurement System 1#)					
SIGNAL ANALYZER	R&S	FSQ26	101272	Apr. 27, 2023	1 Year
Wideband Radio Communication tester	R&S	CMW500	120259	Aug. 26, 2022	1 Year
Vector Signal Generator	Agilent	N5182A	MY19060405	Apr. 27, 2023	1 Year
MXG Vector Signal Generator	Agilent	N5182B	MY59100192	Apr. 27, 2023	1 Year
RF Control Unit	Tonsend	JS0806-2	158060010	Apr. 27, 2023	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	May 26, 2022 May 15, 2023	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.3.2.22	N/A	N/A
☑Radiation 3#chamber					
EMI Test Receiver	R&S	ESU26	100472	Apr. 23, 2023	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Apr. 23, 2023	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 29, 2022	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	Jul. 22, 2022	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120 D	02468	Sep. 29, 2022	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	Apr. 26, 2023	1 Year
Pre-amplifier	COM-POWER	PAM-118A	18040084	Aug. 17, 2022	1 Year
Pre-amplifier	COM-POWER	PAM-840A	461369	Apr. 27, 2023	1 Year
RE Cable	N/A	W23.02 CP1-X2 + W23.09 AP1-X8+ JCT26S-NJ-NJ-1.5M+ JCT26S-NJ-NJ-1.5M	4.5M+8M+1.5M+1.5M	Aug. 17, 2022	1 Year
RF Cable	Yuhu Technology	JCTB810-NJ-NJ-9M	21123964	Apr. 23, 2023	1 Year
RF Cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	21073466	Aug. 17, 2022	1 Year
Micro-Tronics filters	REBES	BRM50702	G555	N/A	N/A
Micro-Tronics filters	REBES	BRM50716	G392	N/A	N/A
High Pass filter	XB	XBLBQ-GTA67	210820-2-3	N/A	N/A
Test software	Tonscend	JS32-RE	V 5.0.0.1	N/A	N/A

☑Power Line Conducted Emissions Test 1#					
Test Receiver	R&S	ESCI	100551	Aug. 26, 2022	1 Year
LISN 1	R&S	ENV216	101109	Aug. 26, 2022	1 Year
LISN 2	R&S	ESH2-Z5	100309	Aug. 26, 2022	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Aug. 26, 2022	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Aug. 26, 2022	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
Test Receiver	R&S	ESCI	100551	Aug. 26, 2022	1 Year

4. 6dB Bandwidth

4.1. Block diagram of test setup

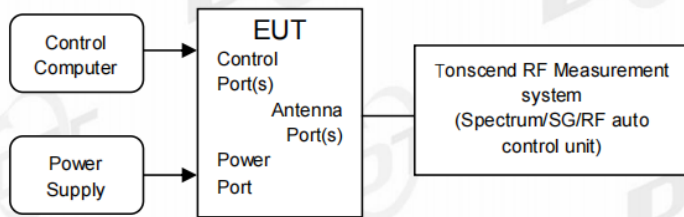

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.8.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for 6 dB Bandwidth:

RBW:	100 kHz
VBW:	$\geq [3 \times \text{RBW}]$
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold

Allow the trace to stabilize, measure the 6 dB bandwidth of signal, and record the results in the report

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	9.56	2407.44	2417.00	0.5	PASS
		2437	10.04	2431.96	2442.00	0.5	PASS
		2462	10.00	2457.00	2467.00	0.5	PASS
11G	Ant1	2412	15.04	2404.44	2419.48	0.5	PASS
		2437	15.08	2429.44	2444.52	0.5	PASS
		2462	15.08	2454.44	2469.52	0.5	PASS
11N20SISO	Ant1	2412	15.08	2404.44	2419.52	0.5	PASS
		2437	15.08	2429.44	2444.52	0.5	PASS
		2462	15.04	2454.48	2469.52	0.5	PASS
11N40SISO	Ant1	2422	35.04	2404.48	2439.52	0.5	PASS
		2437	35.04	2419.48	2454.52	0.5	PASS
		2452	35.04	2434.48	2469.52	0.5	PASS

11B Ant1 2412

Ref 20 dBm Att 20 dB RBW 100 kHz VBW 300 kHz SWT 15 ms Delta 3 [T1] -0.66 dB

Marker 1 [T1] 0.63 dBm 2.40744000 GHz
Marker 2 [T1] -0.77 dBm 2.41222000 GHz

Offset 19.3 dB

Center 2.412 GHz 4 MHz/ Span 40 MHz

Date: 26.MAY.2023 10:24:13

11B Ant1 2437

Ref 20 dBm Att 20 dB RBW 100 kHz VBW 300 kHz SWT 15 ms Delta 3 [T1] 0.15 dB


Marker 1 [T1] 0.98 dBm 2.43196000 GHz
Marker 2 [T1] 0.93 dBm 2.43222000 GHz

Offset 19.6 dB


Center 2.437 GHz 4 MHz/ Span 40 MHz

Date: 26.MAY.2023 10:26:32


11B Ant1 2462

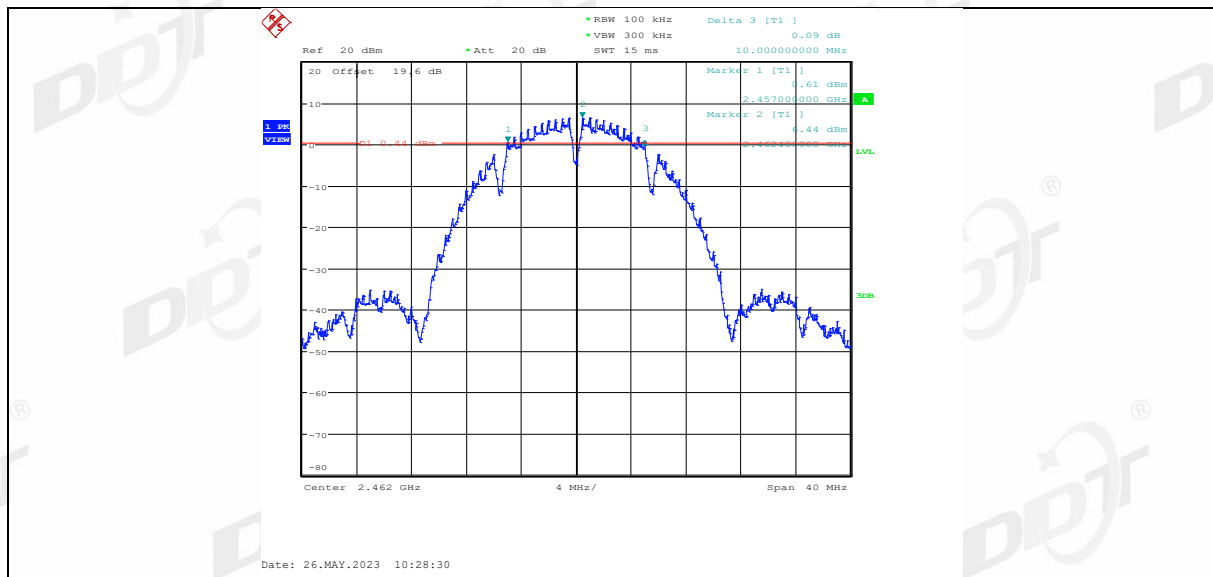


11G Ant1 2412

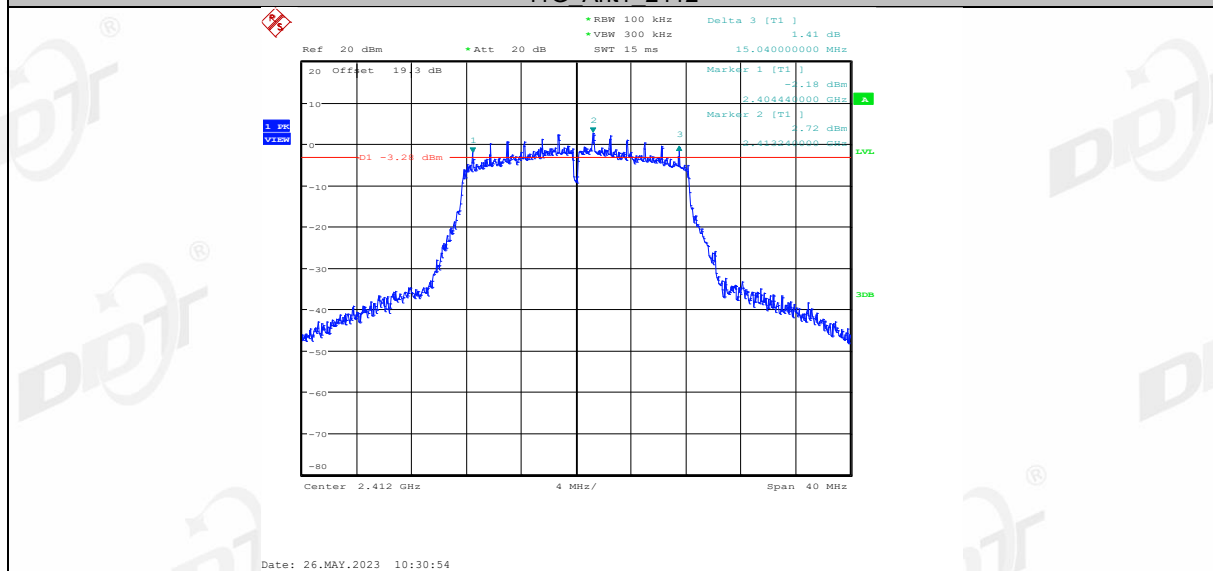

11G Ant1 2437

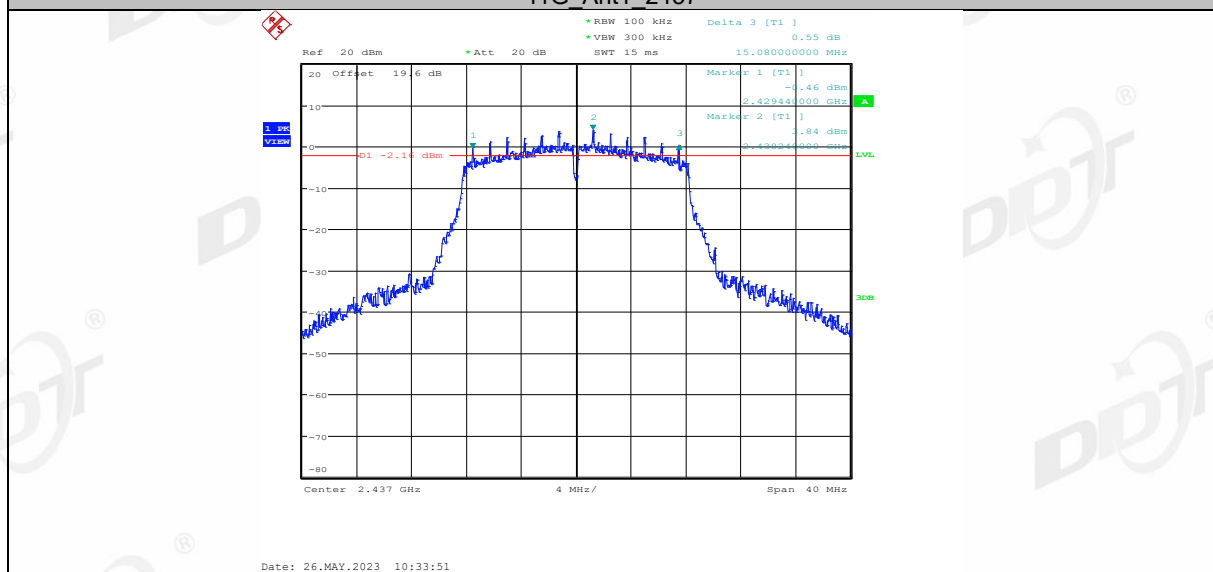


11G Ant1 2462

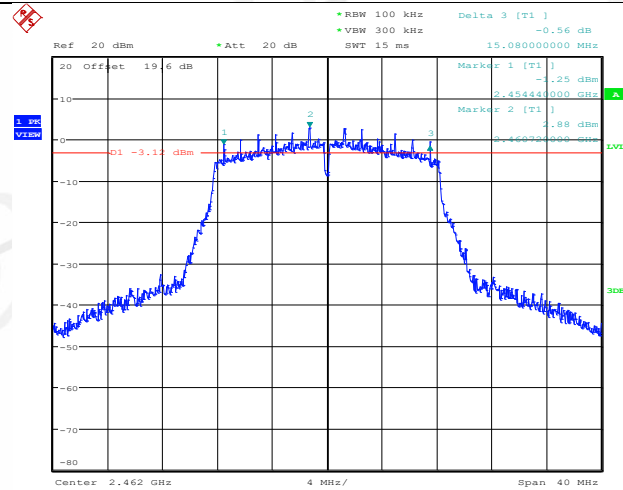


Date: 26.MAY.2023 10:35:47

11N20SISO Ant1_2412

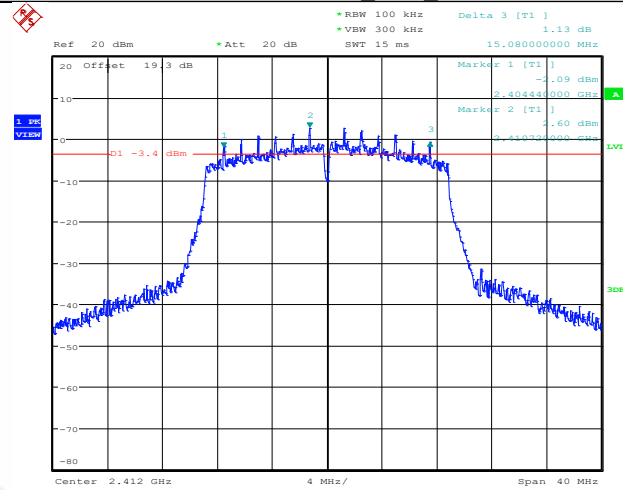


Date: 26.MAY.2023 10:38:09

11N20SISO Ant1_2437

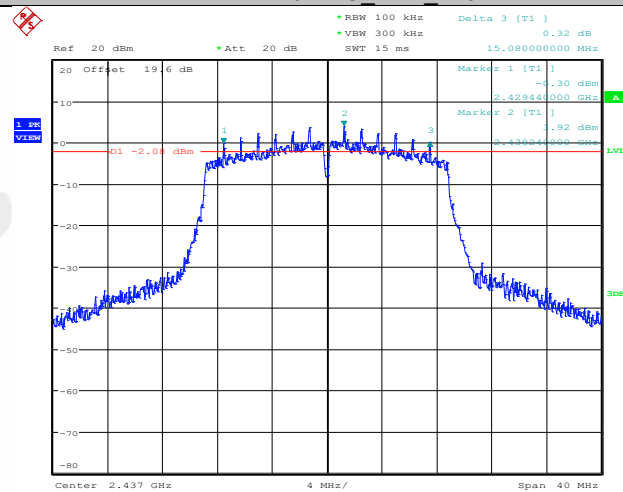


Date: 26.MAY.2023 10:40:21


11N20SISO Ant1_2462

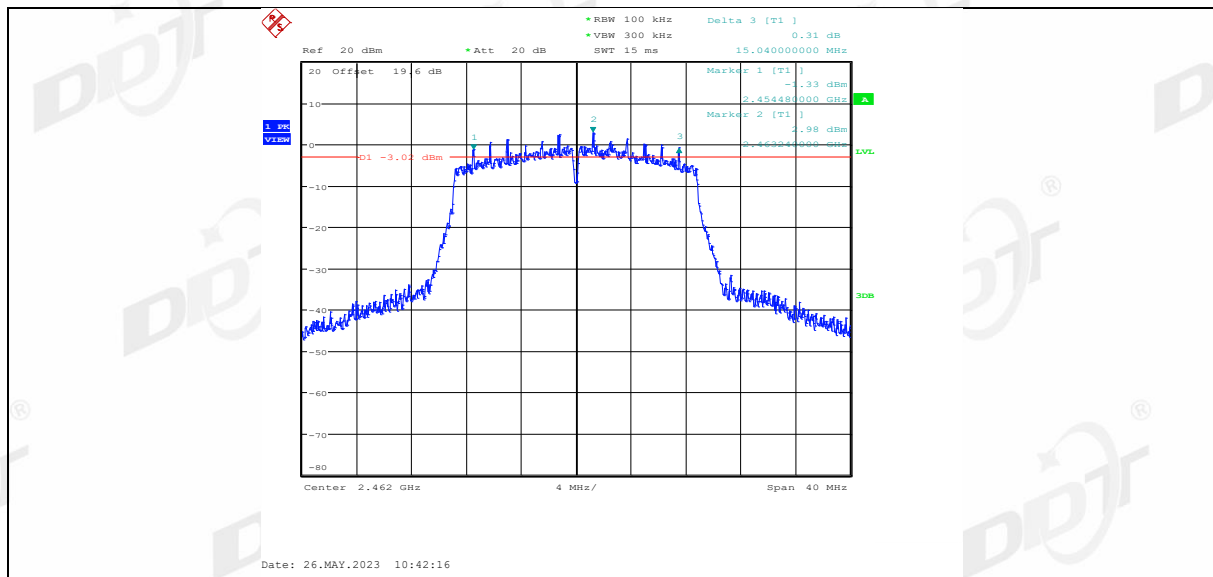


11N40SISO Ant1_2422

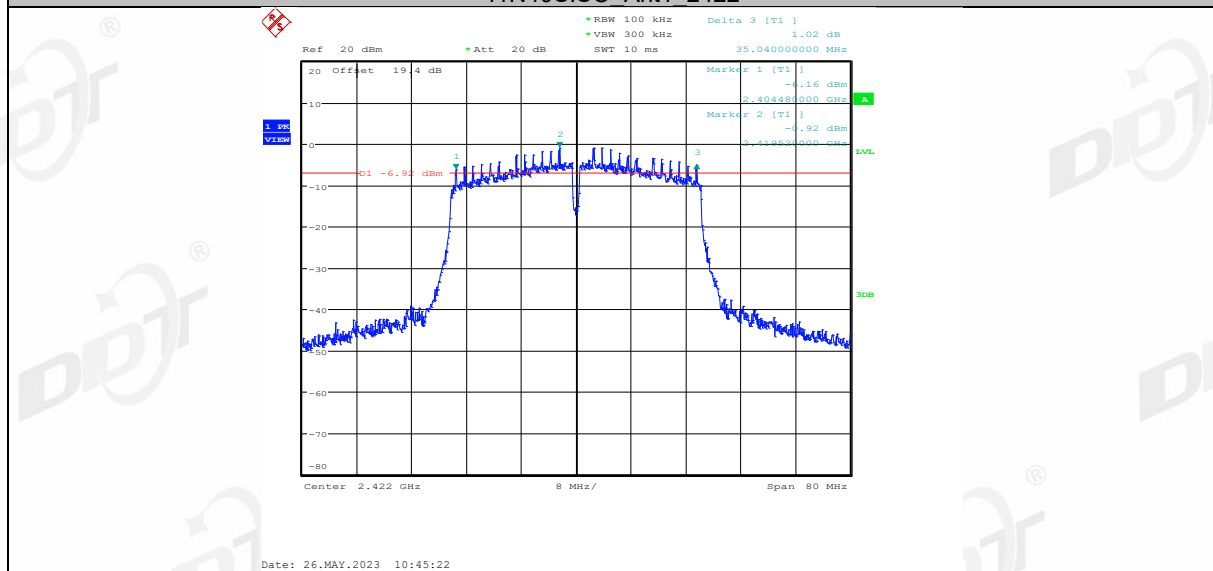

11N40SISO Ant1_2437

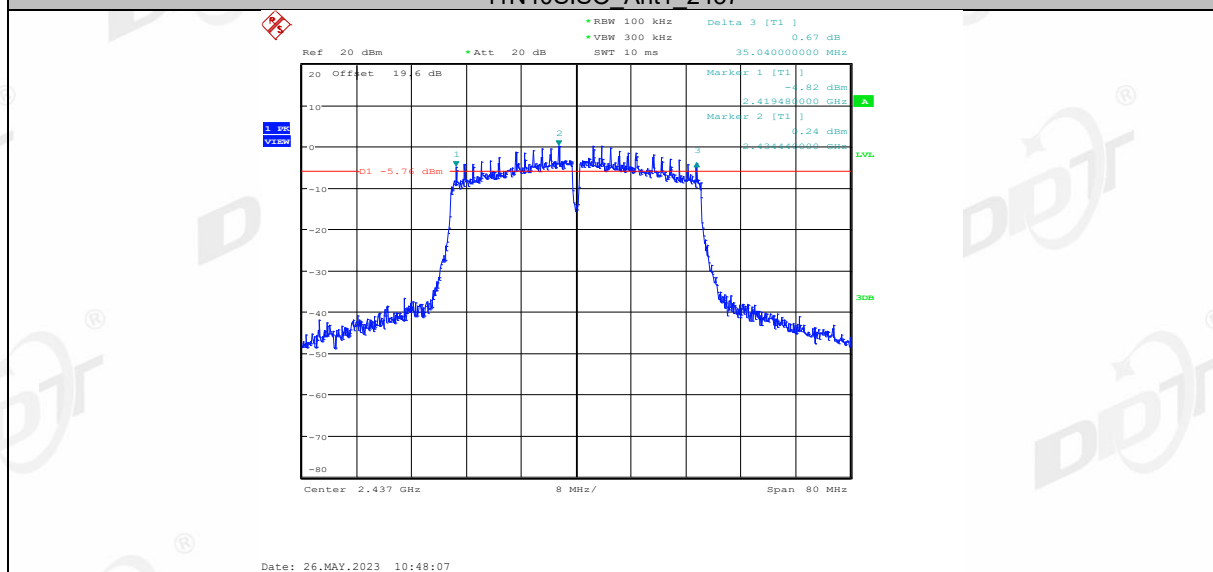


11N40SISO Ant1_2452

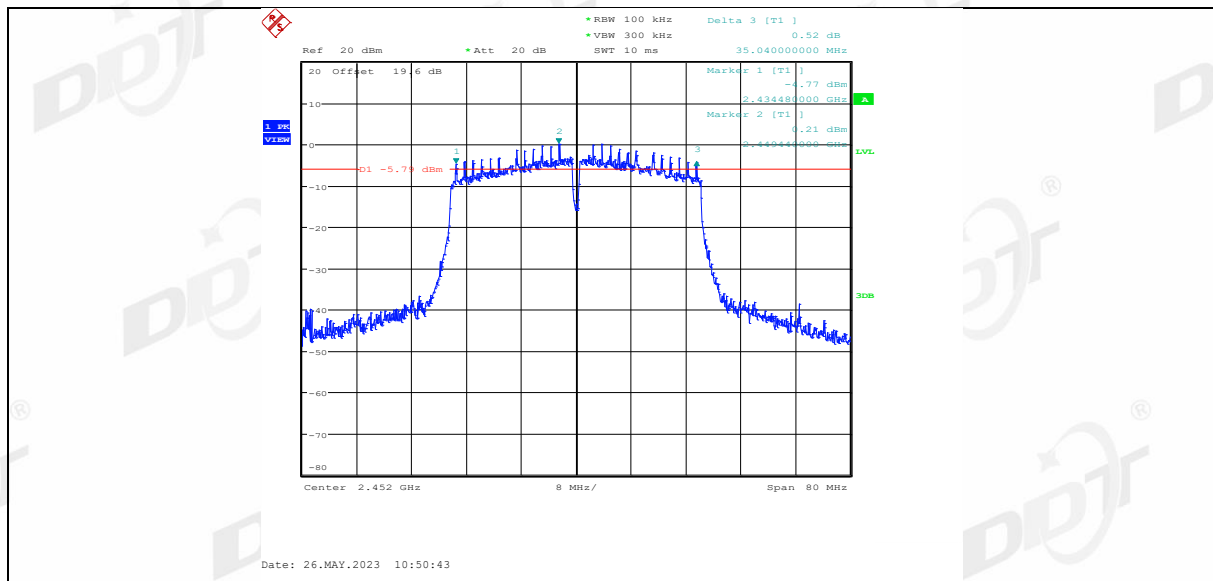

5. 99% Bandwidth

5.1. Block diagram of test setup

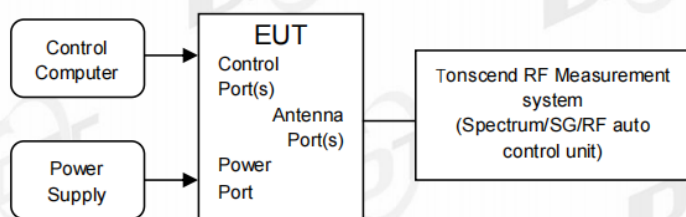

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% Bandwidth:


RBW: 1% to 5% of the OBW
 VBW: approximately three times RBW
 Span: between 1.5 times and 5.0 times the OBW
 Detector Mode: peak
 Sweep time: auto
 Trace mode max hold


Allow the trace to stabilize, measure the 99% bandwidth of signal, and record the results in the report.

5.4. Test Result


Test Mode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	14.32	2404.8800	2419.2000	---	---
		2437	14.36	2429.8400	2444.2000	---	---
		2462	14.32	2454.8400	2469.1600	---	---
11G	Ant1	2412	16.92	2403.5200	2420.4400	---	---
		2437	17.12	2428.4000	2445.5200	---	---
		2462	17.04	2453.4400	2470.4800	---	---
11N20SISO	Ant1	2412	17.84	2403.0800	2420.9200	---	---
		2437	17.84	2428.0800	2445.9200	---	---
		2462	17.84	2453.0800	2470.9200	---	---
11N40SISO	Ant1	2422	36.08	2404.0000	2440.0800	---	---
		2437	36.08	2419.0000	2455.0800	---	---
		2452	36.08	2434.0000	2470.0800	---	---

5.5. Test Graphs

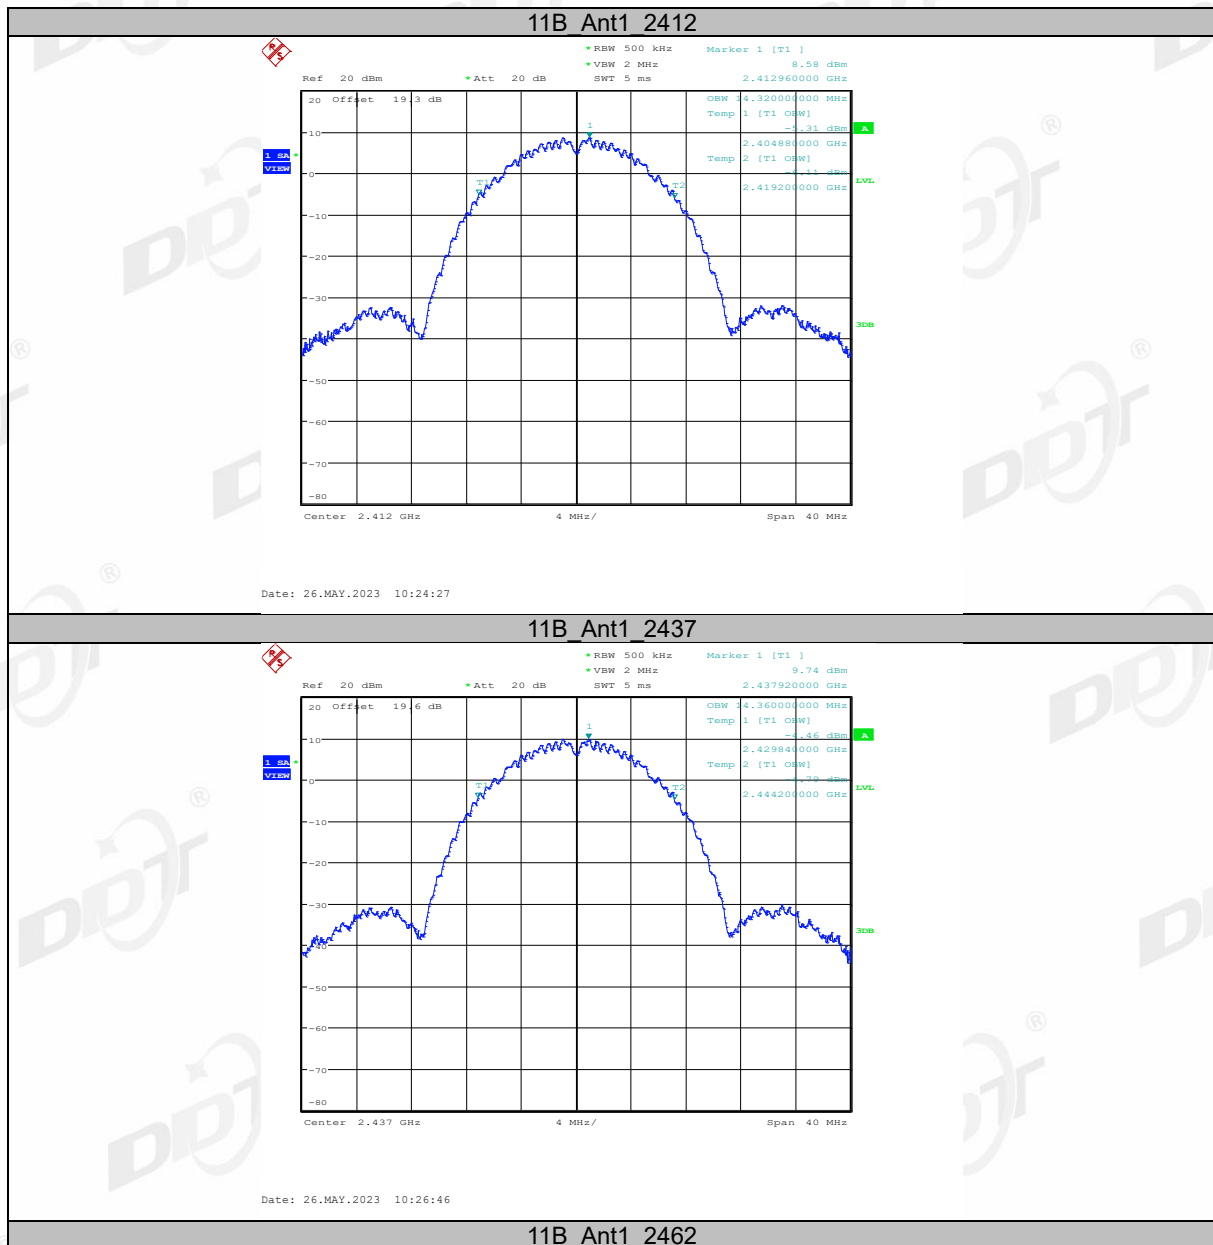


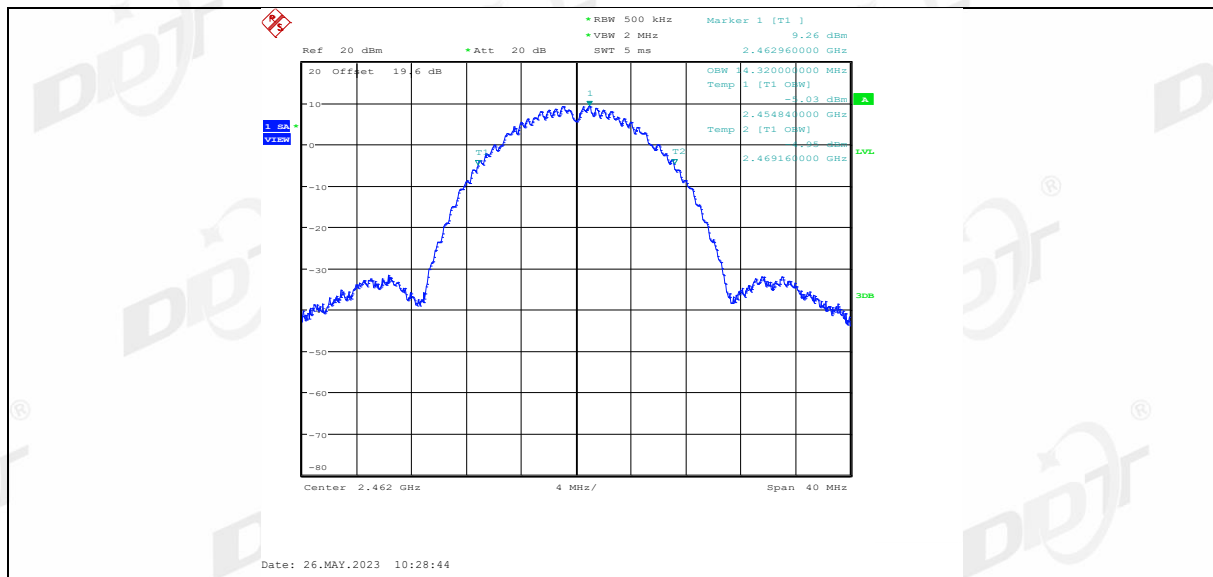


11G Ant1 2412

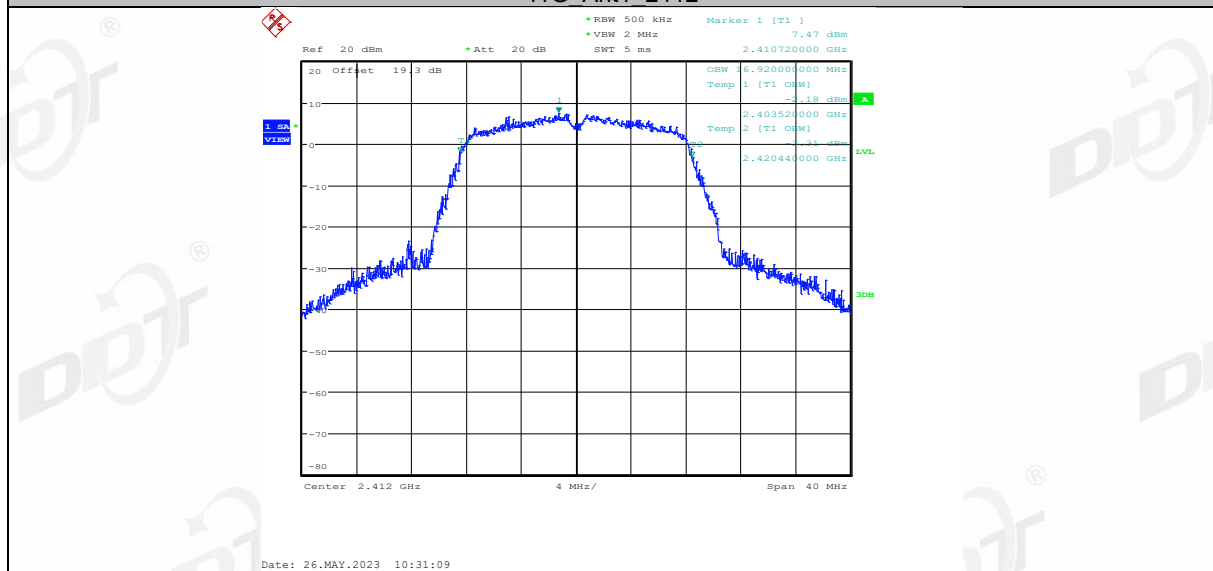


11G Ant1 2437

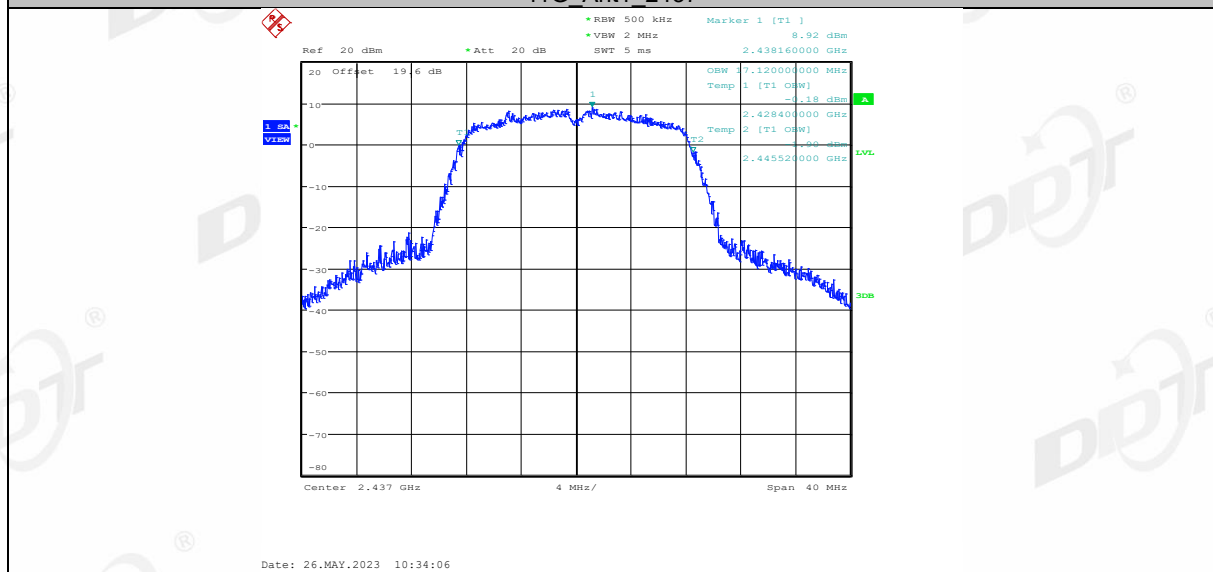


11G Ant1 2462

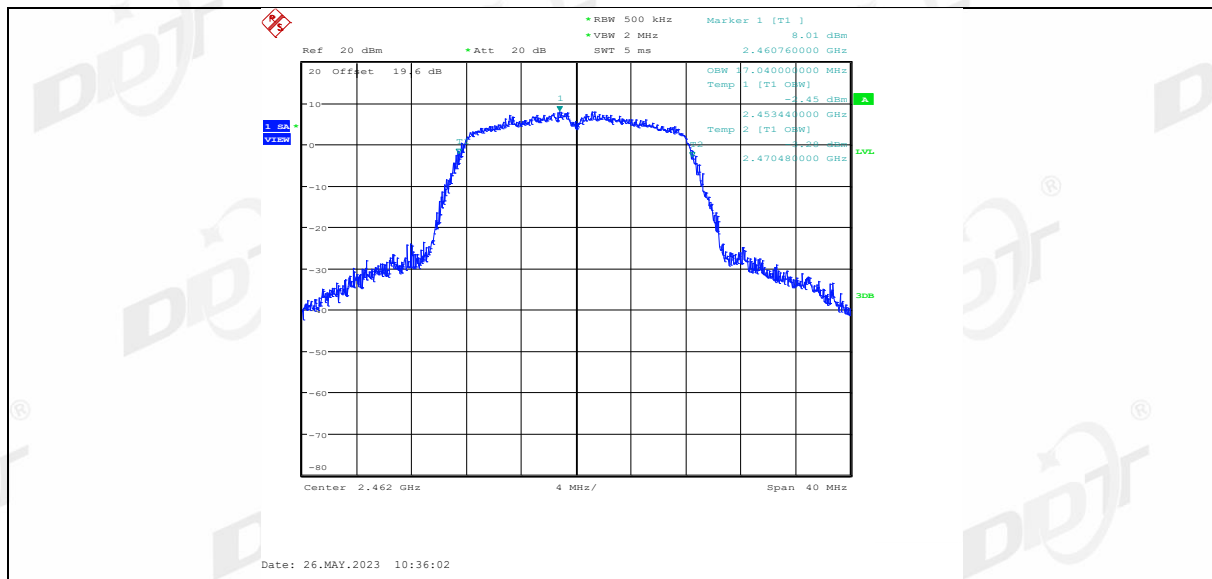


11N20SISO Ant1_2412

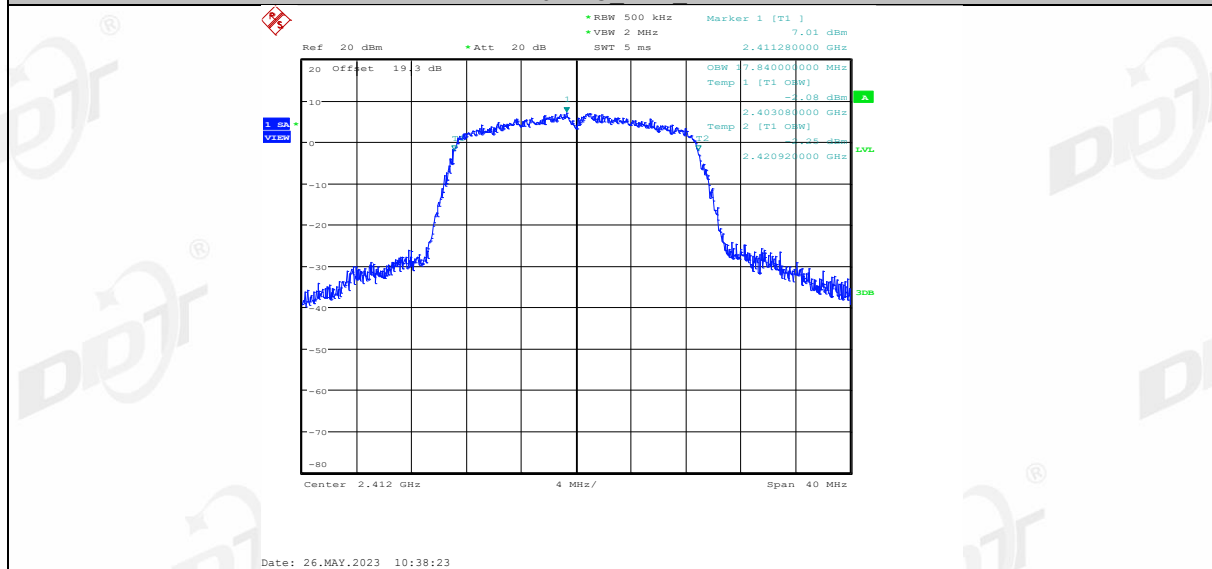


11N20SISO Ant1_2437

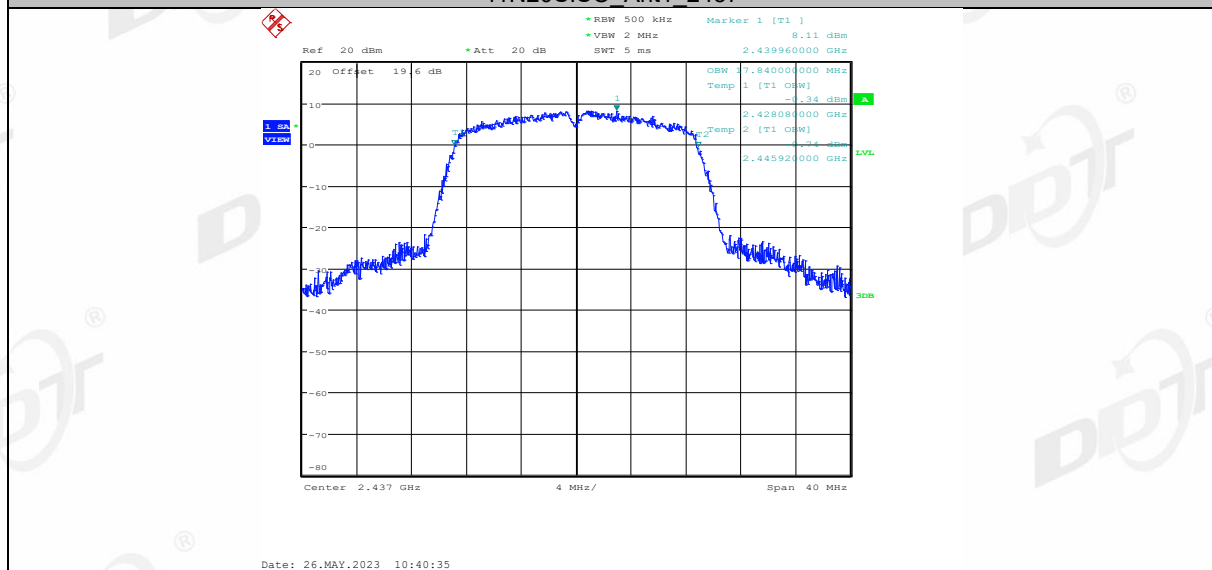


11N20SISO Ant1_2462

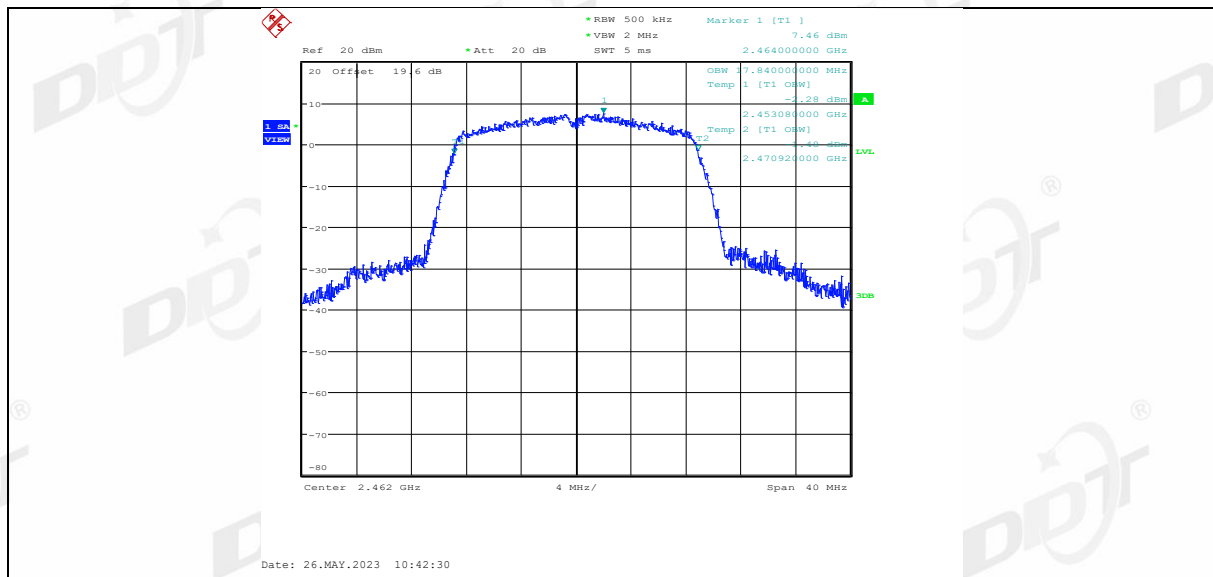


11N40SISO Ant1_2422

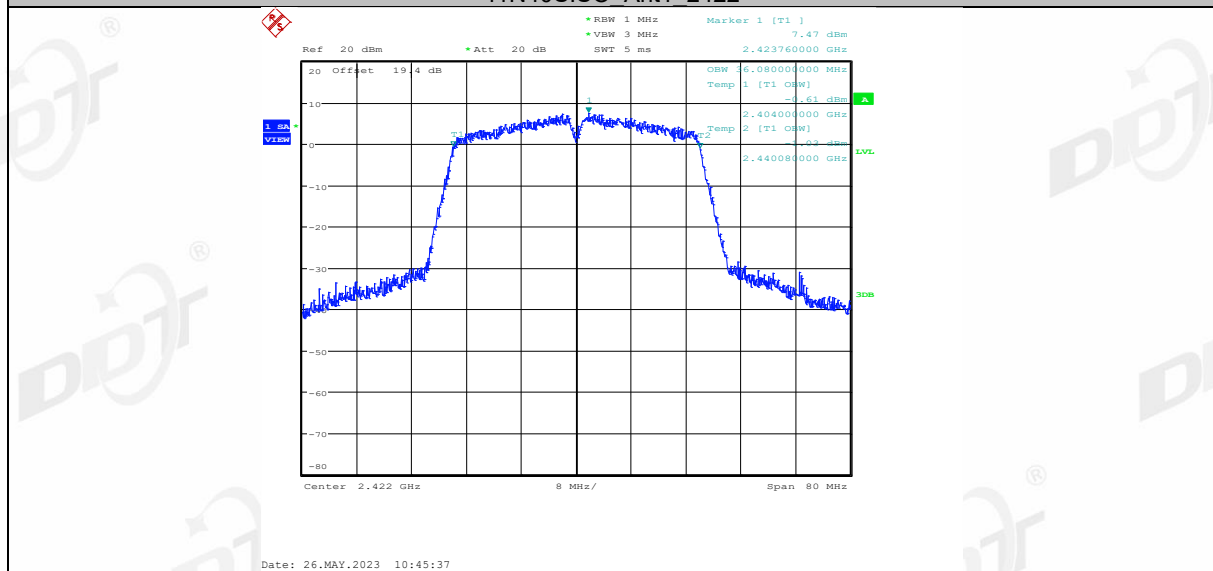

11N40SISO Ant1_2437

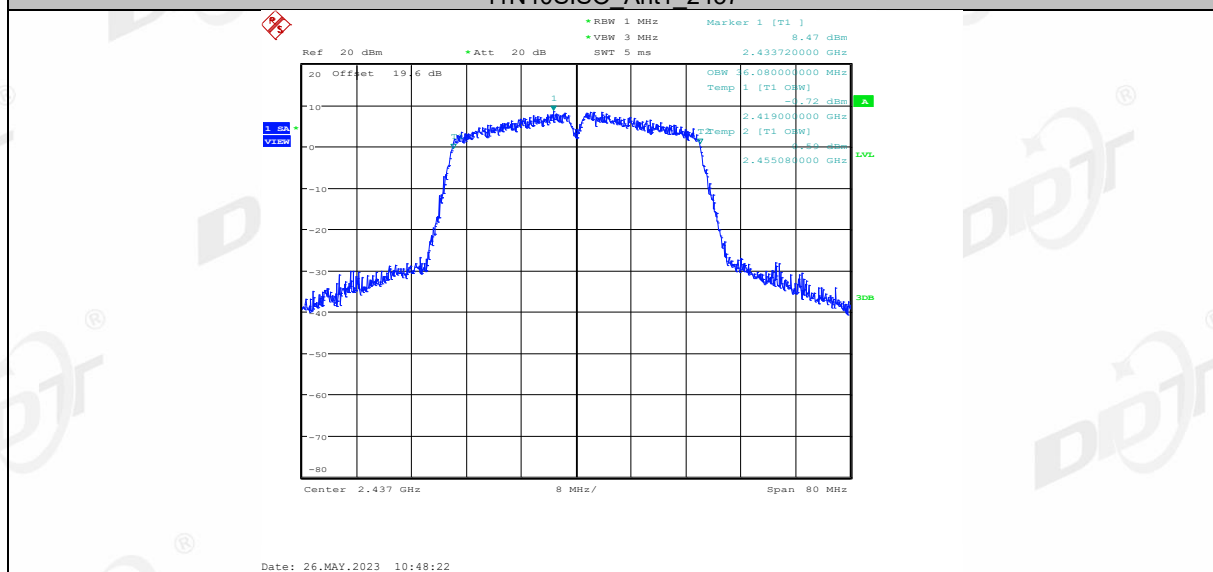


11N40SISO Ant1_2452

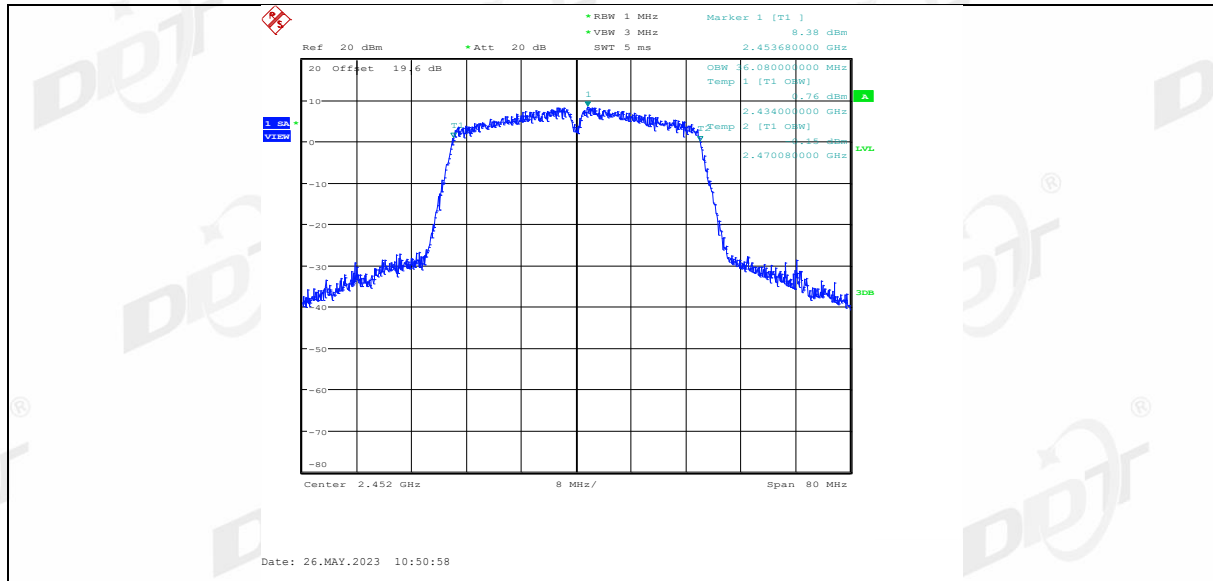

6. Conducted Output Power

6.1. Block diagram of test setup

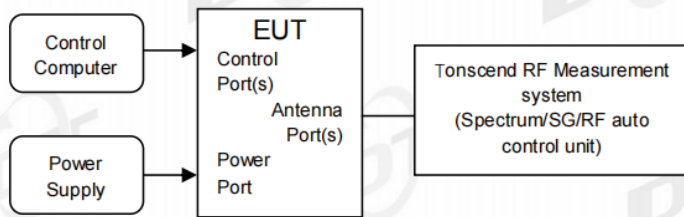

6.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.9.2.3.
- (2) Connect EUT's antenna output to RF power meter by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously, If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal.
- (4) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- (5) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.
- (6) Record the RF average power of each antenna port.


6.4. Test result average

Test Mode	Antenna	Frequency [MHz]	Average power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11B	Ant1	2412	16.00	99.06	0.04	16.04	≤30.00	18.52	≤36.00	PASS
		2437	16.95	98.71	0.06	17.01	≤30.00	19.49	≤36.00	PASS
		2462	16.75	99.53	0.02	16.77	≤30.00	19.25	≤36.00	PASS
11G	Ant1	2412	12.79	94.00	0.27	13.06	≤30.00	15.54	≤36.00	PASS
		2437	13.84	90.91	0.41	14.25	≤30.00	16.73	≤36.00	PASS
		2462	13.15	90.91	0.41	13.56	≤30.00	16.04	≤36.00	PASS
11N20SISO	Ant1	2412	12.64	90.34	0.44	13.08	≤30.00	15.56	≤36.00	PASS
		2437	13.62	90.41	0.44	14.06	≤30.00	16.54	≤36.00	PASS
		2462	12.95	90.41	0.44	13.39	≤30.00	15.87	≤36.00	PASS
11N40SISO	Ant1	2422	11.42	84.42	0.74	12.16	≤30.00	14.64	≤36.00	PASS
		2437	12.41	80.25	0.96	13.37	≤30.00	15.85	≤36.00	PASS
		2452	12.43	81.25	0.90	13.33	≤30.00	15.81	≤36.00	PASS

Note: EIRP (dBm)=Conducted Output Power (dBm)+ Antenna Gain (dBi)

7. Power Spectral Density

7.1. Block diagram of test setup

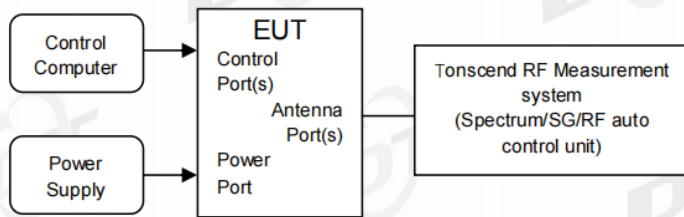

7.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.10.5.
 - (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
 - (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
 - (4) Use the following spectrum analyzer settings for Power Spectral Density measurement:


Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	max hold
	Employ trace averaging (rms)
Trace	mode over a minimum of 100 traces.
 - (5) Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


7.4. Test result

Test Mode	Antenna	Frequency [MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-13.79	≤8.00	PASS
		2437	-12.25	≤8.00	PASS
		2462	-12.16	≤8.00	PASS
11G	Ant1	2412	-17.33	≤8.00	PASS
		2437	-15.76	≤8.00	PASS
		2462	-15.98	≤8.00	PASS
11N20SISO	Ant1	2412	-16.63	≤8.00	PASS
		2437	-14.48	≤8.00	PASS
		2462	-16.65	≤8.00	PASS
11N40SISO	Ant1	2422	-20.79	≤8.00	PASS
		2437	-18.99	≤8.00	PASS
		2452	-19.61	≤8.00	PASS


Note: The Duty Cycle Factor is compensated in the graph.

7.5. Test graphs

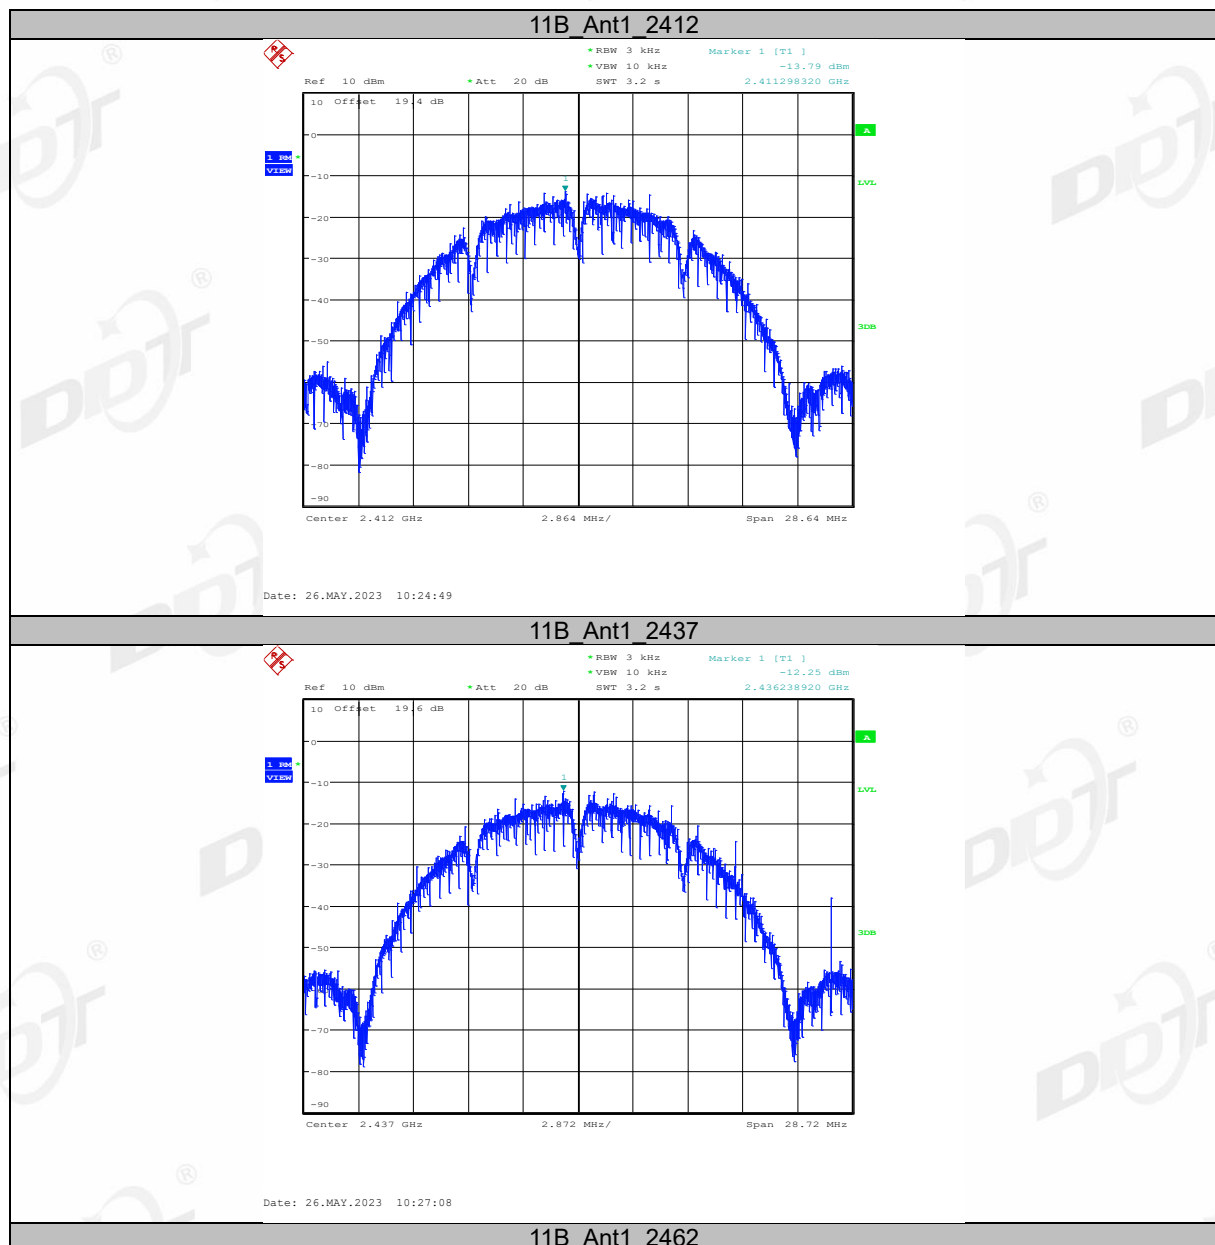


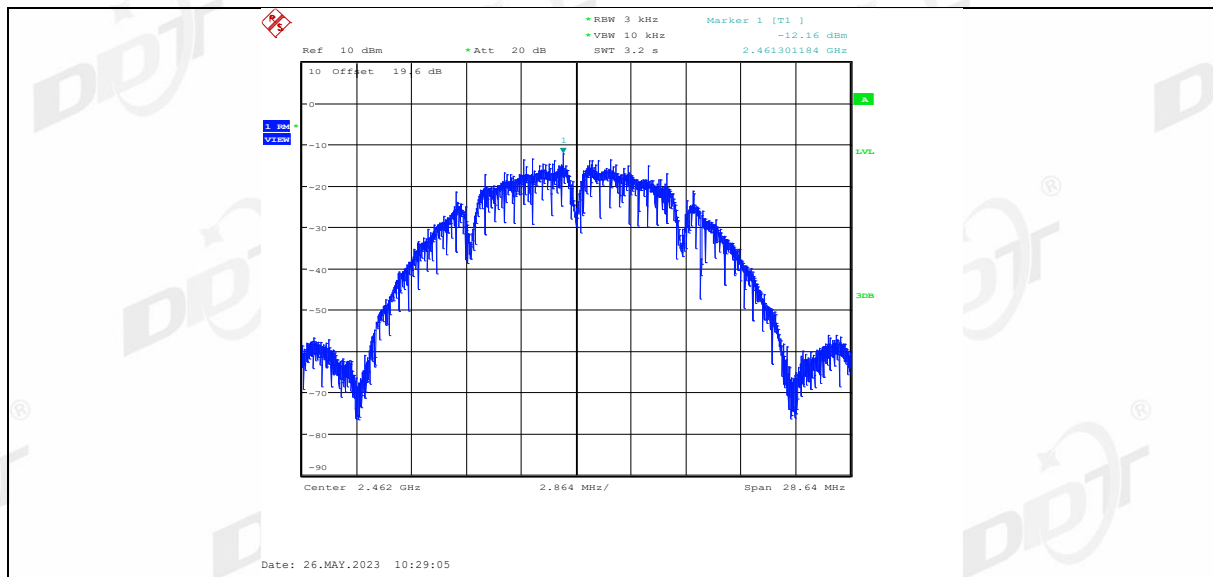


11G Ant1 2412

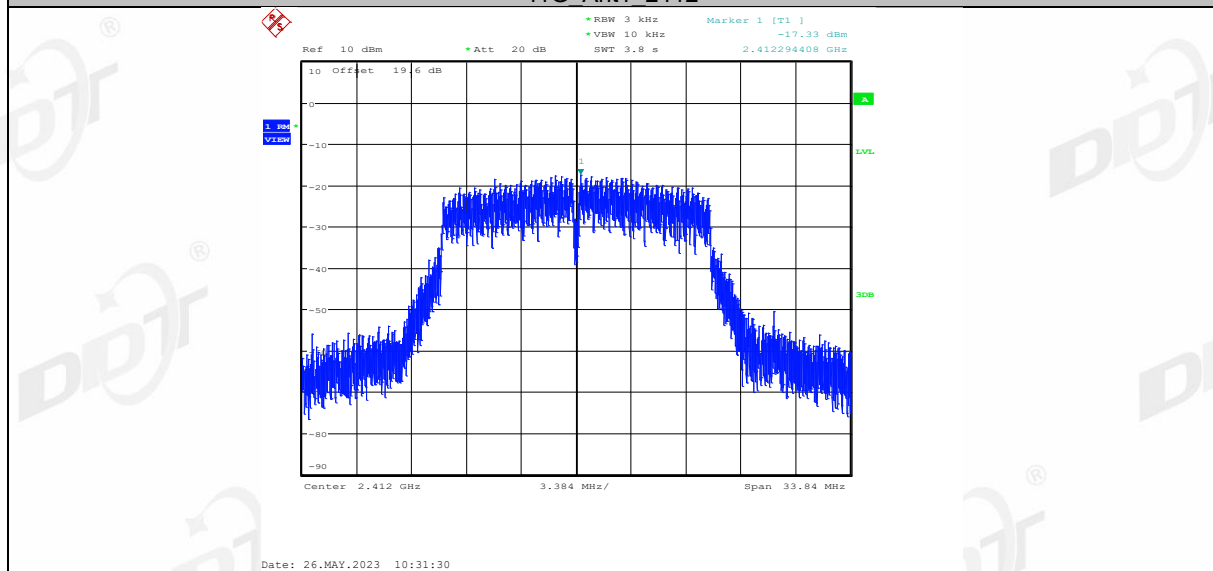


11G Ant1 2437

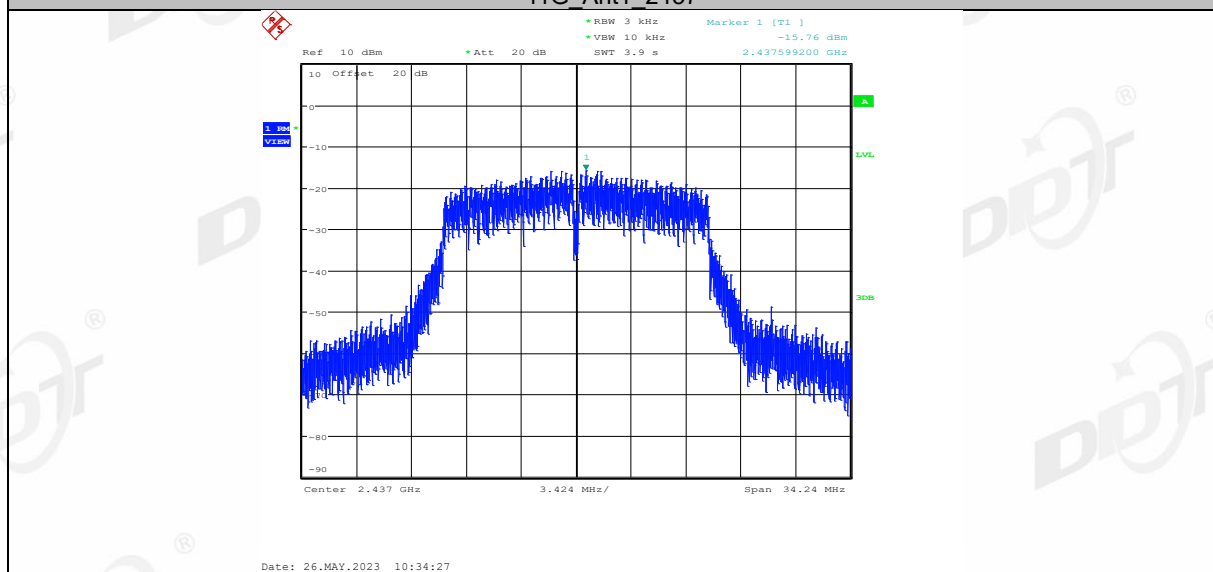


11G Ant1 2462

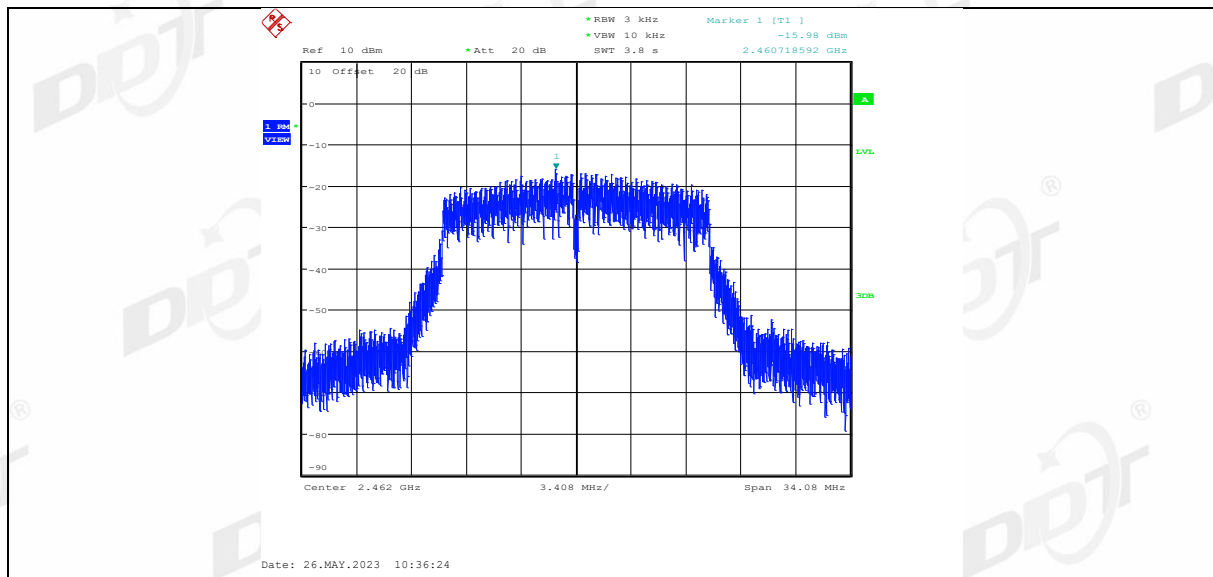


11N20SISO Ant1 2412

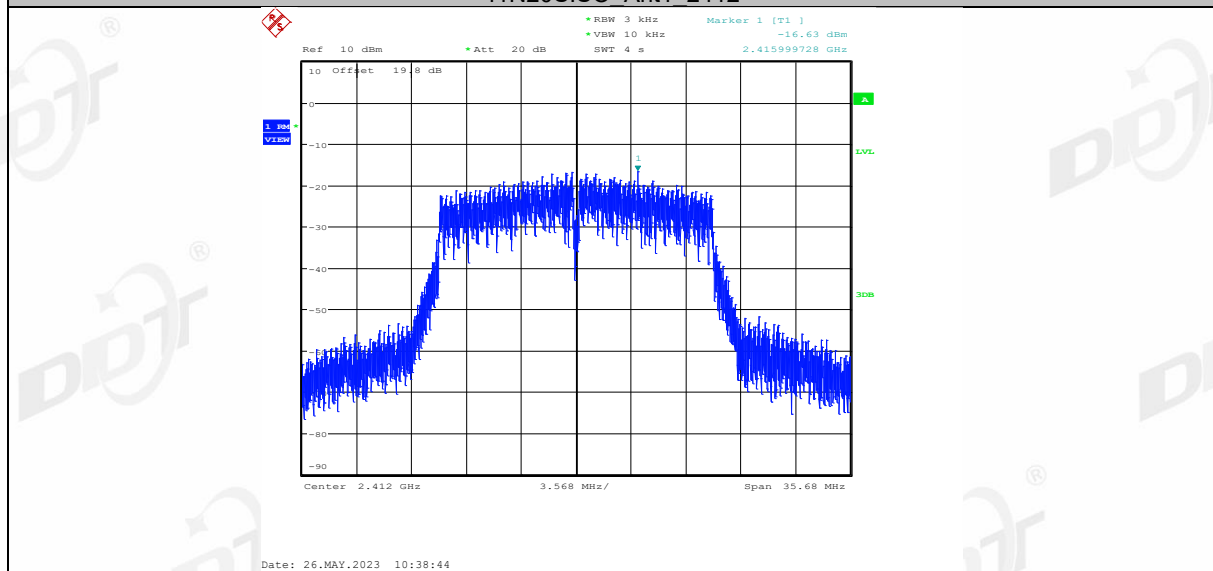


11N20SISO Ant1 2437

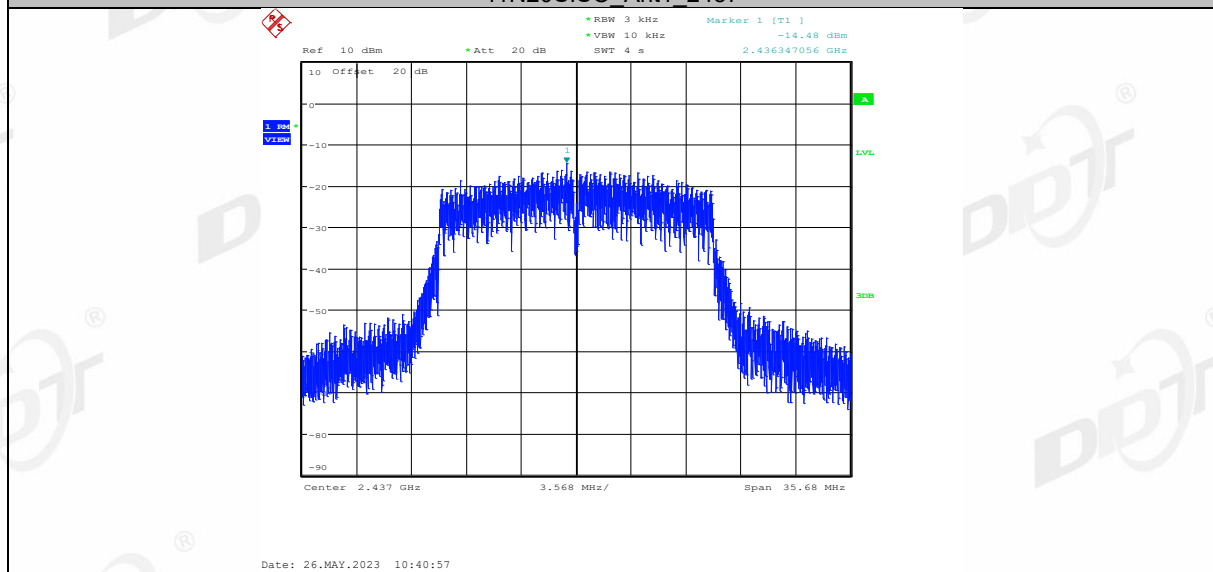


11N20SISO Ant1 2462

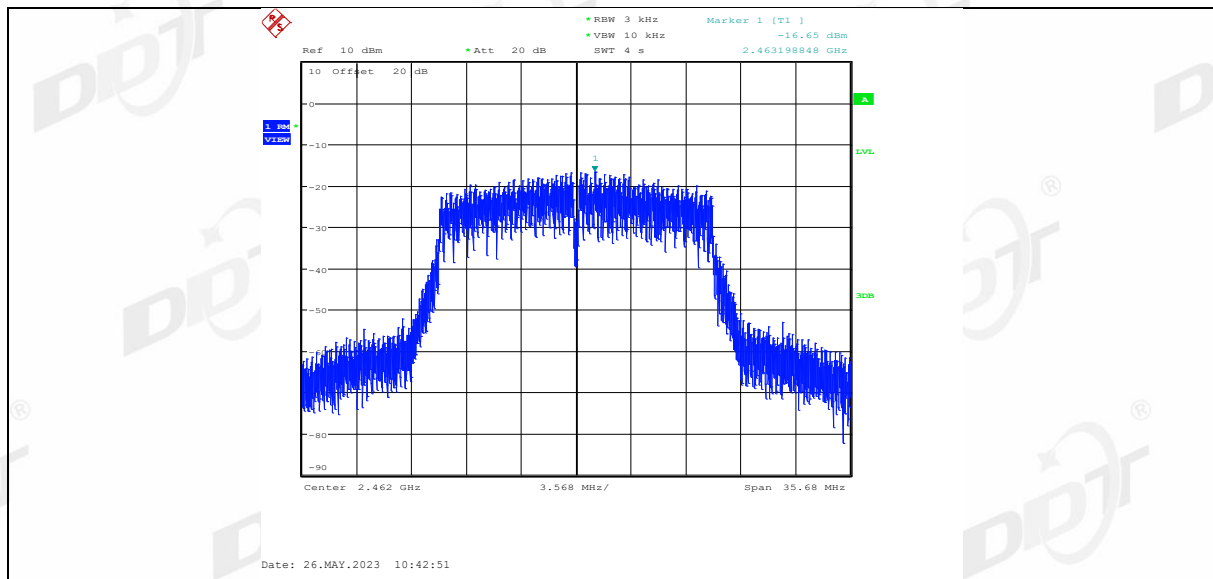


11N40SISO_Ant1_2422

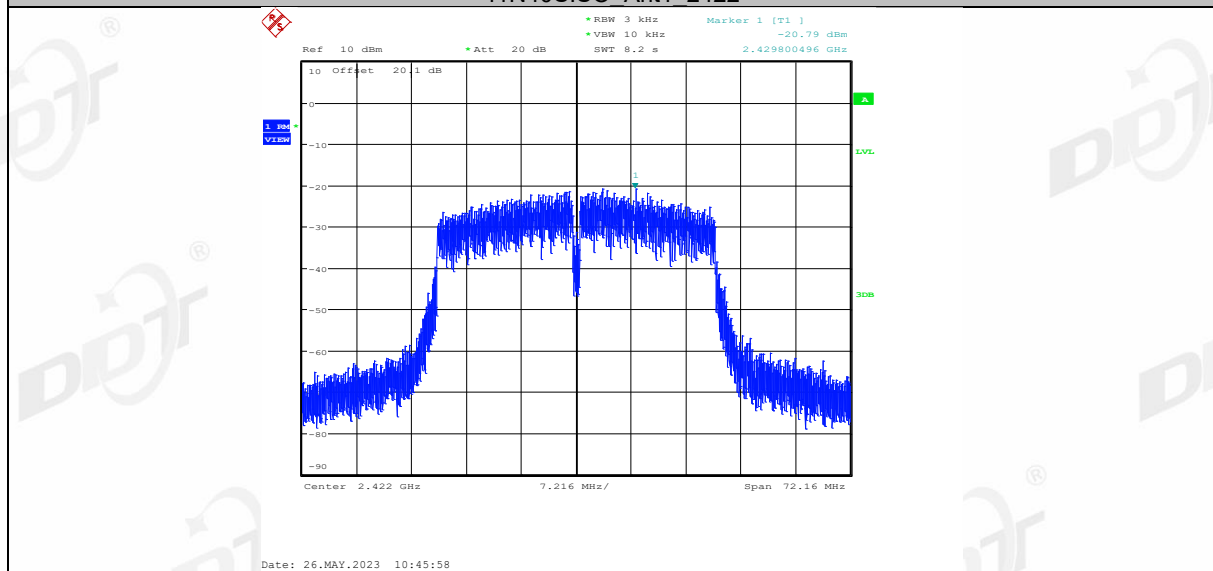

11N40SISO_Ant1_2437

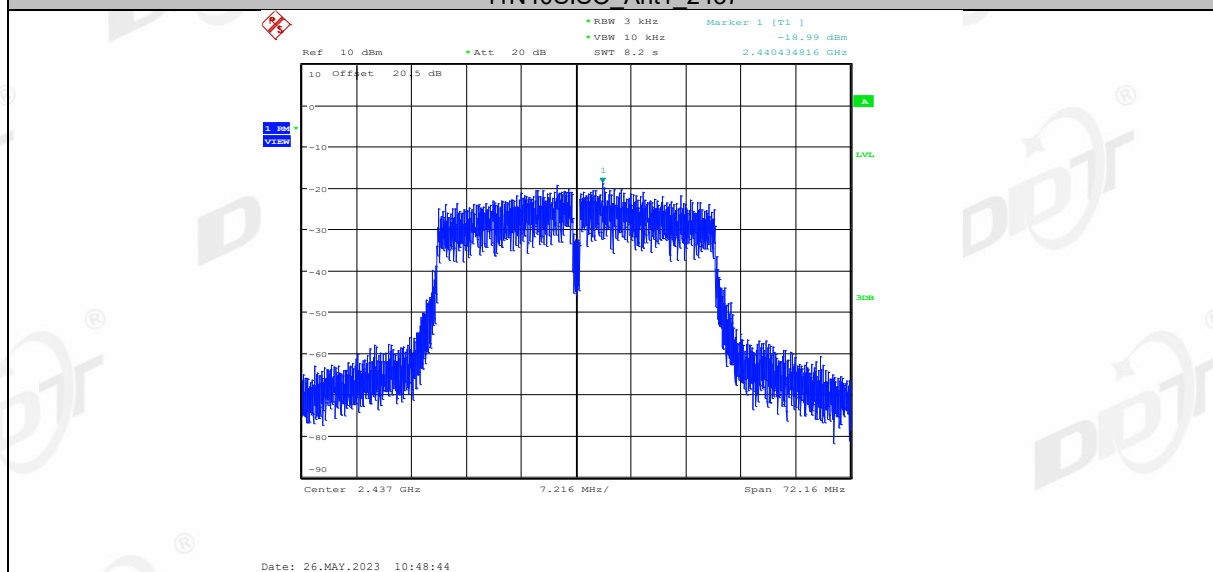


11N40SISO_Ant1_2452

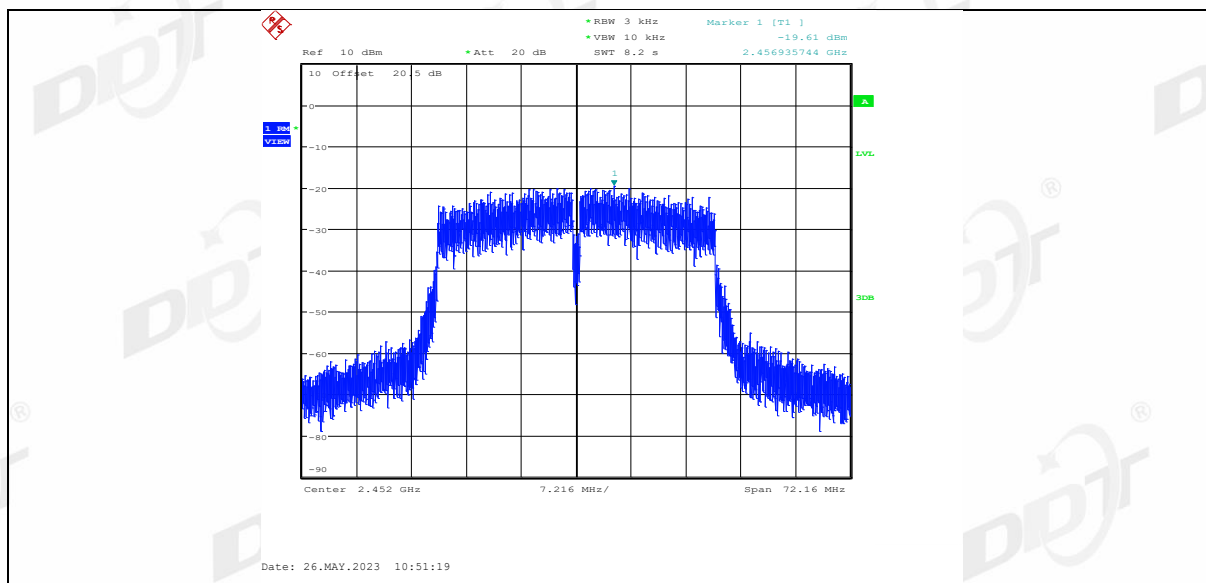

8. Band Edge Compliance (Conducted Method)

8.1. Block diagram of test setup

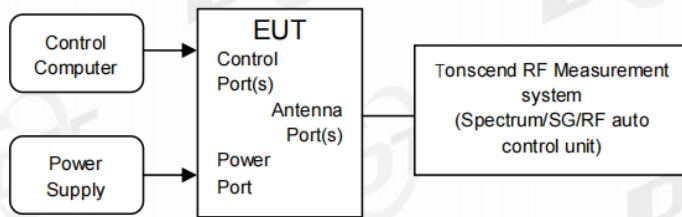

8.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

8.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.


Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.

8.4. Test result


EUT Set Mode	CH or Frequency	Result (dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH11	Pass		CH9	Pass

8.5. Test graphs

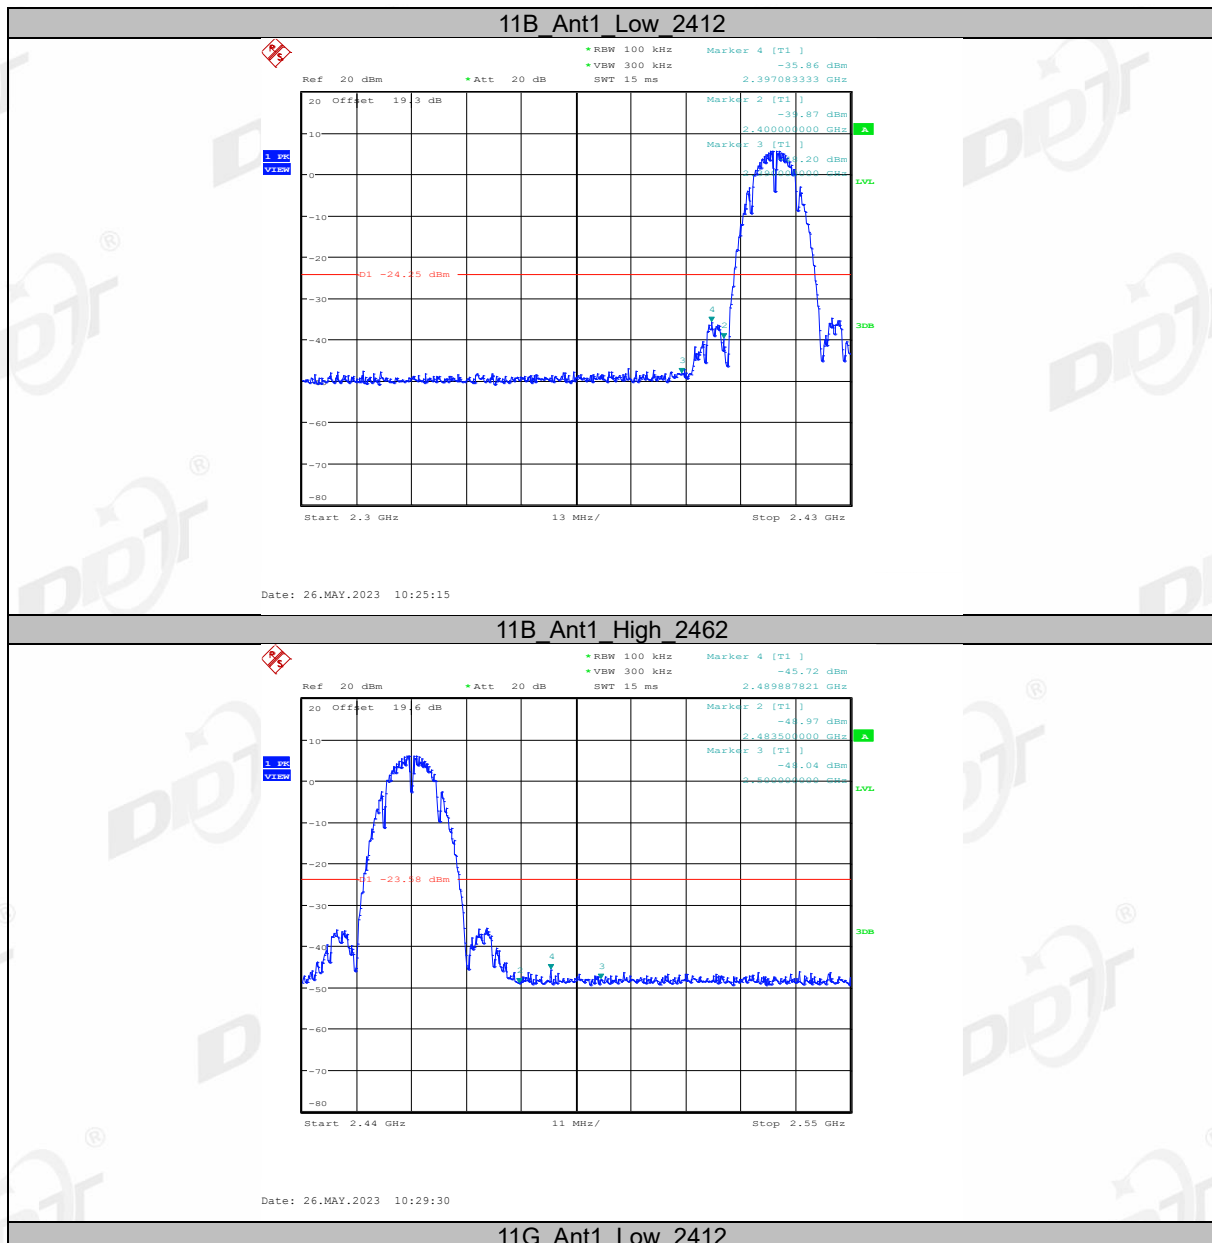


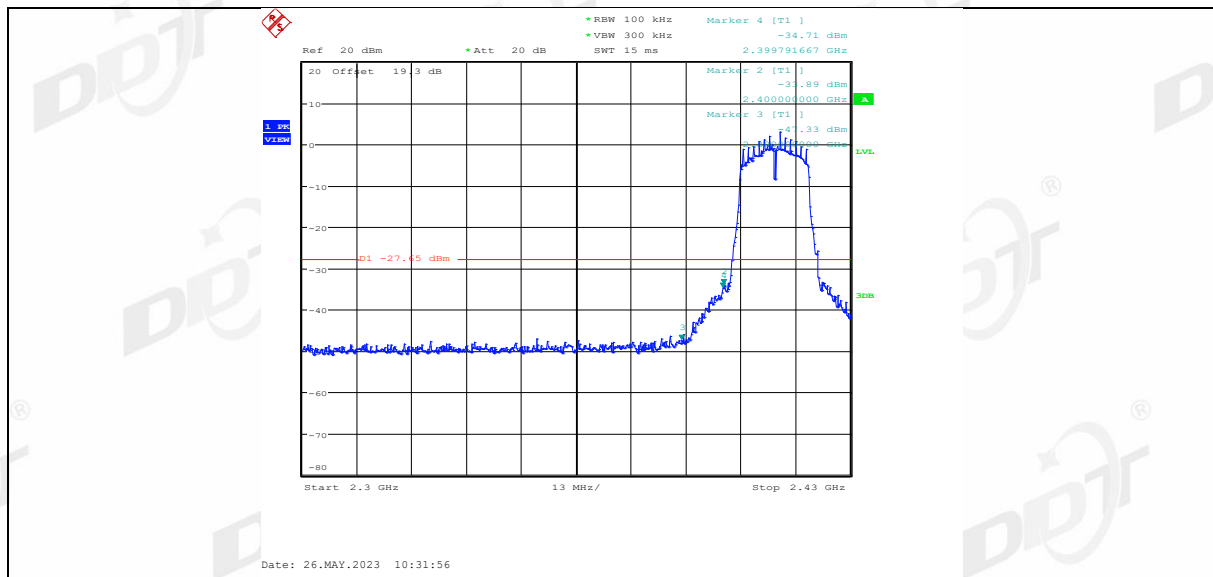


11G Ant1 High 2462

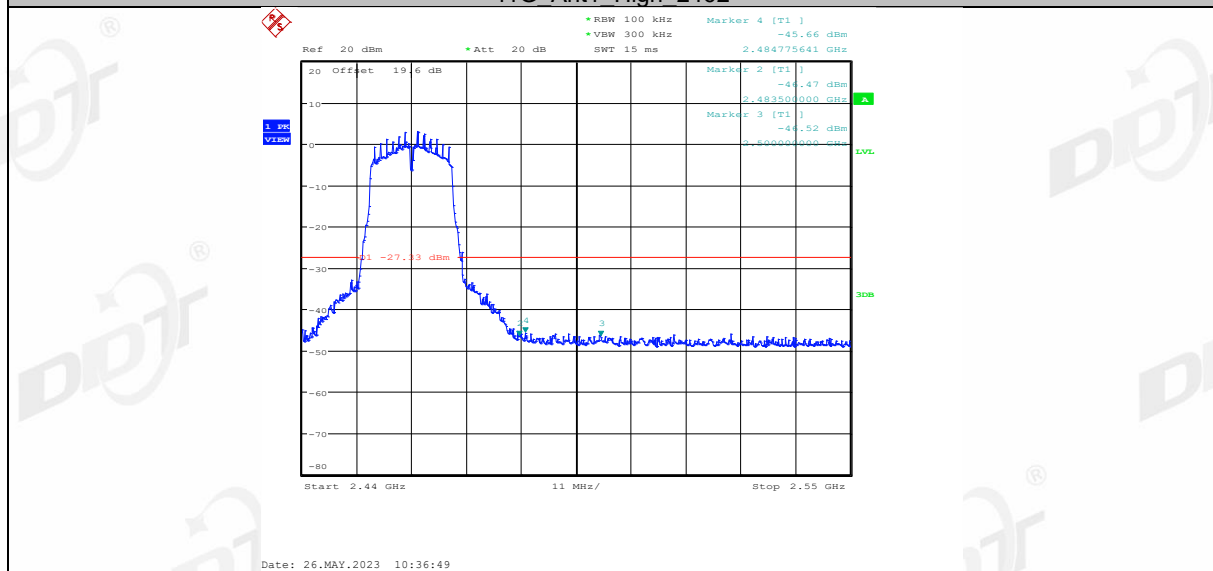


11N20SISO Ant1 Low 2412

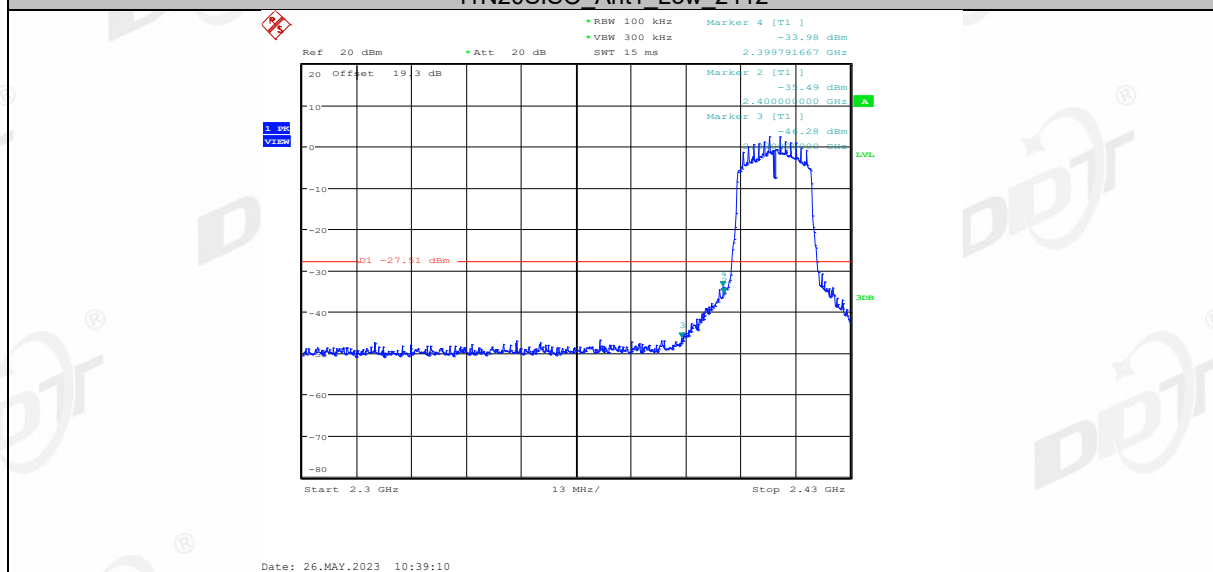


11N20SISO Ant1 High 2462

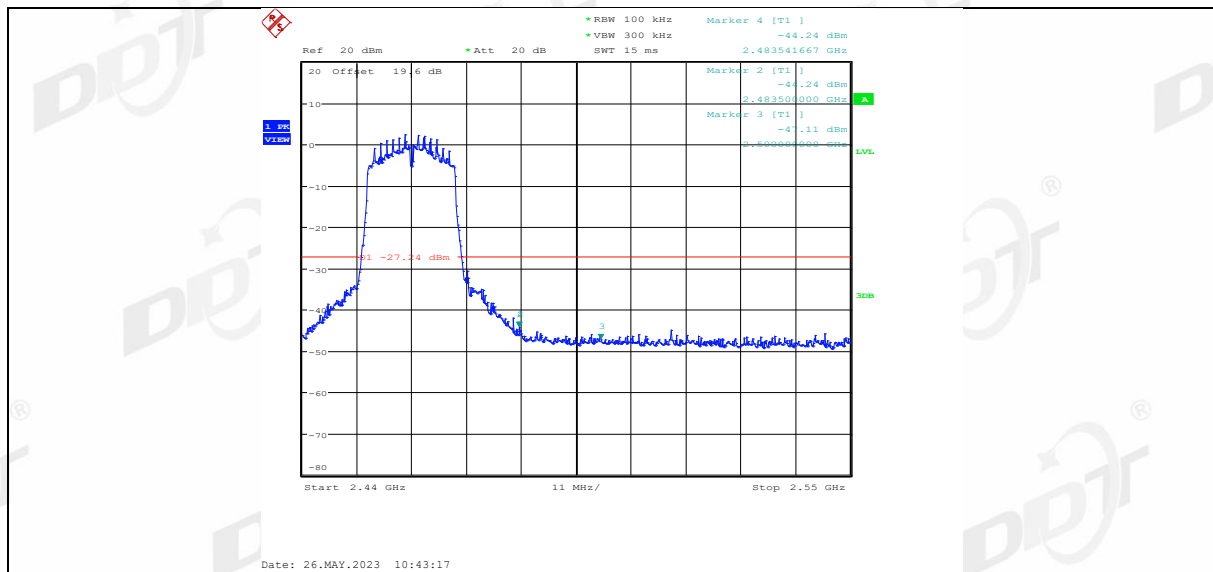

11N40SISO Ant1 Low 2422

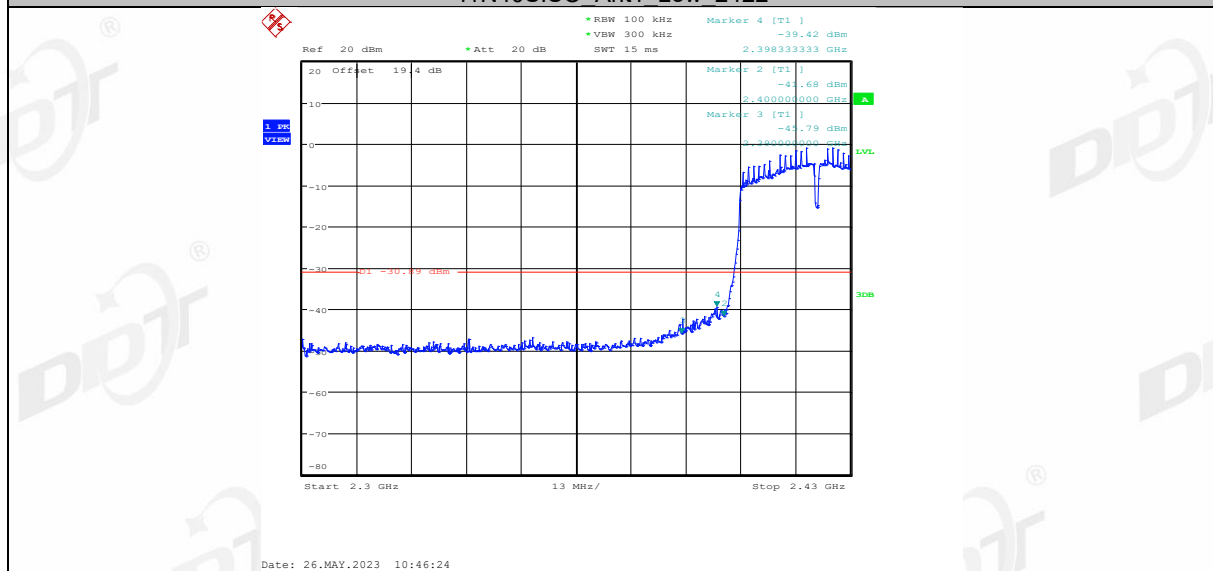


11N40SISO Ant1 High 2452

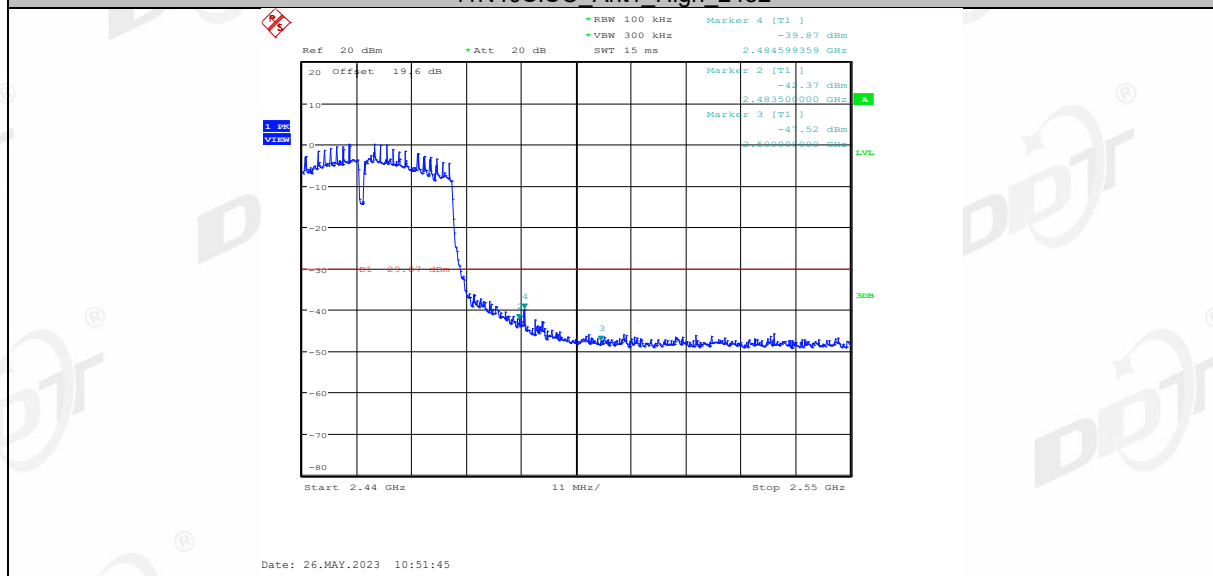

9. RF Conducted Spurious Emissions

9.1. Block diagram of test setup

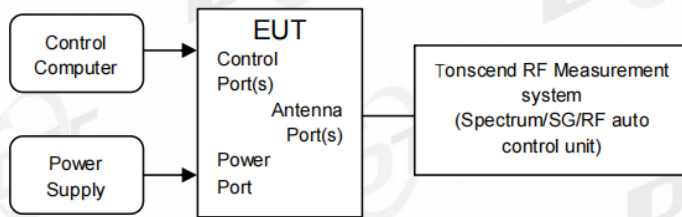

9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

9.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Set the spectrum analyzer as follows:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span/RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


- (5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

9.4. Test result


EUT Set Mode	CH or Frequency	Result (dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass

9.5. Test graphs

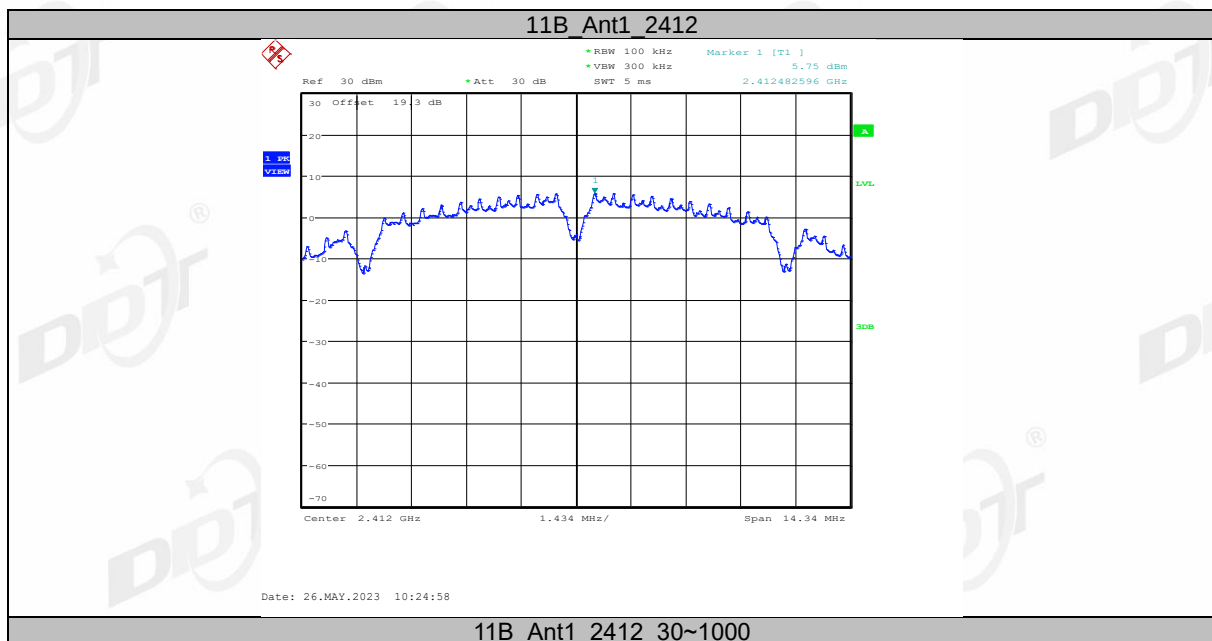


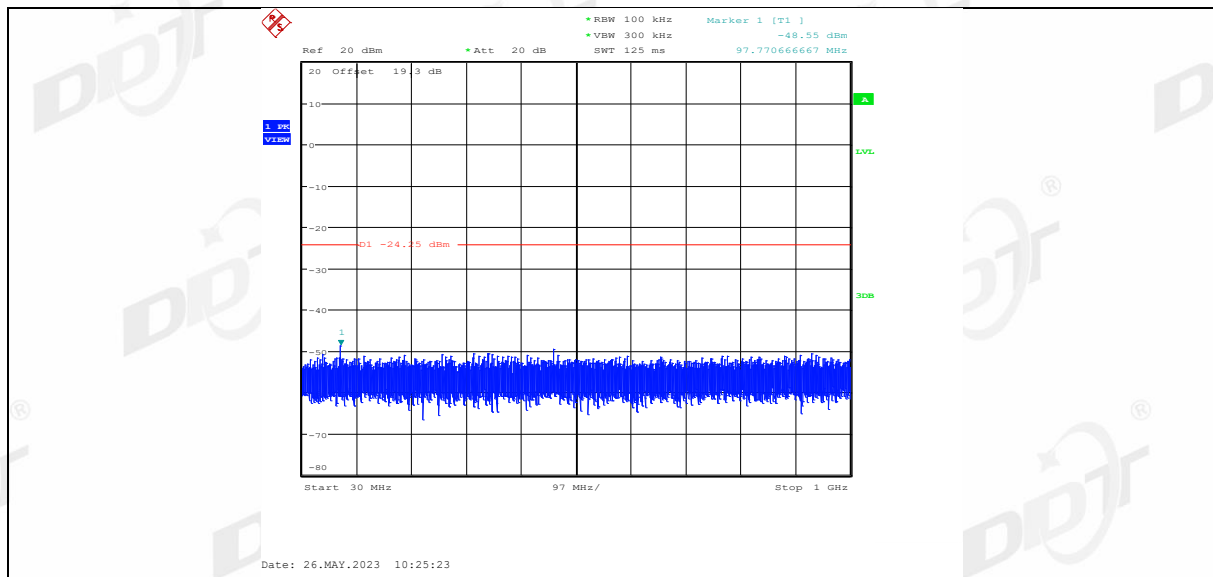


11B Ant1 2412 1000~26500

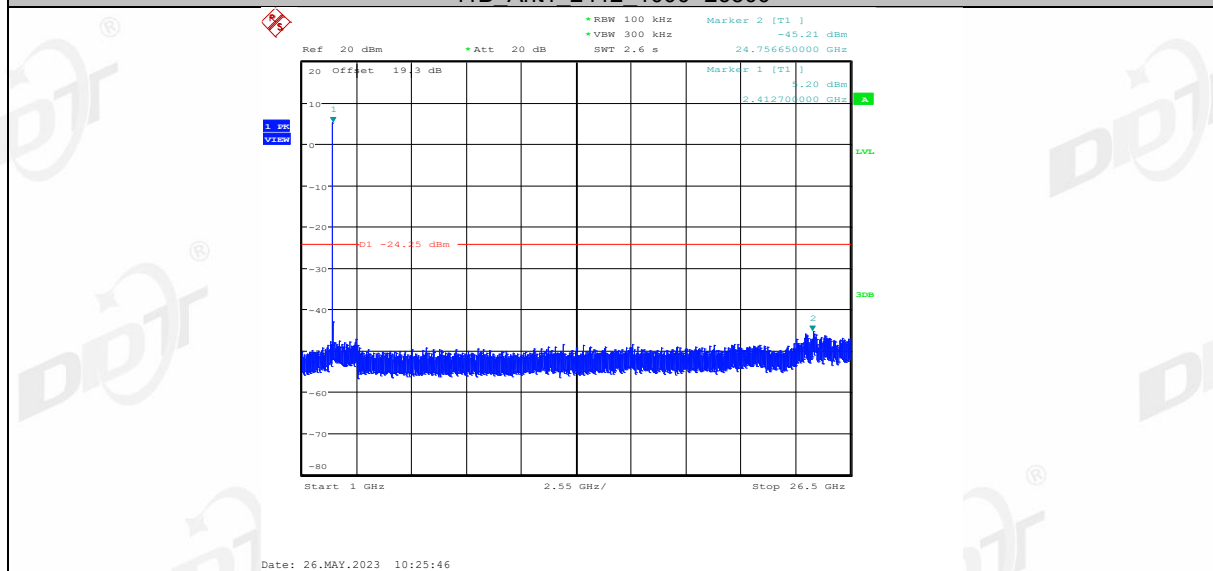


11B Ant1 2437

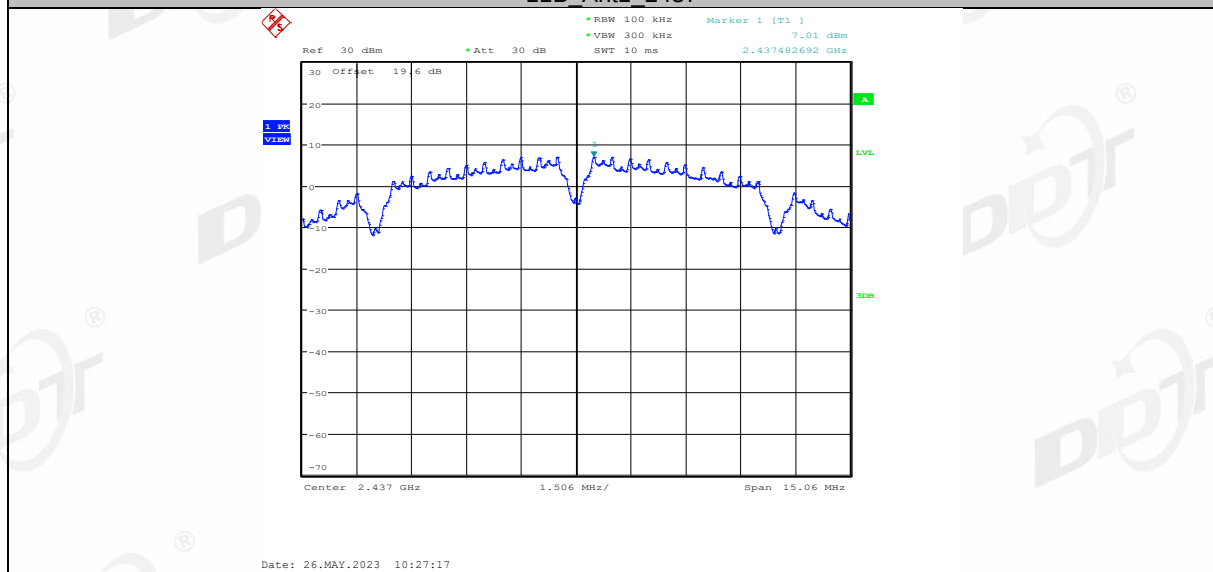


11B Ant1 2437 30~1000

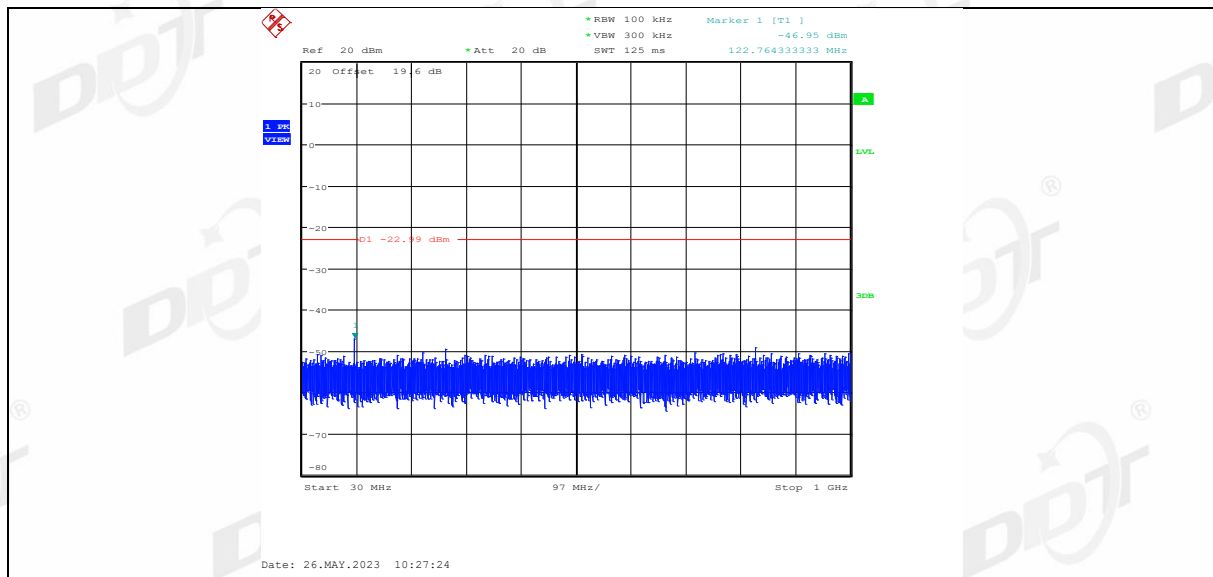


11B Ant1 2437 1000~26500

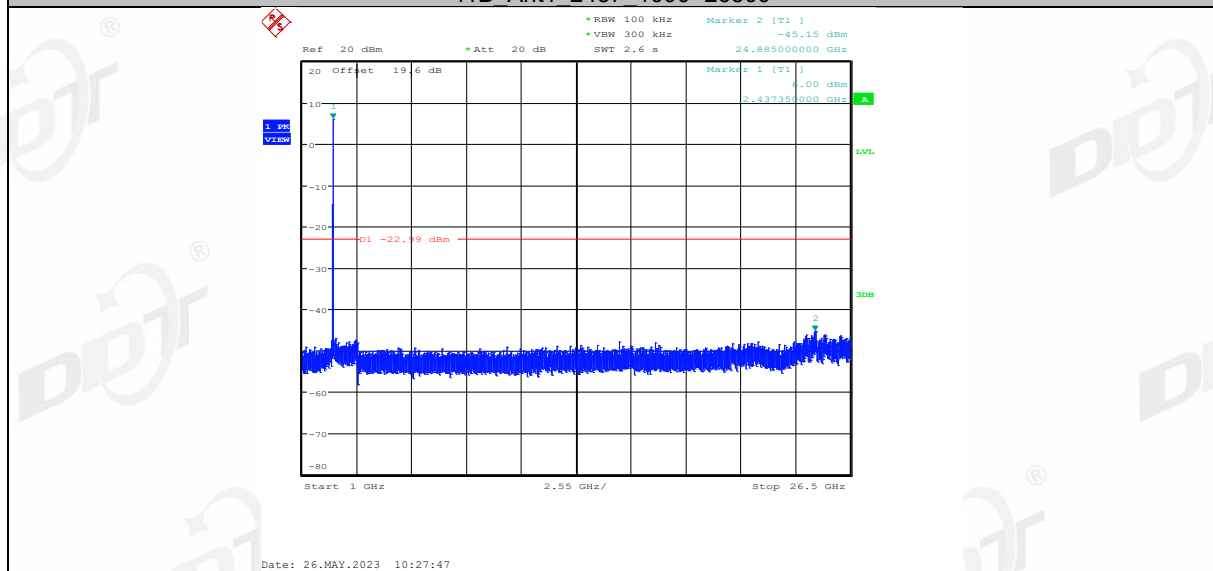


11B Ant1 2462

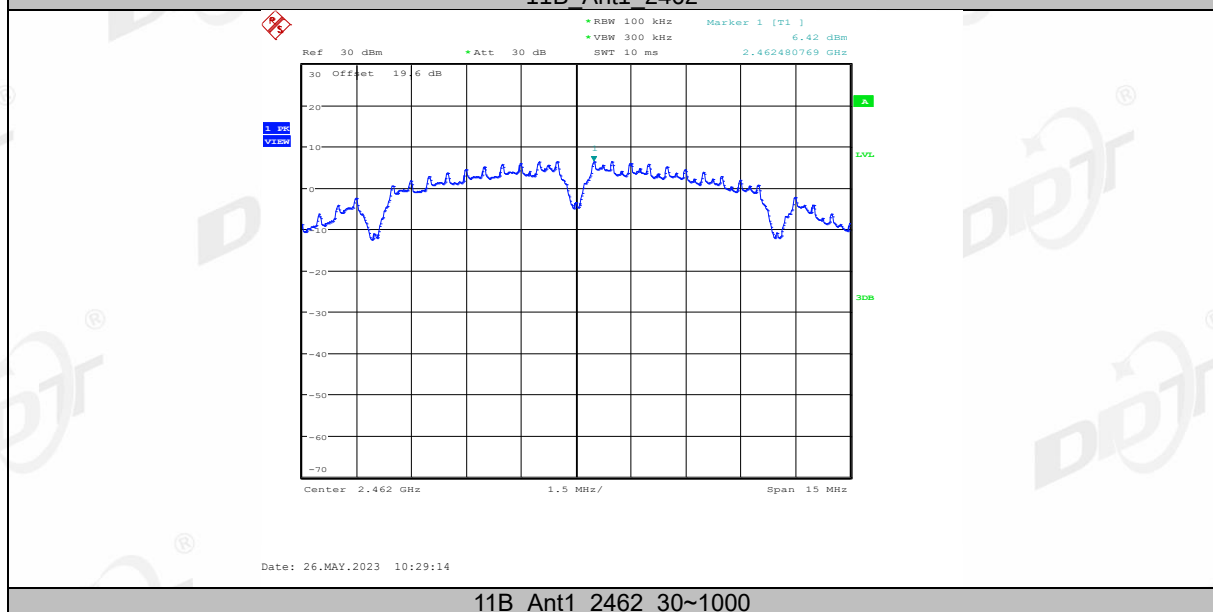


11B Ant1 2462 30~1000

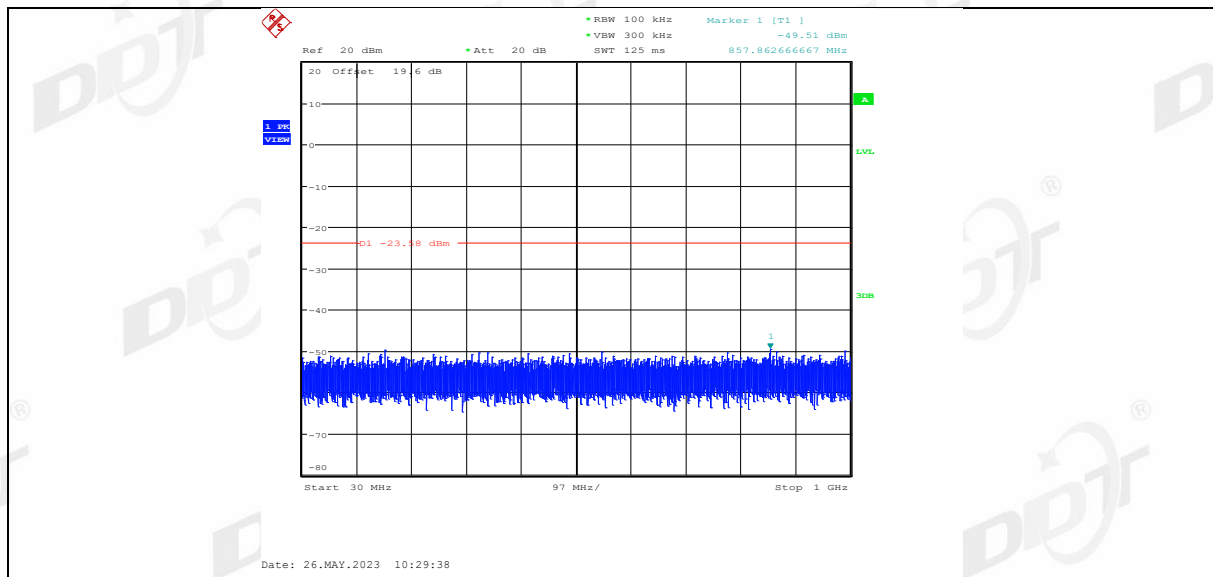


11B Ant1 2462 1000~26500

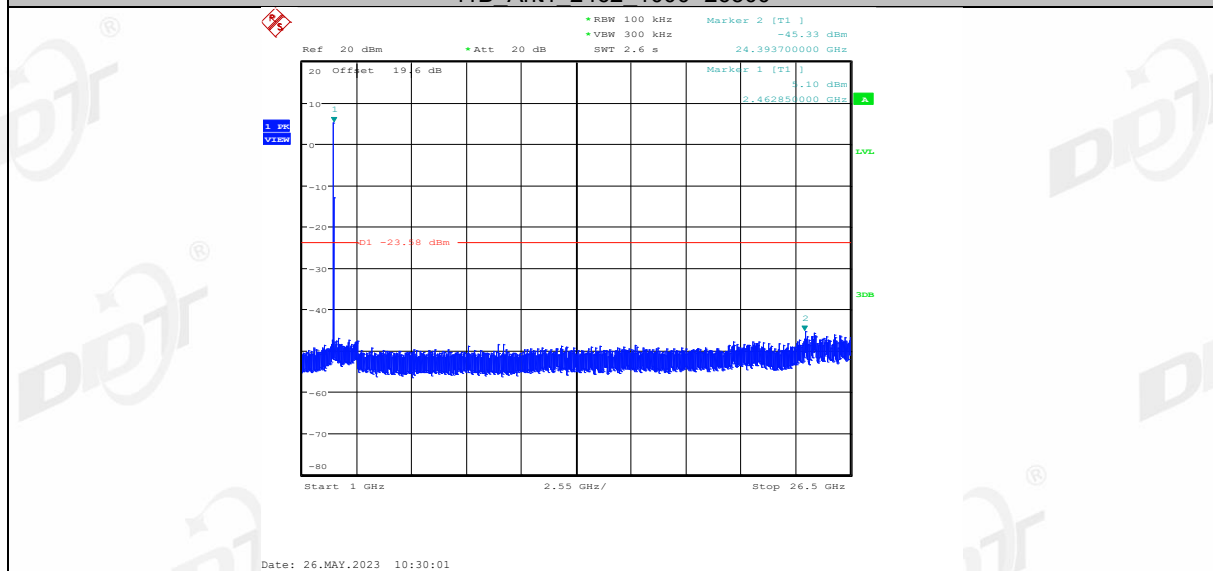


11G Ant1 2412

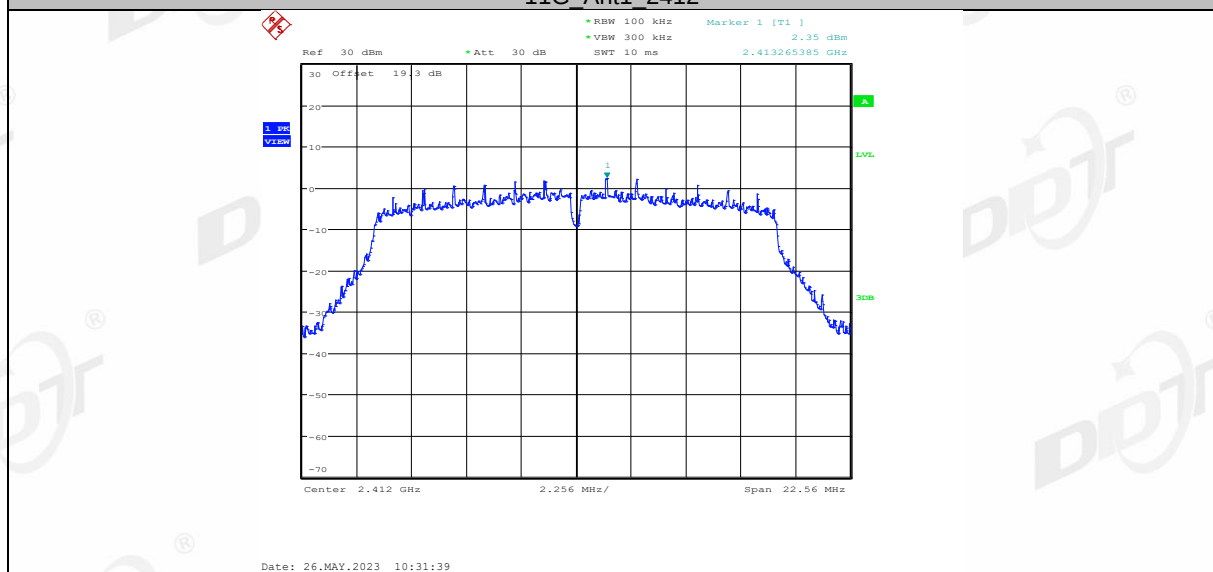


11G Ant1 2412 30~1000

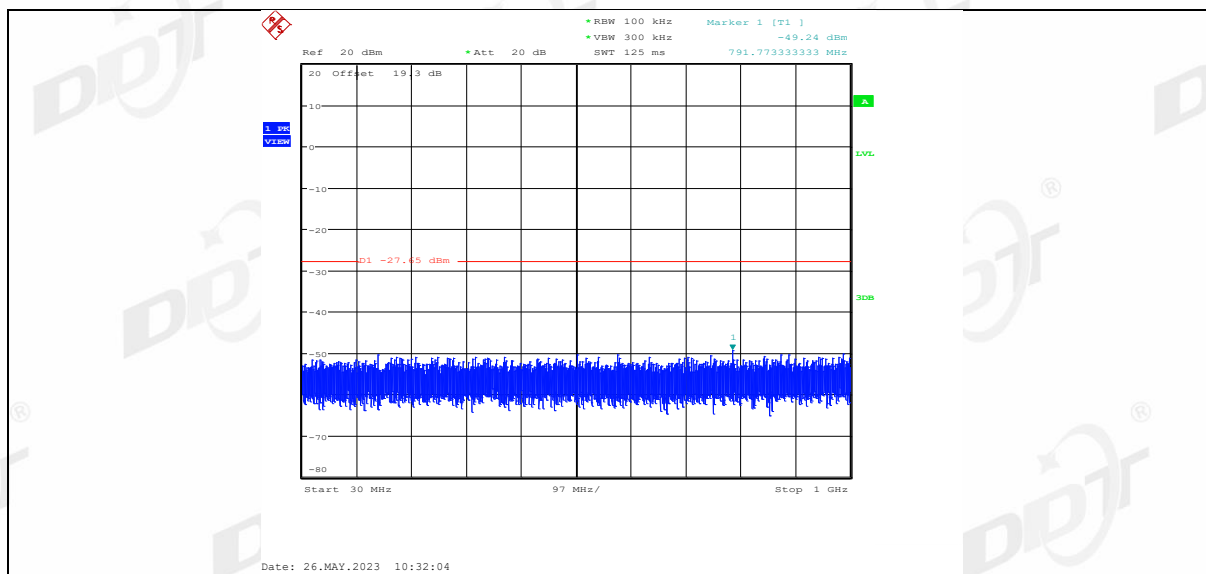


11G Ant1 2412 1000~26500

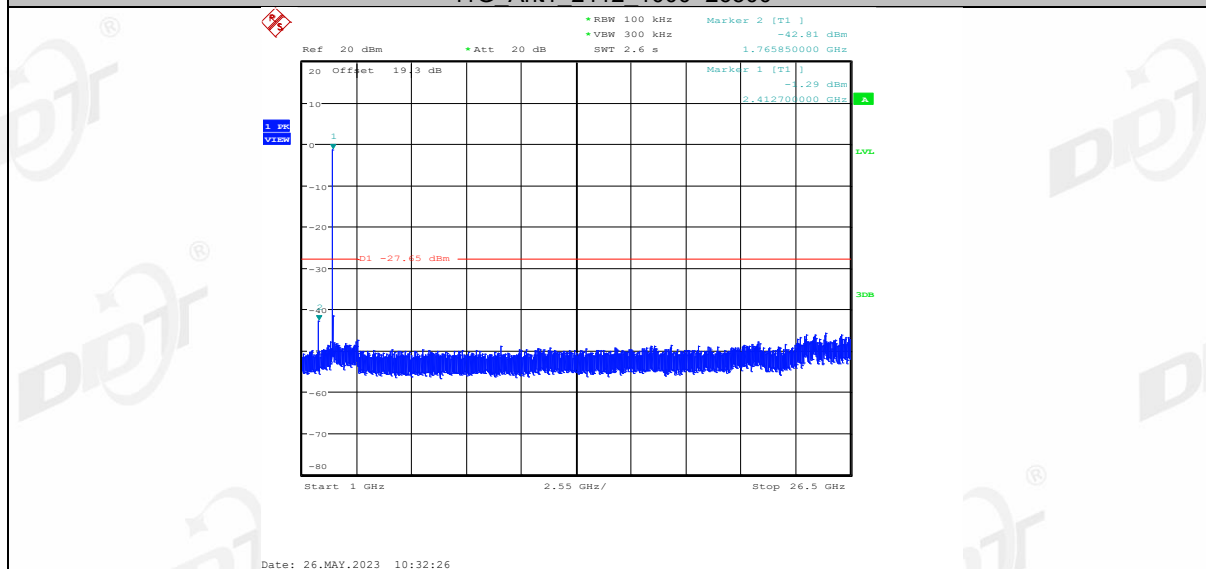


11G Ant1 2437

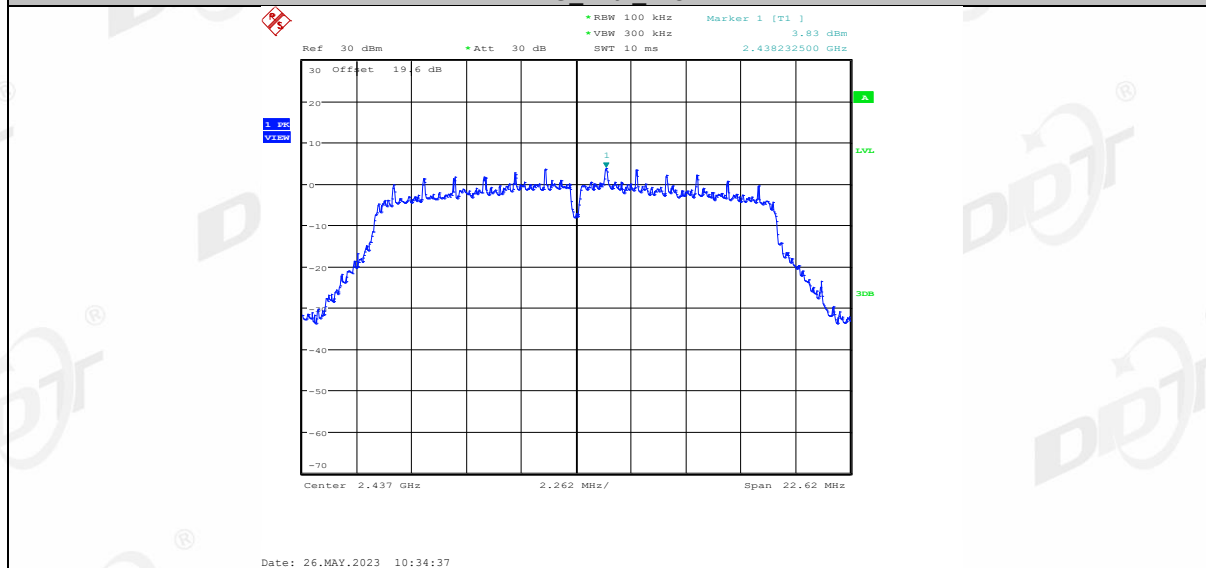


11G Ant1 2437 30~1000

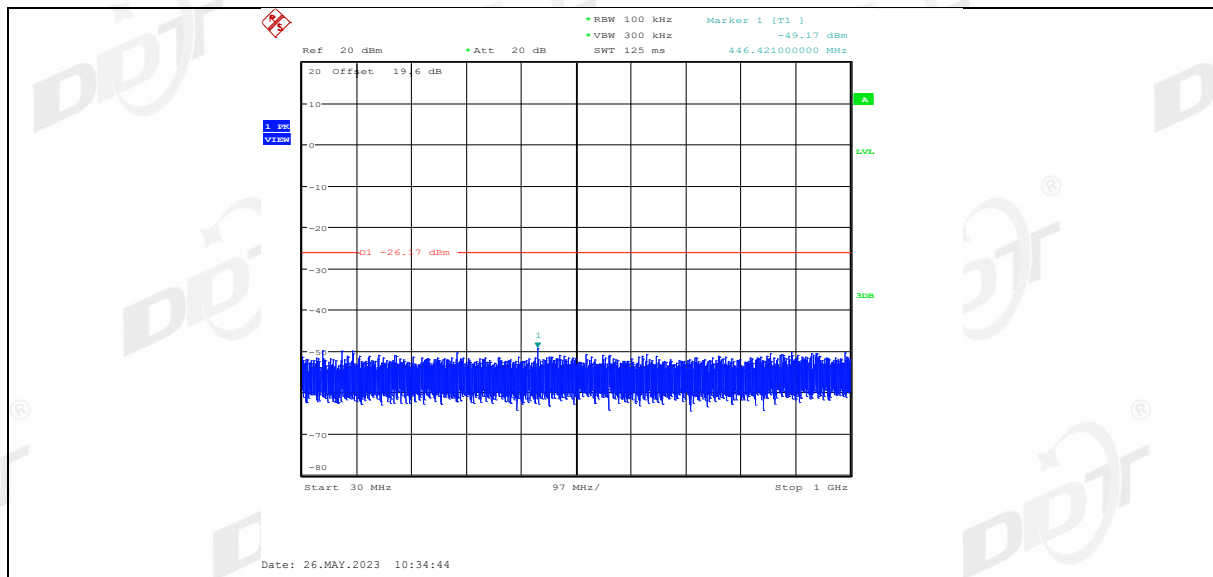


11G Ant1 2437 1000~26500

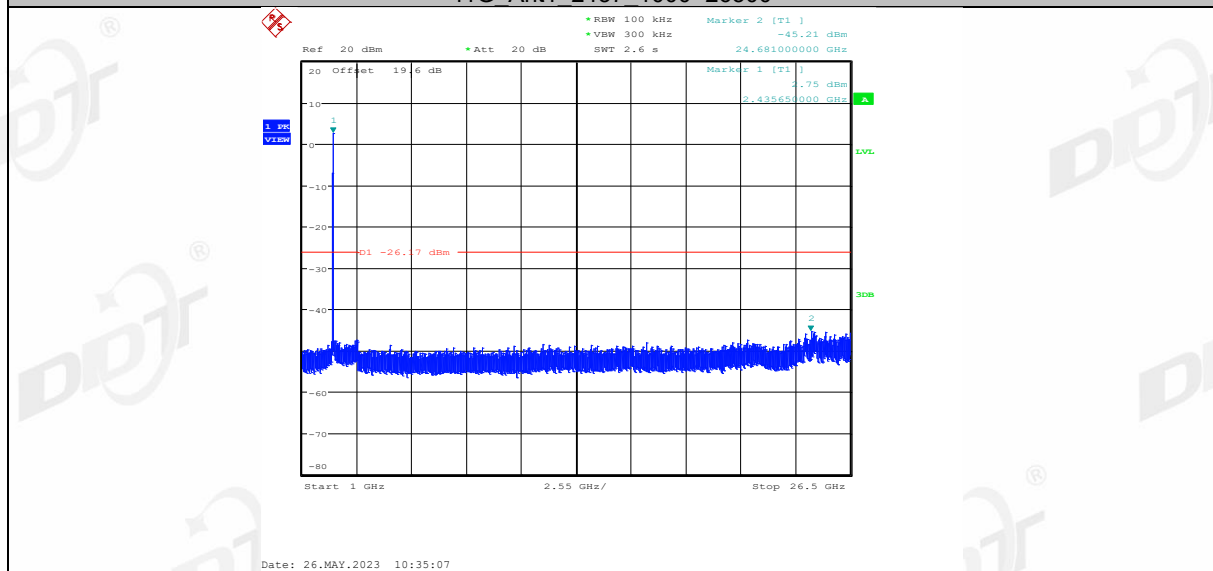


11G Ant1 2462

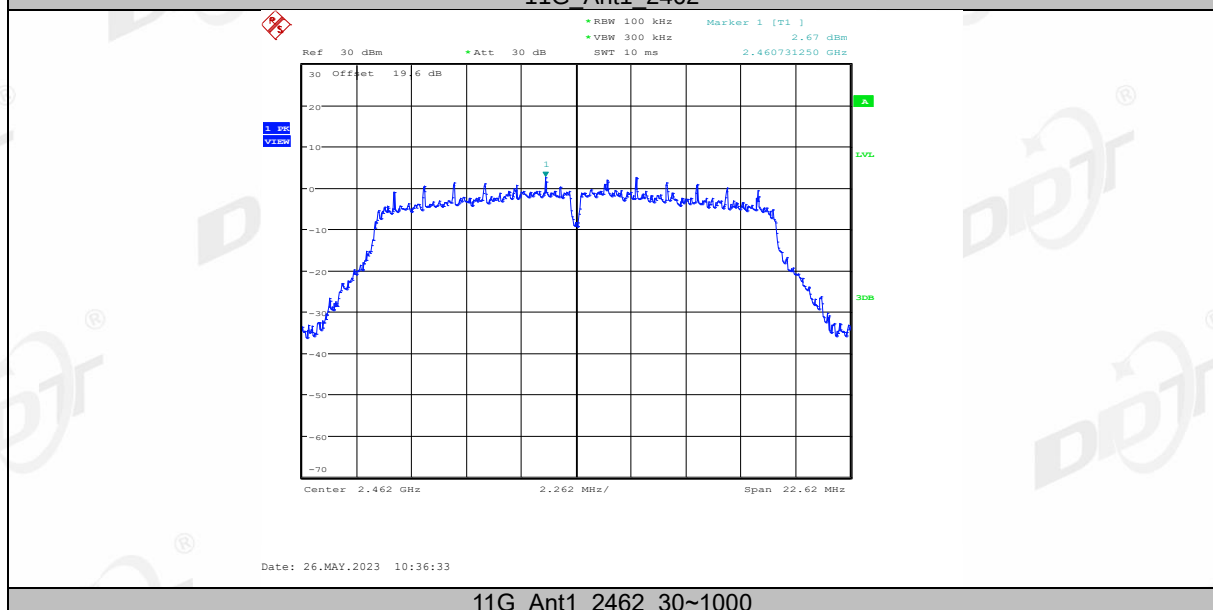


11G Ant1 2462 30~1000

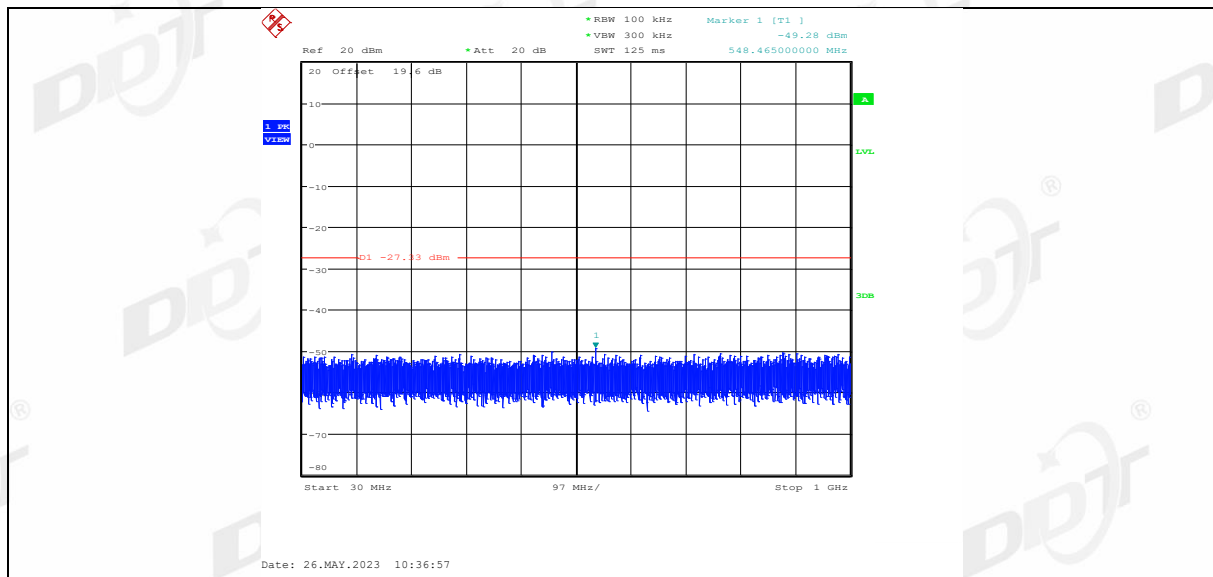


11G Ant1 2462 1000~26500

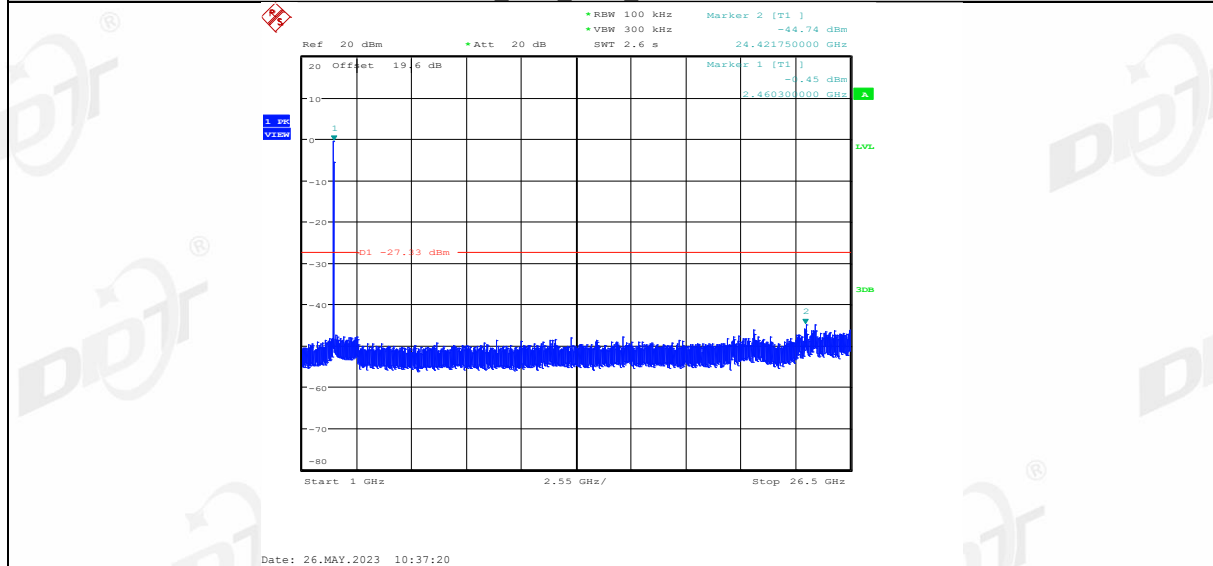


11N20SISO Ant1 2412

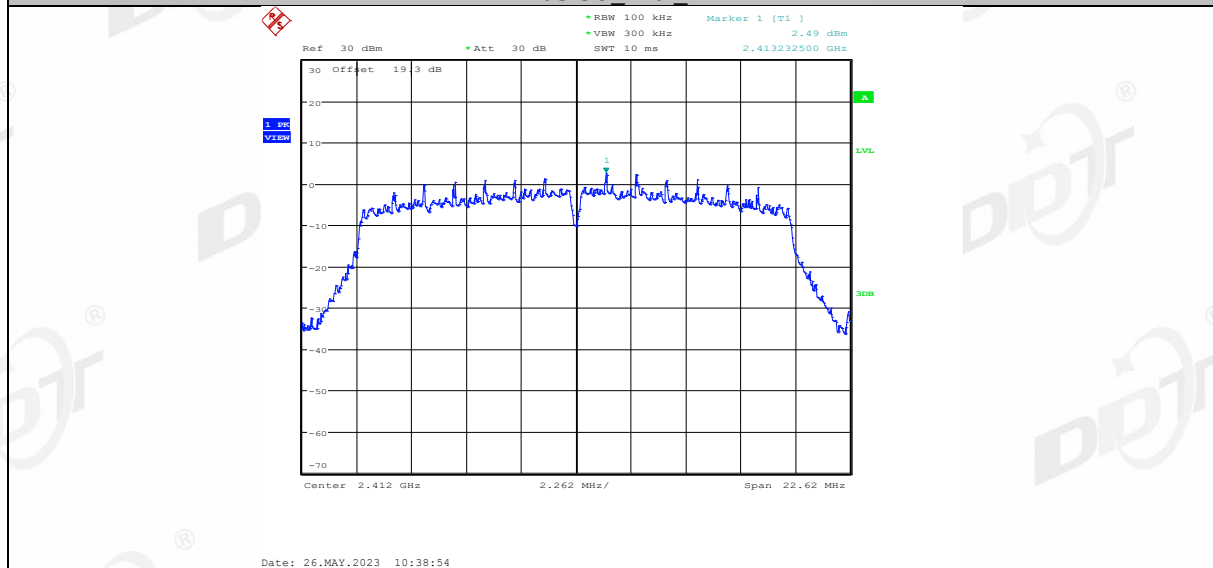


11N20SISO Ant1 2412 30~1000

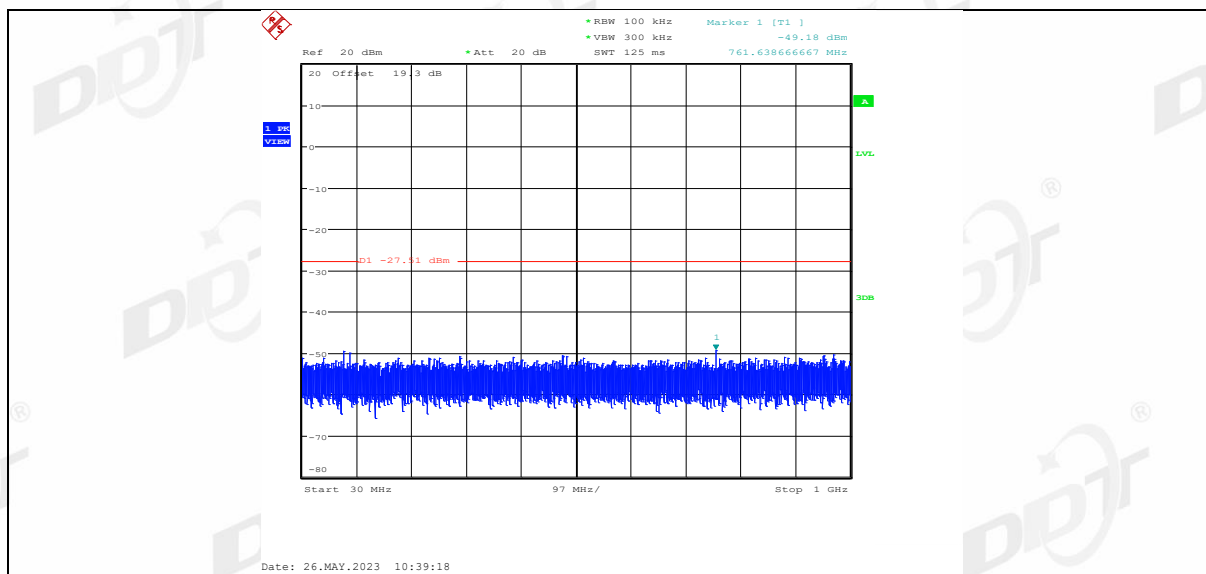


11N20SISO Ant1 2412 1000~26500

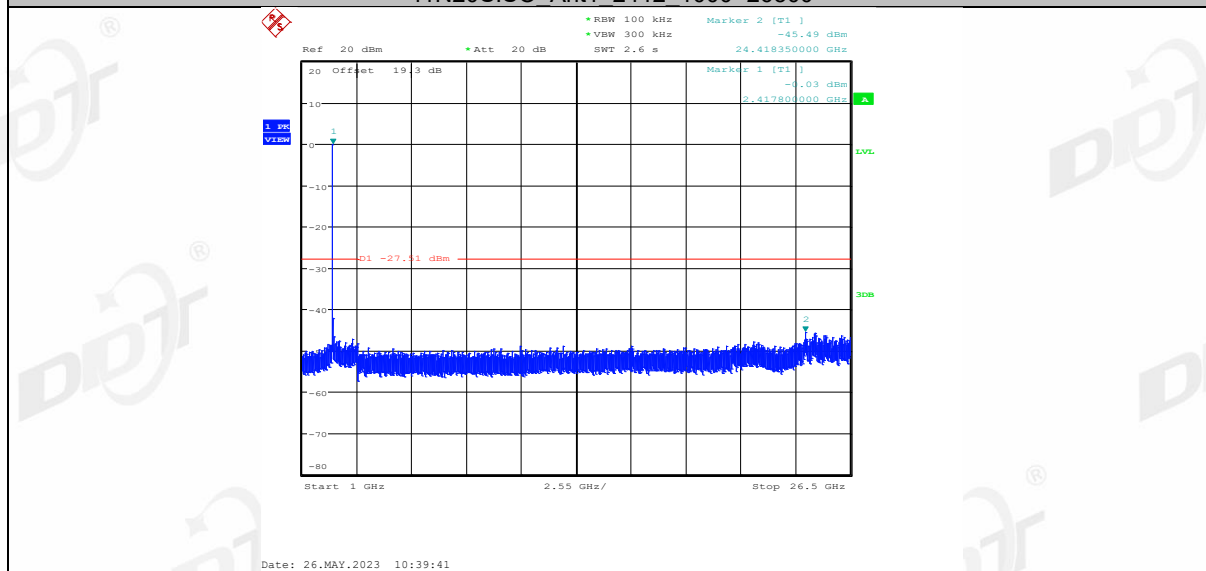


11N20SISO Ant1 2437

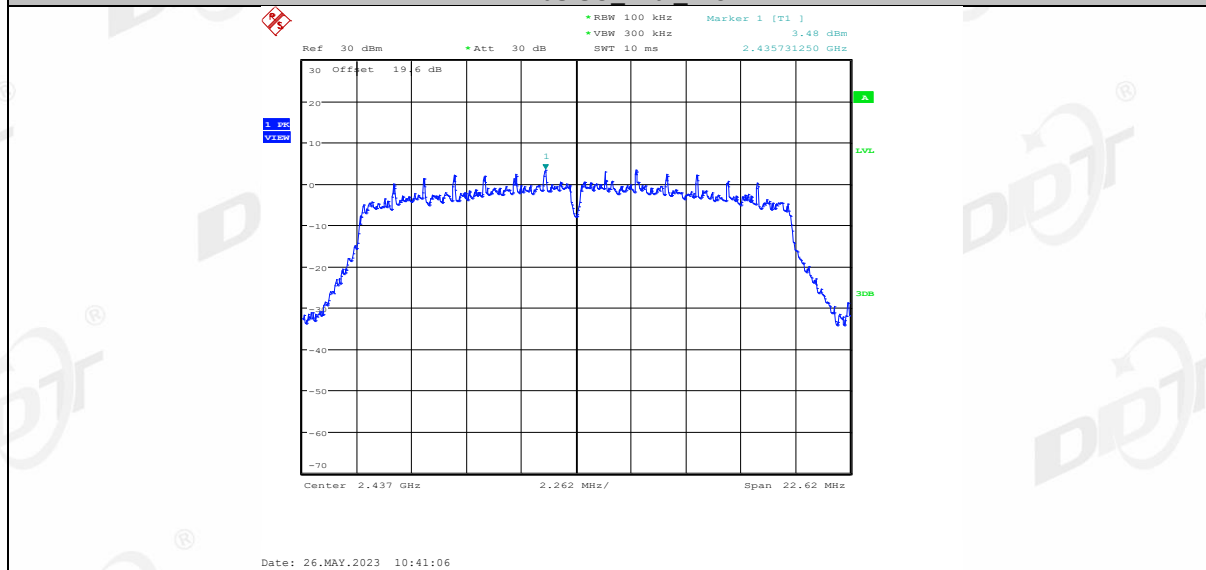


11N20SISO Ant1 2437 30~1000

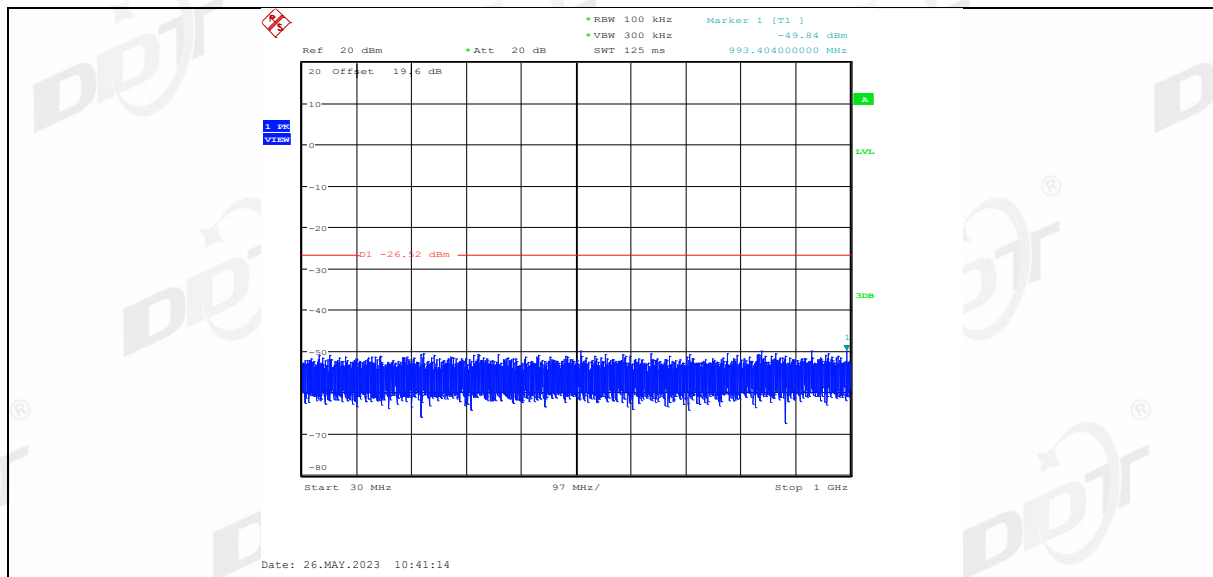


11N20SISO Ant1 2437 1000~26500

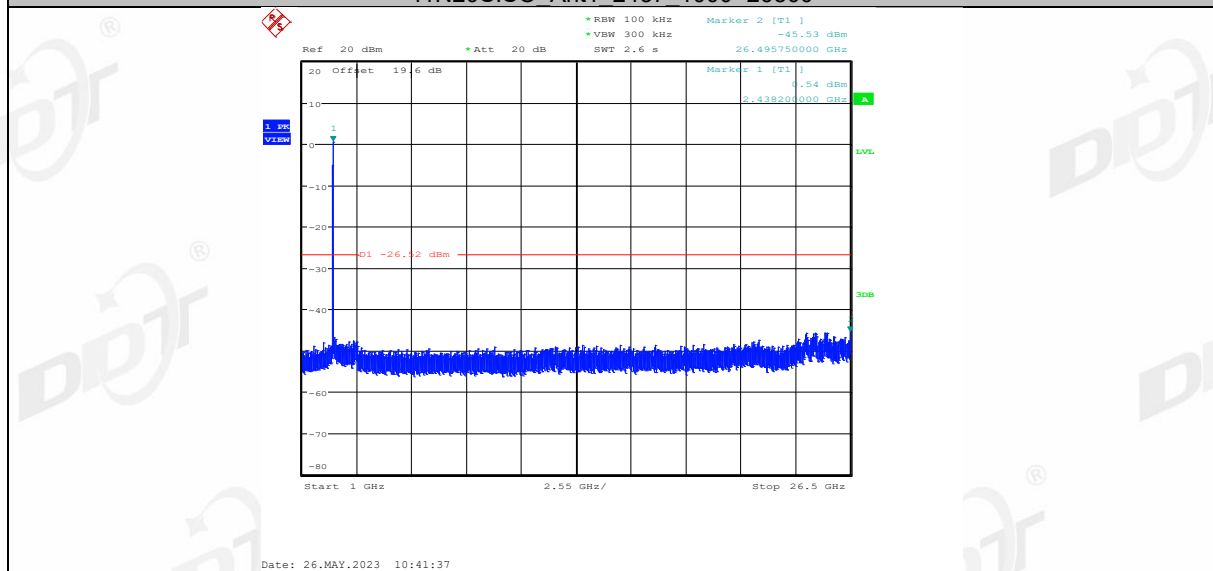


11N20SISO Ant1 2462

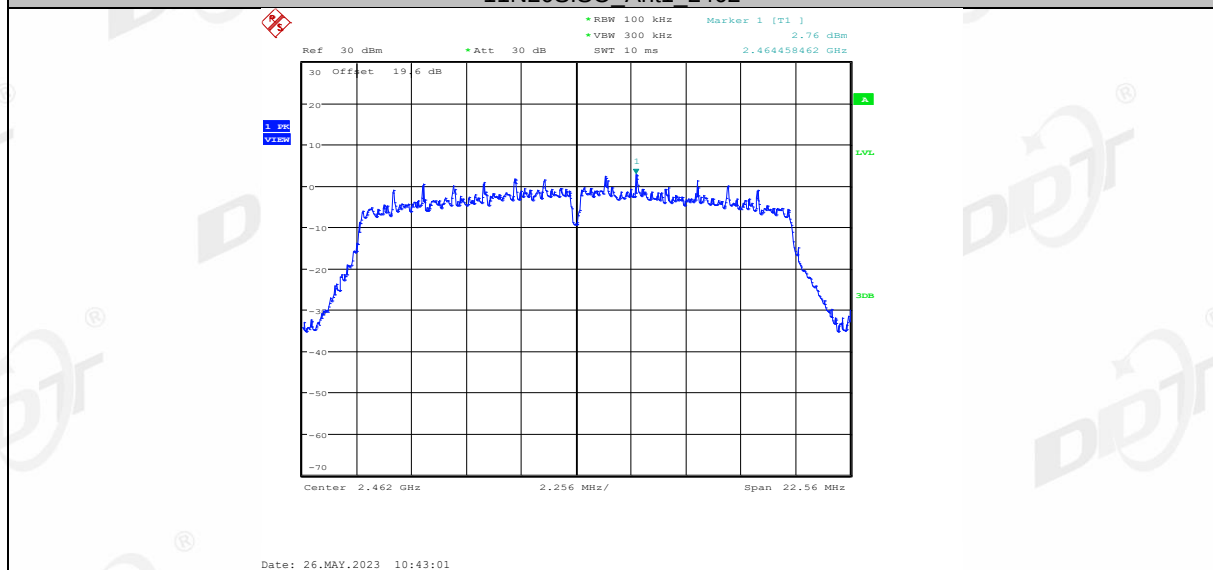


11N20SISO Ant1 2462 30~1000

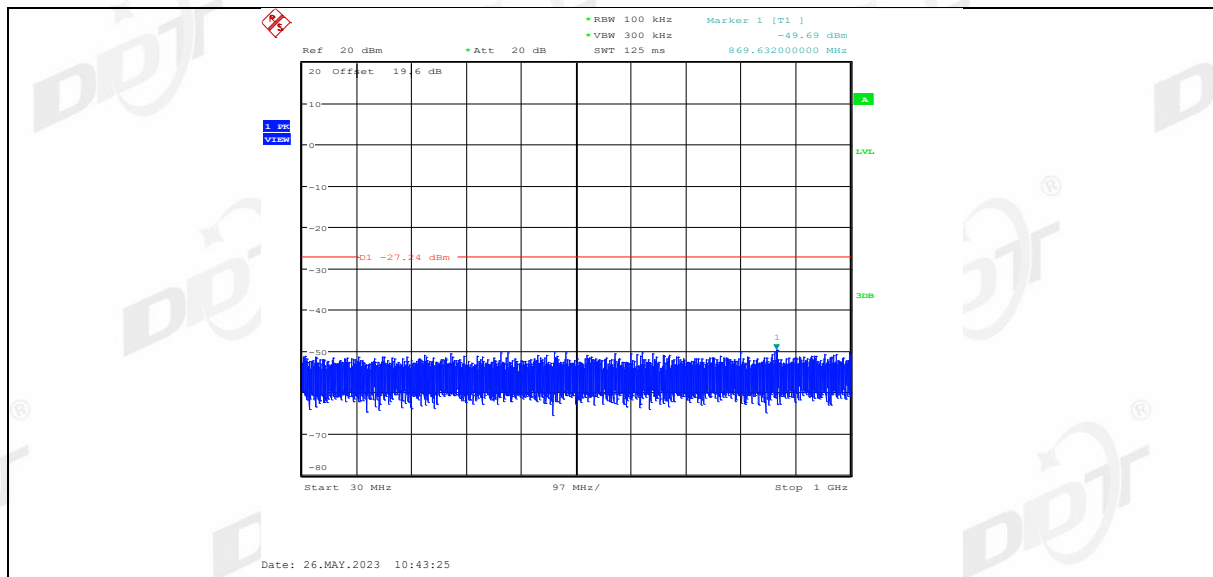


11N20SISO Ant1 2462 1000~26500

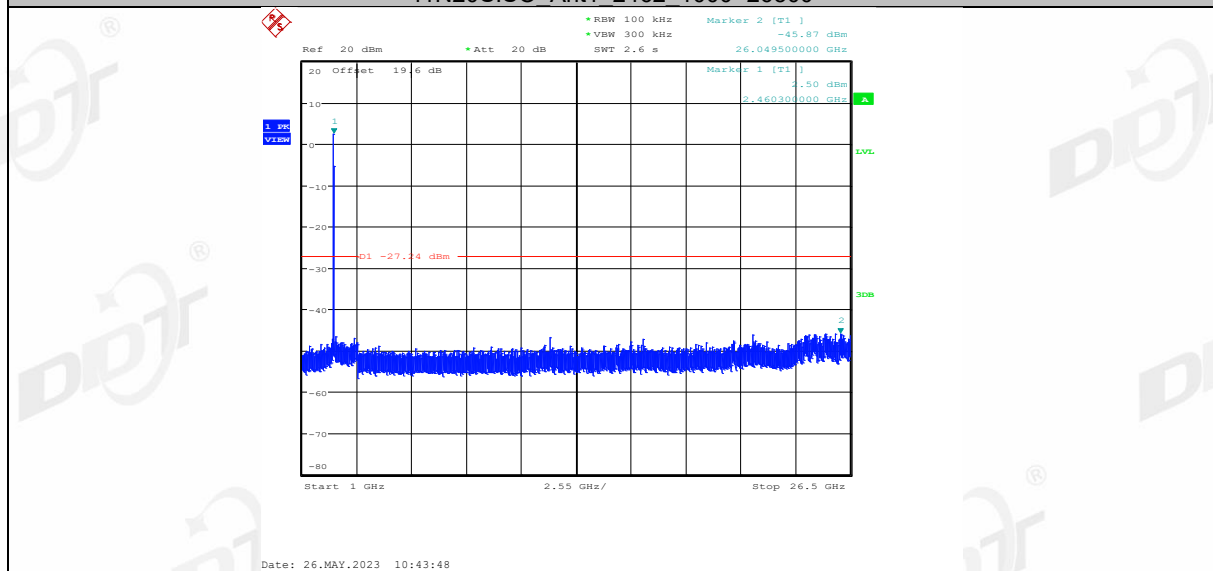


11N40SISO Ant1 2422

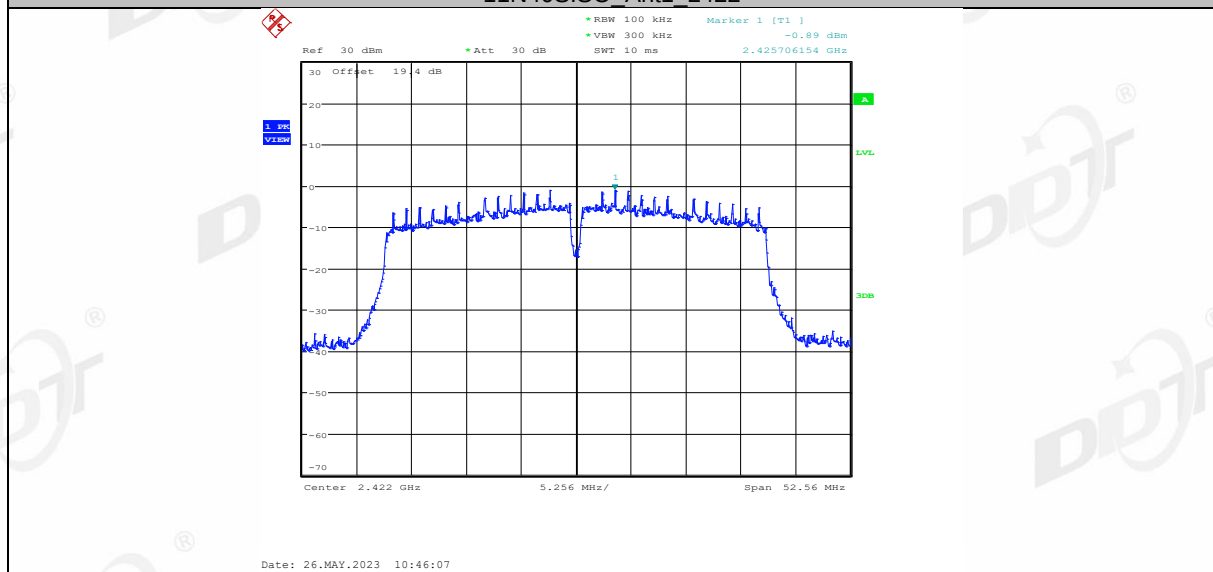


11N40SISO Ant1 2422 30~1000

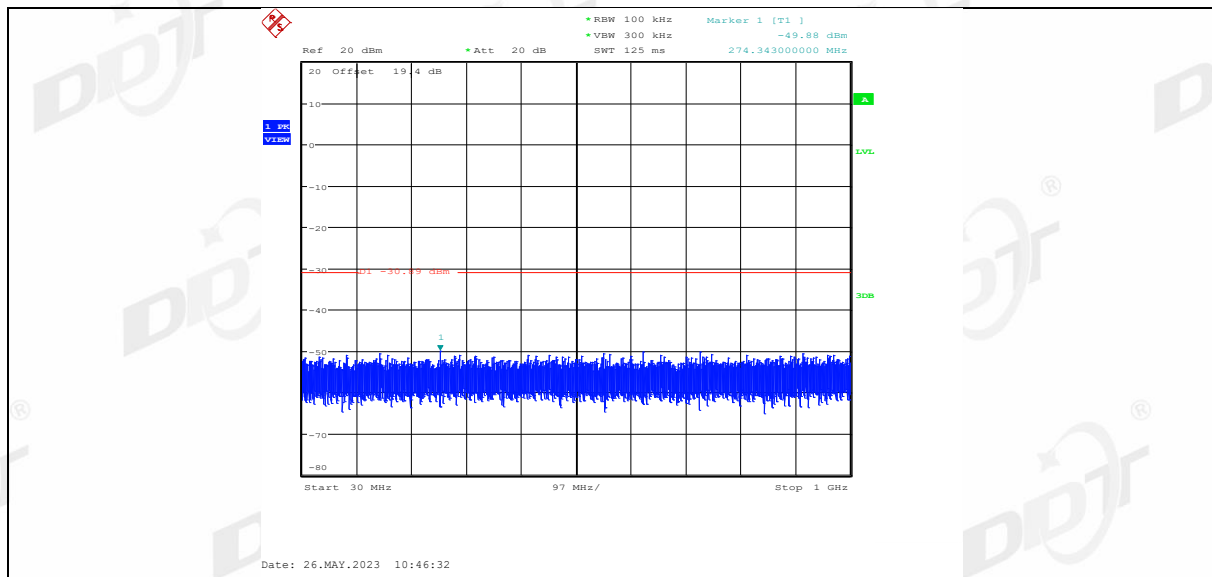


11N40SISO Ant1 2422 1000~26500

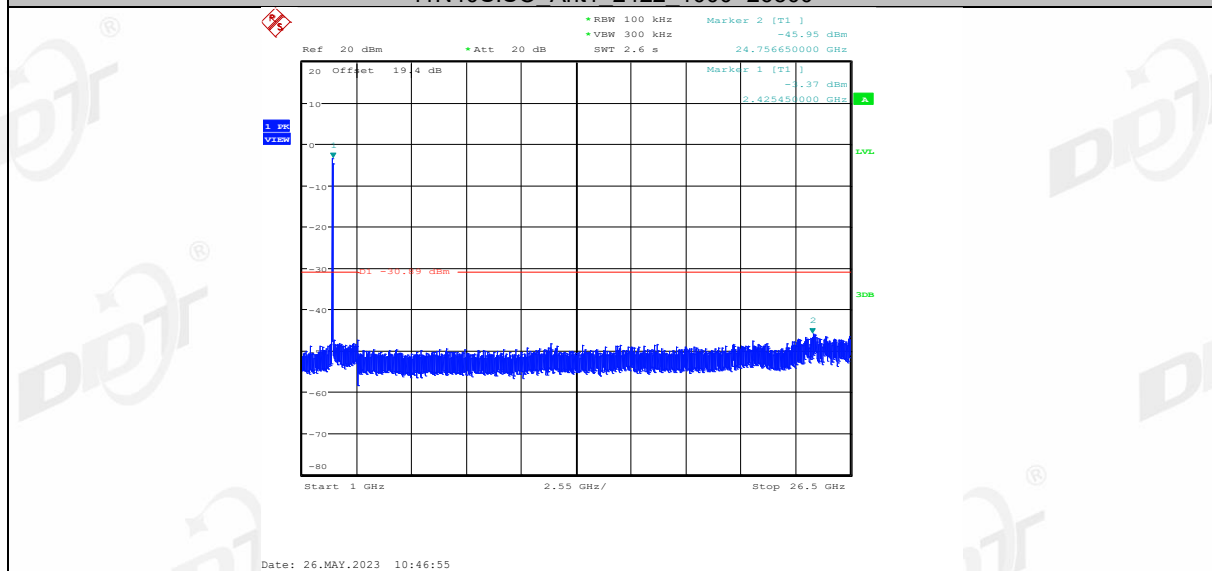


11N40SISO Ant1 2437 30~1000

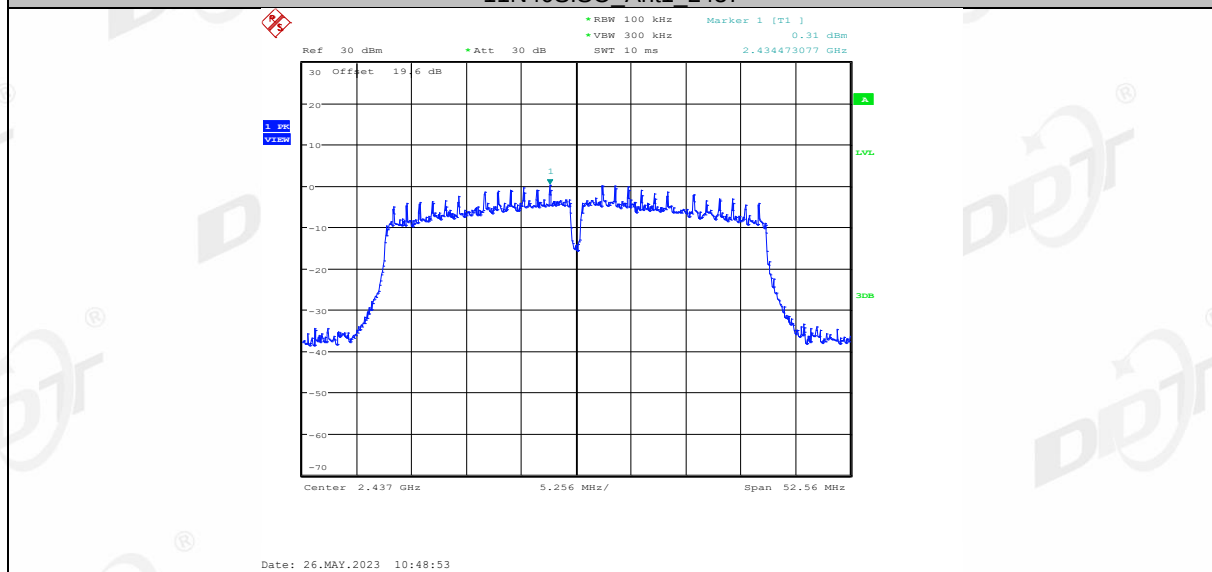


11N40SISO Ant1 2437 30~1000

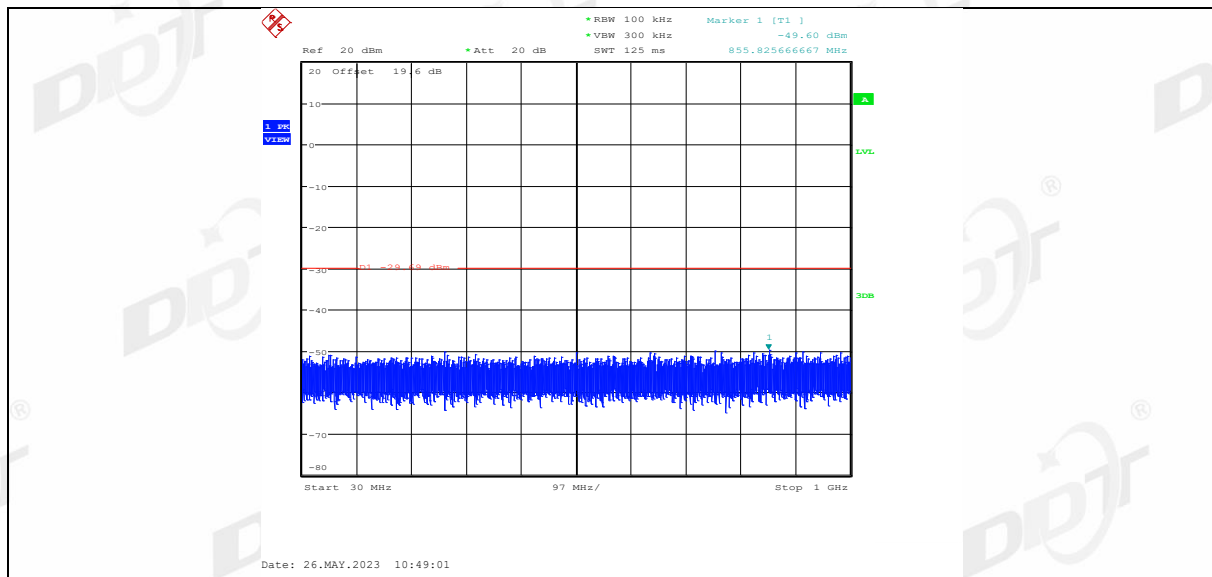

11N40SISO Ant1 2437 1000~26500

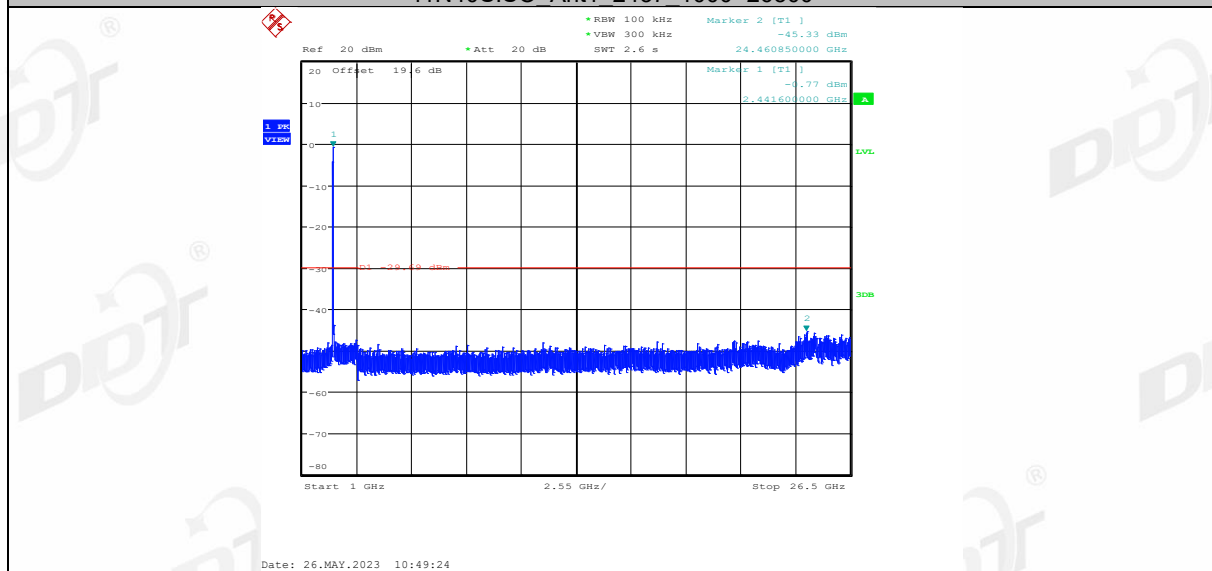

11N40SISO Ant1 2452

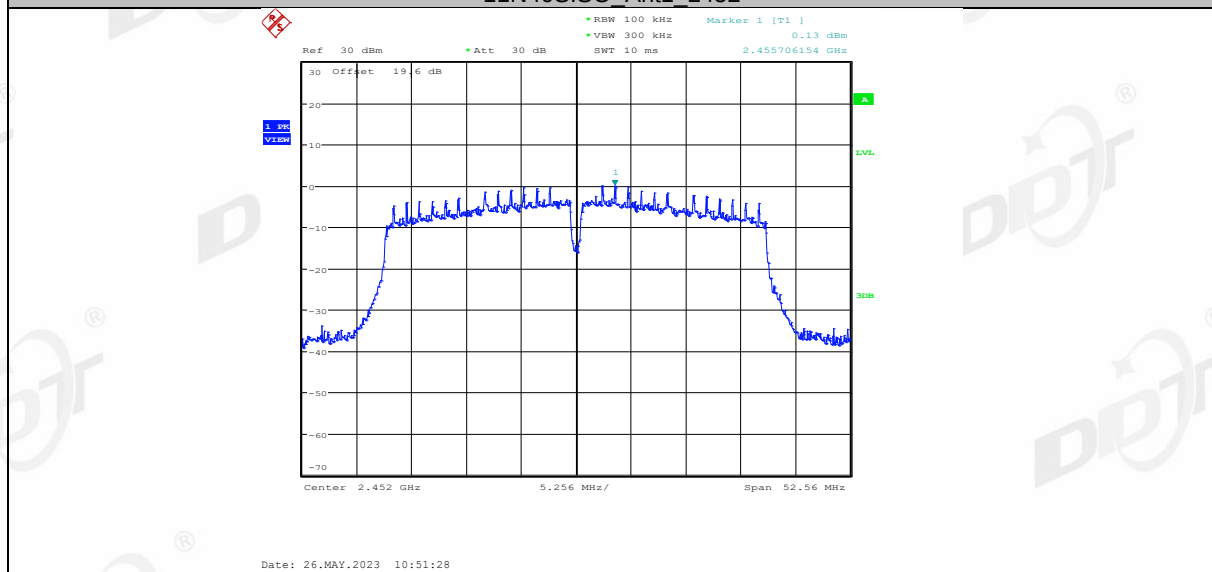


11N40SISO Ant1 2452 30~1000




10. Radiated Spurious Emissions

10.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

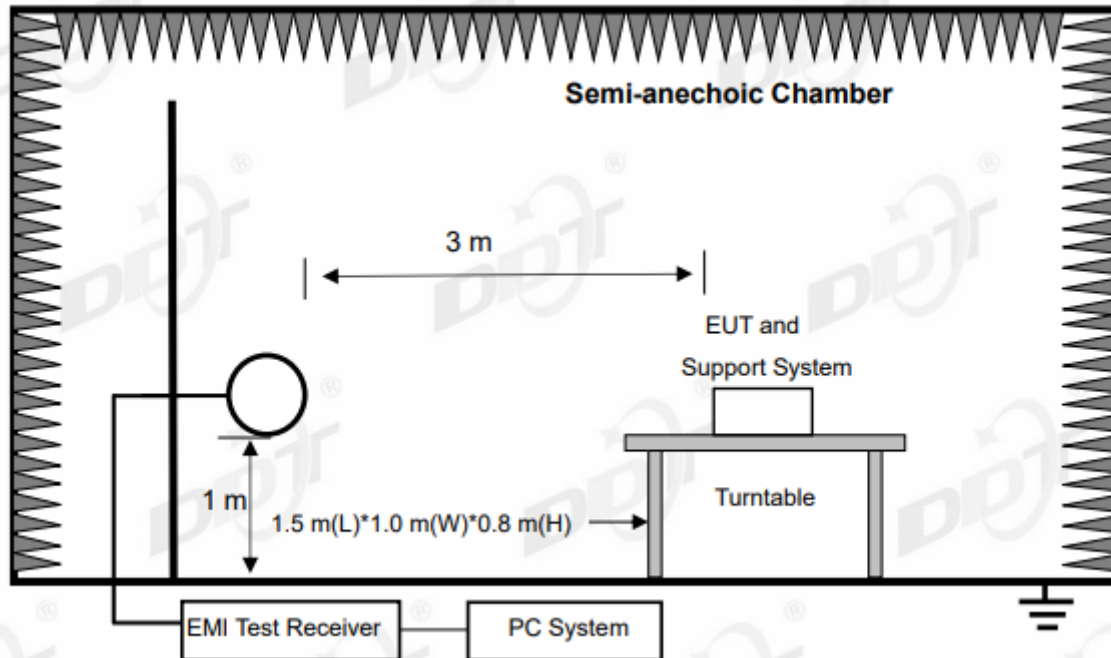

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

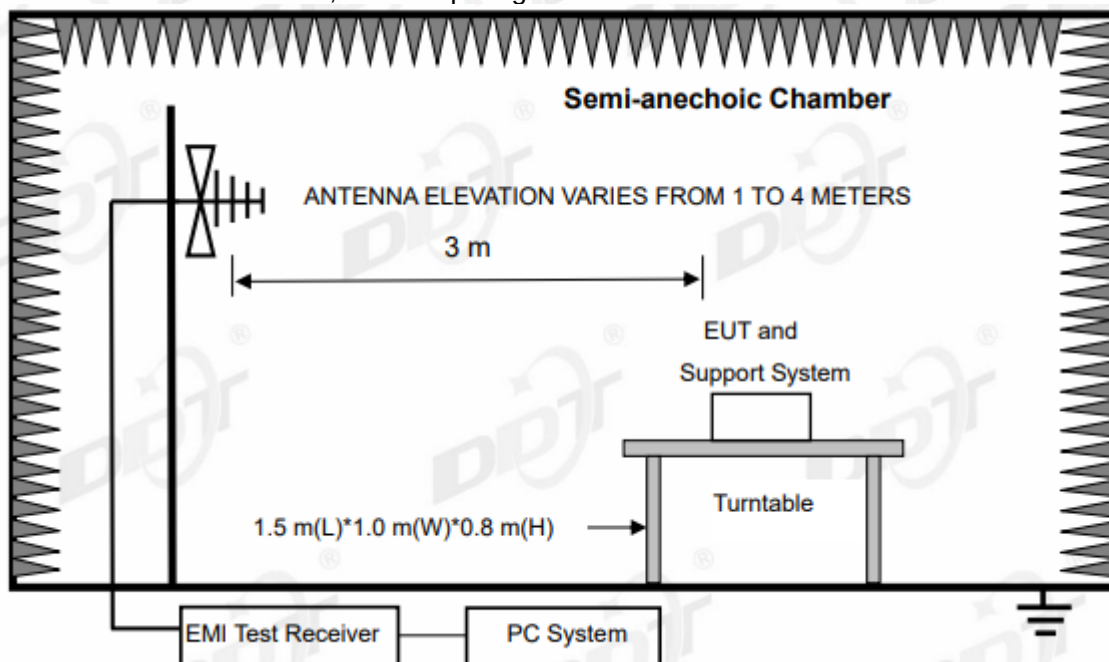

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

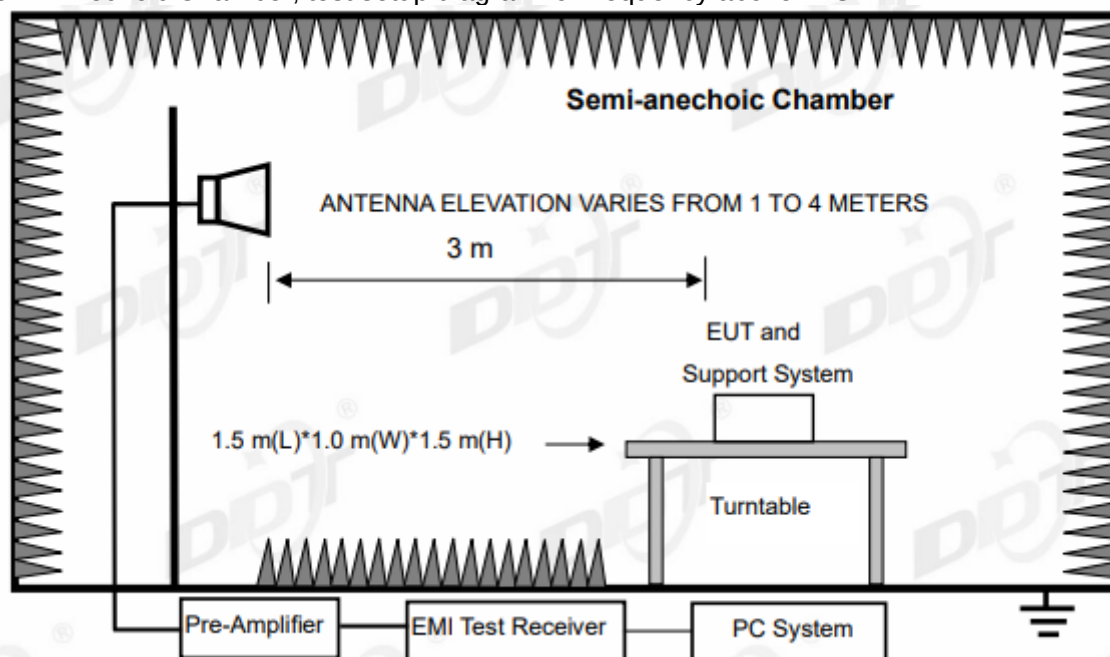

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

10.2. Limit

(1) FCC 15.205 Restricted frequency band:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit.

Frequency (MHz)	Measurement distance (meters)	Field strength limit	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/\text{F}(\text{kHz})$	$67.6-20\log(\text{F})$
0.490 ~ 1.705	30	$24000/\text{F}(\text{kHz})$	$87.6-20\log(\text{F})$
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak), 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\log(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

10.3. Test procedure

(1) EUT height should be 0.8 m for below 1 GHz at a semi - anechoic chamber while EUT height should be 1.5 m for above 1 GHz at full chamber or semi - anechoic chamber ground with absorbers.

(2) The antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9kHz-30MHz	Active Loop antenna	3m
30MHz-1GHz	Trilog Broadband Antenna	3m
1GHz-18GHz	Double Ridged Horn Antenna (1GHz-18GHz)	3m
18GHz-40GHz	Horn Antenna (18GHz-40GHz)	1m

According ANSI C63.10:2013 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or

Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below final test was performed with frequency range from 9kHz to 18GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz-90 kHz, 110 kHz-490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz-150 kHz	200 Hz
150 kHz-30 MHz	9 kHz
30 MHz-1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; RMS detector RBW 1 MHz VBW 10 Hz for Average measure (according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).

10.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note 1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note 2: 30 MHz ~ 25 GHz: (Scan with all mode, the worst case is 802.11b mode)

Note 3: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 802.11b, Tx 2437 MHz mode.

Note 4: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit, only recorded the worst case in this report.

Radiated Emission test (below 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-24

Tested By: Liaowanrong

EUT: 8-SOURCE 8-ZONE DISTRIBUTED
WHOLE HOUSE AUDIO SYSTEMModel
Number: Matrix 88

Test Mode: TX Mode


Power
Supply: AC 120V/60Hz

Condition: Temp:22.4°C;Humi:59.5%

Test Site: DDT 3# Chamber

File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC BELOW 1G\20230524-002822_H

Memo: 2.4G WIFI

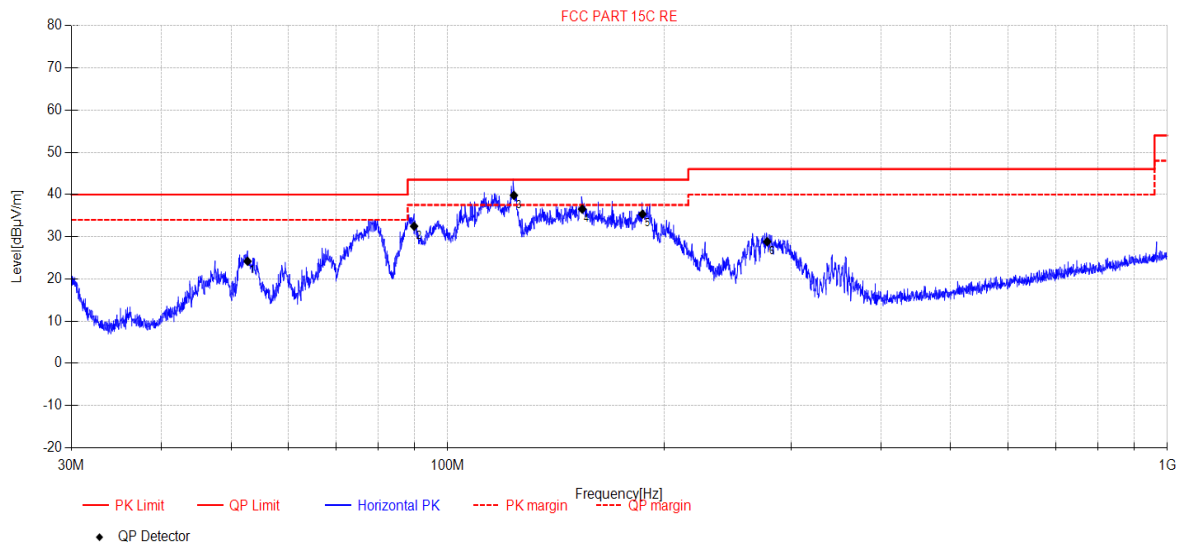

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	52.72	38.8	12.93	4.74	-32.28	24.19	40.00	15.81	QP	Horizontal
2	89.82	50.45	9.35	4.94	-32.25	32.49	43.50	11.01	QP	Horizontal
3	123.62	58.46	8.35	5.19	-32.21	39.79	43.50	3.71	QP	Horizontal
4	153.80	55.71	7.68	5.35	-32.19	36.55	43.50	6.95	QP	Horizontal
5	186.50	52.13	9.85	5.62	-32.25	35.35	43.50	8.15	QP	Horizontal
6	277.94	42.18	12.86	6.06	-32.27	28.83	46.00	17.17	QP	Horizontal


Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-24
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC BELOW 1G\20230524-002918_V
Memo: 2.4G WIFI

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

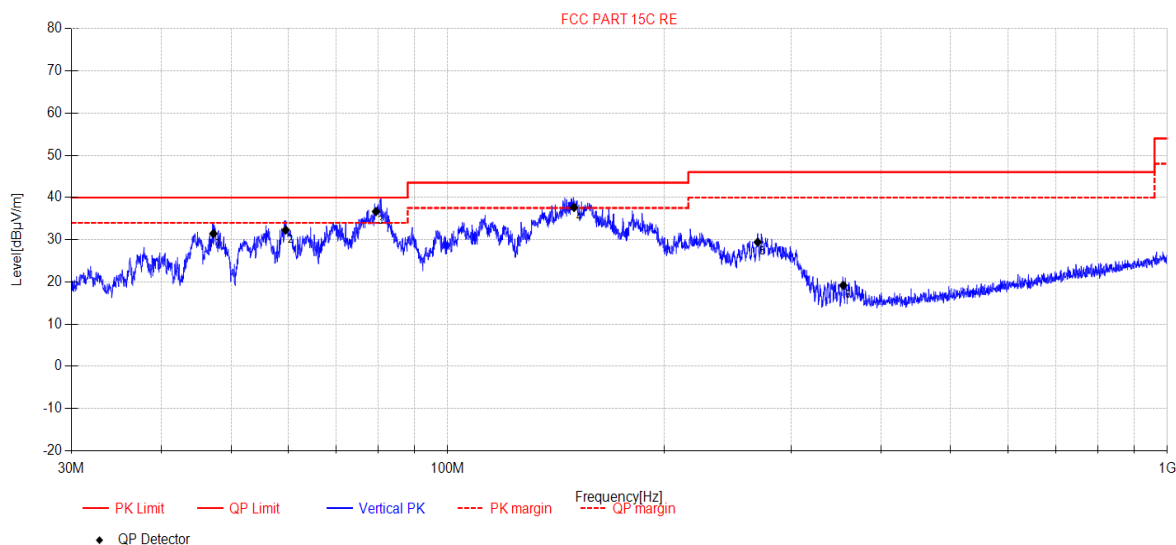

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	47.25	45.83	13.20	4.69	-32.28	31.44	40.00	8.56	QP	Vertical
2	59.56	47.82	11.99	4.76	-32.27	32.30	40.00	7.70	QP	Vertical
3	79.50	57.00	7.10	4.83	-32.26	36.67	40.00	3.33	QP	Vertical
4	149.86	57	7.50	5.32	-32.18	37.64	43.50	5.86	QP	Vertical
5	269.69	42.97	12.69	6.02	-32.26	29.42	46.00	16.58	QP	Vertical
6	354.51	30.4	14.69	6.45	-32.34	19.20	46.00	26.80	QP	Vertical

Note:


- Result Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-24 **Tested By:** Liaowanrong
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM **Model Number:** Matrix 88
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:22.4°C;Humi:59.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\23
Memo: 11B 2412

Test Graph

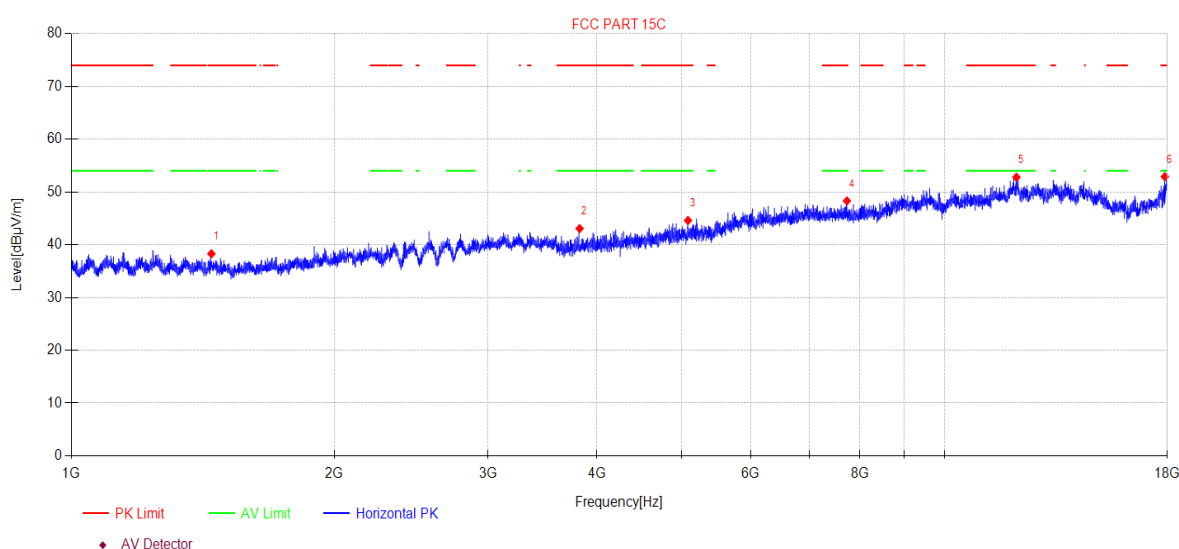

Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1446.80	48.08	3.48	25.60	-38.87	38.29	74.00	35.71	PK	Horizontal
2	3820.65	48.38	5.63	30.34	-41.29	43.06	74.00	30.94	PK	Horizontal
3	5084.77	46.56	6.22	32.90	-41.07	44.61	74.00	29.39	PK	Horizontal
4	7731.57	45.61	7.10	36.60	-41.00	48.31	74.00	25.69	PK	Horizontal
5	12090.35	44.24	8.46	39.08	-38.99	52.79	74.00	21.21	PK	Horizontal
6	17880.75	40.64	11.84	41.07	-40.65	52.90	74.00	21.10	PK	Horizontal

Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-24
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\24
Memo: 11B 2412

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

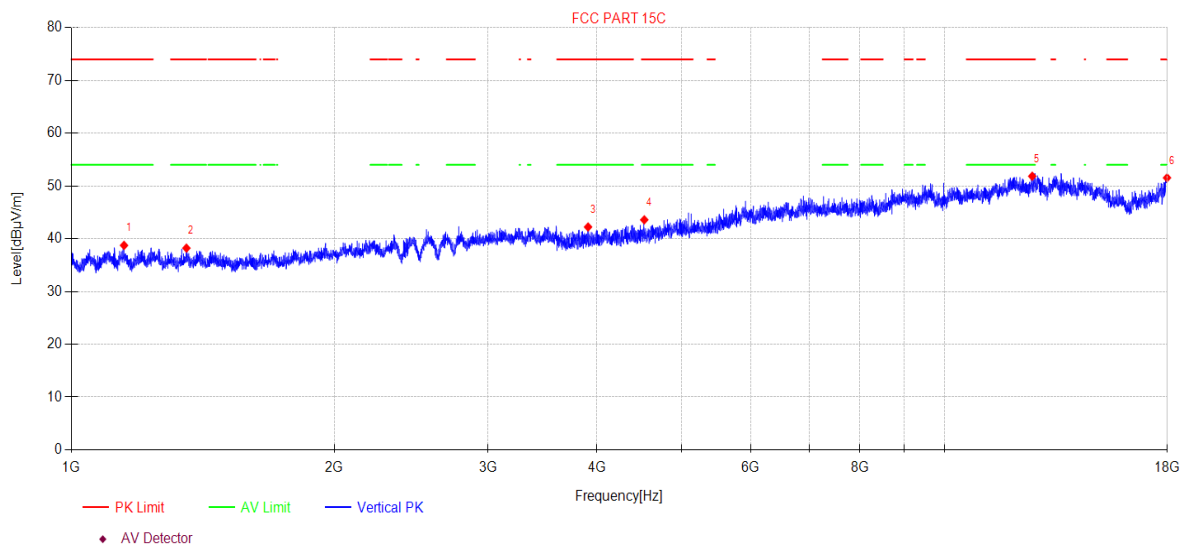

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1149.14	48.57	2.99	25.60	-38.42	38.74	74.00	35.26	PK	Vertical
2	1354.54	48.02	3.33	25.60	-38.73	38.22	74.00	35.78	PK	Vertical
3	3906.63	47.38	5.68	30.51	-41.34	42.23	74.00	31.77	PK	Vertical
4	4530.97	47.26	5.90	31.66	-41.24	43.58	74.00	30.42	PK	Vertical
5	12604.13	43.19	8.95	39.21	-39.50	51.85	74.00	22.15	PK	Vertical
6	17984.40	38.55	11.98	41.71	-40.69	51.55	74.00	22.45	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-24
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\25
Memo: 11B 2437

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

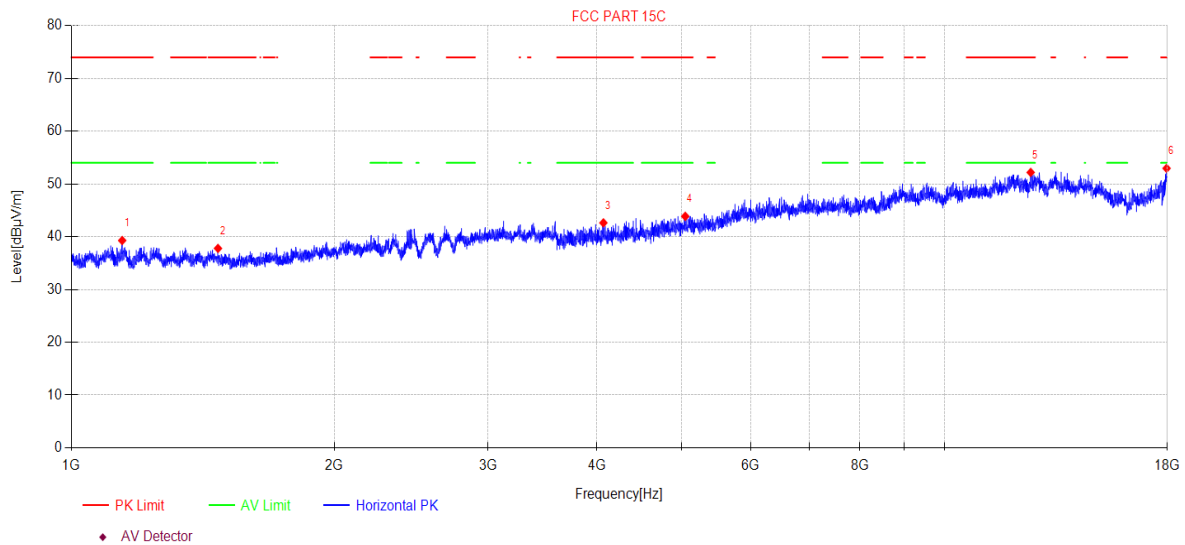

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1143.51	49.13	2.99	25.59	-38.42	39.29	74.00	34.71	PK	Horizontal
2	1472.10	47.62	3.52	25.56	-38.91	37.79	74.00	36.21	PK	Horizontal
3	4067.93	47.42	5.75	30.84	-41.38	42.63	74.00	31.37	PK	Horizontal
4	5048.16	45.91	6.14	32.90	-41.08	43.87	74.00	30.13	PK	Horizontal
5	12553.24	43.59	8.90	39.15	-39.45	52.19	74.00	21.81	PK	Horizontal
6	17963.62	40.12	11.95	41.58	-40.69	52.96	74.00	21.04	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-24
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\26
Memo: 11B 2437

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

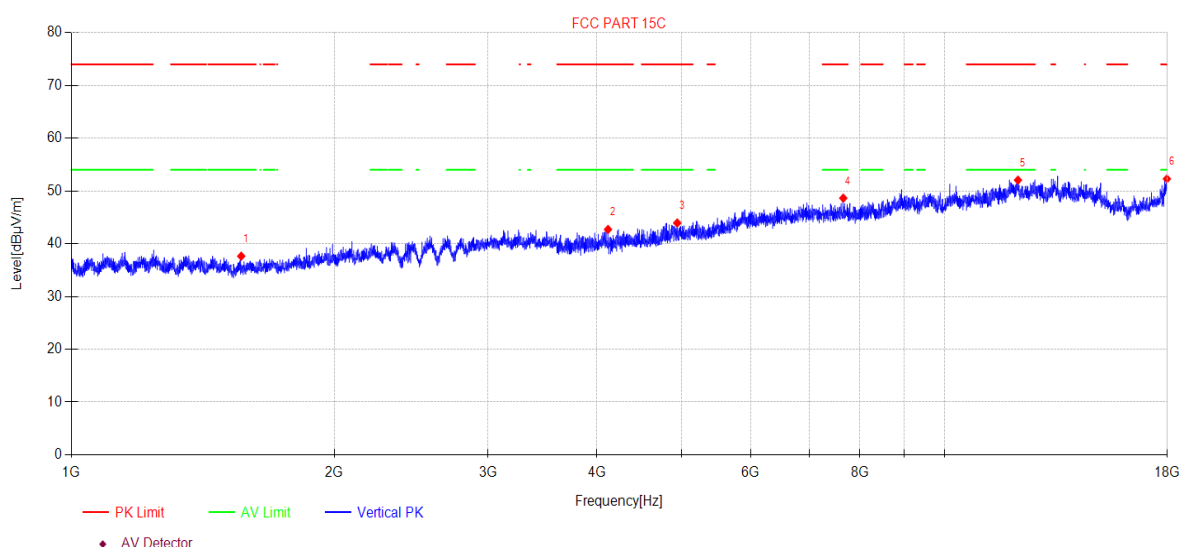

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1565.12	47.61	3.68	25.40	-39.05	37.64	74.00	36.36	PK	Vertical
2	4117.61	47.36	5.77	30.94	-41.36	42.71	74.00	31.29	PK	Vertical
3	4942.77	46.25	6.03	32.77	-41.12	43.93	74.00	30.07	PK	Vertical
4	7658.18	46.00	7.12	36.52	-41.00	48.64	74.00	25.36	PK	Vertical
5	12139.37	43.49	8.51	39.10	-39.04	52.06	74.00	21.94	PK	Vertical
6	17979.20	39.33	11.97	41.68	-40.69	52.29	74.00	21.71	PK	Vertical

Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-24
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\27
Memo: 11B 2462

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

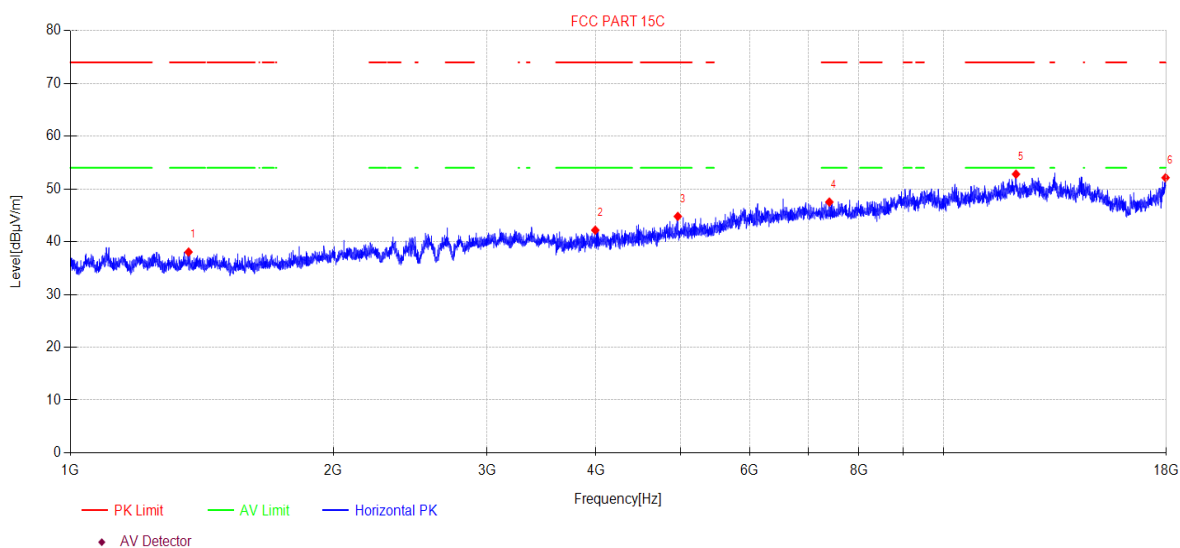

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1365.94	47.85	3.35	25.60	-38.75	38.05	74.00	35.95	PK	Horizontal
2	3992.23	47.18	5.73	30.68	-41.40	42.19	74.00	31.81	PK	Horizontal
3	4962.81	47.07	6.04	32.80	-41.11	44.80	74.00	29.20	PK	Horizontal
4	7401.42	44.85	7.17	36.50	-41.00	47.52	74.00	26.48	PK	Horizontal
5	12107.83	44.23	8.48	39.10	-39.01	52.80	74.00	21.20	PK	Horizontal
6	17963.62	39.30	11.95	41.58	-40.69	52.14	74.00	21.86	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-24
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\28
Memo: 11B 2462

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

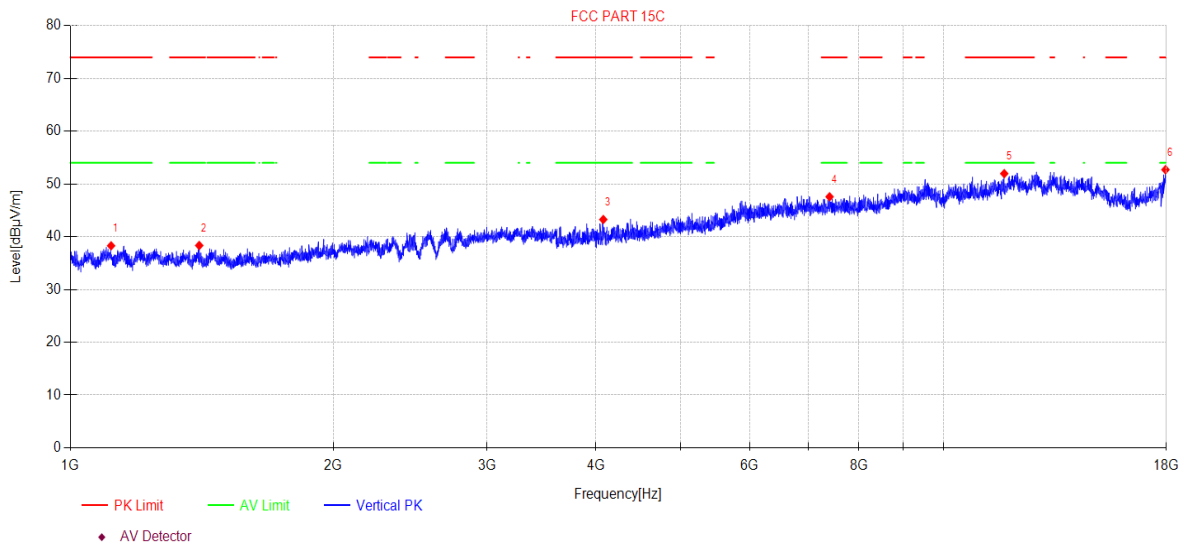


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1113.50	48.19	2.94	25.53	-38.37	38.29	74.00	35.71	PK	Vertical
2	1404.77	48.14	3.41	25.60	-38.81	38.34	74.00	35.66	PK	Vertical
3	4077.35	48.04	5.75	30.85	-41.38	43.26	74.00	30.74	PK	Vertical
4	7405.70	44.91	7.17	36.50	-41.00	47.58	74.00	26.42	PK	Vertical
5	11739.14	44.19	8.29	38.80	-39.32	51.96	74.00	22.04	PK	Vertical
6	17958.43	39.90	11.94	41.55	-40.68	52.71	74.00	21.29	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

11. Radiated Band Edge Compliance

11.1. Block diagram of test setup

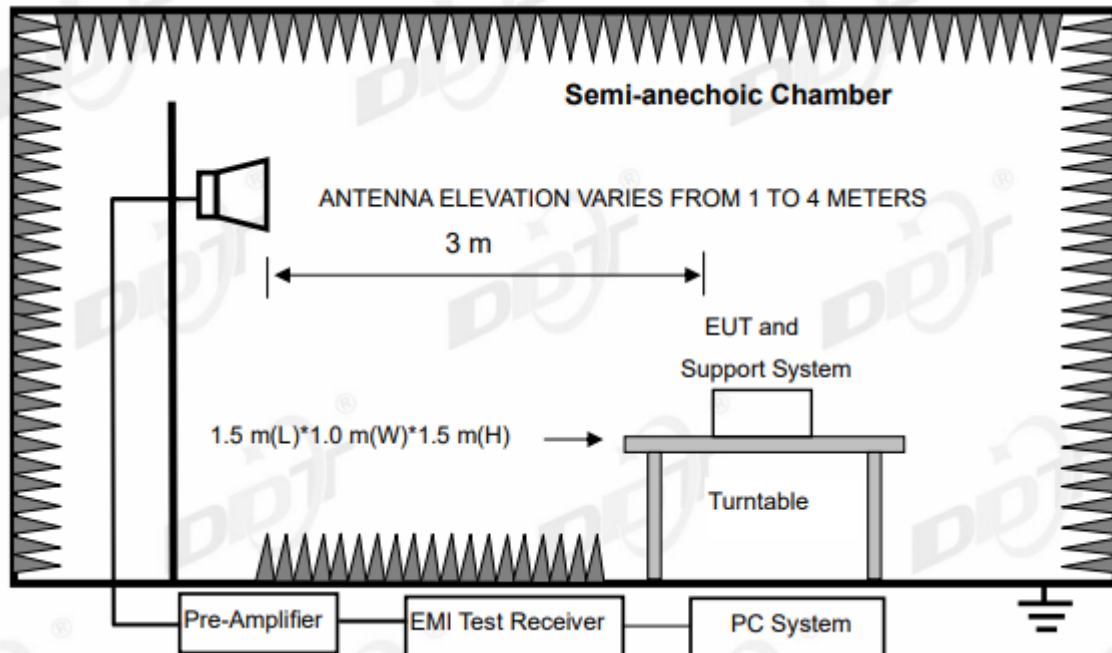

11.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400 MHz to 2483.5 MHz shall be at least 20dB below the fundamental emissions or comply with FCC 15.209 limits.

11.3. Test procedure

Same with Radiated Spurious Emissions except change investigated frequency range from 2310 MHz to 2430 MHz and 2445 MHz to 2500 MHz, 2310 MHz to 2445 MHz and 2435 MHz to 2500 MHz.

11.4. Test result


Pass. (See below detailed test result)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-23
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\7
Memo: 11B 2412

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

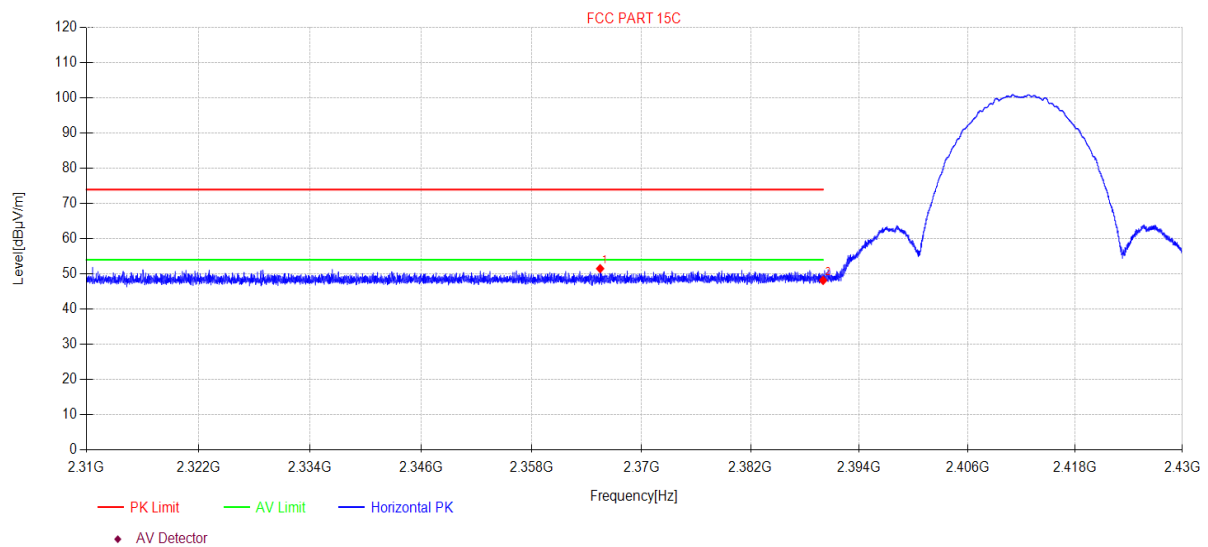

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2365.50	50.41	3.76	27.43	-30.10	51.50	74.00	22.50	PK	Horizontal
2	2390.00	47.03	3.78	27.48	-30.13	48.16	74.00	25.84	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-23
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G8
Memo: 11B 2412

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

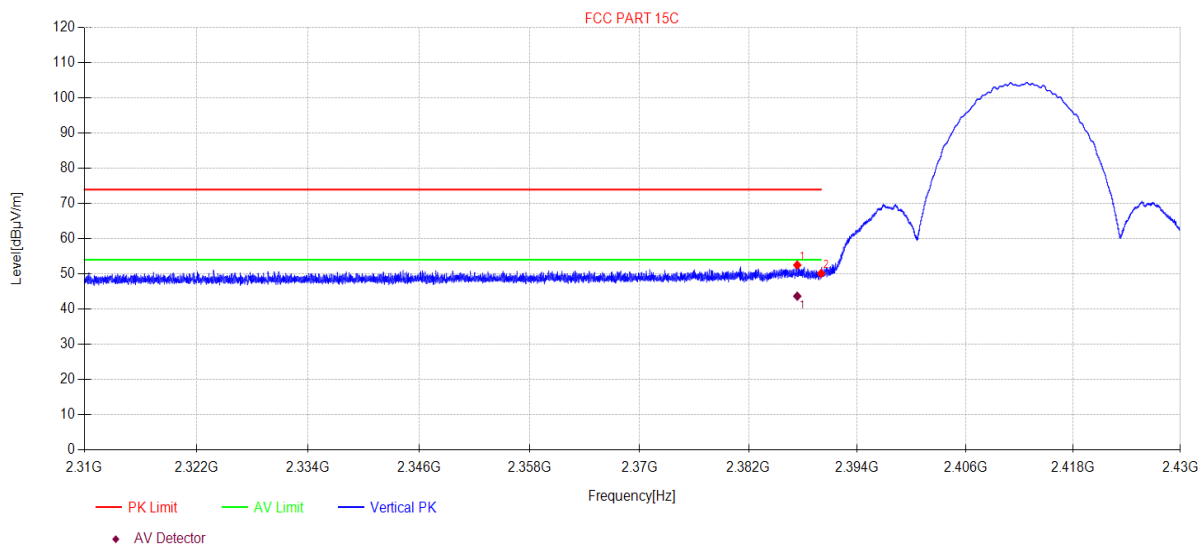

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.36	51.40	3.78	27.47	-30.13	52.52	74.00	21.48	PK	Vertical
2	2390.00	48.99	3.78	27.48	-30.13	50.12	74.00	23.88	PK	Vertical

Final Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.36	42.54	3.78	27.47	-30.13	43.66	54.00	10.34	AV	Vertical

Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-23
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\5
Memo: 11B 2462

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

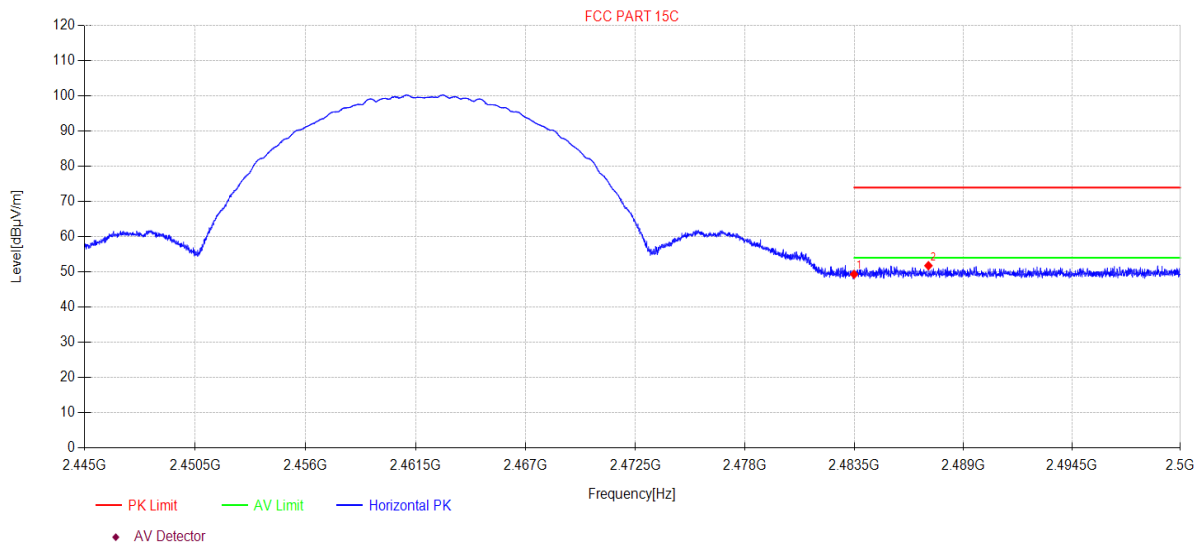

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	47.94	3.88	27.73	-30.23	49.32	74.00	24.68	PK	Horizontal
2	2487.25	50.38	3.88	27.75	-30.24	51.77	74.00	22.23	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-23
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\6
Memo: 11B 2462

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

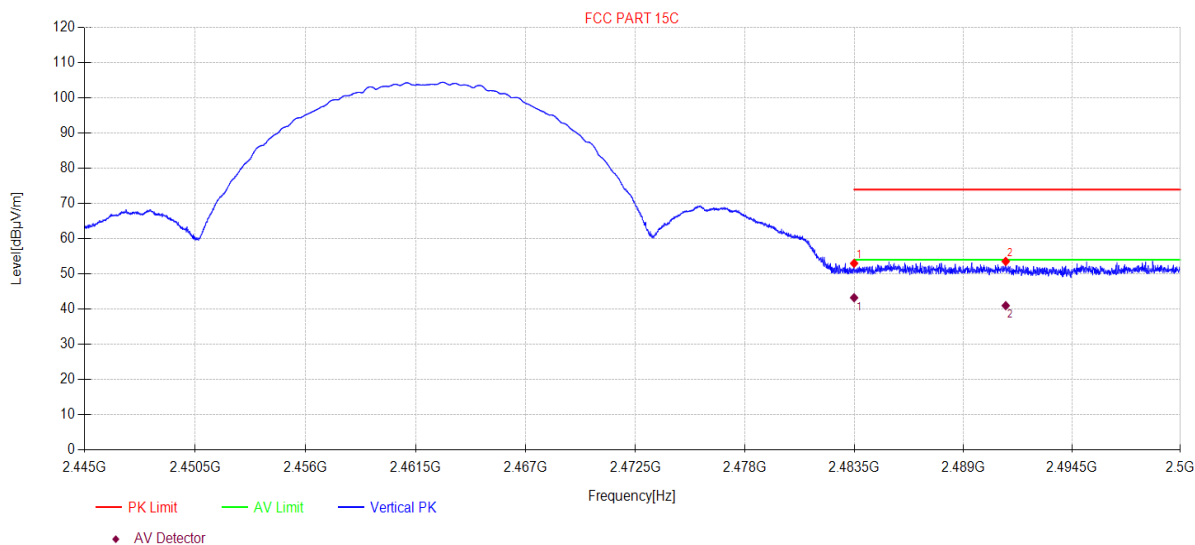

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	51.62	3.88	27.73	-30.23	53.00	74.00	21.00	PK	Vertical
2	2491.16	52.16	3.89	27.76	-30.24	53.57	74.00	20.43	PK	Vertical

Final Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	41.85	3.88	27.73	-30.23	43.23	54.00	10.77	AV	Vertical
2	2491.16	39.56	3.89	27.76	-30.24	40.97	54.00	13.03	AV	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-23
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\11
Memo: 11G 2412

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

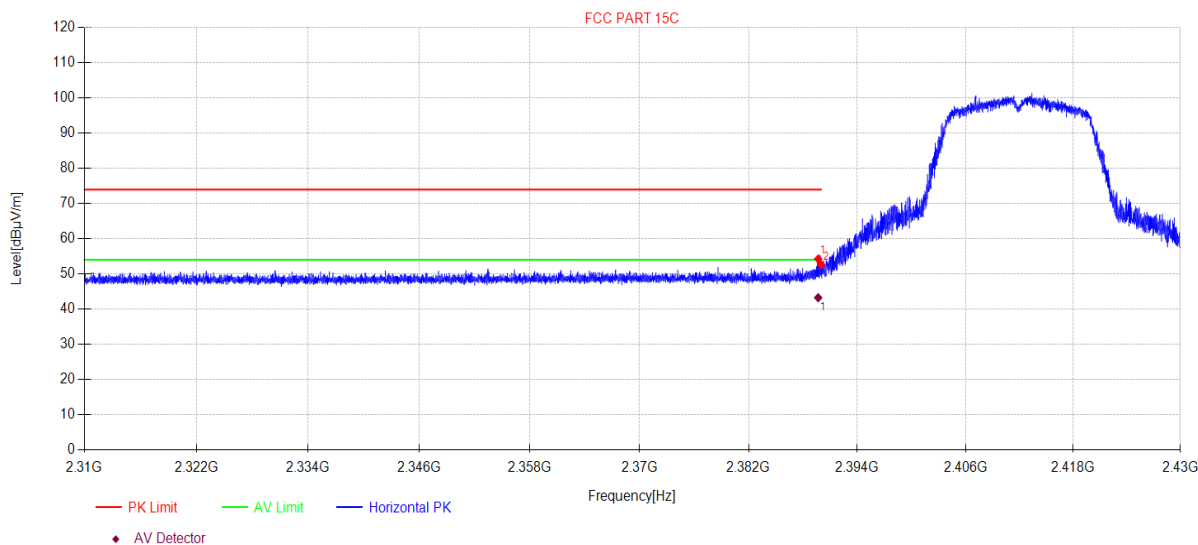

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.67	53.12	3.78	27.48	-30.13	54.25	74.00	19.75	PK	Horizontal
2	2390.00	51.49	3.78	27.48	-30.13	52.62	74.00	21.38	PK	Horizontal

Final Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.67	42.10	3.78	27.48	-30.13	43.23	54.00	10.77	AV	Horizontal

Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-23
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\12
Memo: 11G 2412

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

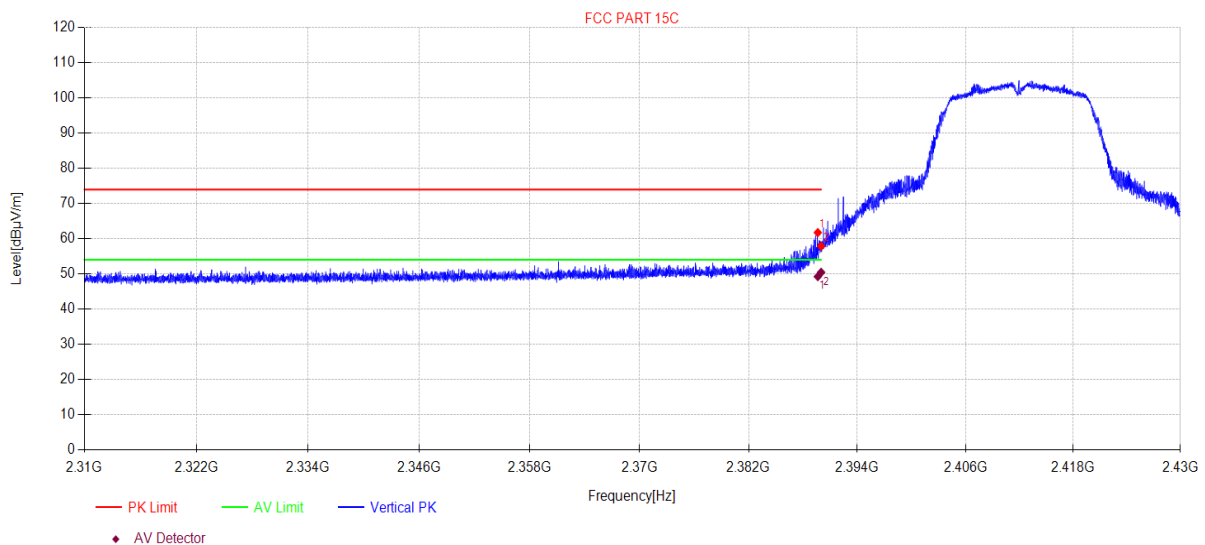

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.63	60.61	3.78	27.48	-30.13	61.74	74.00	12.26	PK	Vertical
2	2390.00	56.77	3.78	27.48	-30.13	57.90	74.00	16.10	PK	Vertical

Final Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.63	48.10	3.78	27.48	-30.13	49.23	54.00	4.77	AV	Vertical
2	2390.00	49.31	3.78	27.48	-30.13	50.44	54.00	3.56	AV	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-23
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\13
Memo: 11G 2462

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

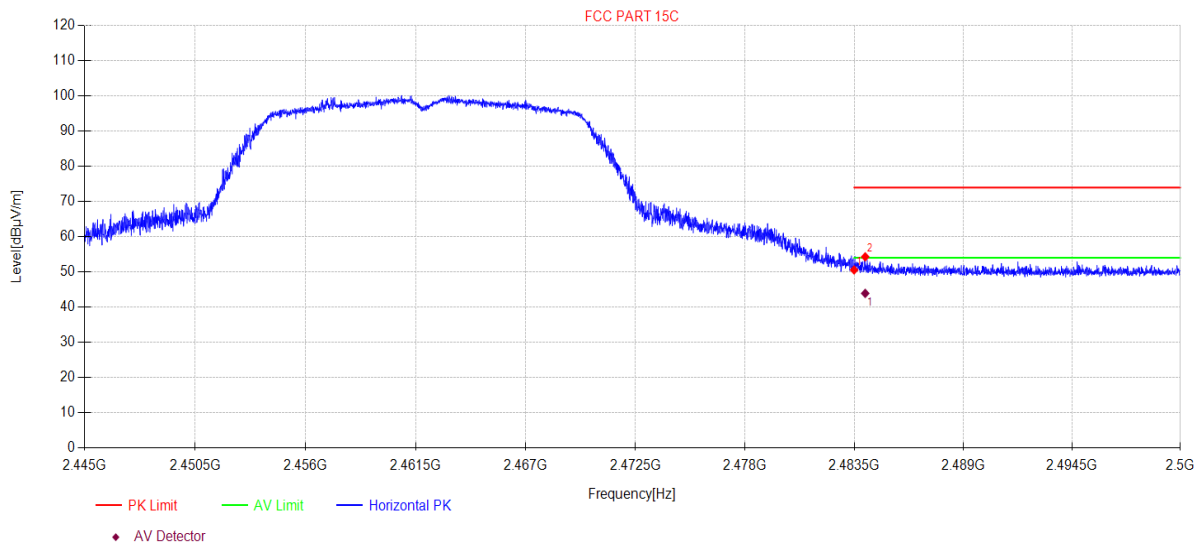

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	49.18	3.88	27.73	-30.23	50.56	74.00	23.44	PK	Horizontal
2	2484.06	52.89	3.88	27.74	-30.23	54.28	74.00	19.72	PK	Horizontal

Final Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2484.06	42.51	3.88	27.74	-30.23	43.90	54.00	10.10	AV	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-23
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\14
Memo: 11G 2462

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

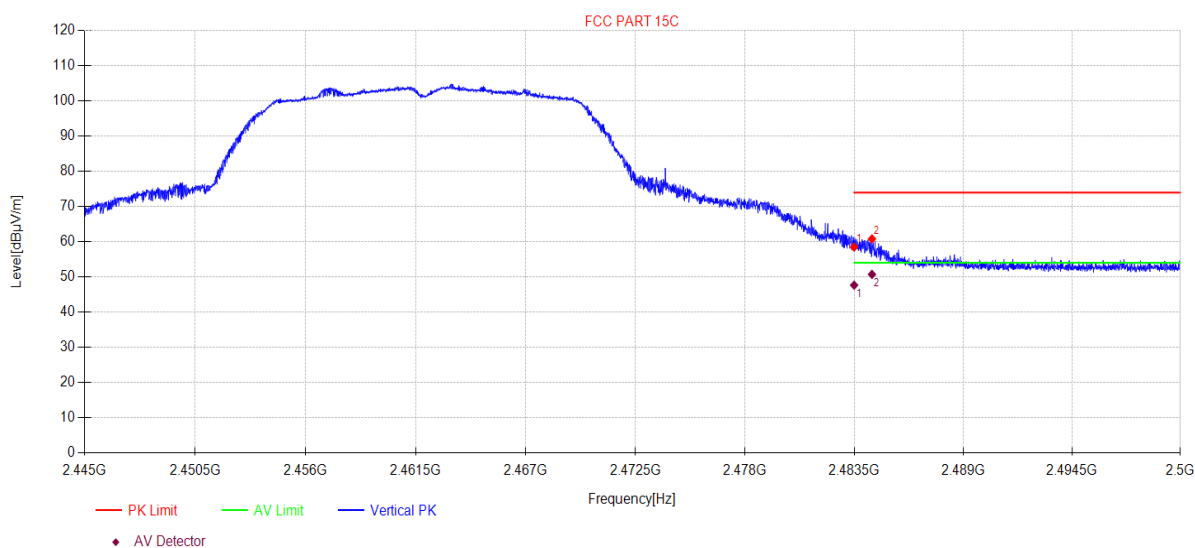

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	57.10	3.88	27.73	-30.23	58.48	74.00	15.52	PK	Vertical
2	2484.40	59.42	3.88	27.74	-30.23	60.81	74.00	13.19	PK	Vertical

Final Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	46.28	3.88	27.73	-30.23	47.66	54.00	6.34	AV	Vertical
2	2484.40	49.33	3.88	27.74	-30.23	50.72	54.00	3.28	AV	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-23
EUT: 8-SOURCE 8-ZONE DISTRIBUTED
WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\17
Memo: 11N20SISO 2412

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

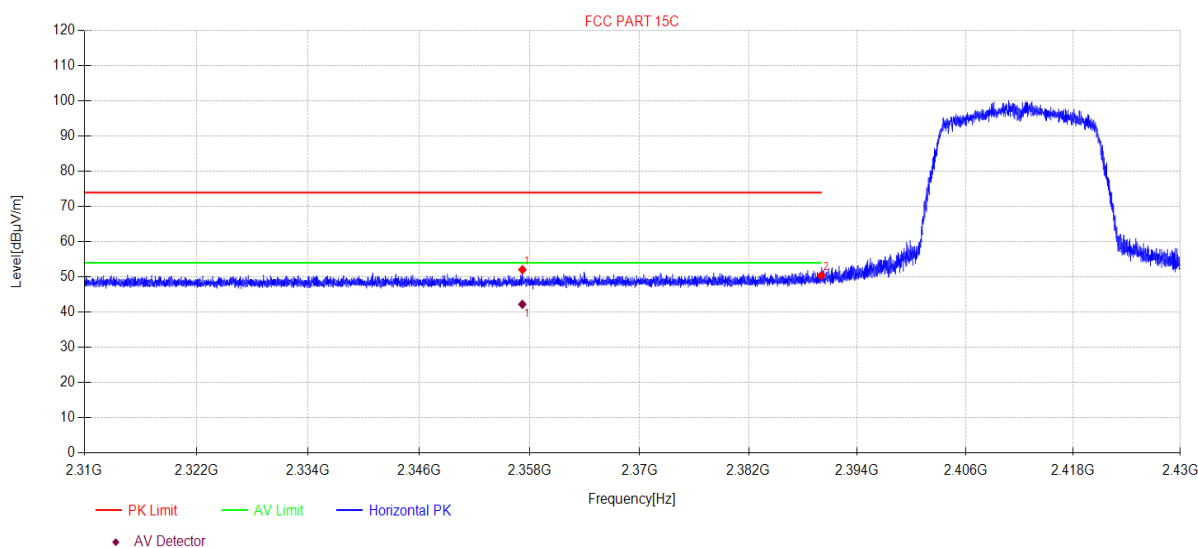

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2357.23	50.98	3.75	27.41	-30.09	52.05	74.00	21.95	PK	Horizontal
2	2390.00	49.24	3.78	27.48	-30.13	50.37	74.00	23.63	PK	Horizontal

Final Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2357.23	41.13	3.75	27.41	-30.09	42.20	54.00	11.80	AV	Horizontal

Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-23
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\18
Memo: 11N20SISO 2412

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

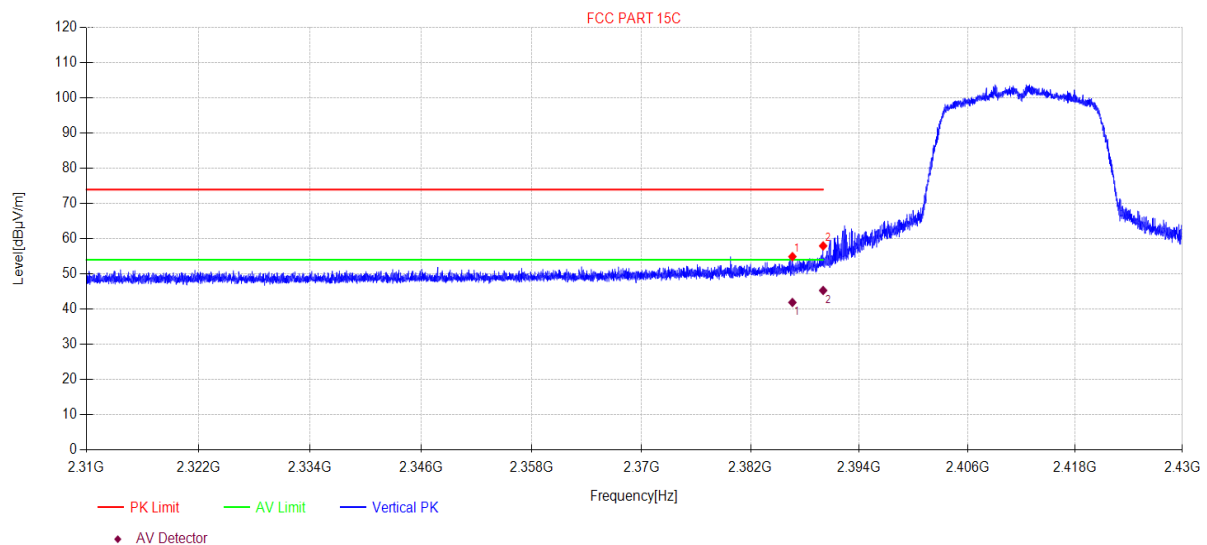

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.61	53.80	3.78	27.47	-30.13	54.92	74.00	19.08	PK	Vertical
2	2390.00	56.83	3.78	27.48	-30.13	57.96	74.00	16.04	PK	Vertical

Final Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.61	40.76	3.78	27.47	-30.13	41.88	54.00	12.12	AV	Vertical
2	2390.00	44.16	3.78	27.48	-30.13	45.29	54.00	8.71	AV	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-23
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\15
Memo: 11N20SISO 2462

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

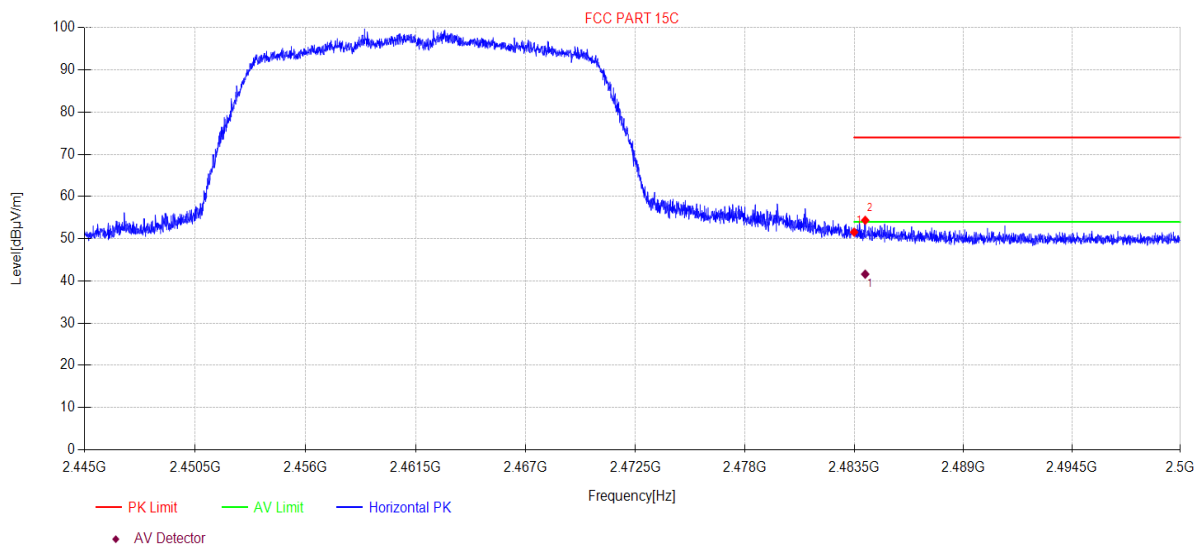

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	50.17	3.88	27.73	-30.23	51.55	74.00	22.45	PK	Horizontal
2	2484.06	52.98	3.88	27.74	-30.23	54.37	74.00	19.63	PK	Horizontal

Final Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2484.06	40.21	3.88	27.74	-30.23	41.60	54.00	12.40	AV	Horizontal

Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-23
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\16
Memo: 11N20SISO 2462

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

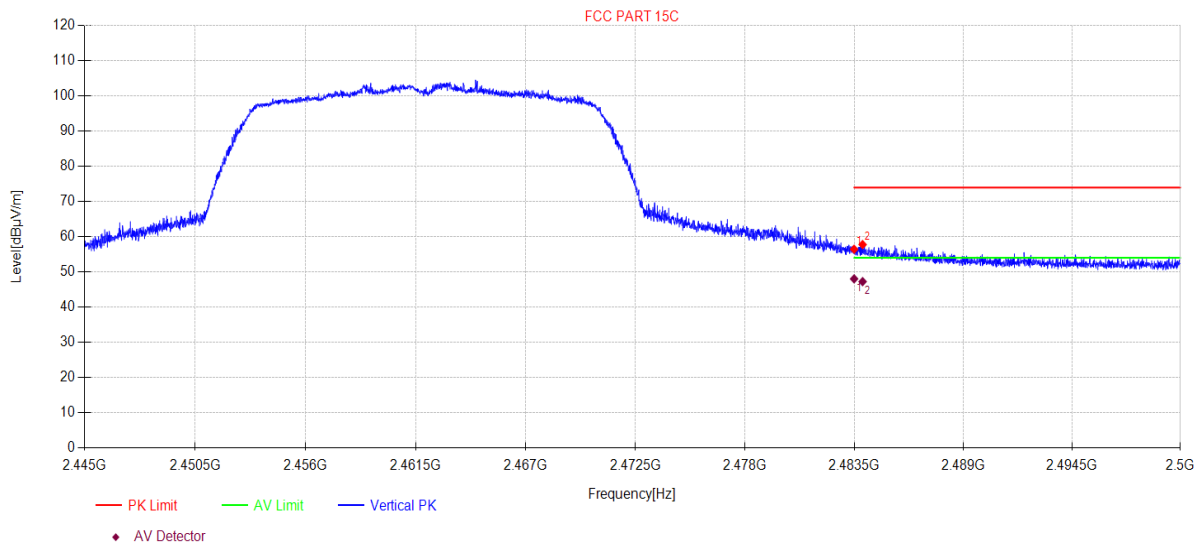

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	55.06	3.88	27.73	-30.23	56.44	74.00	17.56	PK	Vertical
2	2483.93	56.38	3.88	27.74	-30.23	57.77	74.00	16.23	PK	Vertical

Final Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	46.65	3.88	27.73	-30.23	48.03	54.00	5.97	AV	Vertical
2	2483.93	45.85	3.88	27.74	-30.23	47.24	54.00	6.76	AV	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-23
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\19
Memo: 11N40SISO 2422

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

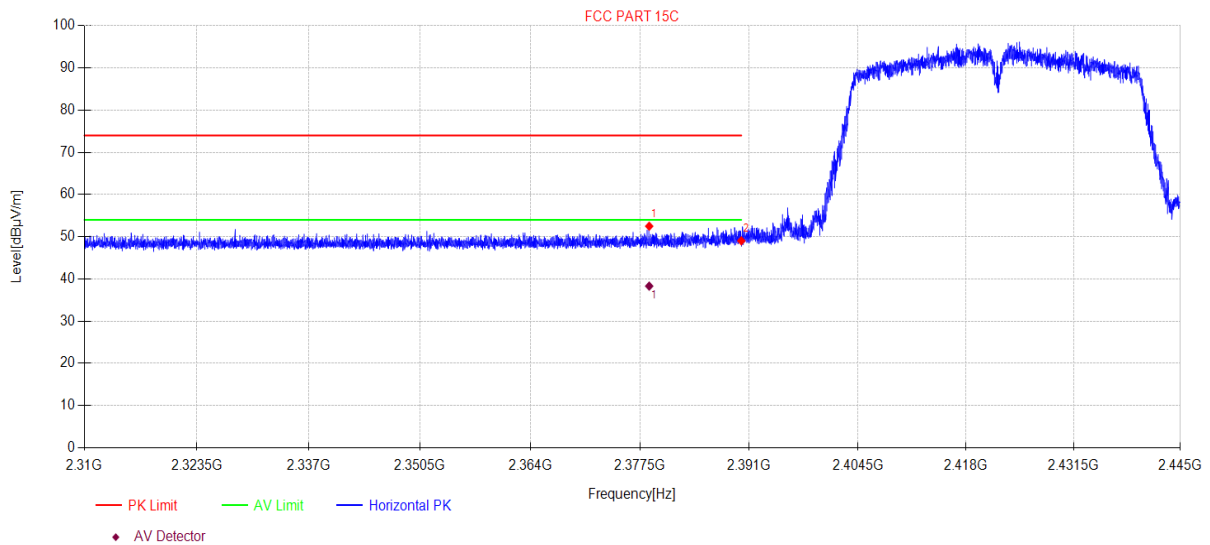

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2378.62	51.39	3.77	27.46	-30.12	52.50	74.00	21.50	PK	Horizontal
2	2390.00	47.90	3.78	27.48	-30.13	49.03	74.00	24.97	PK	Horizontal

Final Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2378.62	37.19	3.77	27.46	-30.12	38.30	54.00	15.70	AV	Horizontal

Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-23
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\20
Memo: 11N40SISO 2422

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

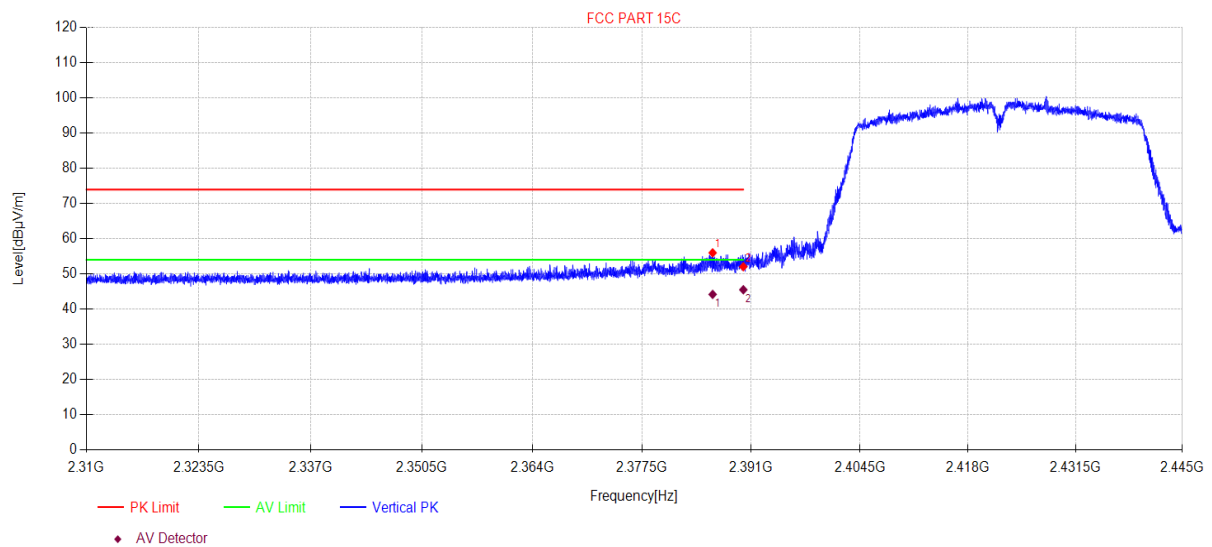

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.21	54.86	3.78	27.47	-30.12	55.99	74.00	18.01	PK	Vertical
2	2390.00	50.92	3.78	27.48	-30.13	52.05	74.00	21.95	PK	Vertical

Final Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.21	43.05	3.78	27.47	-30.12	44.18	54.00	9.82	AV	Vertical
2	2390.00	44.37	3.78	27.48	-30.13	45.50	54.00	8.50	AV	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-23
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\21
Memo: 11N40SISO 2452

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

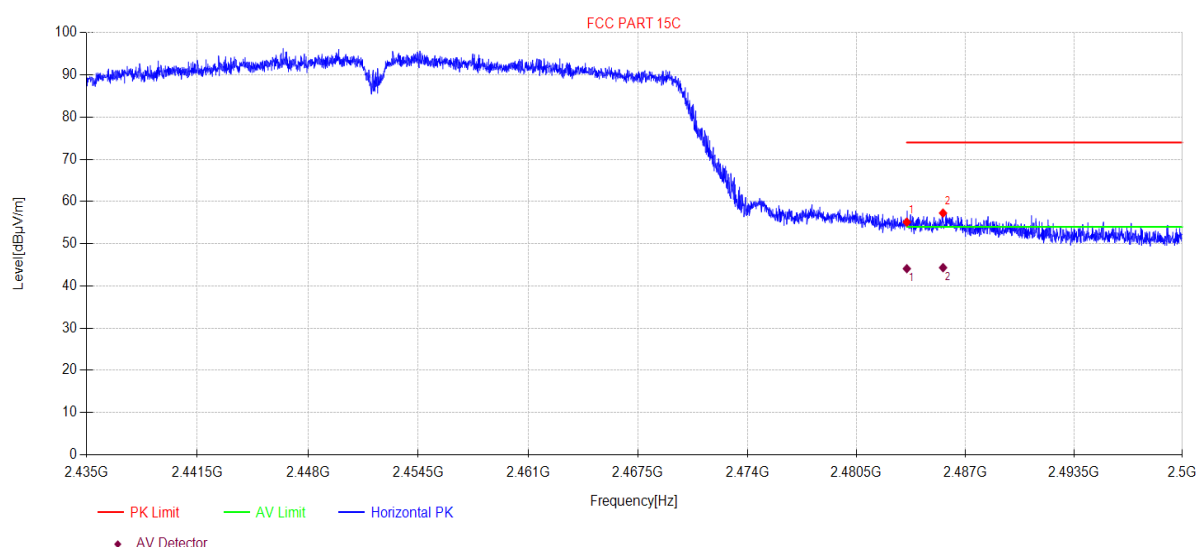

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	53.73	3.88	27.73	-30.23	55.11	74.00	18.89	PK	Horizontal
2	2485.66	55.87	3.88	27.74	-30.23	57.26	74.00	16.74	PK	Horizontal

Final Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	42.71	3.88	27.73	-30.23	44.09	54.00	9.91	AV	Horizontal
2	2485.66	42.94	3.88	27.74	-30.23	44.33	54.00	9.67	AV	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-05-24
EUT: 8-SOURCE 8-ZONE DISTRIBUTED WHOLE HOUSE AUDIO SYSTEM
Test Mode: TX Mode
Condition: Temp:22.4°C;Humi:59.5%
File Path: d:\ts\2023 report data\Q22122617-2E Matrix 88\FCC ABOVE 1G\22
Memo: 11N40SISO 2452

Tested By: Liaowanrong
Model Number: Matrix 88
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

Test Graph

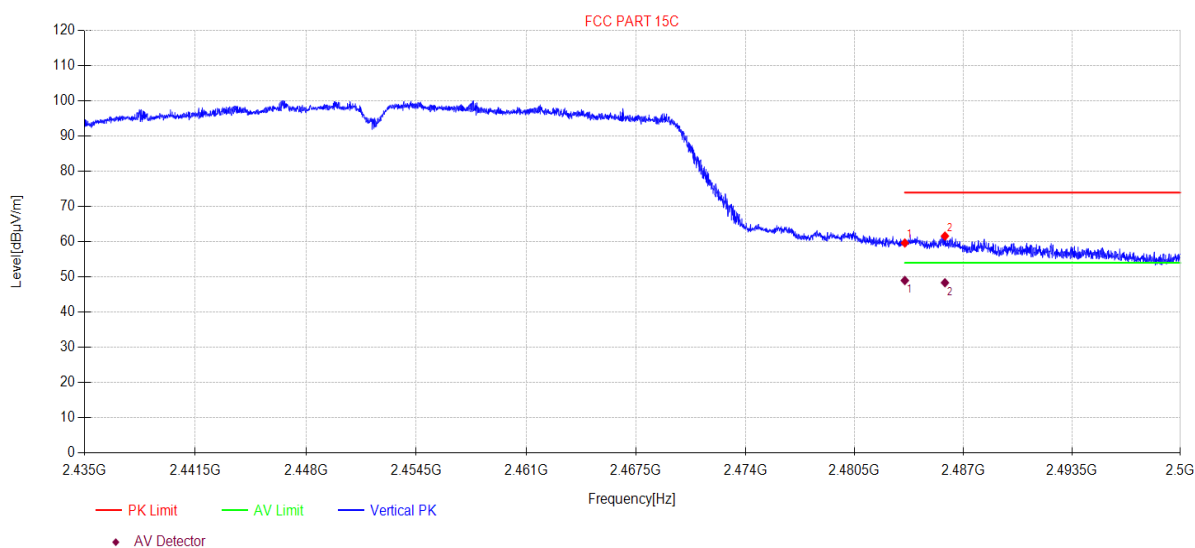

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	58.26	3.88	27.73	-30.23	59.64	74.00	14.36	PK	Vertical
2	2485.90	60.22	3.88	27.74	-30.23	61.61	74.00	12.39	PK	Vertical

Final Data List


N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	47.60	3.88	27.73	-30.23	48.98	54.00	5.02	AV	Vertical
2	2485.90	46.96	3.88	27.74	-30.23	48.35	54.00	5.65	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

12. Power Line Conducted Emission

12.1. Block diagram of test setup

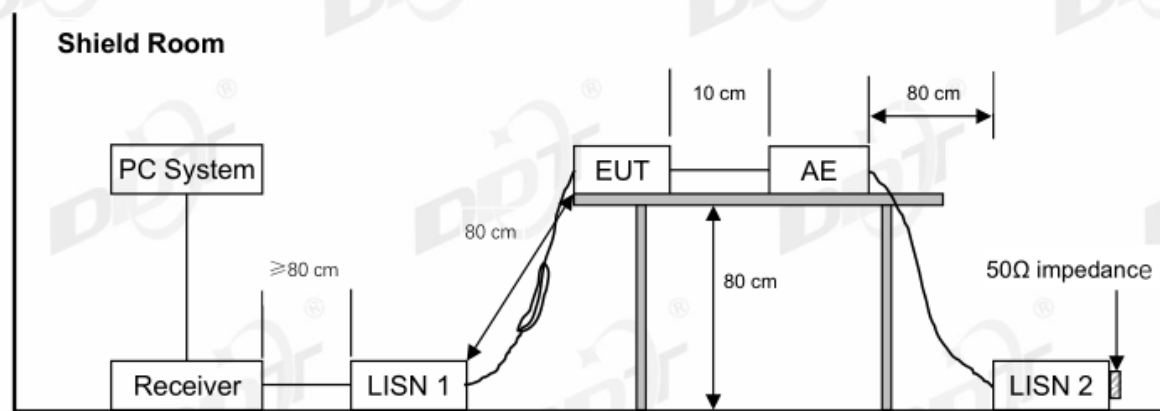

12.2. Power Line Conducted Emission Limits

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

12.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest

emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

12.4. Test result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.


Note2: “----” means peak detection; “-----” means average detection

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/60Hz, recorded worse case.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2023 CE report data\Q22122617-2E\FCC.EM6**
Test Date : 2023-05-24 **Tested By** : Bairong
EUT : 8-SOURCE 8-ZONE DISTRIBUTED **Model Number** : Matrix 88
 : WHOLE HOUSE AUDIO SYSTEM
Power Supply : AC 120V/60Hz **Test Mode** : TX
Condition : TEMP:24.4°C, RH:56.6% **LISN** : 2022 1# ENV216/LINE
Memo : 2.4GWIFI

Data: 2

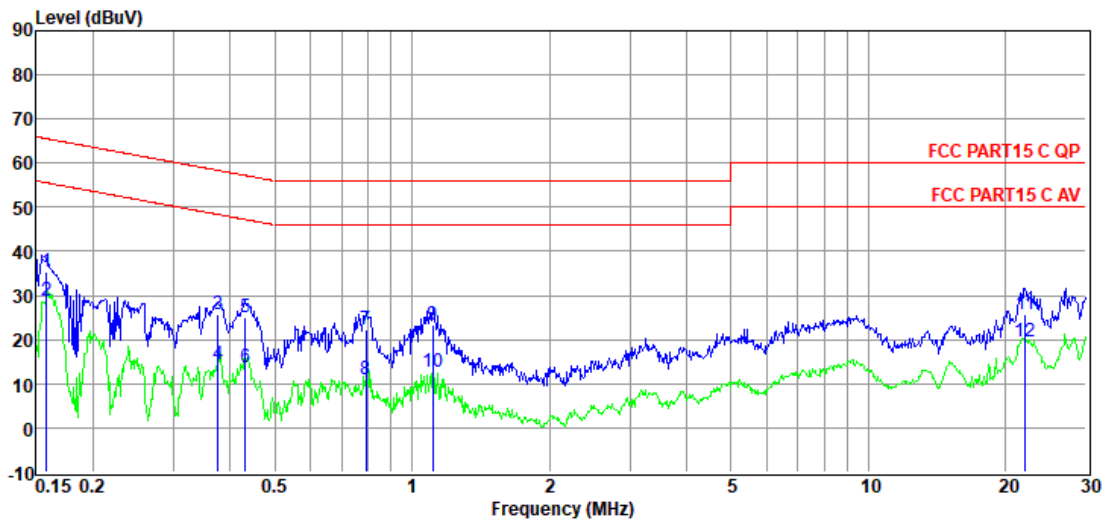

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.16	15.89	9.64	0.01	9.93	35.47	65.56	-30.09	QP	LINE
2	0.16	9.17	9.64	0.01	9.93	28.75	55.56	-26.81	Average	LINE
3	0.38	6.23	9.73	0.01	9.91	25.88	58.39	-32.51	QP	LINE
4	0.38	-5.15	9.73	0.01	9.91	14.50	48.39	-33.89	Average	LINE
5	0.43	5.44	9.72	0.01	9.92	25.09	57.24	-32.15	QP	LINE
6	0.43	-5.83	9.72	0.01	9.92	13.82	47.24	-33.42	Average	LINE
7	0.79	2.77	9.57	0.02	9.92	22.28	56.00	-33.72	QP	LINE
8	0.79	-8.70	9.57	0.02	9.92	10.81	46.00	-35.19	Average	LINE
9	1.11	4.04	9.52	0.02	9.91	23.49	56.00	-32.51	QP	LINE
10	1.11	-6.90	9.52	0.02	9.91	12.55	46.00	-33.45	Average	LINE
11	22.06	6.13	9.55	0.14	9.96	25.78	60.00	-34.22	QP	LINE
12	22.06	0.05	9.55	0.14	9.96	19.70	50.00	-30.30	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2023 CE report data\Q22122617-2E\FCC.EM6**
Test Date : 2023-05-24 **Tested By** : Bairong
EUT : 8-SOURCE 8-ZONE DISTRIBUTED **Model Number** : Matrix 88
 : WHOLE HOUSE AUDIO SYSTEM
Power Supply : AC 120V/60Hz **Test Mode** : TX
Condition : TEMP:24.4°C, RH:56.6% **LISN** : 2022 1# ENV216/NEUTRAL
Memo : 2.4GWIFI

Data: 4

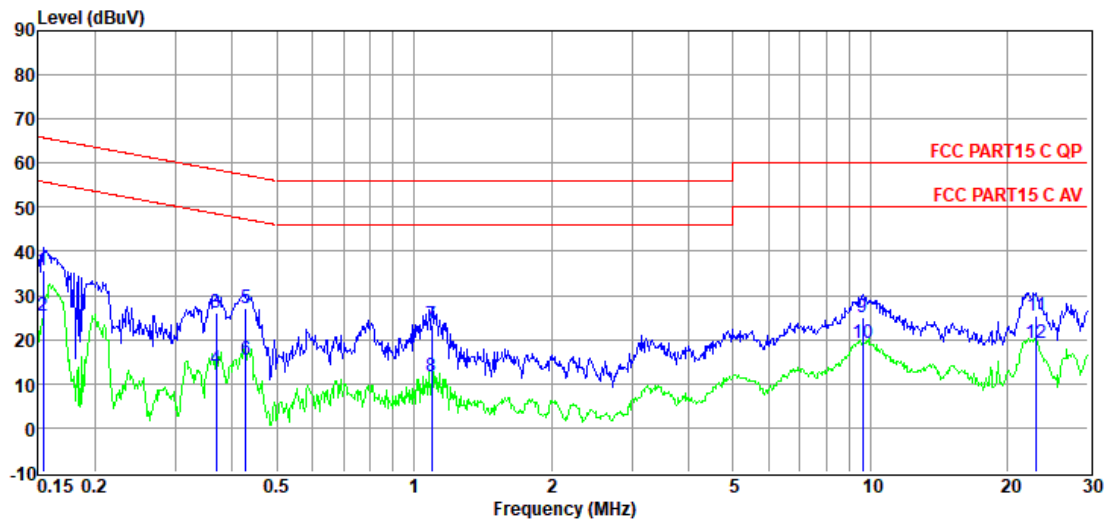

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	15.84	9.81	0.01	9.94	35.60	65.78	-30.18	QP	NEUTRAL
2	0.15	5.61	9.81	0.01	9.94	25.37	55.78	-30.41	Average	NEUTRAL
3	0.37	6.37	9.70	0.01	9.91	25.99	58.52	-32.53	QP	NEUTRAL
4	0.37	-6.12	9.70	0.01	9.91	13.50	48.52	-35.02	Average	NEUTRAL
5	0.43	7.61	9.65	0.01	9.92	27.19	57.29	-30.10	QP	NEUTRAL
6	0.43	-4.16	9.65	0.01	9.92	15.42	47.29	-31.87	Average	NEUTRAL
7	1.09	3.63	9.70	0.02	9.91	23.26	56.00	-32.74	QP	NEUTRAL
8	1.09	-8.15	9.70	0.02	9.91	11.48	46.00	-34.52	Average	NEUTRAL
9	9.60	5.18	9.78	0.09	9.96	25.01	60.00	-34.99	QP	NEUTRAL
10	9.60	-0.63	9.78	0.09	9.96	19.20	50.00	-30.80	Average	NEUTRAL
11	23.14	5.32	9.80	0.15	9.97	25.24	60.00	-34.76	QP	NEUTRAL
12	23.14	-0.82	9.80	0.15	9.97	19.10	50.00	-30.90	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

13. Antenna Requirements

13.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2. Result

The device support 1T1R SISO, the antenna used for this product is Dipole antenna and no antenna other than that furnished by the responsible party shall be used with the device, maximum antenna gain is 2.48 dBi.

15. Photos of the EUT

Please refer to appendix I.

END OF REPORT