



TEST Report

Applicant: Huizhou Iclink tech Co. Ltd

Address of Applicant: 1803 Building 7, Zone 3, Shuibei New Village, Huicheng District, Huizhou City

Manufacturer : Huizhou Iclink tech Co. Ltd

Address of Manufacturer : 1803 Building 7, Zone 3, Shuibei New Village, Huicheng District, Huizhou City

Equipment Under Test (EUT)

Product Name: USB Car Interconnect Module

Model No.: H-1

Series model: H-2, H-3, H-5, H-6, H-8, H-MAX, H-AIR, H-Plus, H-Pro, H-ultra

Trade Mark: N/A

FCC ID: 2BAT2-H-1

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: Mar.08,2023

Date of Test: Mar.08,2023~Apr.18,2023

Date of report issued: Apr.18,2023

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.



Report No.: HTT202304037F02

1. Version

Version No.	Date	Description
00	Apr.18,2023	Original

Tested/ Prepared By

Heber He

Date:

Apr.18,2023

Project Engineer

Check By:

Bruce Zhu

Date:

Apr.18,2023

Reviewer

Approved By :

Kevin Yang

Date:

Apr.18,2023

Authorized Signature



2. Contents

	Page
1. VERSION	2
2. CONTENTS	3
3. TEST SUMMARY	4
4. GENERAL INFORMATION	5
4.1. GENERAL DESCRIPTION OF EUT	5
4.2. TEST MODE	7
4.3. DESCRIPTION OF SUPPORT UNITS	7
4.4. DEVIATION FROM STANDARDS	7
4.5. ABNORMALITIES FROM STANDARD CONDITIONS	7
4.6. TEST FACILITY	7
4.7. TEST LOCATION	7
4.8. ADDITIONAL INSTRUCTIONS	7
5. TEST INSTRUMENTS LIST	8
6. TEST RESULTS AND MEASUREMENT DATA	9
6.1. CONDUCTED EMISSIONS	9
6.2. CONDUCTED PEAK OUTPUT POWER	12
6.3. CHANNEL BANDWIDTH	13
6.4. POWER SPECTRAL DENSITY	16
6.5. BAND EDGE	19
6.5.1. <i>Conducted Emission Method</i>	19
6.5.2. <i>Radiated Emission Method</i>	22
6.6. SPURIOUS EMISSION	24
6.6.1. <i>Conducted Emission Method</i>	24
6.6.2. <i>Radiated Emission Method</i>	29
7. TEST SETUP PHOTO	37
8. EUT CONSTRUCTIONAL DETAILS	37



Report No.: HTT202304037F02

3. Test Summary

Test Item	Section	Result
Antenna requirement	FCC part 15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	FCC part 15.207	Pass
Conducted Peak Output Power	FCC part 15.247 (b)(3)	Pass
6dB Bandwidth	FCC part 15.247 (a)(2)	Pass
Power Spectral Density	FCC part 15.247 (e)	Pass
Band Edge	FCC part 15.247(d)	Pass
Spurious Emission	FCC part 15.205/15.209	Pass

Remark: Test according to ANSI C63.10:2013 and RSS-Gen

Pass: The EUT complies with the essential requirements in the standard.

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	3.45 dB	(1)
Radiated Emission	1~6GHz	3.54 dB	(1)
Radiated Emission	6~40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.66 dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.



Report No.: HTT202304037F02

4. General Information

4.1. General Description of EUT

Product Name:	USB Car Interconnect Module
Model No.:	H-1
Series model:	H-2, H-3, H-5, H-6, H-8, H-MAX, H-AIR, H-Plus, H-Pro, H-ultra
Test sample(s) ID:	HTT202304037-1(Engineer sample) HTT202304037-2(Normal sample)
Channel numbers:	802.11b/802.11g /802.11n(HT20): 11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n(H20)/802.11n(HT40): Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	FPC Antenna
Antenna gain:	0.00dBi
Power supply:	DC 5.0V



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz



4.2. Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode			
<i>Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>				

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:										
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.										
<table border="1"><tr><td>Mode</td><td>802.11b</td><td>802.11g</td><td>802.11n(HT20)</td><td>802.11n(HT40)</td></tr><tr><td>Data rate</td><td>1Mbps</td><td>6Mbps</td><td>6.5Mbps</td><td>13Mbps</td></tr></table>	Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)	Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)						
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps						

4.3. Description of Support Units

None.

4.4. Deviation from Standards

None.

4.5. Abnormalities from Standard Conditions

None.

4.6. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 779513 Designation Number: CN1319

Shenzhen HTT Technology Co.,Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6435.01

Shenzhen HTT Technology Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

4.7. Test Location

All tests were performed at:

Shenzhen HTT Technology Co.,Ltd.

1F, Building B, Huafeng International Robotics Industrial Park, Hangcheng Road, Nanchang Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China

Tel: 0755-23595200

Fax: 0755-23595201

4.8. Additional Instructions

Test Software	Special AT test command provided by manufacturer to Keep the EUT in continuously transmitting mode and hopping mode
Power level setup	Default

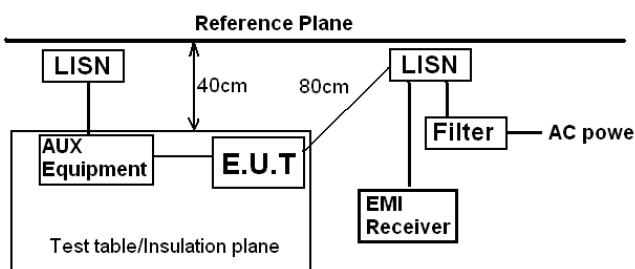


5. Test Instruments list

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	Shenzhen C.R.T technology co., LTD	9*6*6	HTT-E028	Aug. 10 2020	Aug. 09 2024
2	Control Room	Shenzhen C.R.T technology co., LTD	4.8*3.5*3.0	HTT-E030	Aug. 10 2020	Aug. 09 2024
3	EMI Test Receiver	Rohde&Schwarz	ESCI7	HTT-E022	May 23 2022	May 22 2023
4	Spectrum Analyzer	Rohde&Schwarz	FSP	HTT-E037	May 23 2022	May 22 2023
5	Coaxial Cable	ZDecl	ZT26-NJ-NJ-0.6M	HTT-E018	May 23 2022	May 22 2023
6	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-2M	HTT-E019	May 23 2022	May 22 2023
7	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-0.6M	HTT-E020	May 23 2022	May 22 2023
8	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-8.5M	HTT-E021	May 23 2022	May 22 2023
9	Composite logarithmic antenna	Schwarzbeck	VULB 9168	HTT-E017	May 23 2022	May 22 2023
10	Horn Antenna	Schwarzbeck	BBHA9120D	HTT-E016	May 23 2022	May 22 2023
11	Loop Antenna	Zhinan	ZN30900C	HTT-E039	May 23 2022	May 22 2023
12	Horn Antenna	Beijing Hangwei Dayang	OBH100400	HTT-E040	May 23 2022	May 22 2023
13	low frequency Amplifier	Sonoma Instrument	310	HTT-E015	May 23 2022	May 22 2023
14	high-frequency Amplifier	HP	8449B	HTT-E014	May 23 2022	May 22 2023
15	Variable frequency power supply	Shenzhen Anbiao Instrument Co., Ltd	ANB-10VA	HTT-082	May 23 2022	May 22 2023
16	EMI Test Receiver	Rohde & Schwarz	ESCS30	HTT-E004	May 23 2022	May 22 2023
17	Artificial Mains	Rohde & Schwarz	ESH3-Z5	HTT-E006	May 23 2022	May 22 2023
18	Artificial Mains	Rohde & Schwarz	ENV-216	HTT-E038	May 23 2022	May 22 2023
19	Cable Line	Robinson	Z302S-NJ-BNCJ-1.5M	HTT-E001	May 23 2022	May 22 2023
20	Attenuator	Robinson	6810.17A	HTT-E007	May 23 2022	May 22 2023
21	Variable frequency power supply	Shenzhen Yanghong Electric Co., Ltd	YF-650 (5KVA)	HTT-E032	May 23 2022	May 22 2023
22	Control Room	Shenzhen C.R.T technology co., LTD	8*4*3.5	HTT-E029	May 23 2022	May 22 2023
23	DC power supply	Agilent	E3632A	HTT-E023	May 23 2022	May 22 2023
24	EMI Test Receiver	Agilent	N9020A	HTT-E024	May 23 2022	May 22 2023
25	Analog signal generator	Agilent	N5181A	HTT-E025	May 23 2022	May 22 2023
26	Vector signal generator	Agilent	N5182A	HTT-E026	May 23 2022	May 22 2023
27	Power sensor	Keysight	U2021XA	HTT-E027	May 23 2022	May 22 2023
28	Temperature and humidity meter	Shenzhen Anbiao Instrument Co., Ltd	TH10R	HTT-074	May 23 2022	May 22 2023
29	Radiated Emission Test Software	Farad	EZ-EMC	N/A	N/A	N/A
30	Conducted Emission Test Software	Farad	EZ-EMC	N/A	N/A	N/A
31	RF Test Software	panshanrf	TST	N/A	N/A	N/A

6. Test results and Measurement Data

6.1. Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2013																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	* Decreases with the logarithm of the frequency.																
Test setup:	 <p>Reference Plane</p> <p>LISN</p> <p>40cm</p> <p>80cm</p> <p>AUX Equipment</p> <p>E.U.T.</p> <p>Test table/Insulation plane</p> <p>EMI Receiver</p> <p>Filter</p> <p>AC power</p> <p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>																
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 																
Test Instruments:	Refer to section 6.0 for details																
Test mode:	Refer to section 5.2 for details																
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar											
Test voltage:	AC 120V, 60Hz																
Test results:	Pass																

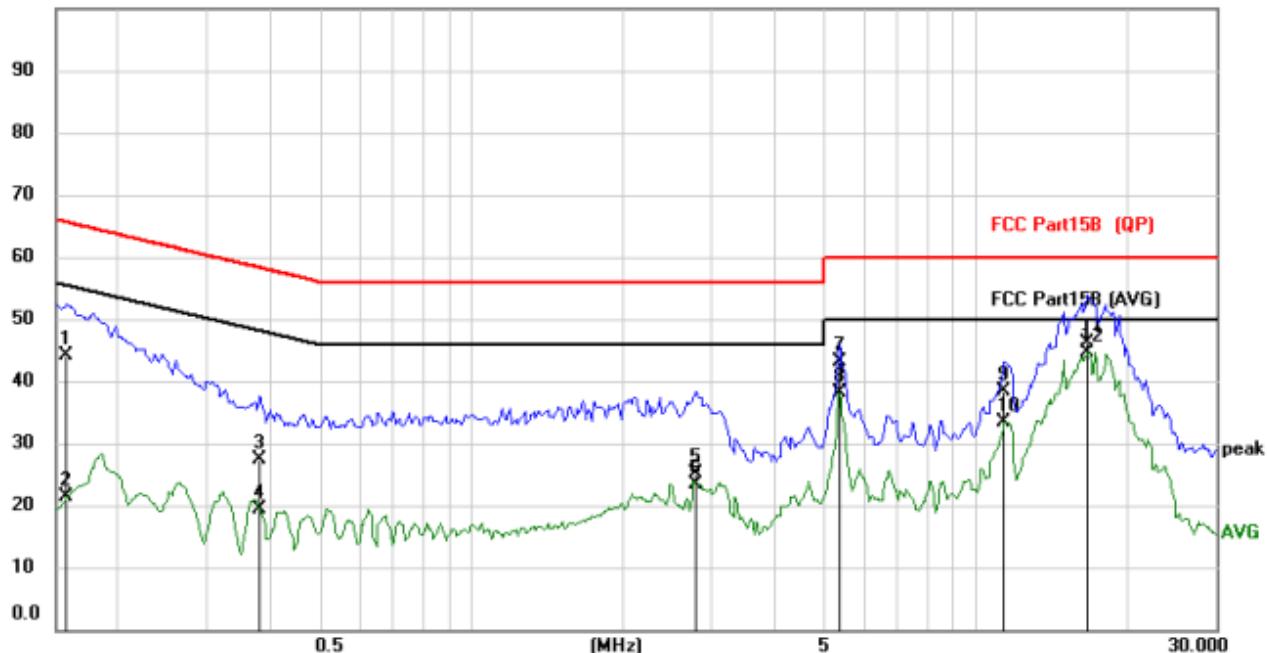
Remark: Both high and low voltages have been tested to show only the worst low voltage test data.

Measurement data:
Line:


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.1500	34.77	10.37	45.14	66.00	-20.86	QP
2		0.1500	8.74	10.37	19.11	56.00	-36.89	AVG
3		1.8777	18.13	10.83	28.96	56.00	-27.04	QP
4		1.8777	8.62	10.83	19.45	46.00	-26.55	AVG
5		5.4063	32.13	11.13	43.26	60.00	-16.74	QP
6		5.4063	26.88	11.13	38.01	50.00	-11.99	AVG
7		11.4006	26.76	11.67	38.43	60.00	-21.57	QP
8		11.4006	20.22	11.67	31.89	50.00	-18.11	AVG
9		17.4300	31.78	12.25	44.03	60.00	-15.97	QP
10	*	17.4300	30.16	12.25	42.41	50.00	-7.59	AVG
11		18.5415	33.54	12.31	45.85	60.00	-14.15	QP
12		18.5415	29.56	12.31	41.87	50.00	-8.13	AVG

Neutral:

100.0 dBuV

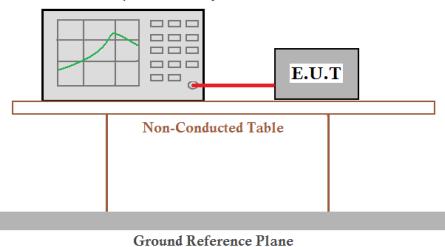


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1577	33.97	10.26	44.23	65.58	-21.35	QP
2		0.1577	11.11	10.26	21.37	55.58	-34.21	AVG
3		0.3800	17.15	10.29	27.44	58.28	-30.84	QP
4		0.3800	9.17	10.29	19.46	48.28	-28.82	AVG
5		2.7902	14.22	10.84	25.06	56.00	-30.94	QP
6		2.7902	12.48	10.84	23.32	46.00	-22.68	AVG
7		5.3673	32.32	10.90	43.22	60.00	-16.78	QP
8		5.3673	27.33	10.90	38.23	50.00	-11.77	AVG
9		11.4318	26.60	11.70	38.30	60.00	-21.70	QP
10		11.4318	21.75	11.70	33.45	50.00	-16.55	AVG
11		16.6383	33.83	12.30	46.13	60.00	-13.87	QP
12	*	16.6383	32.35	12.30	44.65	50.00	-5.35	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Los

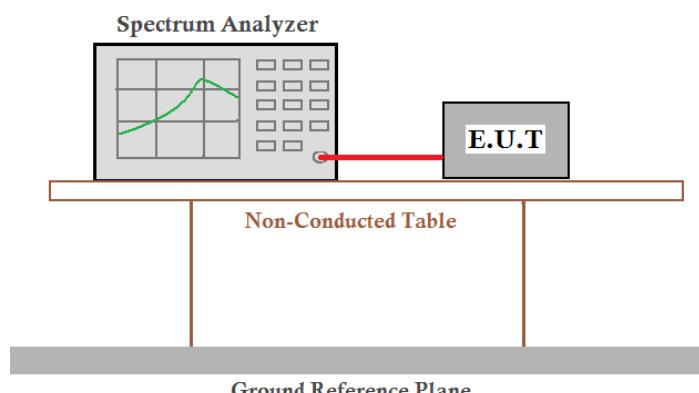
6.2. Conducted Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)					
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02					
Limit:	30dBm					
Test setup:	<p>Power sensor and Spectrum analyzer</p> 					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data

Test CH	Peak Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	17.19	20.99	20.34	18.84	30.00	Pass
Middle	16.27	20.17	19.39	18.07		
Highest	16.14	20.12	19.63	17.34		

6.3. Channel Bandwidth

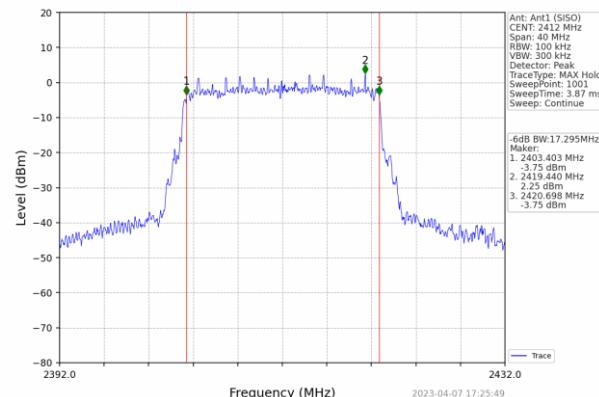
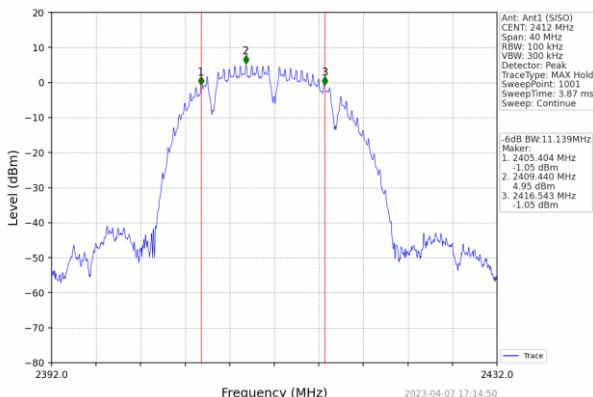
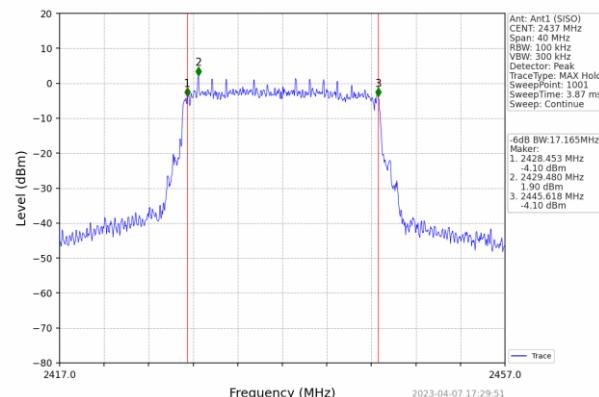
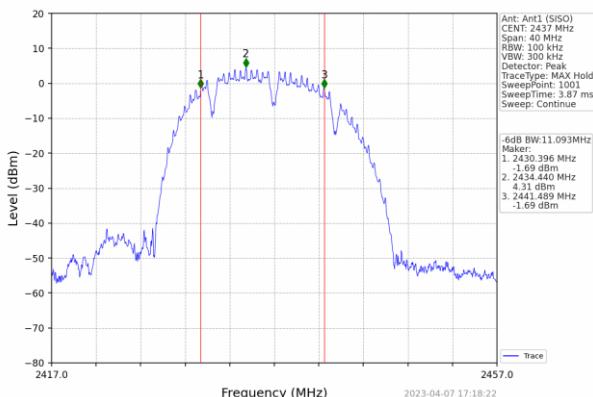
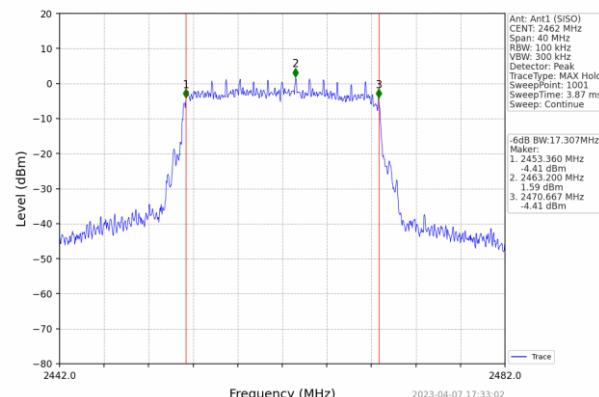
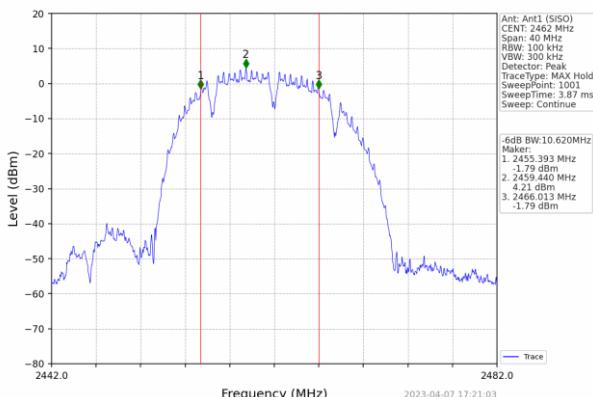
Test Requirement:	FCC Part15 C Section 15.247 (a)(2)					
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02					
Limit:	>500KHz					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data

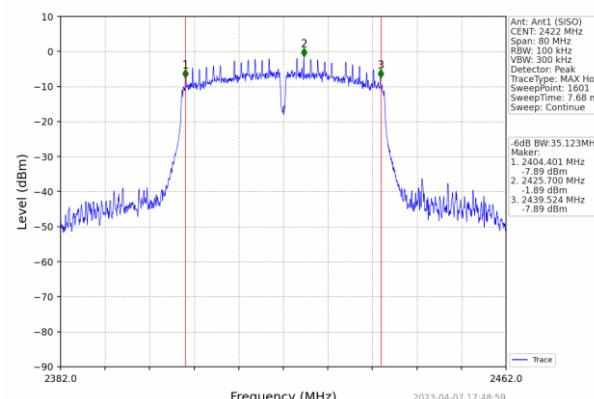
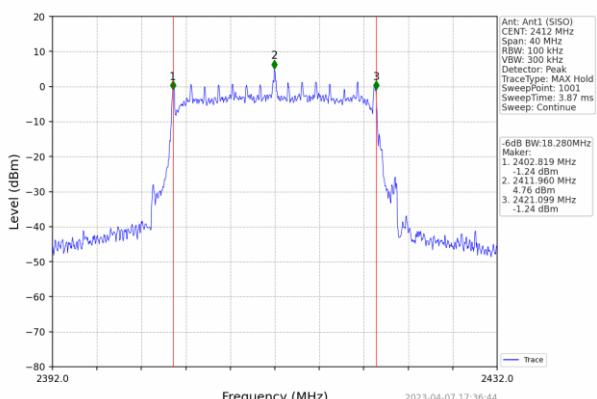
Test CH	Channel Bandwidth (MHz)				Limit(KHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	11.139	17.295	18.280	35.123	>500	Pass
Middle	11.093	17.165	18.281	35.177		
Highest	10.620	17.307	18.229	35.161		

Test plot as follows:

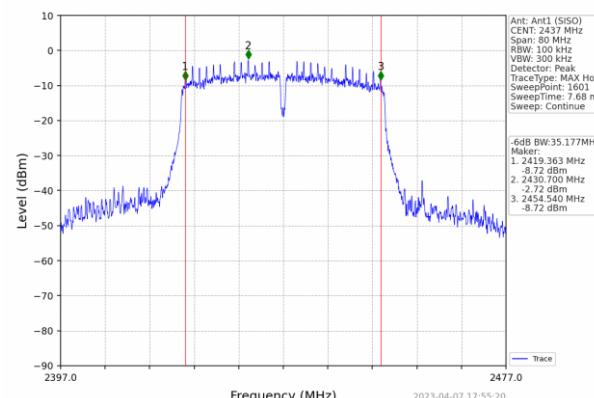
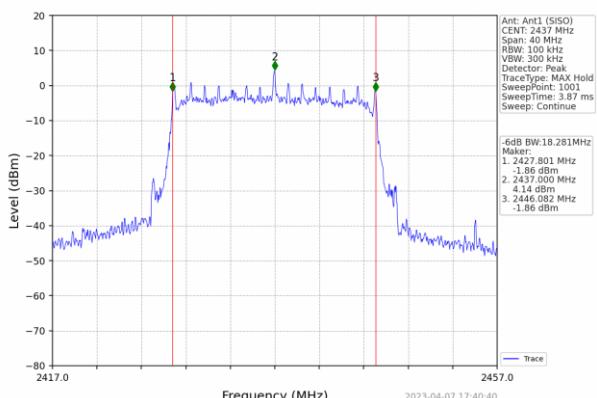
802.11b		802.11g	
---------	--	---------	--


Lowest channel

Middle channel

Highest channel

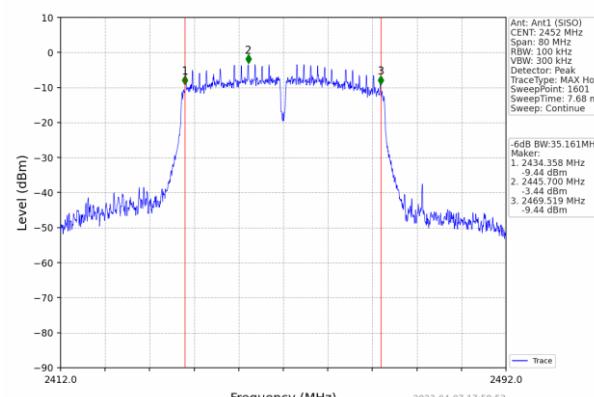
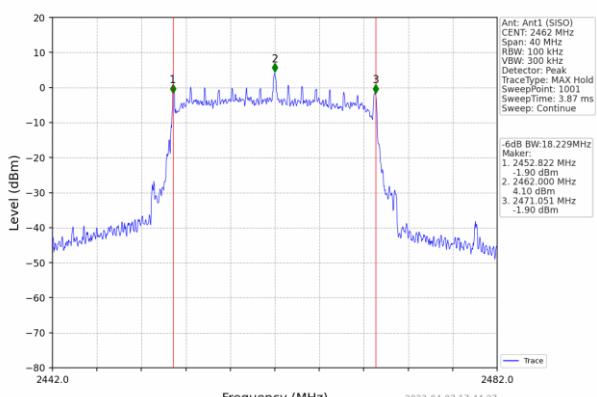
802.11n(HT20)	802.11n(HT40)
---------------	---------------



Lowest channel

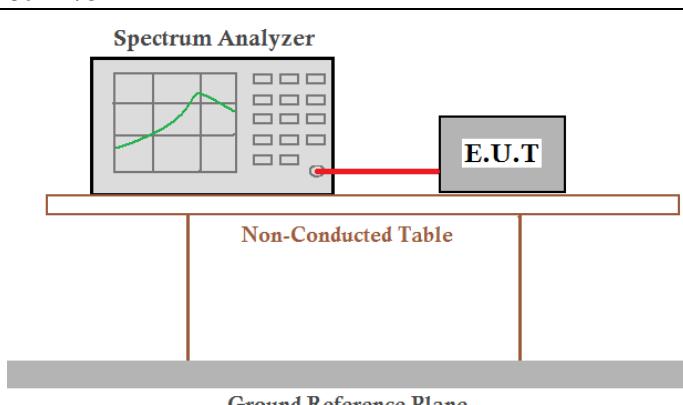


Middle channel



Highest channel

6.4. Power Spectral Density

Test Requirement:	FCC Part15 C Section 15.247 (e)					
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02					
Limit:	8dBm/3kHz					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

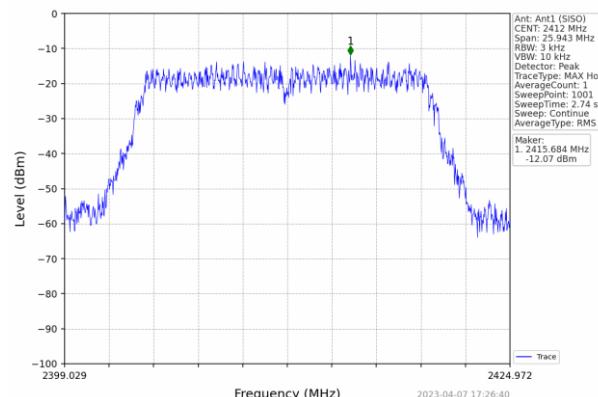
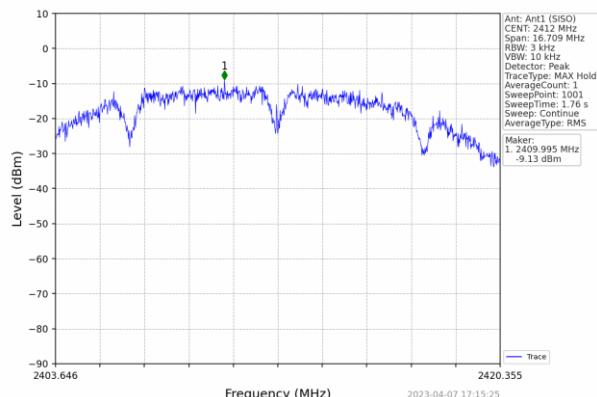
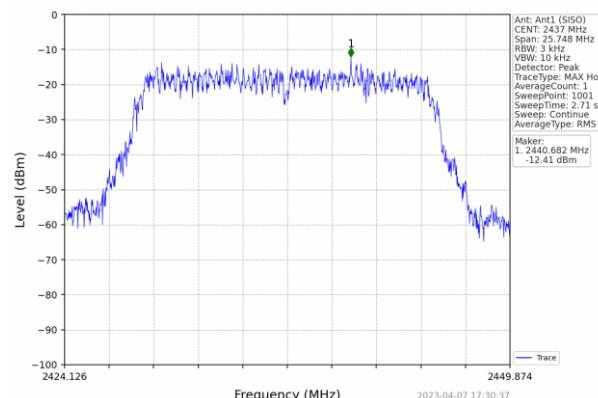
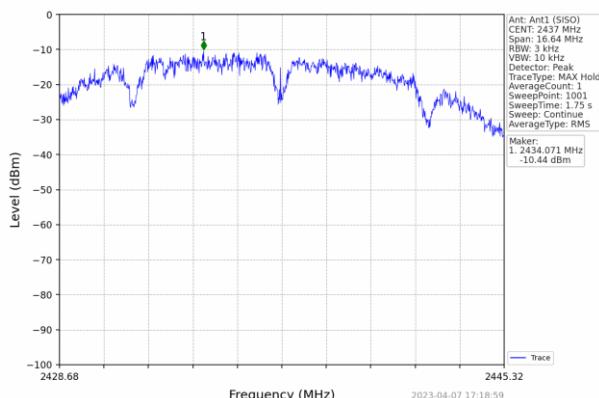
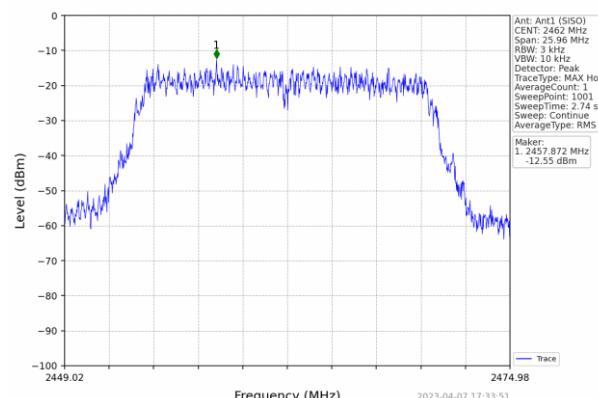
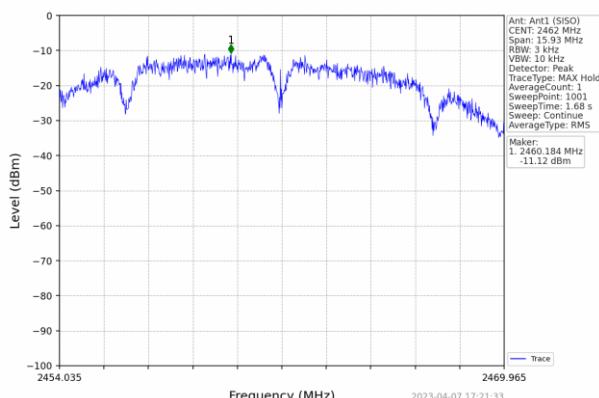
Measurement Data

Test CH	Power Spectral Density (dBm/3kHz)				Limit (dBm/3kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	-9.13	-12.07	-14.34	-16.31		
Middle	-10.44	-12.41	-13.93	-17.36	8.00	Pass
Highest	-11.12	-12.55	-14.41	-18.56		

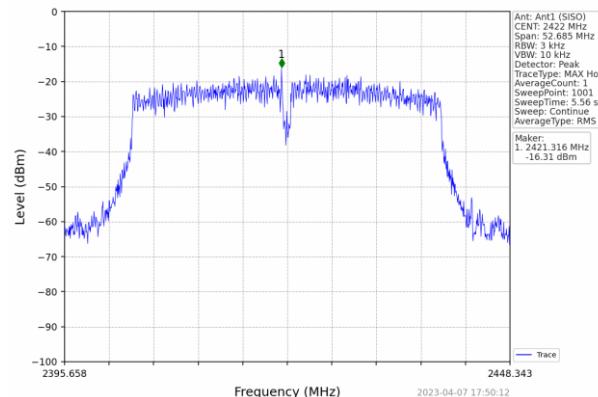
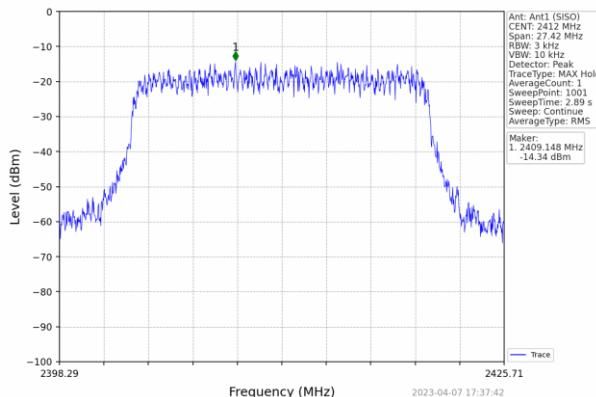
Remark: We have tested all mode at high, middle and low channel, and recorded worst case at middle

Test plot as follows:

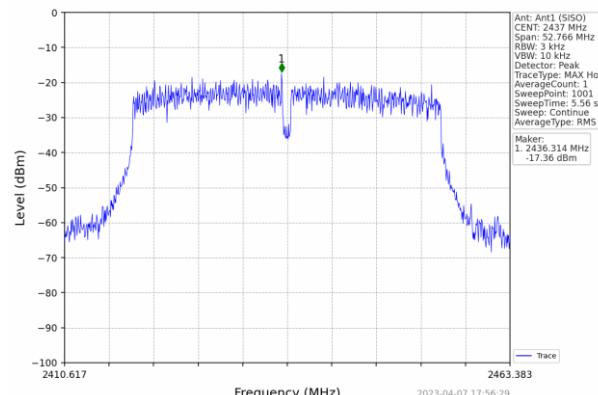
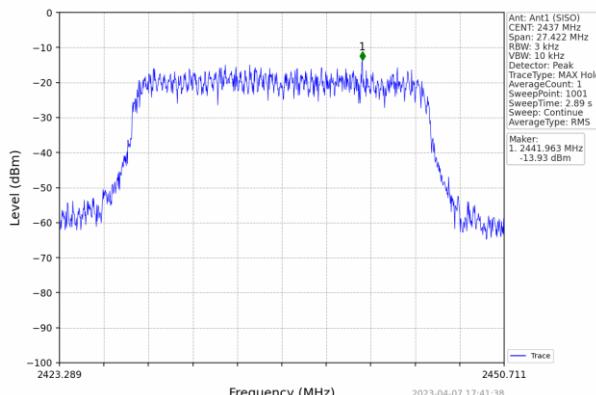
802.11b		802.11b	
---------	--	---------	--


Lowest channel

Middle channel

Highest channel

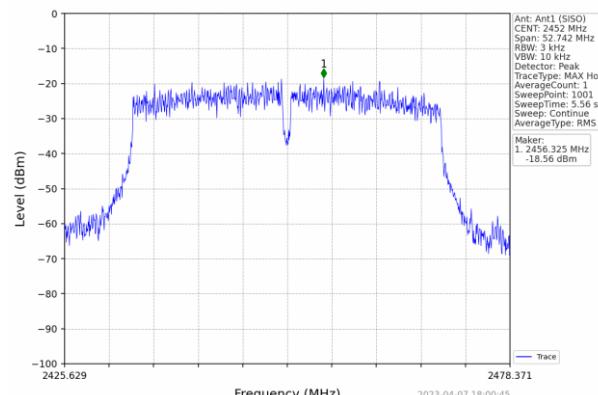
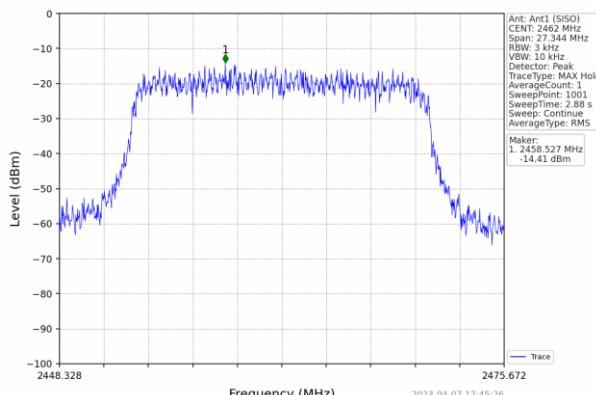
802.11n(HT20)	802.11n(HT40)
---------------	---------------



Lowest channel



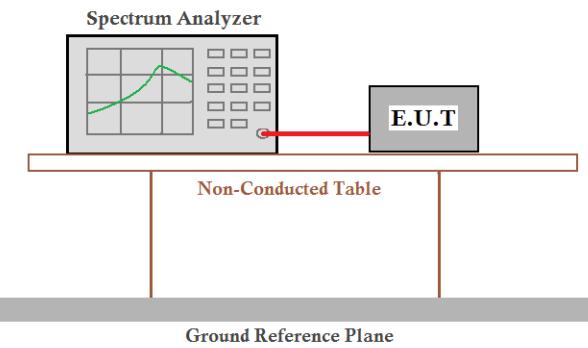
Middle channel



Highest channel

6.5. Band Edge

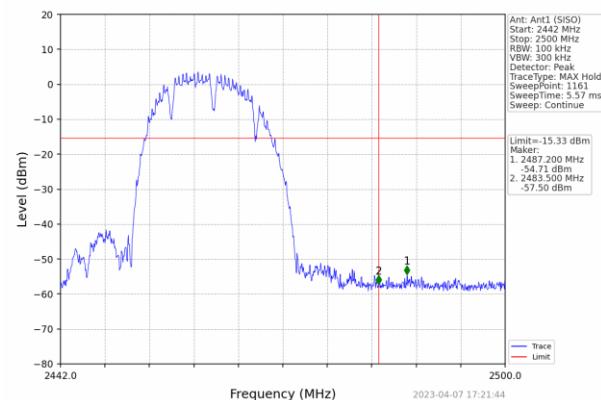
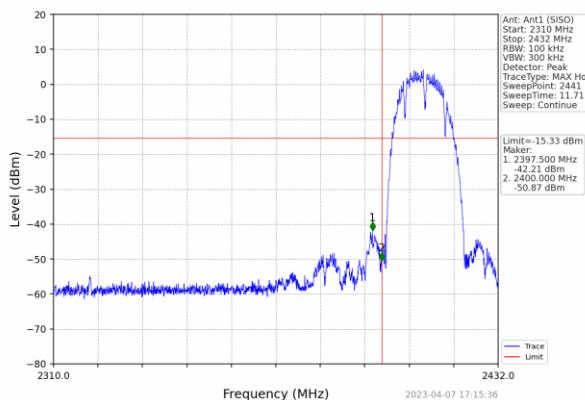
6.5.1. Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Test plot as follows:

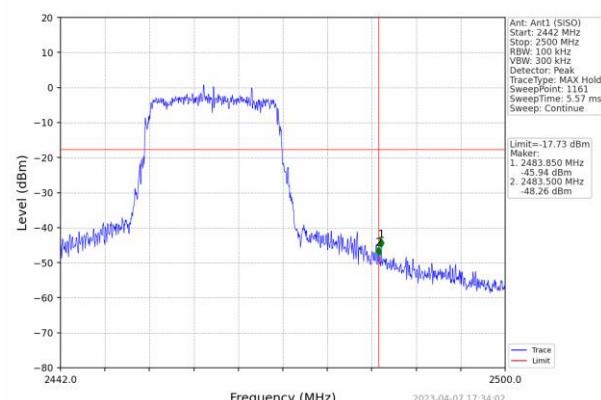
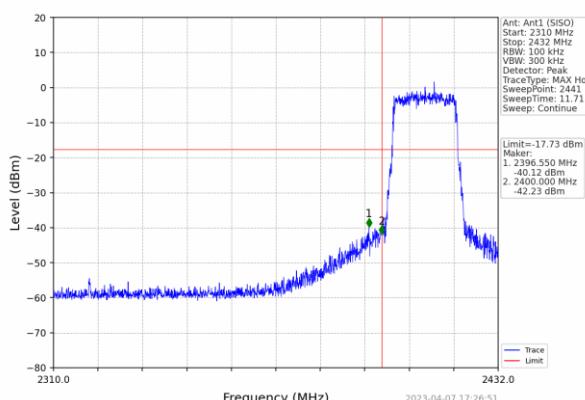
Test mode:

802.11b

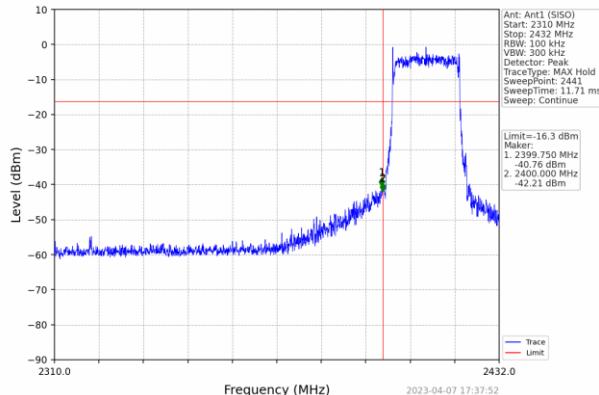

Lowest channel
Highest channel

Test mode:

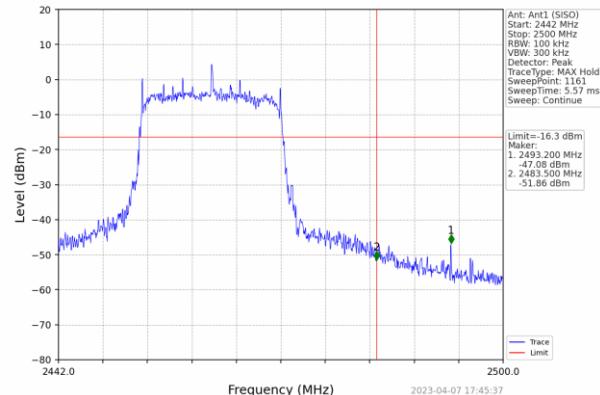
802.11g


Lowest channel
Highest channel

Test mode:	802.11n(HT20)
------------	---------------

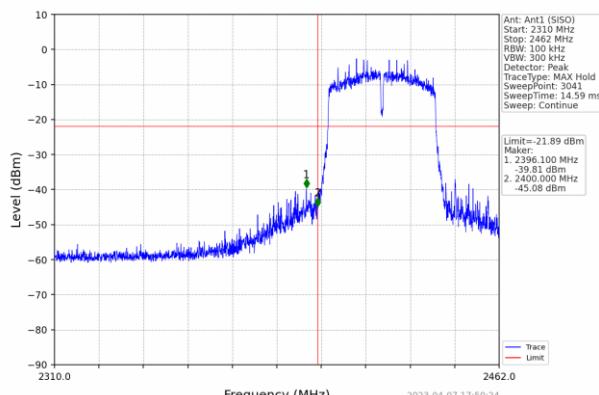


Lowest channel

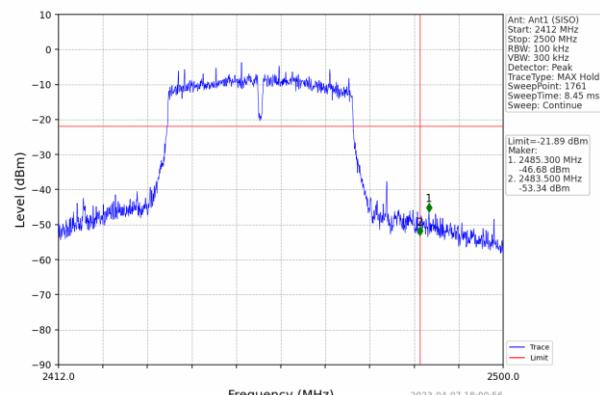


Highest channel

Test mode:	802.11n(HT40)
------------	---------------

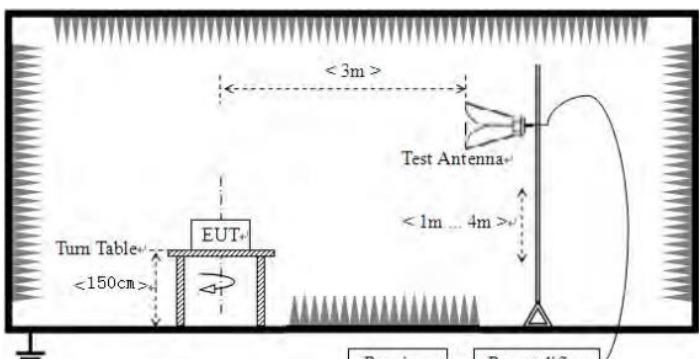


Lowest channel



Highest channel

6.5.2. Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205										
Test Method:	ANSI C63.10: 2013										
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.										
Test site:	Measurement Distance: 3m										
Receiver setup:	Frequency	Detector	RBW	VBW	Remark						
	Above 1GHz	Peak	1MHz	3MHz	Peak Value						
Limit:	Frequency	Limit (dBuV/m @3m)		Remark							
	Above 1GHz	54.00		Average Value							
Test setup:											
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 										
Test Instruments:	Refer to section 6.0 for details										
Test mode:	Refer to section 5.2 for details										
Test results:	Pass										
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar					



Report No.: HTT202304037F02

Measurement Data

Remark: During the test, pre-scan the 802.11b/802.11g/802.11n (H20)/802.11n (H40) modulation, and found the 802.11b modulation which is worse case.

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Horizontal (Worst case)

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	61.28	26.20	5.72	33.30	59.90	74.00	-14.10	peak
2390	45.96	26.20	5.72	33.30	44.58	54.00	-9.42	AVG

Vertical:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	60.11	26.20	5.72	33.30	58.73	74.00	-15.27	peak
2390	45.69	26.20	5.72	33.30	44.31	54.00	-9.69	AVG

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Horizontal (Worst case)

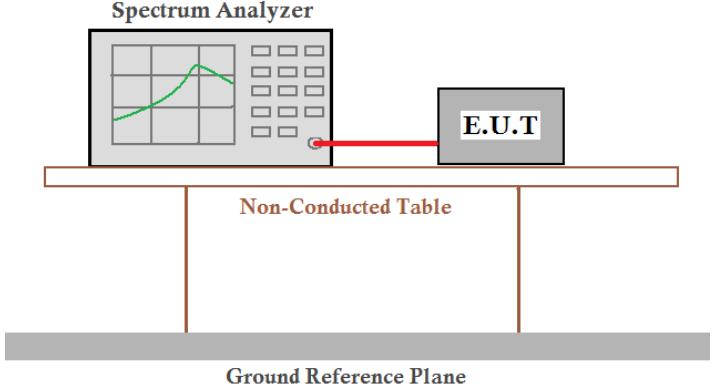
Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	57.20	28.60	6.97	32.70	60.07	74.00	-13.93	peak
2483.5	43.69	28.60	6.97	32.70	46.56	54.00	-7.44	AVG

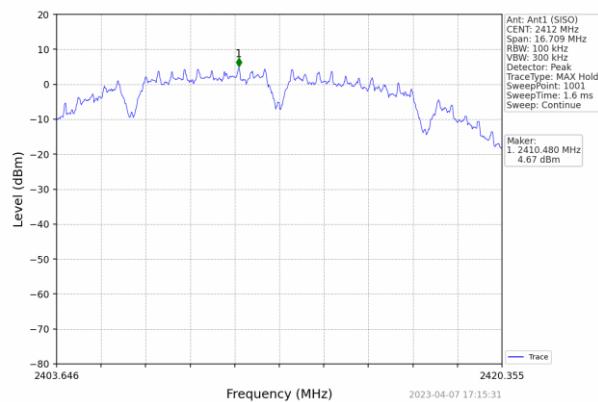
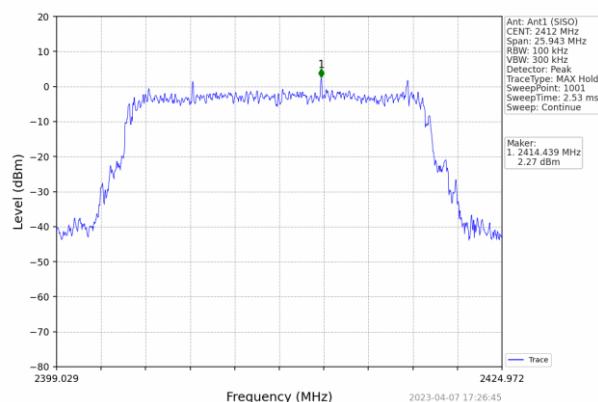
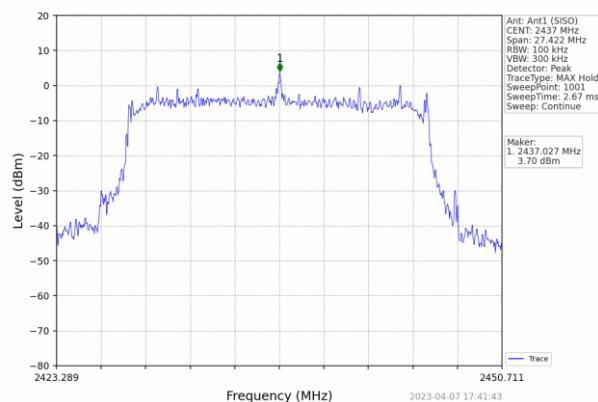
Vertical:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	58.12	28.60	6.97	32.70	60.99	74.00	-13.01	peak
2483.5	43.67	28.60	6.97	32.70	46.54	54.00	-7.46	AVG

6.6. Spurious Emission

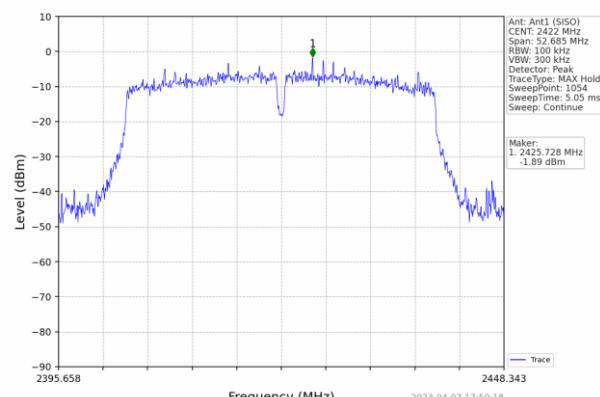
6.6.1. Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data:
Reference

802.11b

802.11g

802.11n(HT20)



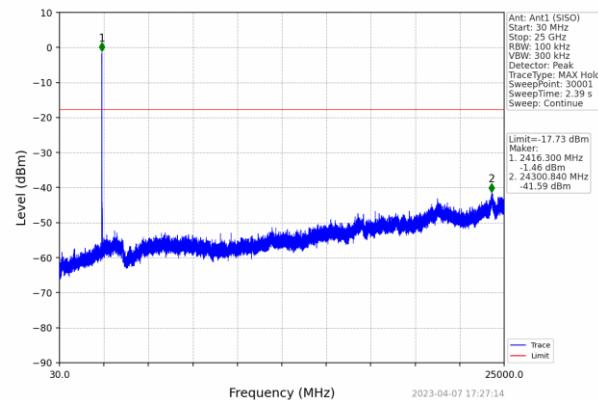
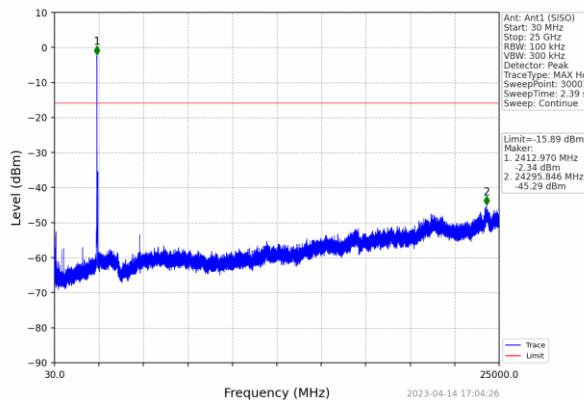
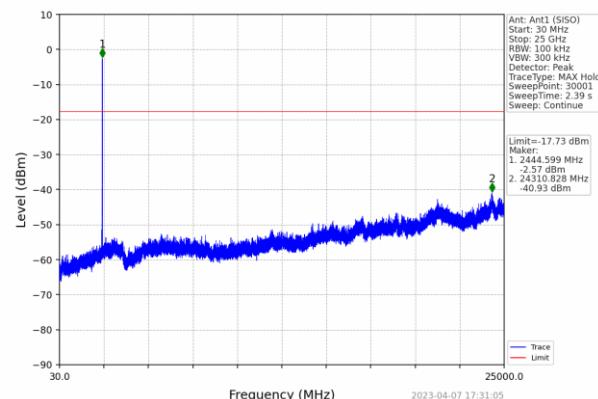
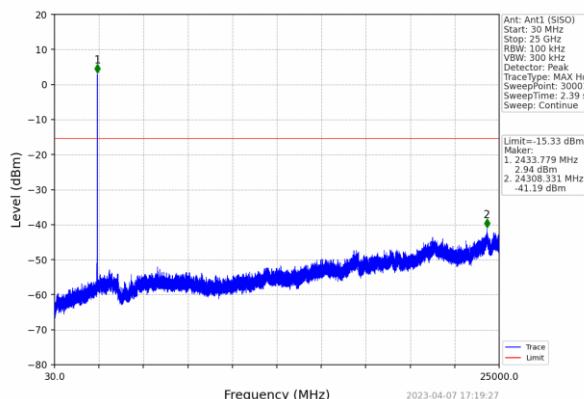
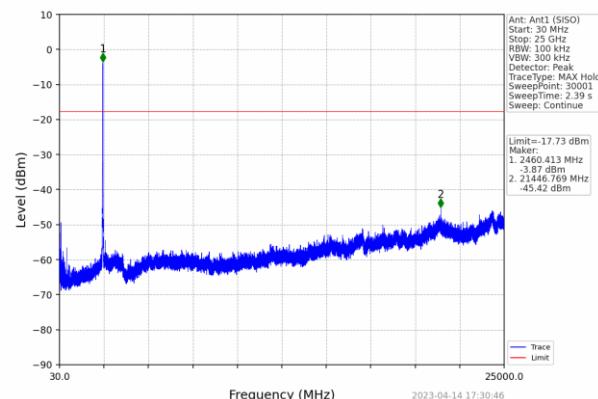
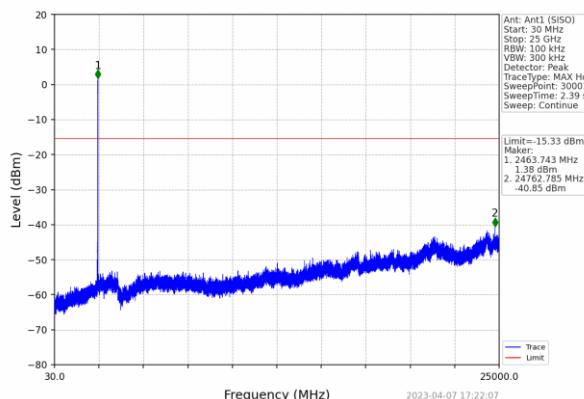
Report No.: HTT202304037F02



802.11n(HT40)

802.11b

802.11g

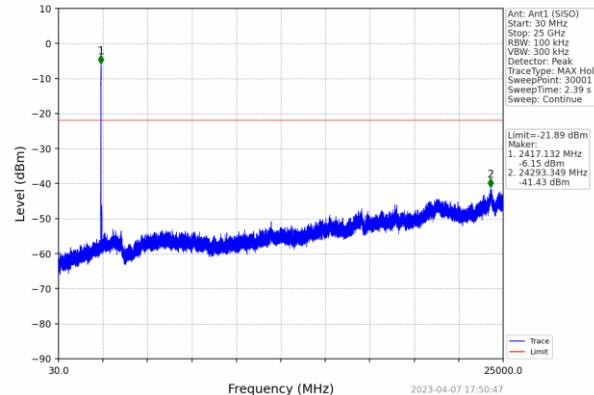
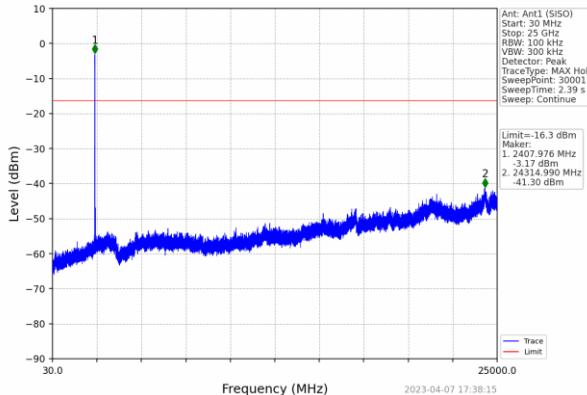
Lowest channel

30MHz~25GHz
Middle channel

30MHz~25GHz
Highest channel


30MHz~25GHz

802.11n(HT20)

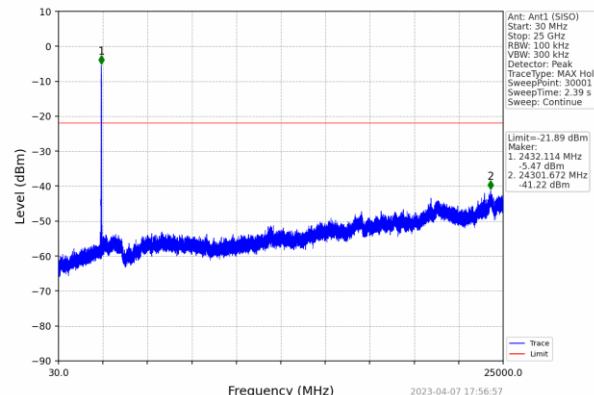
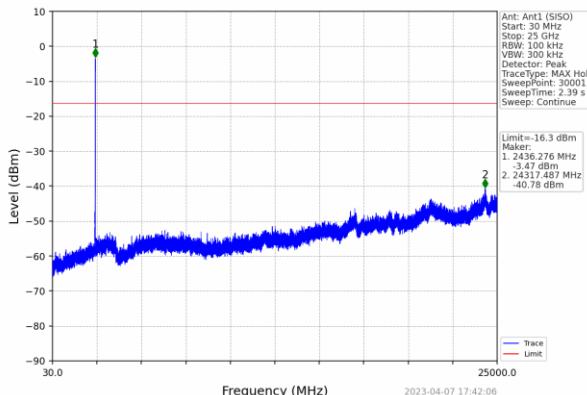
802.11n(HT40)

Lowest channel



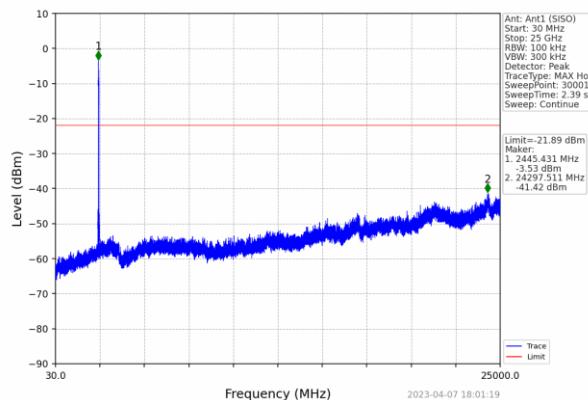
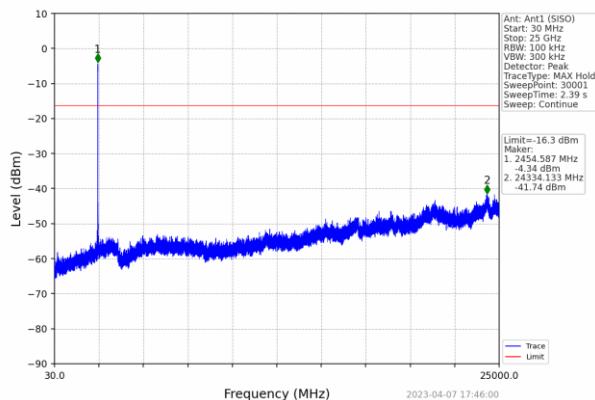
30MHz~25GHz

Middle channel



30MHz~25GHz

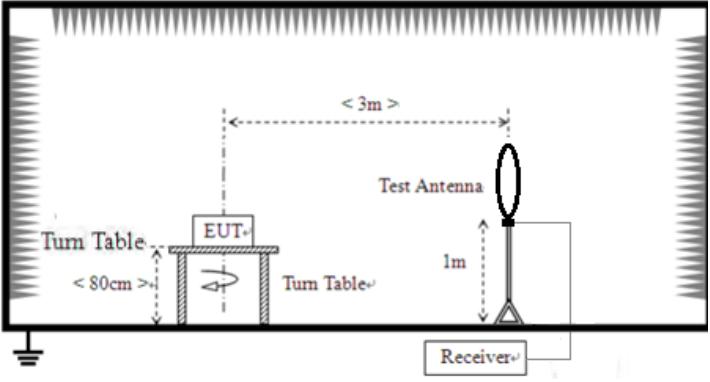
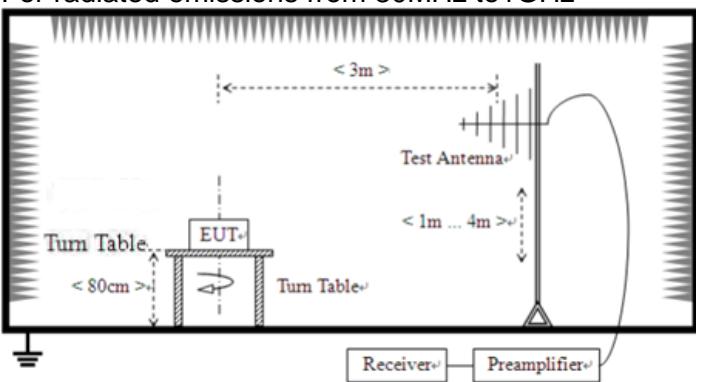
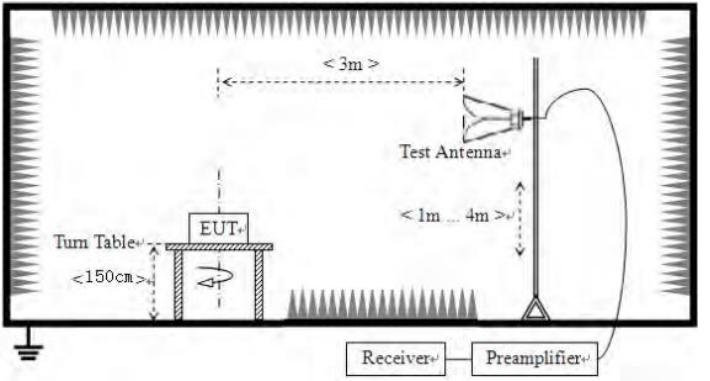
Highest channel



30MHz~25GHz

6.6.2. Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209																																										
Test Method:	ANSI C63.10:2013																																										
Test Frequency Range:	9kHz to 25GHz																																										
Test site:	Measurement Distance: 3m																																										
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>9KHz-150KHz</td> <td>Quasi-peak</td> <td>200Hz</td> <td>600Hz</td> <td>Quasi-peak</td> </tr> <tr> <td>150KHz-30MHz</td> <td>Quasi-peak</td> <td>9KHz</td> <td>30KHz</td> <td>Quasi-peak</td> </tr> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120KHz</td> <td>300KHz</td> <td>Quasi-peak</td> </tr> <tr> <td rowspan="2">Above 1GHz</td><td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average</td> </tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Value	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak	Above 1GHz	Peak	1MHz	3MHz	Peak	Peak	1MHz	10Hz	Average									
Frequency	Detector	RBW	VBW	Value																																							
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak																																							
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak																																							
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak																																							
Above 1GHz	Peak	1MHz	3MHz	Peak																																							
	Peak	1MHz	10Hz	Average																																							
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (uV/m)</th> <th>Value</th> <th>Measurement Distance</th> </tr> </thead> <tbody> <tr> <td>0.009MHz-0.490MHz</td> <td>2400/F(KHz)</td> <td>QP</td> <td>300m</td> </tr> <tr> <td>0.490MHz-1.705MHz</td> <td>24000/F(KHz)</td> <td>QP</td> <td>30m</td> </tr> <tr> <td>1.705MHz-30MHz</td> <td>30</td> <td>QP</td> <td>30m</td> </tr> <tr> <td>30MHz-88MHz</td> <td>100</td> <td>QP</td> <td></td> </tr> <tr> <td>88MHz-216MHz</td> <td>150</td> <td>QP</td> <td></td> </tr> <tr> <td>216MHz-960MHz</td> <td>200</td> <td>QP</td> <td></td> </tr> <tr> <td>960MHz-1GHz</td> <td>500</td> <td>QP</td> <td></td> </tr> <tr> <td rowspan="2">Above 1GHz</td><td>500</td> <td>Average</td> <td rowspan="2">3m</td> </tr> <tr> <td>5000</td> <td>Peak</td> </tr> </tbody> </table>					Frequency	Limit (uV/m)	Value	Measurement Distance	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	0.490MHz-1.705MHz	24000/F(KHz)	QP	30m	1.705MHz-30MHz	30	QP	30m	30MHz-88MHz	100	QP		88MHz-216MHz	150	QP		216MHz-960MHz	200	QP		960MHz-1GHz	500	QP		Above 1GHz	500	Average	3m	5000	Peak
Frequency	Limit (uV/m)	Value	Measurement Distance																																								
0.009MHz-0.490MHz	2400/F(KHz)	QP	300m																																								
0.490MHz-1.705MHz	24000/F(KHz)	QP	30m																																								
1.705MHz-30MHz	30	QP	30m																																								
30MHz-88MHz	100	QP																																									
88MHz-216MHz	150	QP																																									
216MHz-960MHz	200	QP																																									
960MHz-1GHz	500	QP																																									
Above 1GHz	500	Average	3m																																								
	5000	Peak																																									

<p>Test setup:</p>	<p>For radiated emissions from 9kHz to 30MHz</p>  <p>For radiated emissions from 30MHz to 1GHz</p>  <p>For radiated emissions above 1GHz</p> 
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the



	measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1012mbar
Test voltage:	AC 120V, 60Hz
Test results:	Pass

Remarks:

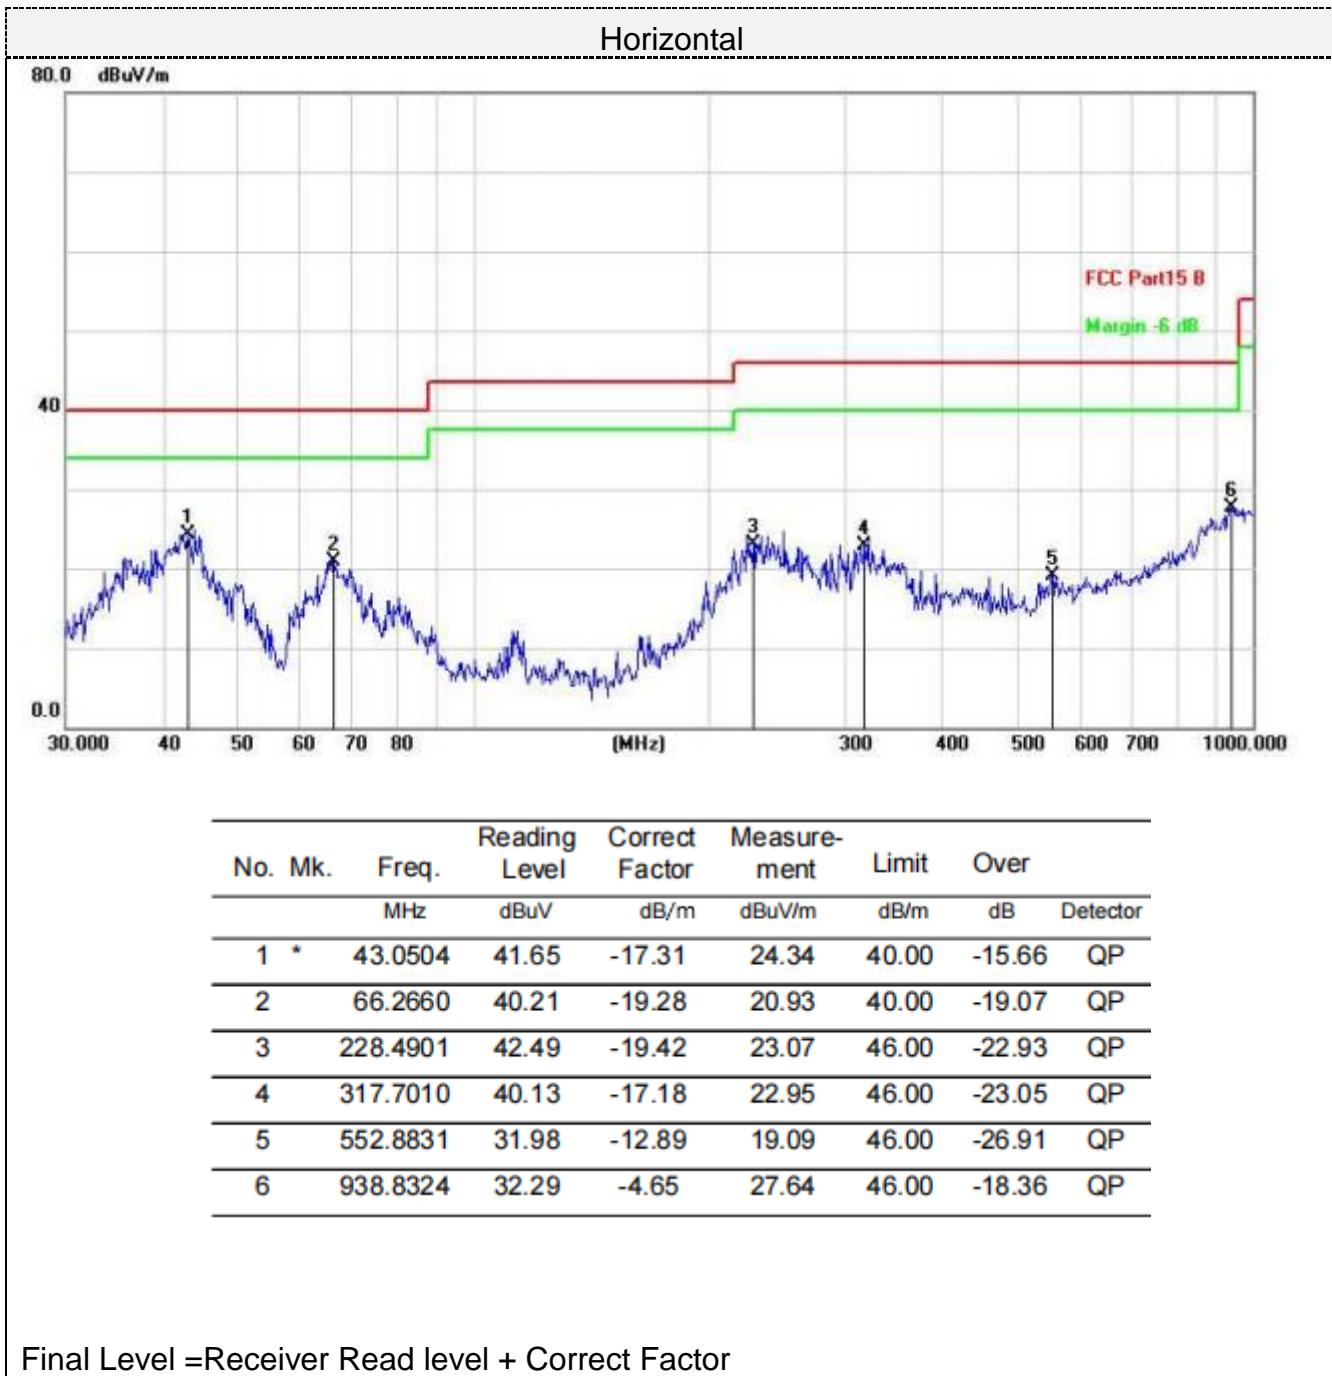
- 1.Only the worst case Main Antenna test data.
- 2.Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

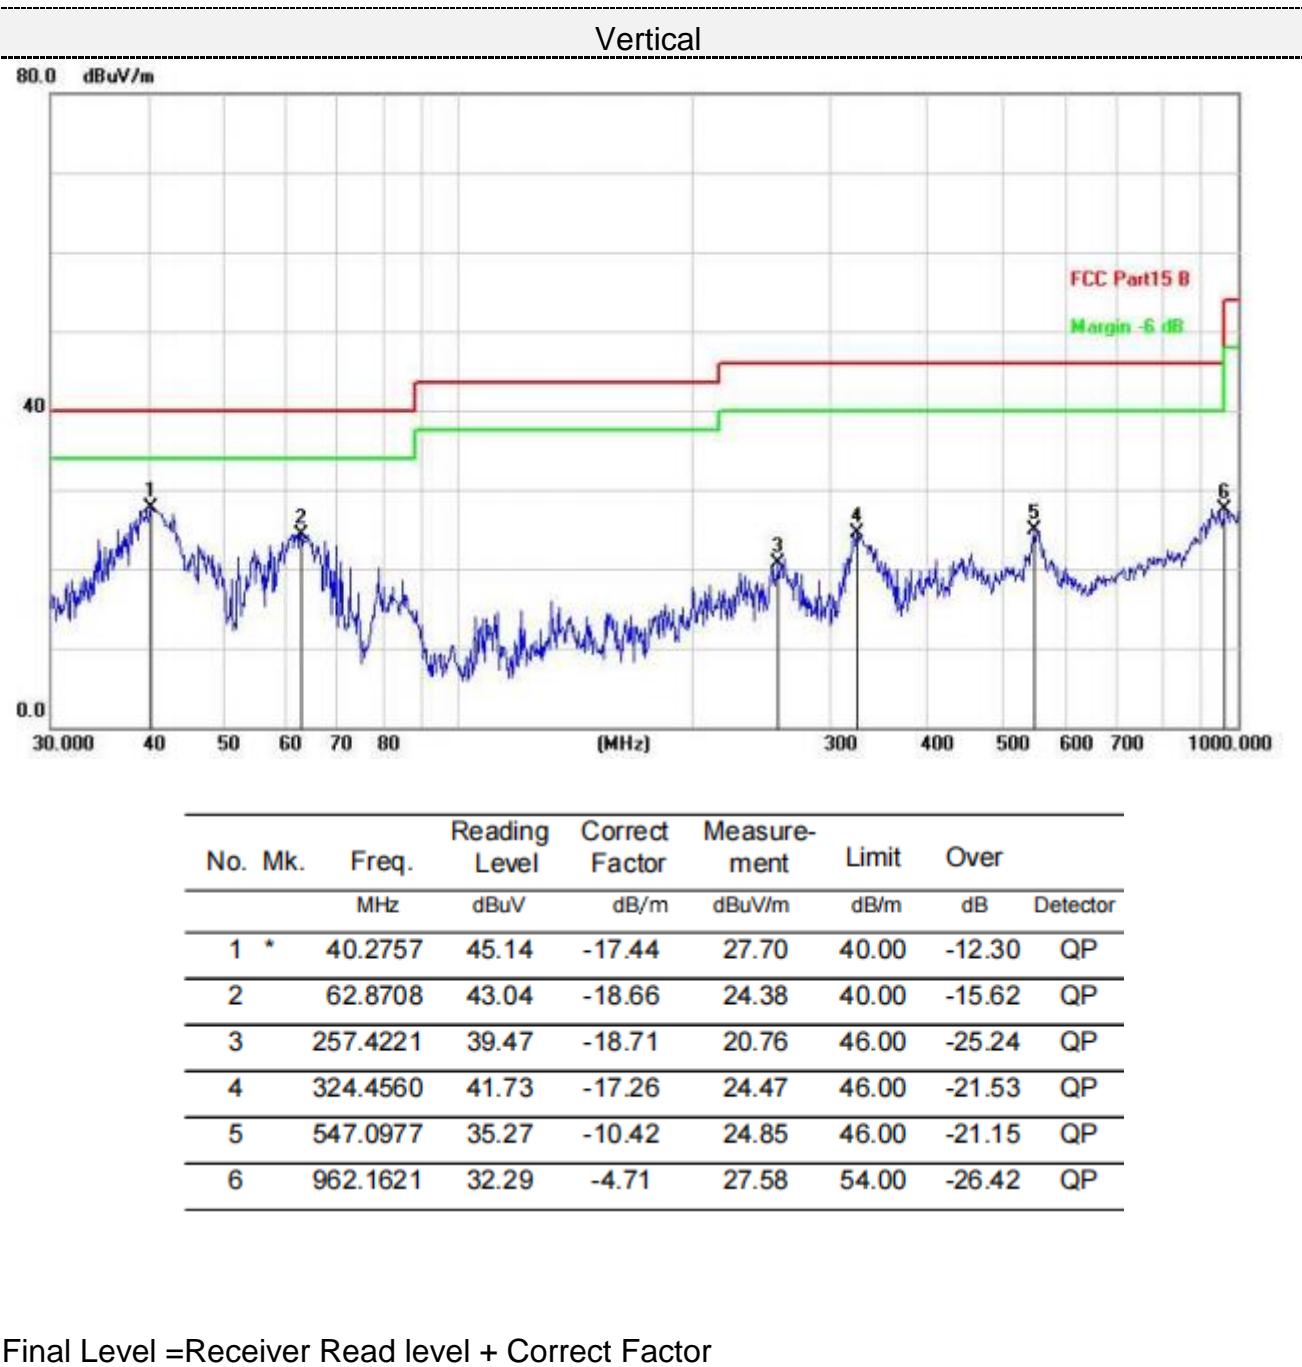
Measurement data:**■ 9kHz~30MHz**

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

■ Below 1GHz

Pre-scan all test modes, found worst case at 802.11b 2437MHz, and so only show the test result of 802.11b 2437MHz





**■ Above 1-25GHz**

Note: During the test, pre-scan the 802.11b/802.11g/802.11n (H20)/802.11n (H40) modulation, and found the 802.11b modulation which it is worse case.

802.11b:Lowest

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	52.17	31.40	8.18	31.50	60.25	74.00	-13.75	peak
4824	37.54	31.40	8.18	31.50	45.62	54.00	-8.38	AVG
7236	45.96	35.80	10.83	31.40	61.19	74.00	-12.81	peak
7236	28.76	35.80	10.83	31.40	43.99	54.00	-10.01	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	51.88	31.40	8.18	31.50	59.96	74.00	-14.04	peak
4824	38.25	31.40	8.18	31.50	46.33	54.00	-7.67	AVG
7236	45.96	35.80	10.83	31.40	61.19	74.00	-12.81	peak
7236	28.90	35.80	10.83	31.40	44.13	54.00	-9.87	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Report No.: HTT202304037F02

802.11b:Middle

Horizontal:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	51.78	31.40	9.17	32.10	60.25	74.00	-13.75	peak
4874	37.54	31.40	9.17	32.10	46.01	54.00	-7.99	AVG
7311	44.96	35.80	10.83	31.40	60.19	74.00	-13.81	peak
7311	29.07	35.80	10.83	31.40	44.30	54.00	-9.70	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	51.57	31.40	9.17	32.10	60.04	74.00	-13.96	peak
4874	36.95	31.40	9.17	32.10	45.42	54.00	-8.58	AVG
7311	42.87	35.80	10.83	31.40	58.10	74.00	-15.90	peak
7311	29.77	35.80	10.83	31.40	45.00	54.00	-9.00	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Report No.: HTT202304037F02

802.11b:Highest

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924	50.28	31.40	9.17	32.10	58.75	74	-15.25	peak
4924	35.67	31.40	9.17	32.10	44.14	54	-9.86	AVG
7386	44.19	35.80	10.83	31.40	59.42	74	-14.58	peak
7386	28.72	35.80	10.83	31.40	43.95	54	-10.05	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924	51.27	31.40	9.17	32.10	59.74	74	-14.26	peak
4924	35.69	31.40	9.17	32.10	44.16	54	-9.84	AVG
7386	44.07	35.80	10.83	31.40	59.3	74	-14.7	peak
7386	30.21	35.80	10.83	31.40	45.44	54	-8.56	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed.



Report No.: HTT202304037F02

7. Test Setup Photo

Reference to the **appendix I** for details.

8. EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----