



TEST REPORT

Applicant Name : Xunison Inc
Address : 11720 Amber Park Dr.Suite 160 Atlanta, GA 30009 United States
Report Number : RA221215-61881E-RF-00D
FCC ID: 2BAT3D50H

Test Standard (s)

FCC PART 15.407

Sample Description

Product Type: Xunison Hub
Model No.: D50 Home
Multiple Model(s) No.: N/A
Trade Mark: XUNISON
Date Received: 2022/12/15
Report Date: 2023/06/12

Test Result:

Pass*

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Approved By:

Nick Fang
EMC Engineer

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290 Fax: +86 755-26503290 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
APPLICABLE STANDARDS.....	10
DFS REQUIREMENT	10
DFS MEASUREMENT SYSTEM.....	14
SYSTEM BLOCK DIAGRAM	14
CONDUCTED METHOD	15
RADIATED METHOD.....	16
TEST PROCEDURE	16
TEST RESULTS.....	17
DESCRIPTION OF EUT	17
RADAR WAVEFORM CALIBRATION	17
TEST DATA	17
CHANNEL AVAILABILITY CHECK TIME(CAC)	18
TEST PROCEDURE	18
TEST DATA	18
CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME	19
TEST PROCEDURE	19
TEST DATA	19
NON-OCCUPANCY PERIOD.....	20
TEST PROCEDURE	20
TEST DATA	20
DETECTION BANDWIDTH.....	21
TEST PROCEDURE	21
TEST DATA	21
STATISTICAL PERFORMANCE CHECK	22
TEST PROCEDURE	22
TEST DATA	22

BRIDGE AND/OR MESH MODE.....	23
TEST PROCEDURE	23
TEST DATA	23
APPENDIX	24
APPENDIX A: DFS DETECTION THRESHOLDS	24
APPENDIX B: CHANNEL LOADING.....	35
APPENDIX C: CHANNEL AVAILABILITY CHECK TIME	36
APPENDIX D: CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME	39
APPENDIX E: NON-OCCUPANCY PERIOD.....	40
APPENDIX F: U-NII DETECTION BANDWIDTH.....	41
APPENDIX G: STATISTICAL PERFORMANCE CHECK	43

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA221215-61881E-RF-00D	Original Report	2023/03/10
1	RA221215-61881E-RF-00D	Update the report format	2023/05/25
2	RA221215-61881E-RF-00D	Update Detection Bandwidth to 160MHz in page 41 ((Typo)	2023/06/12

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	5G Wi-Fi: 5250-5350MHz; 5470-5725MHz
Mode	802.11a/n20/n40/ac20/ac40/ac80/ac160/ax20/ax40/ax80/ax160
Maximum Conducted Average Output Power	5250-5350MHz: 20.34dBm 5470-5725MHz: 20.48dBm
Maximum EIRP	5250-5350MHz: 25.34dBm 5470-5725MHz: 25.48dBm
Modulation Technique	OFDM, OFDMA
Antenna Specification*	ANT 1: 5.0dBi, ANT 2: 5.0dBi, ANT 3: 5.0dBi, ANT 4:5.0dBi (It is provided by the applicant)
Voltage Range	DC12V from adapter
Sample serial number	1ZF4 (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter 1 Information	Model: AS2406A-1202000DM Input: AC 100-240V, 50/60Hz, 0.8A MAX Output: DC 12.0V, 2.0A, 24.0W
Adapter 2 Information	Model: AS2406A-1202000US Input: AC 100-240V, 50/60Hz, 0.8A MAX Output: DC 12.0V, 2000mA
Adapter 3 Information	Model: RD1202000-C55-154MG Input: AC 100-240V, 50/60Hz, 1.0A MAX Output: DC 12.0V, 2.0A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts E of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC Part 15, Subpart E, section 15.407 Dynamic Frequency Selection (DFS) for devices operating in the bands 5250-5350 MHz, 5470-5725 MHz.

Test Methodology

FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02.

Each test item follows test standards and with no deviation.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

EUT Exercise Software

“SecureCRT” software was used.

Equipment Modifications

N/A

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
ASUS	Notebook	FX504G	J6NRCX0140447232

External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-shielded detachable RJ45 cable	8.0	EUT	NoteBook
Unshielded Un-detachable DC cable	1.8	Adapter	EUT

SUMMARY OF TEST RESULTS

The following result table represents the list of measurements required under the CFR §47 Part 15.407(h), and KDB: 905462 D02 UNII DFS Compliance Procedures New Rules v02

Items	Description of Test	Result
Detection Bandwidth	UNII Detection Bandwidth	Compliant
Performance Requirements Check	Initial Channel Availability Check Time (CAC)	Compliant
	Radar Burst at the Beginning of the CAC	Compliant
	Radar Burst at the End of the CAC	Compliant
In-Service Monitoring	Channel Move Time	Compliant
	Channel Closing Transmission Time	Compliant
	Non-Occupancy Period	Compliant
Radar Detection	Statistical Performance Check	Compliant

Note: This device does not support “802.11ax Channel Puncturing” function.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101590	2022/11/25	2023/11/24
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2022/11/25	2023/11/24
AGILENT	Vector Signal Generator	N5182B	MY53052129	2022/11/25	2023/11/24

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

APPLICABLE STANDARDS

DFS Requirement

CFR §47 Part 15.407(h)

FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
<i>Non-Occupancy Period</i>	Yes	Not required	Yes
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Availability Check Time</i>	Yes	Not required	Not required
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not required
<i>Channel Closing Transmission Time</i>	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>U-NII Detection Bandwidth and Statistical Performance Check</i>	All BW modes must be tested	Not required
<i>Channel Move Time and Channel Closing Transmission Time</i>	Test using widest BW mode available	Test using the widest BW mode available for the link
<i>All other tests</i>	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

Table 4: DFS Response Requirement Values

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel move</i> (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 usec is selected, the number of pulses

would be $\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{3066} \right) \right\} = \text{Roundup} \{17.2\} = 18.$

Table 5a - Pulse Repetition Intervals Values for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4. For example, the following table indicates how to compute the aggregate of percentage of successful detections.

Radar Type	Number of Trials	Number of Successful Detections	Minimum Percentage of Successful Detection
1	35	29	82.9%
2	30	18	60%
3	30	27	90%
4	50	44	88%
Aggregate $(82.9\% + 60\% + 90\% + 88\%)/4 = 80.2\%$			

Table 6 – Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per <i>Burst</i>	Number of <i>Bursts</i>	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30


Table 7 – Frequency Hopping Radar Test Waveform



Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30


DFS Measurement System

DFS measurement system consists of two subsystems: (1) The radar signal generating subsystem and (2) the traffic monitoring subsystem.

System Block Diagram

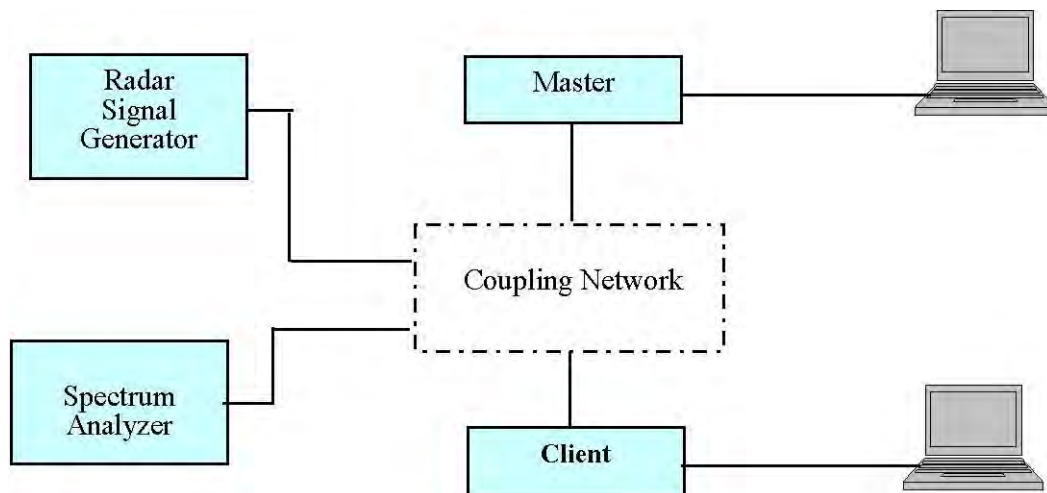


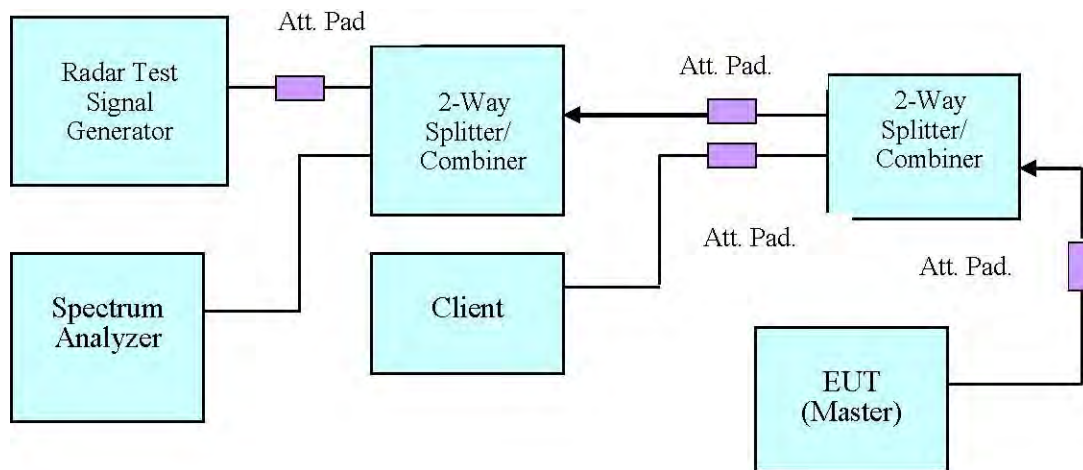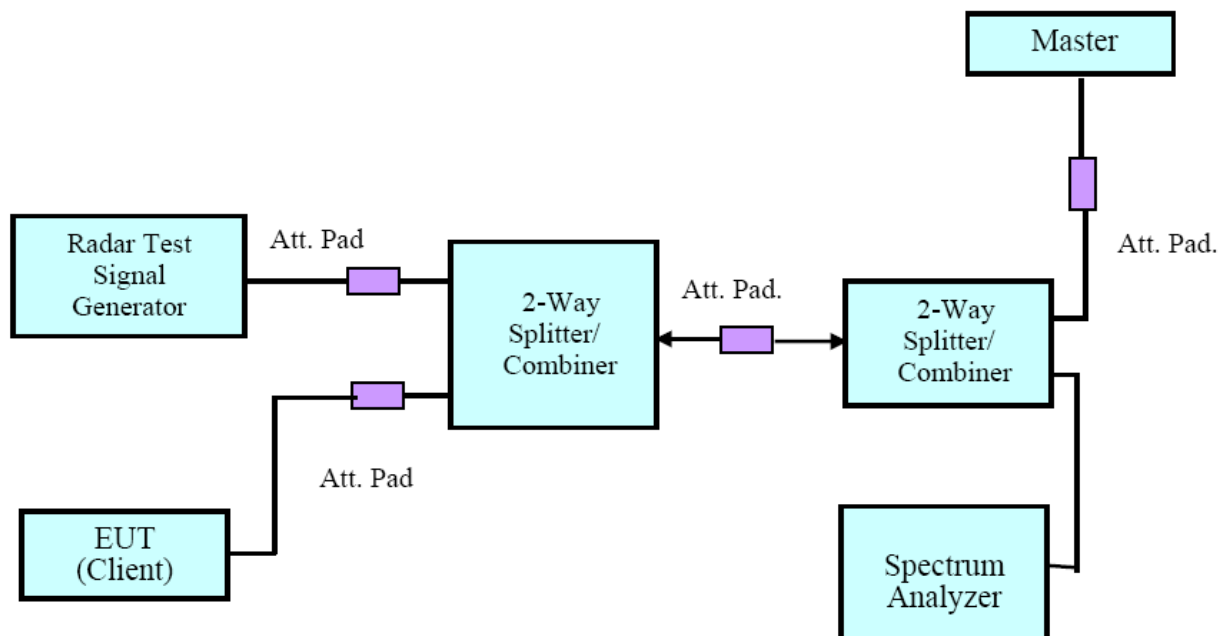Conducted Method**Setup for Master with injection at the Master****Setup for Client with injection at the Master**

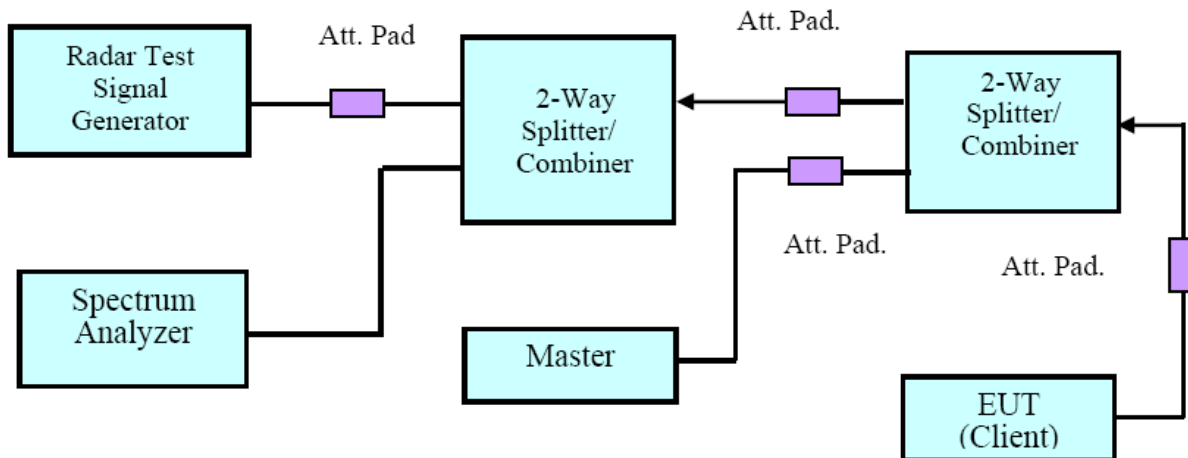

Setup for Client with injection at the Client

Radiated Method

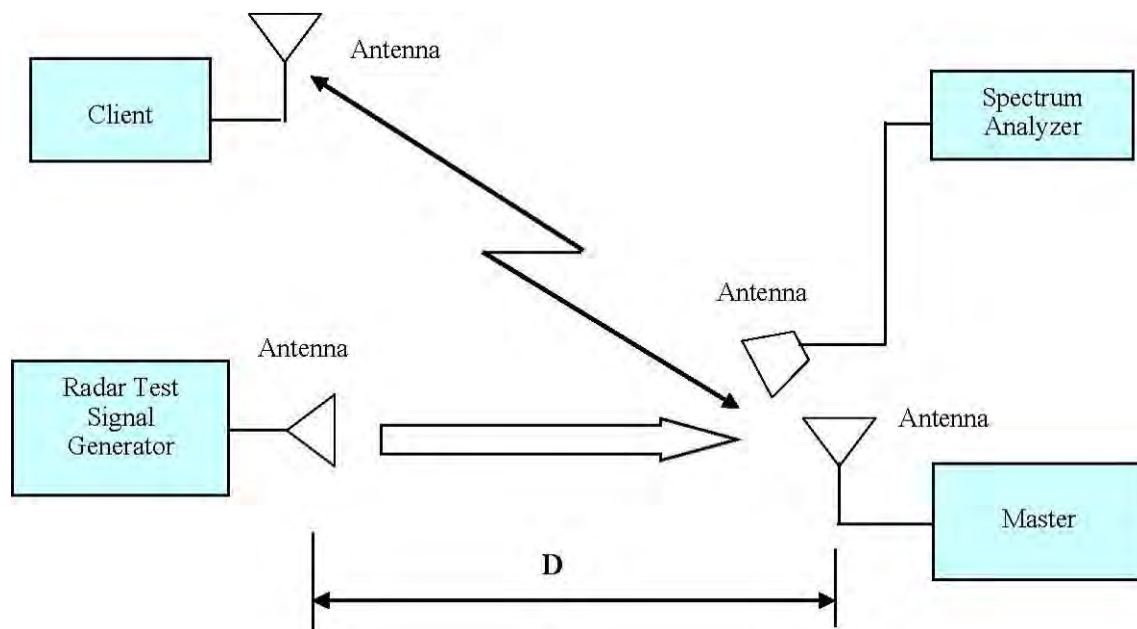

Test Procedure


A spectrum analyzer is used as a monitor verifies that the EUT status including Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the diction and Channel move. It is also used to monitor EUT transmissions during the Channel Availability Check Time.

TEST RESULTS

Description of EUT

The calibrated radiated DFS detection threshold level is set to -64 dBm is more stringent.

Radar Waveform Calibration

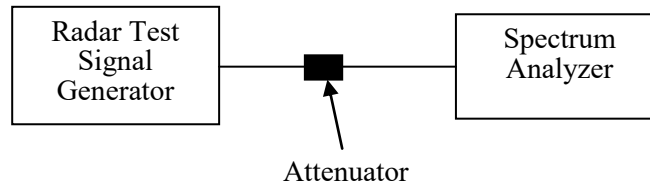

Test Data

Environmental Conditions

Temperature:	21~25 °C
Relative Humidity:	45~53 %
ATM Pressure:	100.1~101.0 kPa

The testing was performed by Nick Fang from 2023-02-07 to 2023-02-15.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

CHANNEL AVAILABILITY CHECK TIME(CAC)

Test Procedure

1. Initial Channel Availability Check Time

The U-NII devices will be powered on and be instructed to operate on the appropriate U-NII Channel that must incorporate DFS functions. At the same time the UUT is powered on, the spectrum analyzer will be set to zero span and the spectrum analyzer's sweep will be started at the same time power is applied to the U-NII device.

The UUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.

Confirm that the UUT initiates transmission on the channel

2. Radar Burst at the Beginning of the Channel Availability Check Time

A single Burst of one of the Short Pulse Radar Types 0-4 will commence within a 6 second window at the beginning of CAC time. Visual indication or measured results on the UUT of successful detection of the radar Burst will be recorded and reported.

3. Radar Burst at the End of the Channel Availability Check Time

A single Burst of one of the Short Pulse Radar Types 0-4 will commence within a 6 second window at the end of CAC time. Visual indication or measured results on the UUT of successful detection of the radar Burst will be recorded and reported.

Test Data

Environmental Conditions

Temperature:	21~25 °C
Relative Humidity:	45~53 %
ATM Pressure:	100.1~101.0 kPa

The testing was performed by Nick Fang from 2023-02-07 to 2023-02-15.

EUT operation mode: Transmitting

Test Result: Pass

Note: measurement was made on antenna port 1

Please refer to the Appendix.

CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME

Test Procedure

Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. repeat using a long pulse radar type5 waveform.

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time = $N \times \text{Dwell Time}$

N is the number of spectrum analyzer bins showing a device transmission Dwell Time is the dwell time per bin (i.e. $\text{Dwell Time} = S/B$, S is the sweep time and B is the number of bin, i.e. 8192)

Test Data

Environmental Conditions

Temperature:	21~25 °C
Relative Humidity:	45~53 %
ATM Pressure:	100.1~101.0 kPa

The testing was performed by Nick Fang from 2023-02-07 to 2023-02-15.

EUT operation mode: Transmitting

Test Result: Pass

Note: measurement was made on antenna port 1

Please refer to the Appendix.

NON-OCCUPANCY PERIOD

Test Procedure

Measure the EUT for more than 30 minutes following the channel close/move time to verify that the EUT does not resume any transmissions on this channel. Provide one plot to demonstrate no transmission on the channel for the non-occupancy period (30 minutes observation time)

Test Data

Environmental Conditions

Temperature:	21~25 °C
Relative Humidity:	45~53 %
ATM Pressure:	100.1~101.0 kPa

The testing was performed by Nick Fang from 2023-02-07 to 2023-02-15.

EUT operation mode: Transmitting

Test Result: Pass

Note: measurement was made on antenna port 1

Please refer to the Appendix.

DETECTION BANDWIDTH

Test Procedure

Performed with Type 0 radar waveforms

Starting at the center frequency of the UUT operating Channel, increase the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the *U-NII Detection Bandwidth* criterion specified in Table 4. Repeat this measurement in 1MHz steps at frequencies 5 MHz below where the detection rate begins to fall. Record the highest frequency (denote as F_H) at which detection is greater than or equal to the *U-NII Detection Bandwidth* criterion. Recording the detection rate at frequencies above F_H is not required to demonstrate compliance.

Starting at the center frequency of the UUT operating Channel, decrease the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the *U-NII Detection Bandwidth* criterion specified in Table 4. Repeat this measurement in 1MHz steps at frequencies 5 MHz above where the detection rate begins to fall. Record the lowest frequency (denote as F_L) at which detection is greater than or equal to the *U-NII Detection Bandwidth* criterion. Recording the detection rate at frequencies below F_L is not required to demonstrate compliance

The *U-NII Detection Bandwidth* is calculated as follows: $U-NII\ Detection\ Bandwidth = F_H - F_L$

The *U-NII Detection Bandwidth* must meet the *U-NII Detection Bandwidth* criterion specified in Table 4. Otherwise, the UUT does not comply with DFS requirements. This is essential to ensure that the UUT is capable of detecting *Radar Waveforms* across the same frequency spectrum that contains the significant energy from the system. In the case that the *U-NII Detection Bandwidth* is greater than or equal to the 99 percent power bandwidth for the measured F_H and F_L , the test can be truncated and the *U-NII Detection Bandwidth* can be reported as the measured F_H and F_L .

Test Data

Environmental Conditions

Temperature:	21~25 °C
Relative Humidity:	45~53 %
ATM Pressure:	100.1~101.0 kPa

The testing was performed by Nick Fang from 2023-02-07 to 2023-02-15.

EUT operation mode: Transmitting

Test Result: Pass

Note: measurement was made on antenna port 1

Please refer to the Appendix.

STATISTICAL PERFORMANCE CHECK

Test Procedure

The steps below define the procedure to determine the minimum percentage of successful detection requirements found in **Tables 5-7** when a radar burst with a level equal to the *DFS Detection Threshold* + 1dB is generated on the *Operating Channel* of the U-NII device (*In-Service Monitoring*).

a) One frequency will be chosen from the *Operating Channels* of the UUT within the 5250-5350 MHz or 5470-5725 MHz bands.

b) In case the UUT is a U-NII device operating as a *Client Device* (with or without Radar Detection), a U-NII device operating as a *Master Device* will be used to allow the UUT (Client device) to *Associate* with the *Master Device*. In case the UUT is a *Master Device*, a U-NII device operating as a *Client Device* will be used and it is assumed that the Client will *Associate* with the UUT (Master). In both cases for conducted tests, the *Radar Waveform* generator will be connected to the *Master Device*. For radiated tests, the emissions of the *Radar Waveform* generator will be directed towards the *Master Device*. If the *Master Device* has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.

c) Stream the channel loading test file from the *Master Device* to the Client Device on the test *Channel* for the entire period of the test.

d) At time T_0 the *Radar Waveform* generator sends the individual waveform for each of the Radar Types 1-6 in **Tables 5-7**, at levels defined in **Table 3**, on the *Operating Channel*. An additional 1 dB is added to the radar test signal to ensure it is at or above the *DFS Detection Threshold*, accounting for equipment variations/errors.

e) Observe the transmissions of the UUT at the end of the Burst on the *Operating Channel* for duration greater than 10 seconds for Radar Type 0 to ensure detection occurs.

f) Observe the transmissions of the UUT at the end of the Burst on the *Operating Channel* for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs.

g) In case the UUT is a U-NII device operating as a *Client Device* with *In-Service Monitoring*, perform steps a) to f).

Test Data

Environmental Conditions

Temperature:	21~25 °C
Relative Humidity:	45~53 %
ATM Pressure:	100.1~101.0 kPa

The testing was performed by Nick Fang from 2023-02-07 to 2023-02-15.

EUT operation mode: Transmitting

Test Result: Pass

Note: measurement was made on antenna port 1

Please refer to the Appendix.

BRIDGE AND/OR MESH MODE

Test Procedure

Networks Access Points with Bridge and/or MESH modes of operation are permitted to operate in the DFS bands but must employ a DFS function. The functionality of the Bridge mode as specified in ?15.403(a) must be validated in the DFS test report. Devices operating as relays where they act as master and client must also employ DFS function for the master. The method used to validate the functionality must be documented and validation data must be documented. Bridge mode can be validated by performing a test statistical performance check (Section 7.8.4) on any one of the radar types. This is an abbreviated test to verify DFS functionality. MESH mode operational methodology must be submitted in the application for certification for evaluation by the FCC.

Test Data

Environmental Conditions

Temperature:	21~25 °C
Relative Humidity:	45~53 %
ATM Pressure:	100.1~101.0 kPa

The testing was performed by Nick Fang from 2023-02-07 to 2023-02-15.

EUT operation mode: Transmitting

Test Result: Pass

Note: measurement was made on antenna port 1


Please refer to the Appendix.


APPENDIX

Appendix A: DFS Detection Thresholds Test Result


Test Mode	Frequency[dbm]	Radar Type	Result	Limit[dbm]	Verdict
20M	5260	Type0	-64.27	-64.00	PASS
		Type1	-64.14	-64.00	PASS
		Type2	-64.15	-64.00	PASS
		Type3	-64.50	-64.00	PASS
		Type4	-64.28	-64.00	PASS
		Type5	-64.42	-64.00	PASS
		Type6	-64.35	-64.00	PASS
40M	5270	Type0	-64.19	-64.00	PASS
		Type1	-64.08	-64.00	PASS
		Type2	-64.16	-64.00	PASS
		Type3	-64.33	-64.00	PASS
		Type4	-64.46	-64.00	PASS
		Type5	-64.32	-64.00	PASS
		Type6	-64.09	-64.00	PASS
80M	5290	Type0	-64.08	-64.00	PASS
		Type1	-64.11	-64.00	PASS
		Type2	-64.06	-64.00	PASS
		Type3	-64.21	-64.00	PASS
		Type4	-64.29	-64.00	PASS
		Type5	-64.27	-64.00	PASS
		Type6	-64.25	-64.00	PASS
160M	5250	Type0	-64.22	-64.00	PASS
		Type1	-64.11	-64.00	PASS
		Type2	-64.27	-64.00	PASS
		Type3	-64.20	-64.00	PASS
		Type4	-64.34	-64.00	PASS
		Type5	-64.31	-64.00	PASS
		Type6	-64.25	-64.00	PASS

Test Graphs

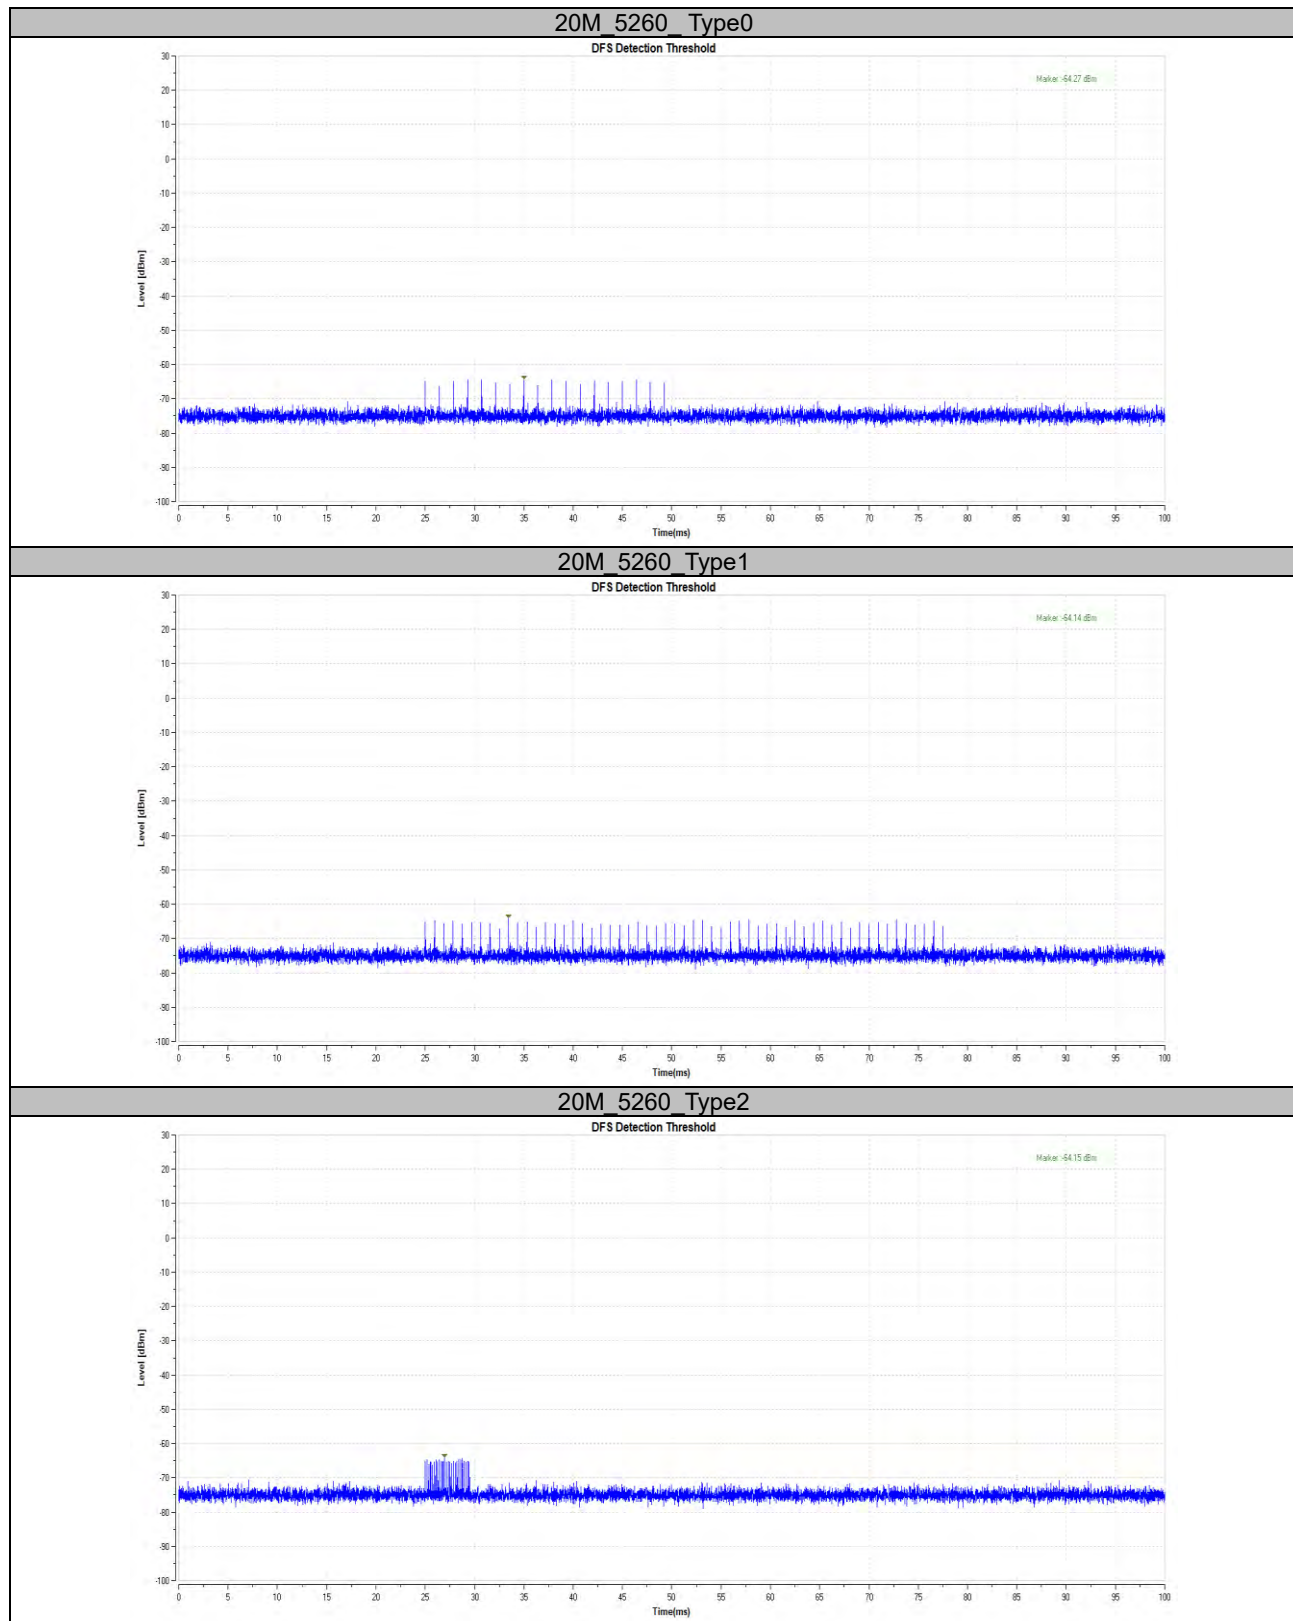


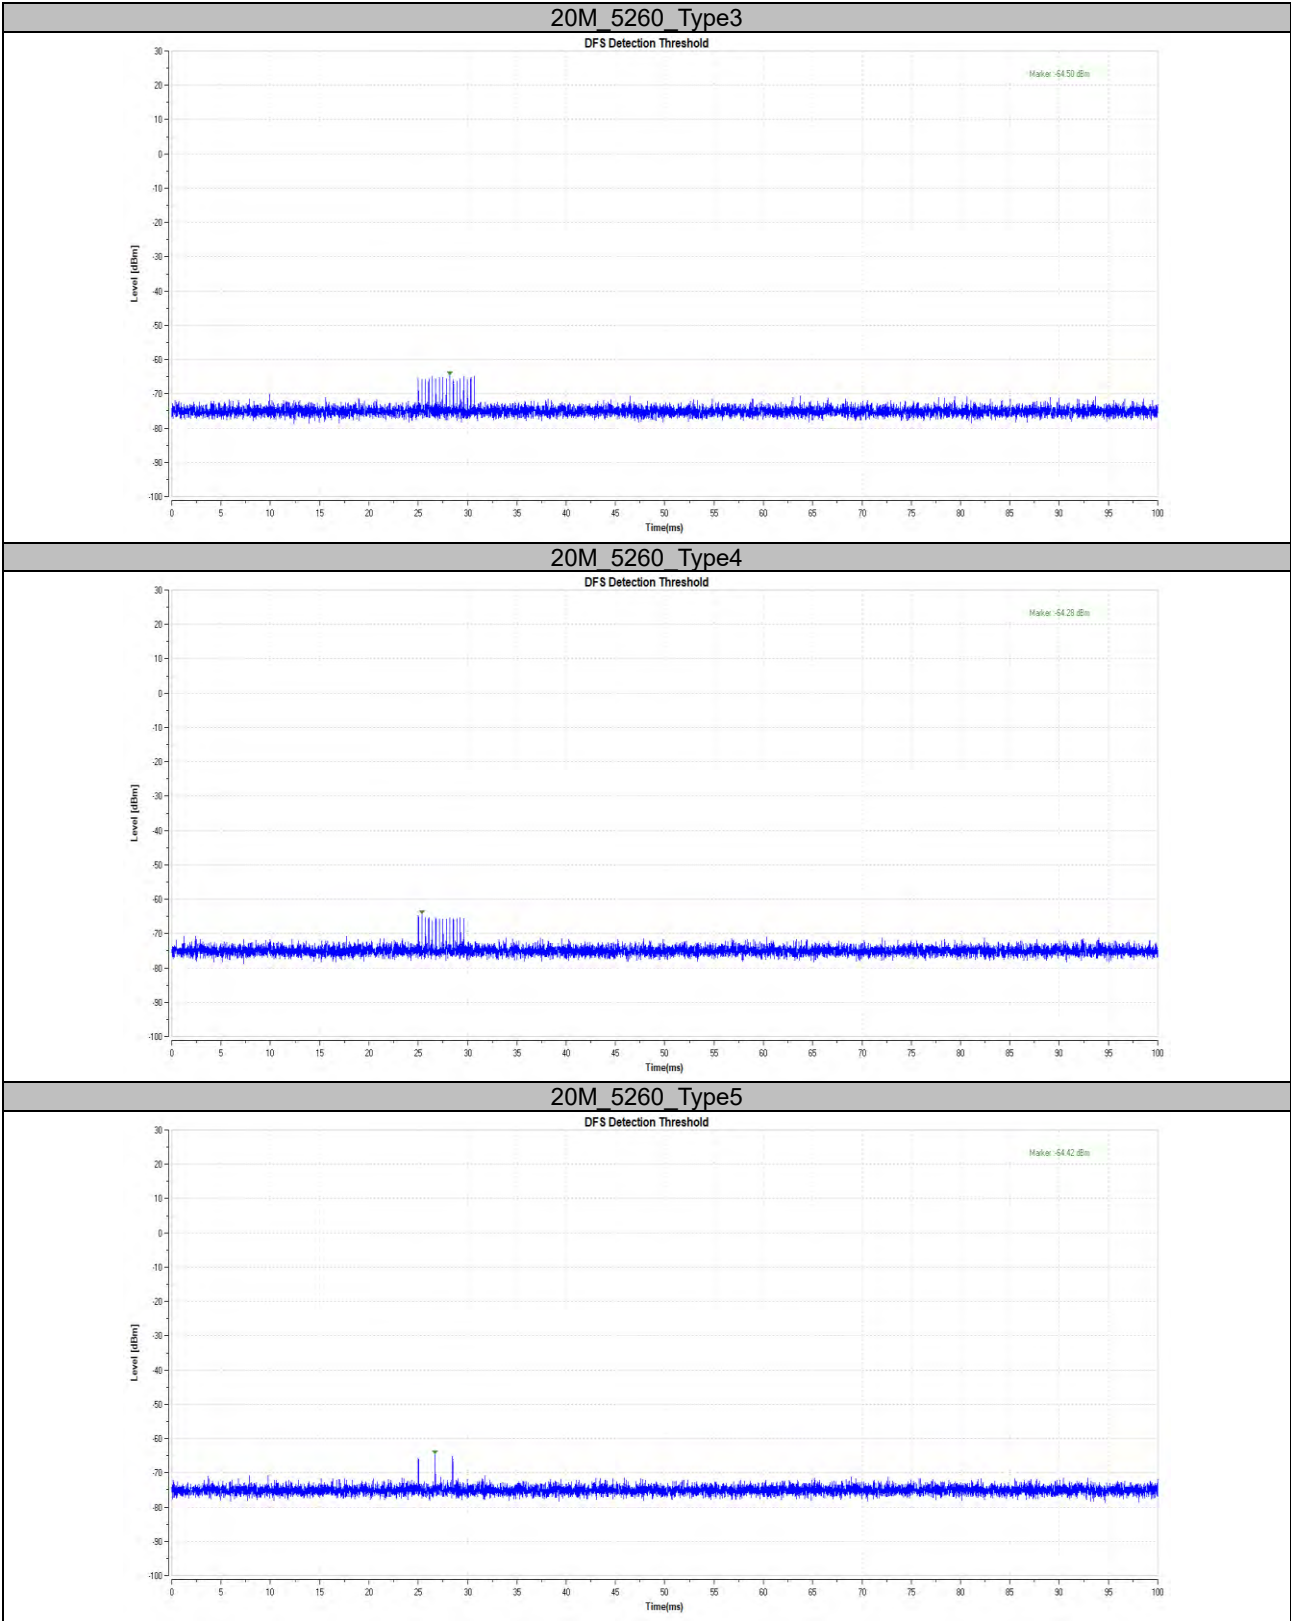


20M_5260_Type6

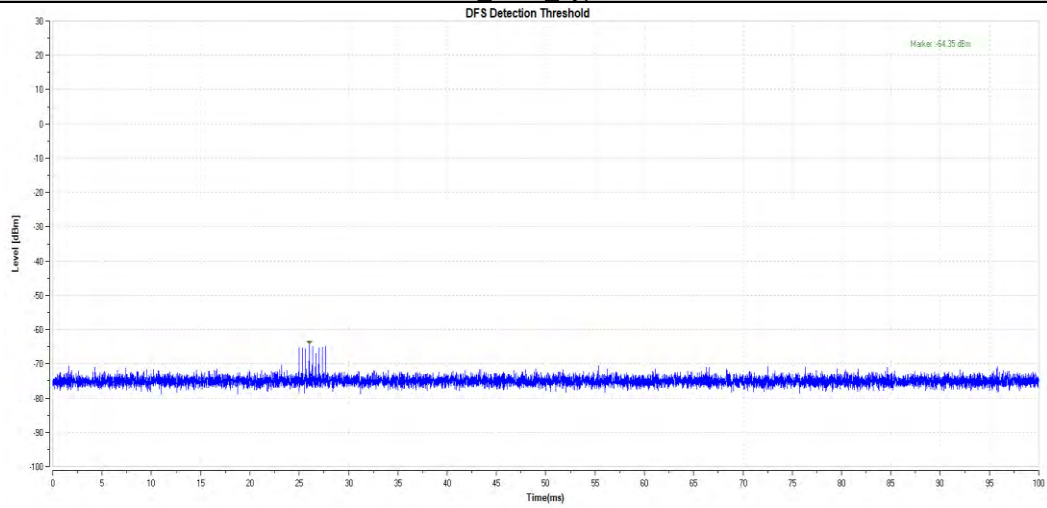


40M_5270_Type0

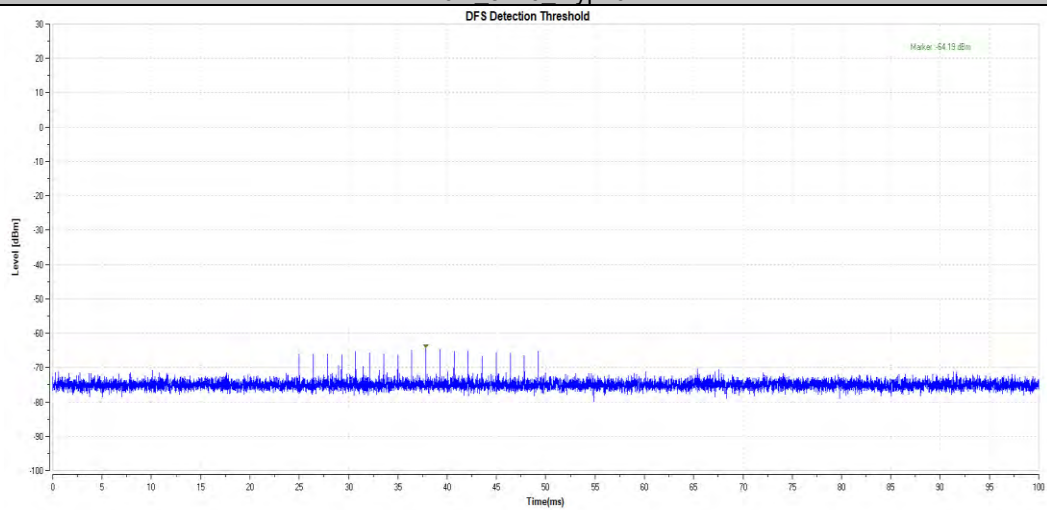


40M_5270_Type1

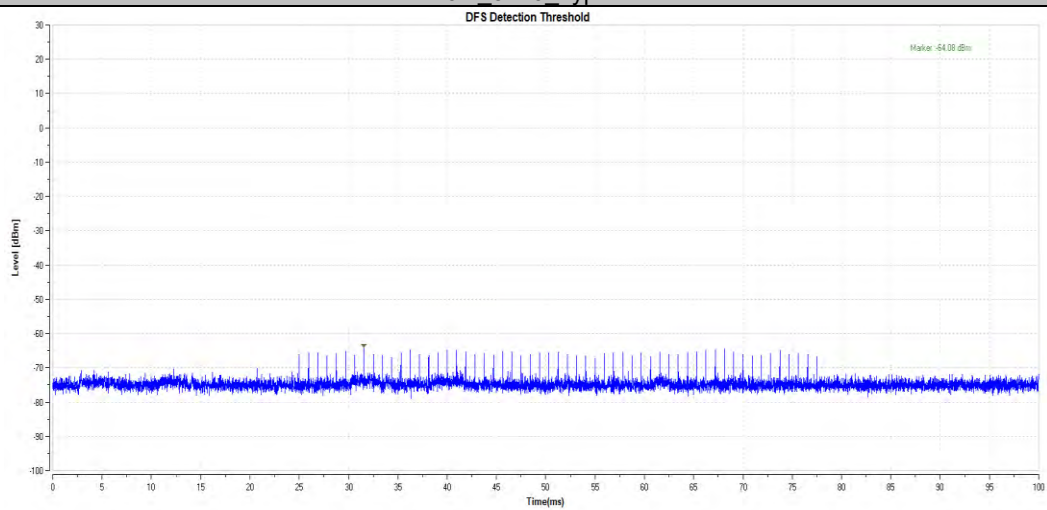


40M_5270_Type2

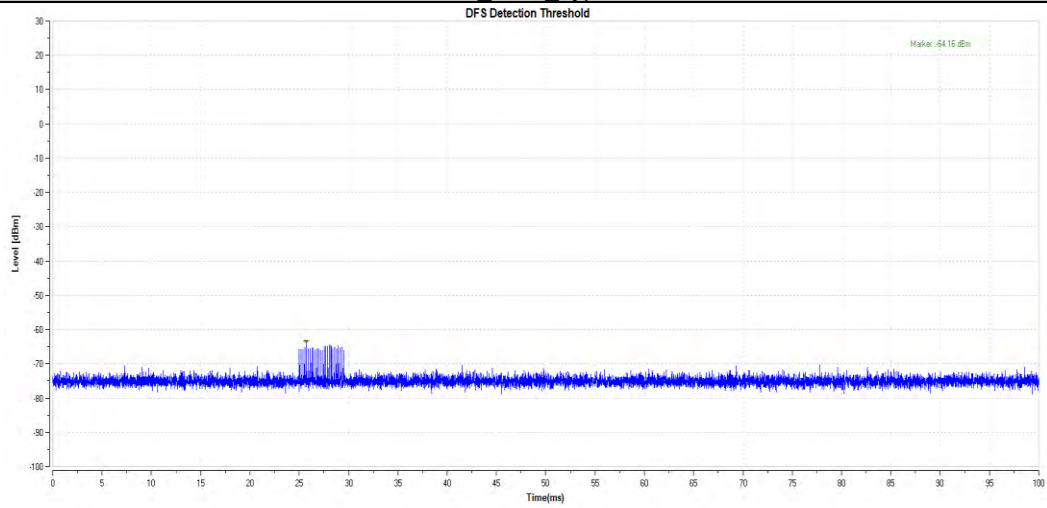


40M_5270_Type3

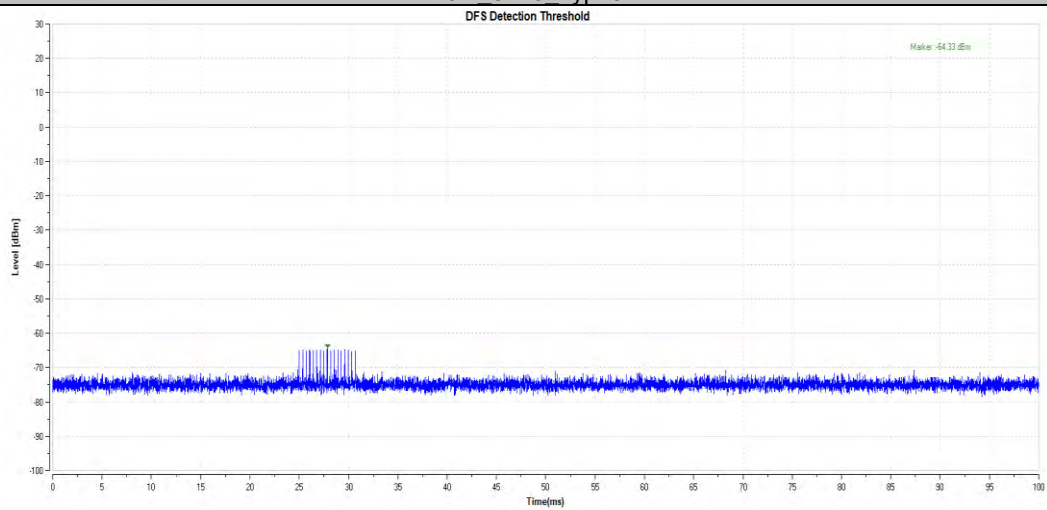


40M_5270_Type4

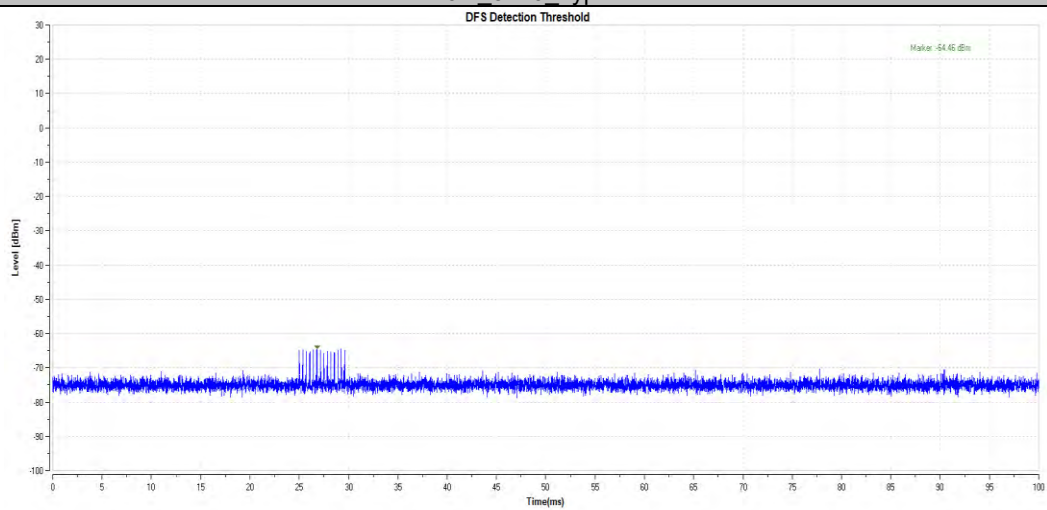


40M 5270 Type5

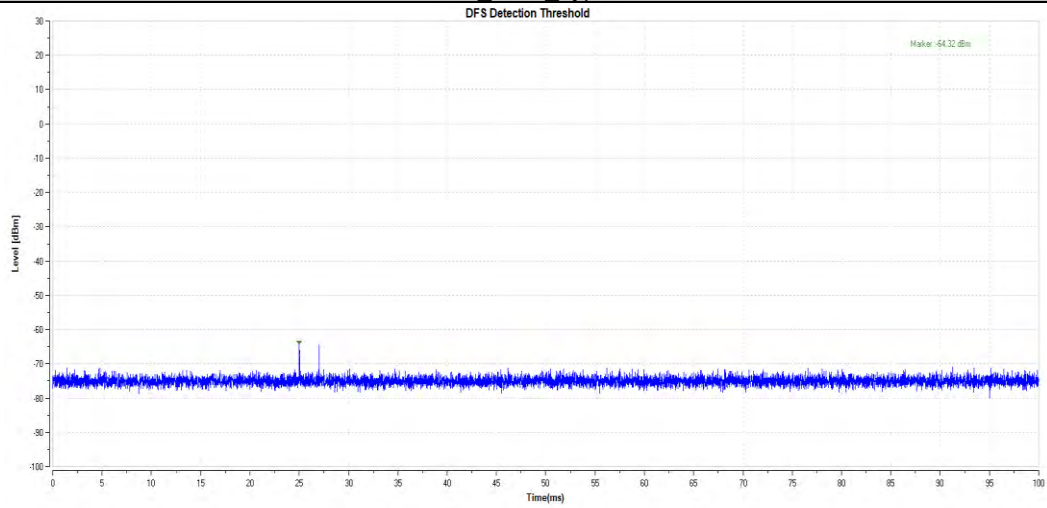


40M 5270 Type6

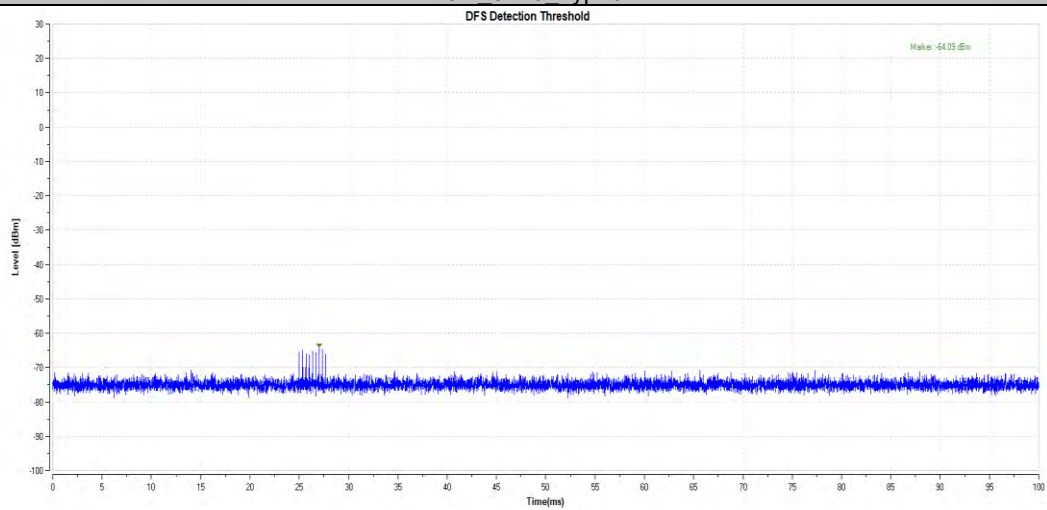


80M 5290 Type0

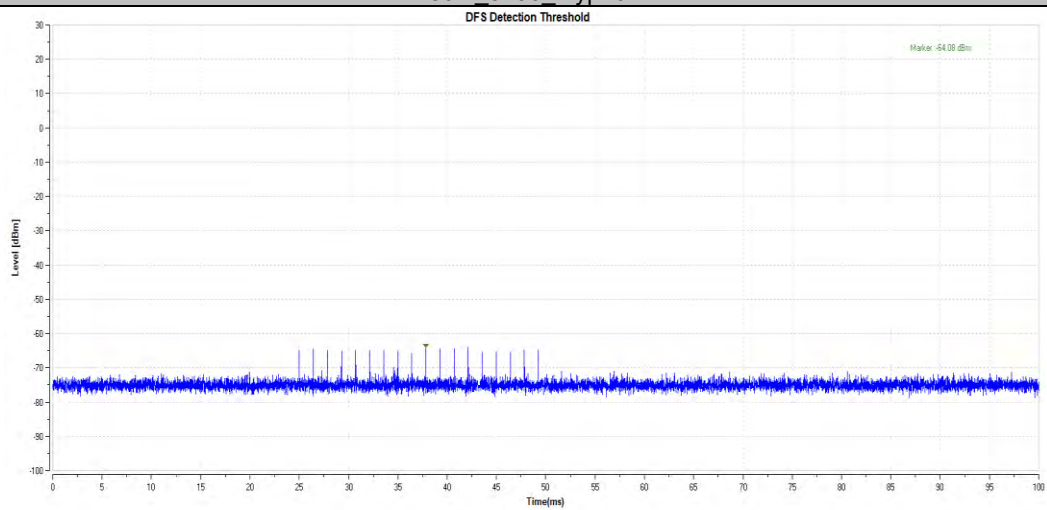


80M_5290_Type1

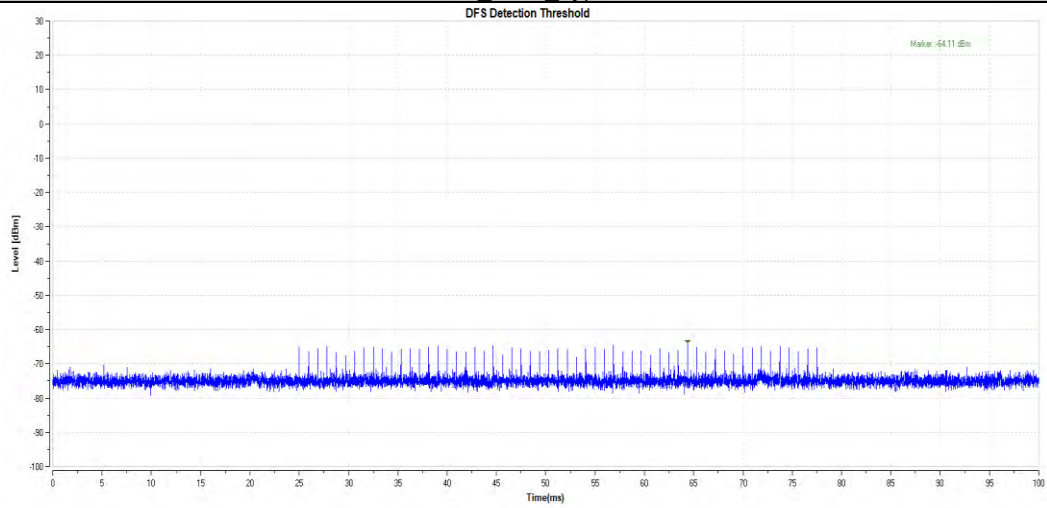


80M_5290_Type2

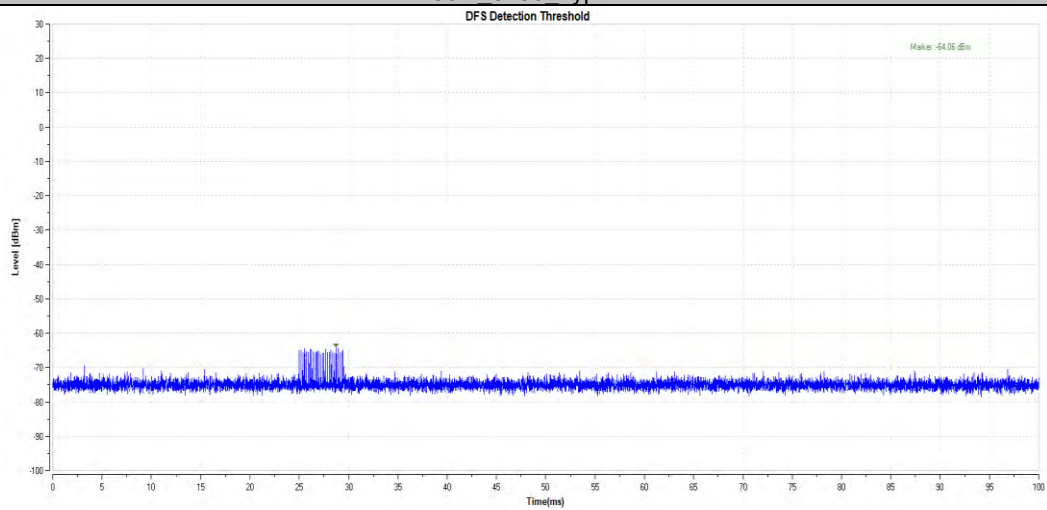


80M_5290_Type3

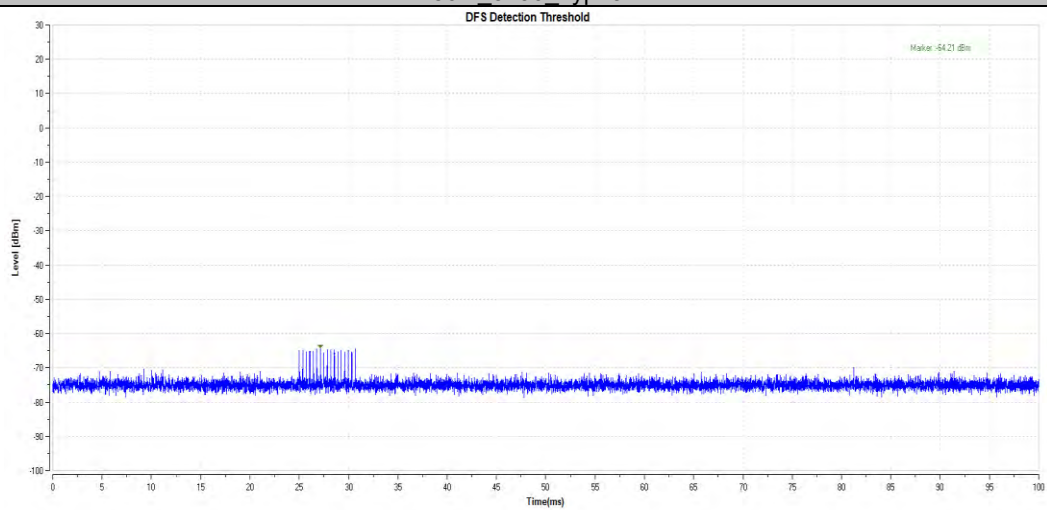


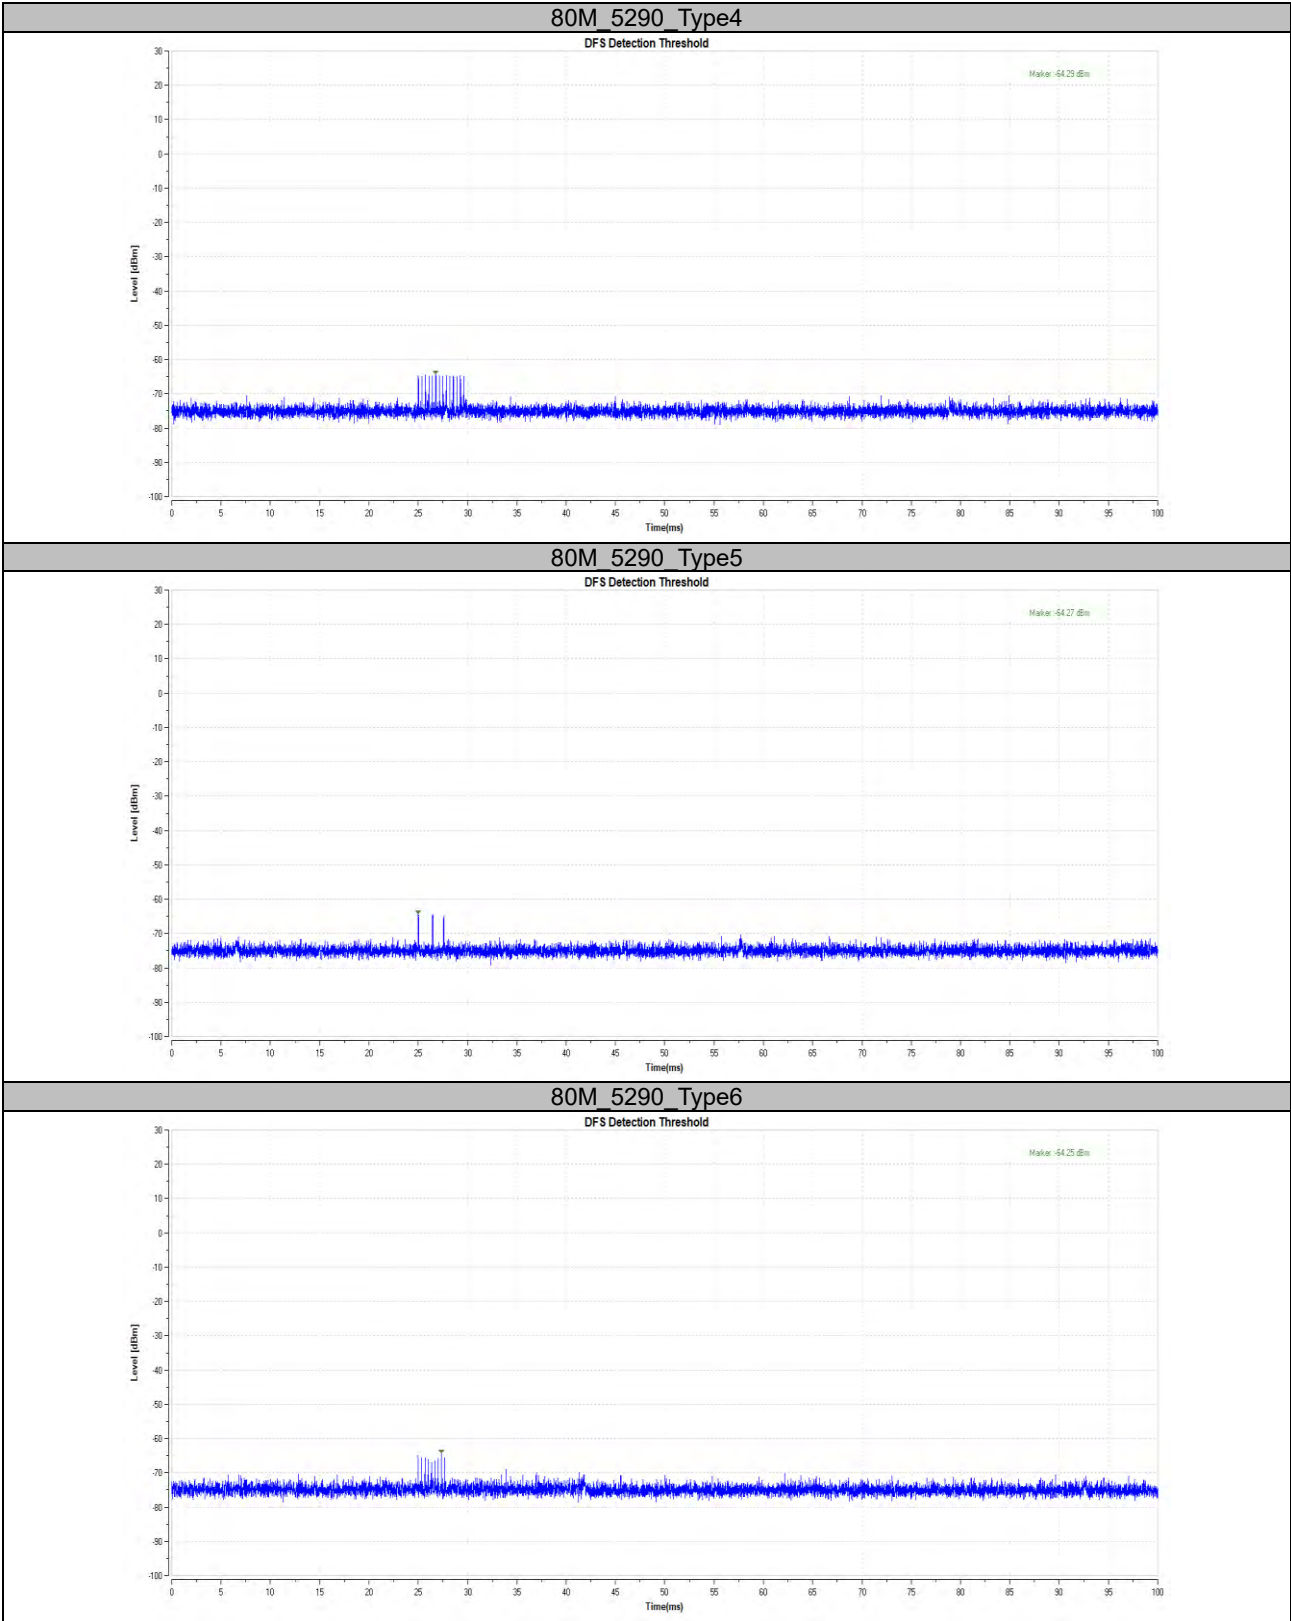


160M_5250_Type0

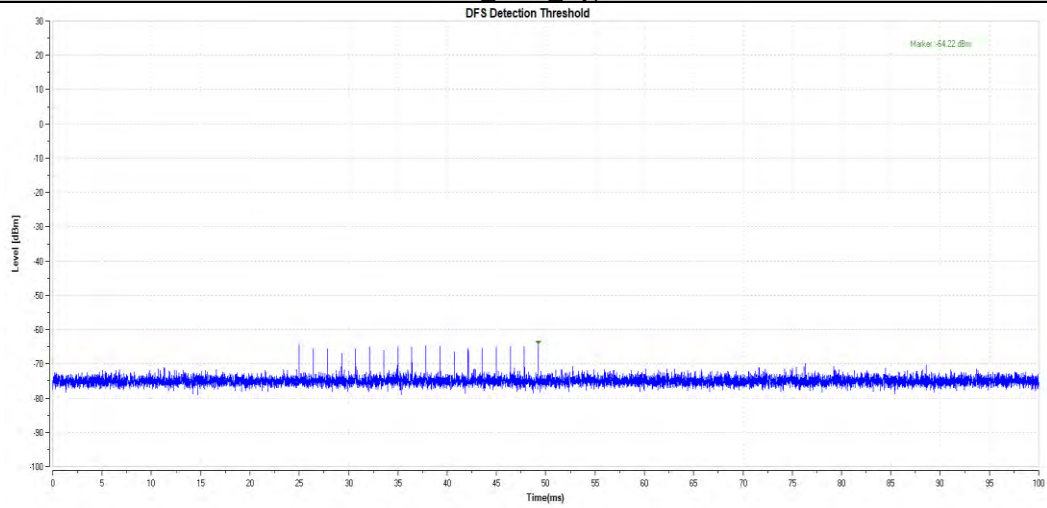



160M_5250_Type1

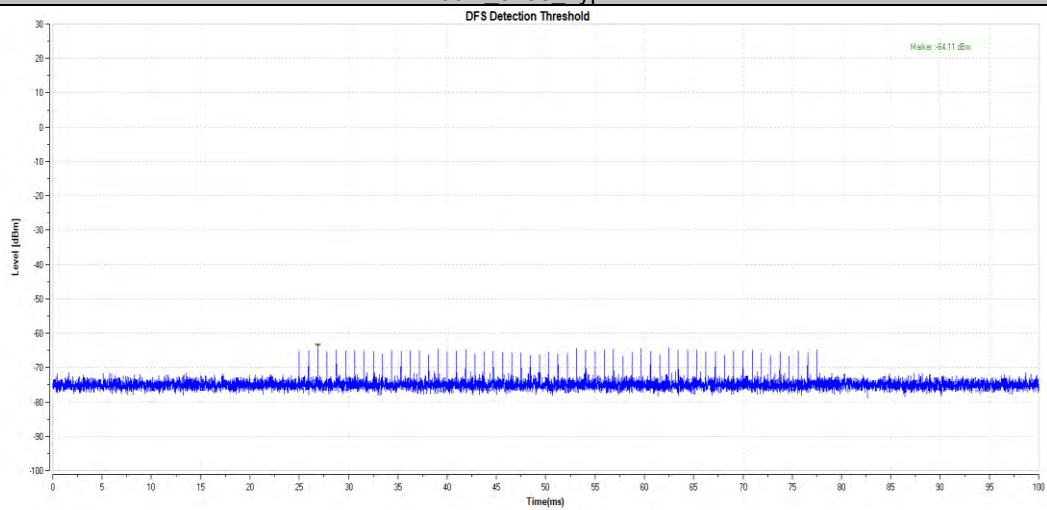

160M_5250_Type2

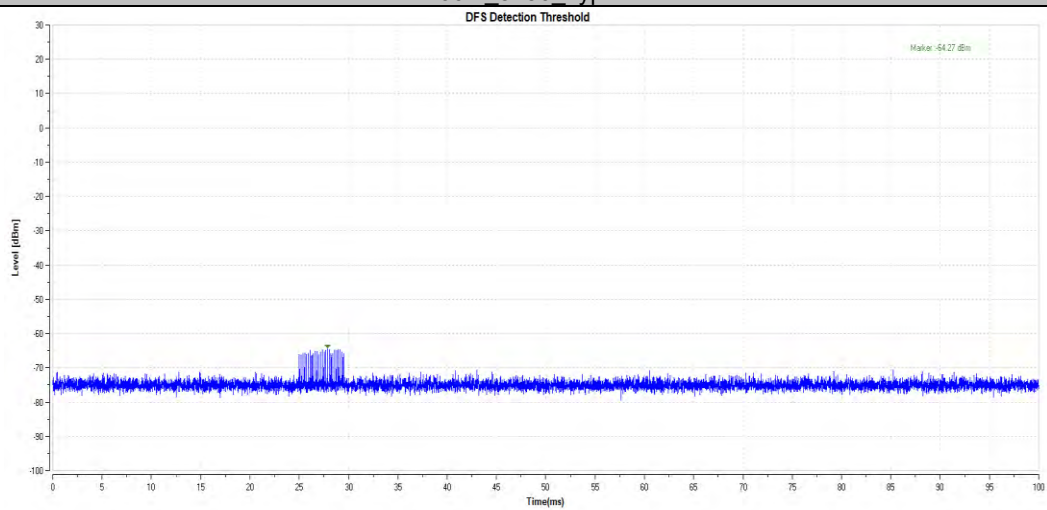

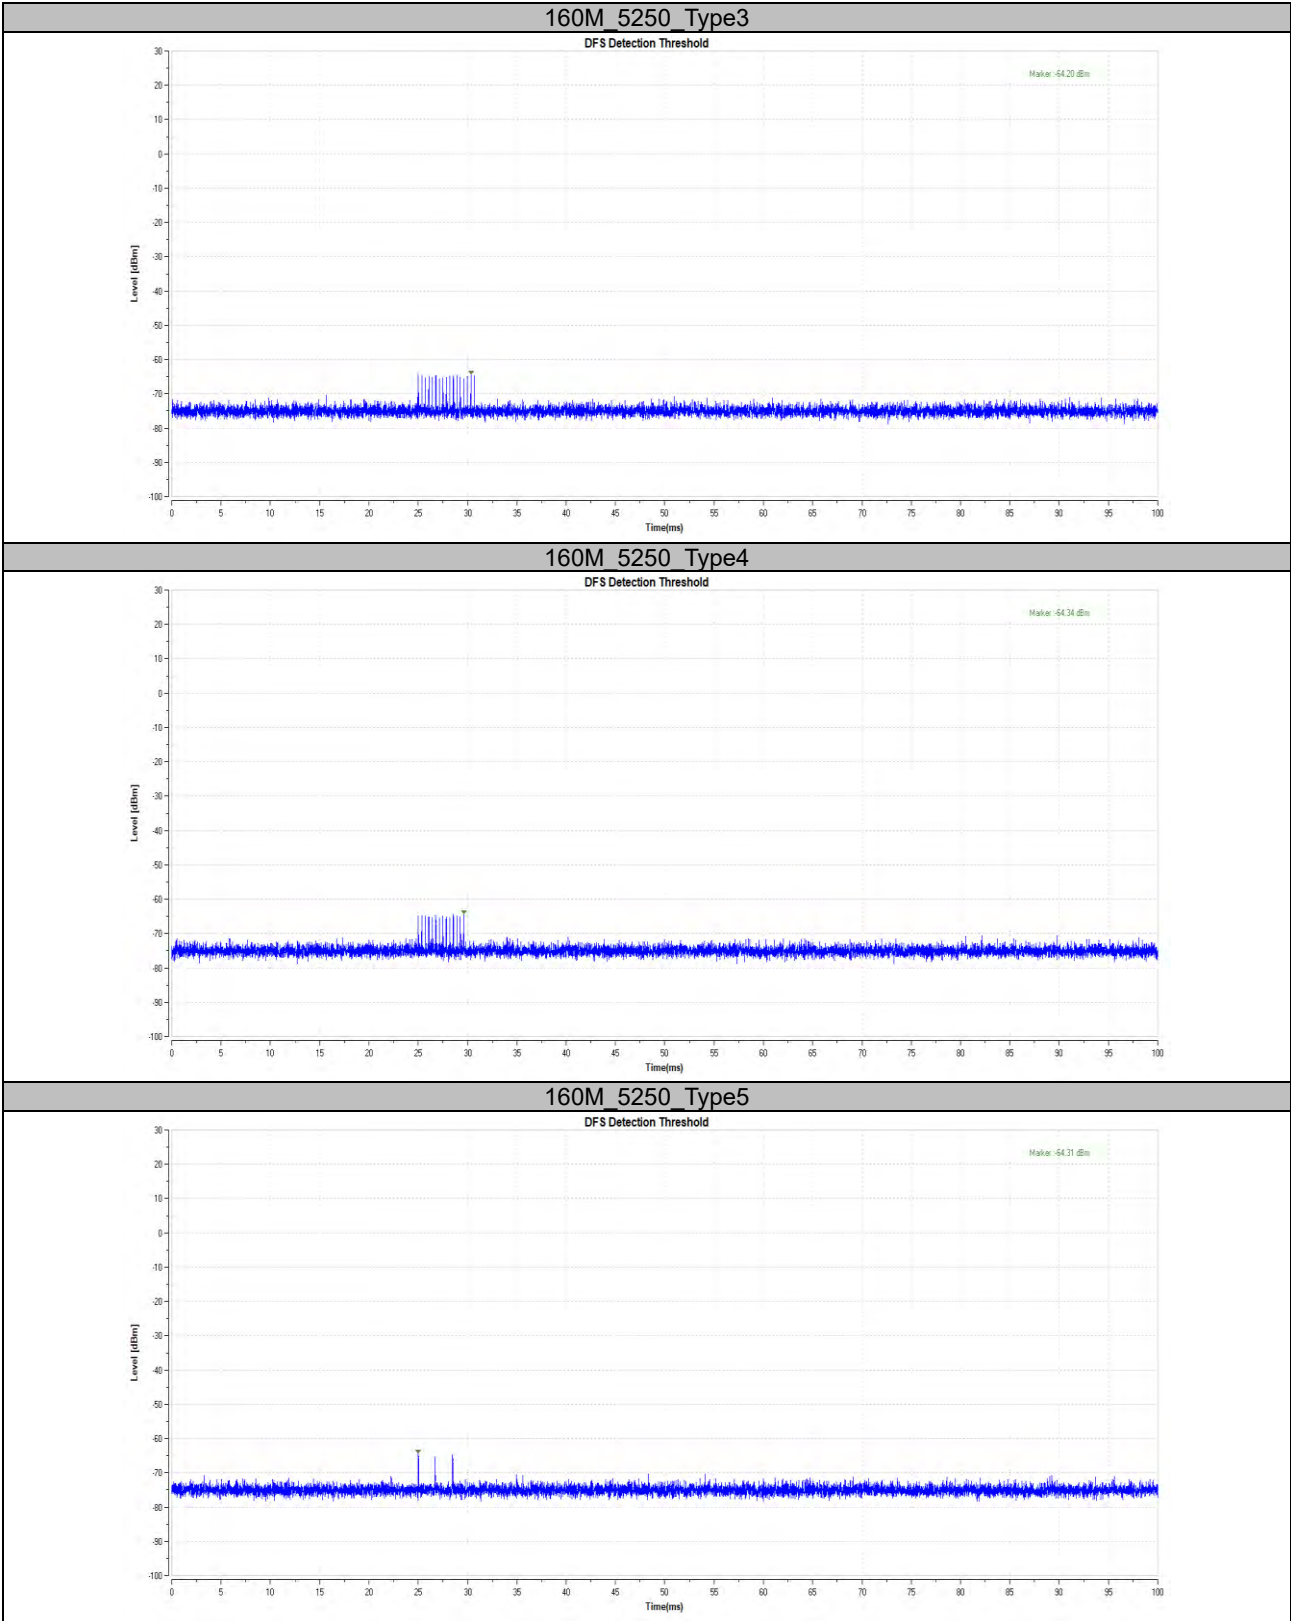


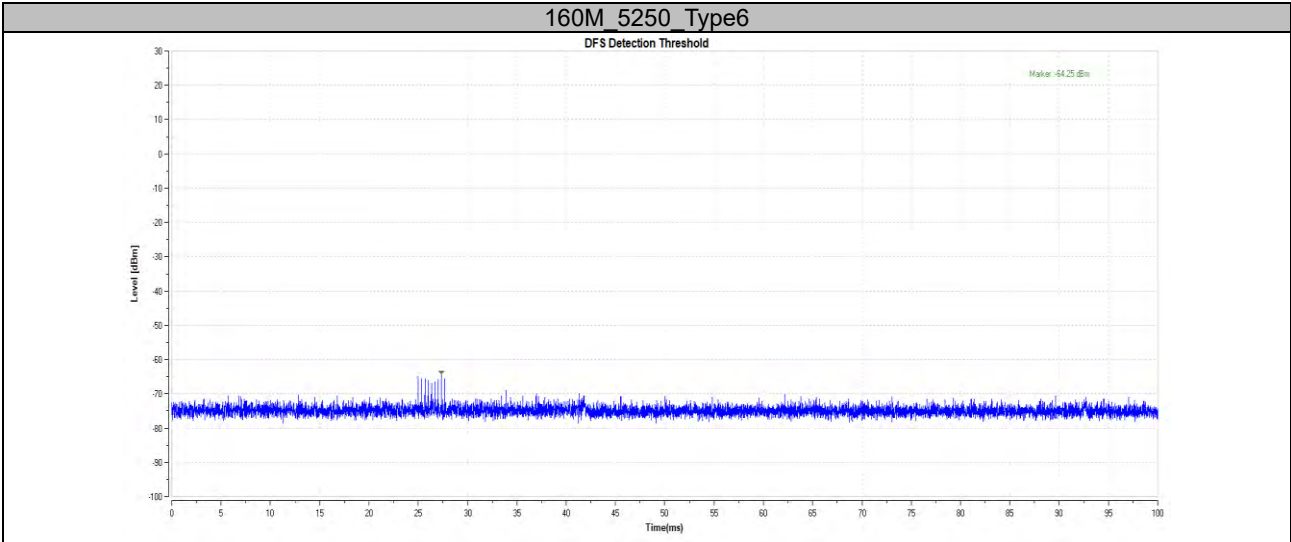

Appendix B: Channel Loading
Test Result

Test Mode	Frequency[MHz]	Result	Limit [%]	Verdict
11AX160MIMO	5250	27.16	17	PASS

Test Graphs

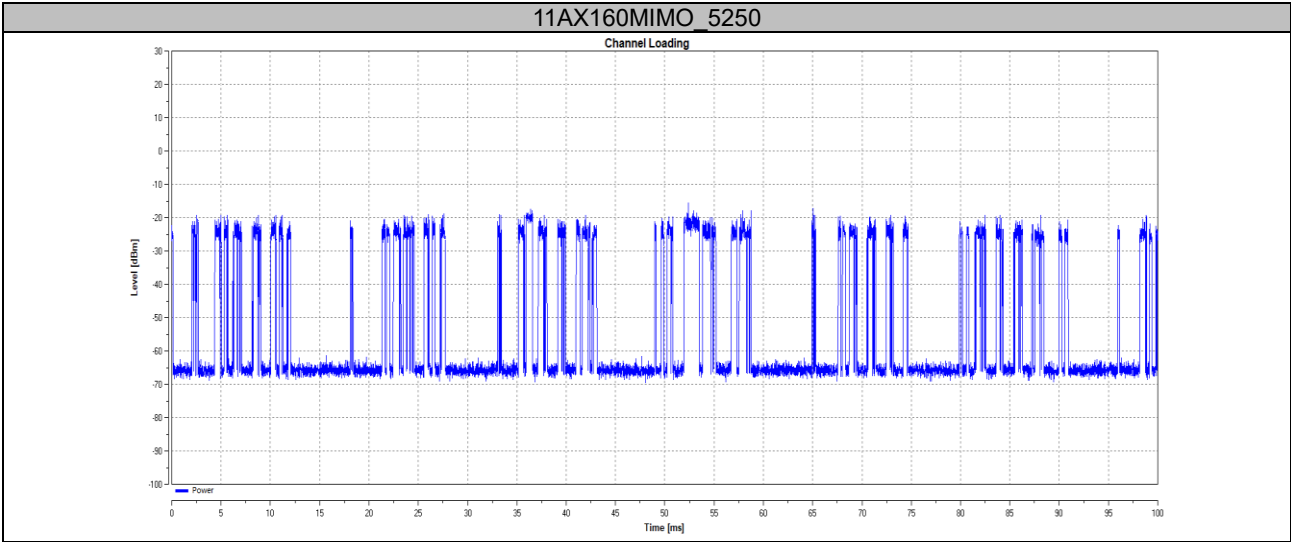

Appendix C: Channel Availability Check Time Test Result

Initial Channel Availability Check Time

Test Mode	Frequency[MHz]	Result	Verdict
11AX160MIMO	5250	See test Graph	PASS

Beginning of Channel Availability Check Time



Test Mode	Frequency[MHz]	Result	Verdict
11AX160MIMO	5250	See test Graph	PASS


End of Channel Availability Check Time

Test Mode	Frequency[MHz]	Result	Verdict
11AX160MIMO	5250	See test Graph	PASS

Note: the power-up cycle time of EUT is 101s.

Test Graphs

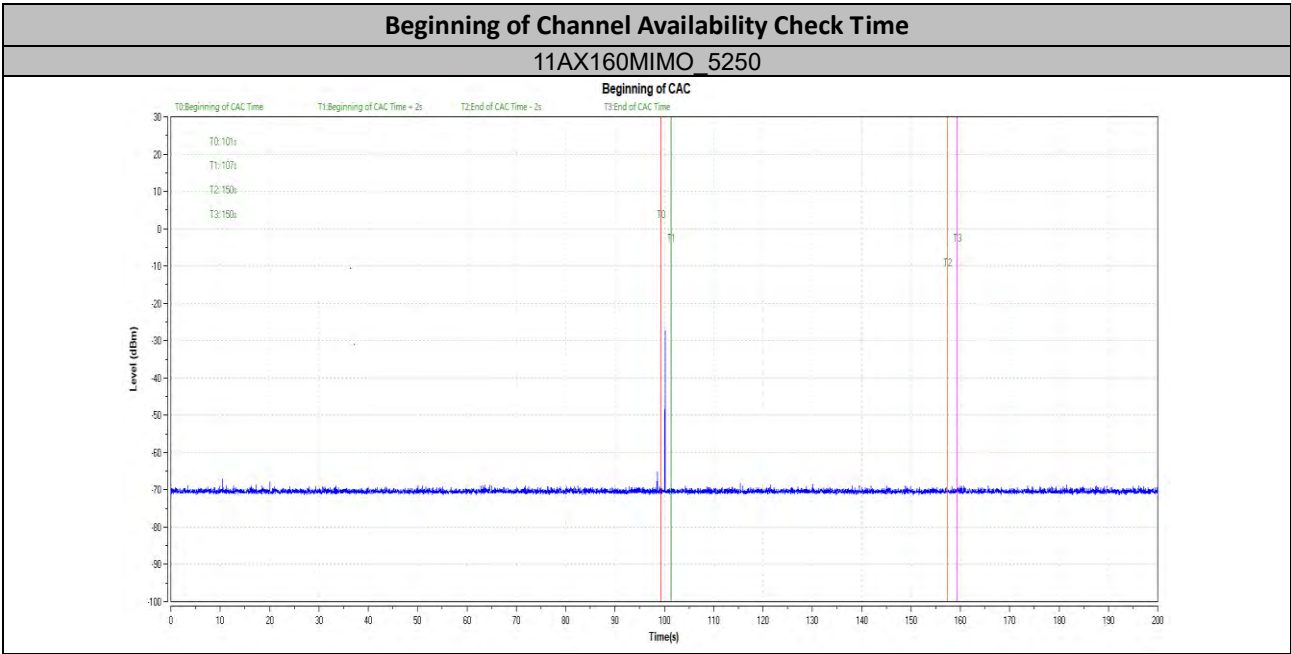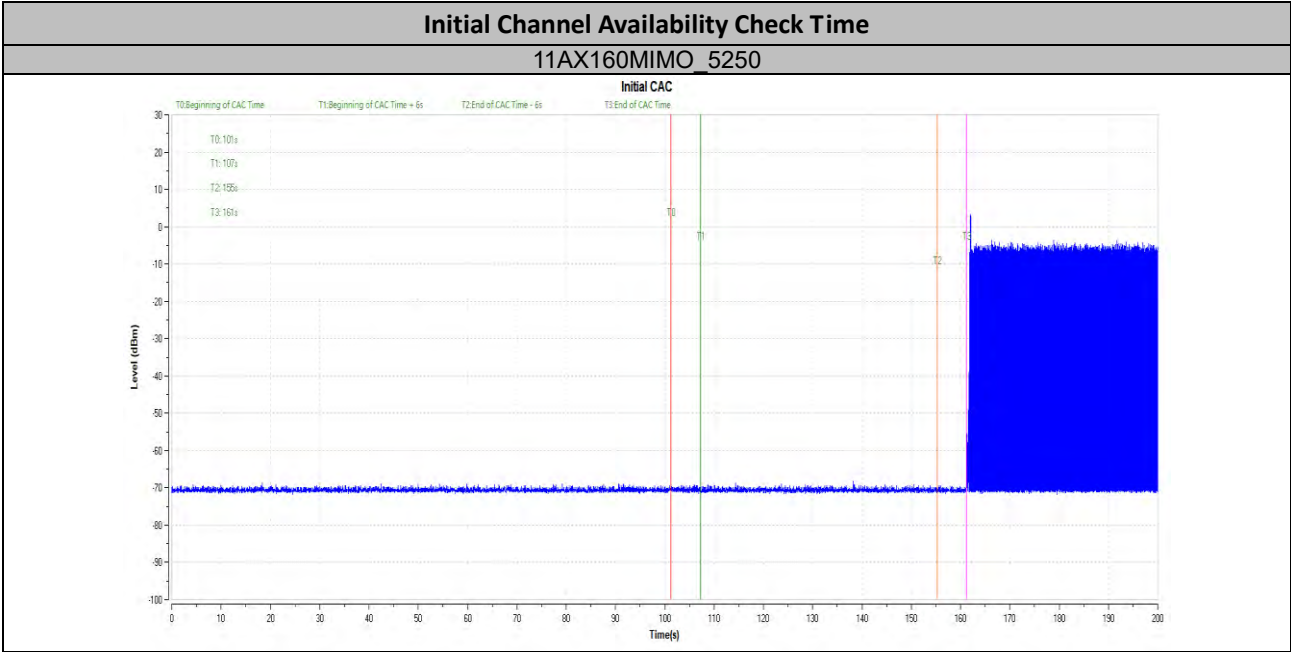


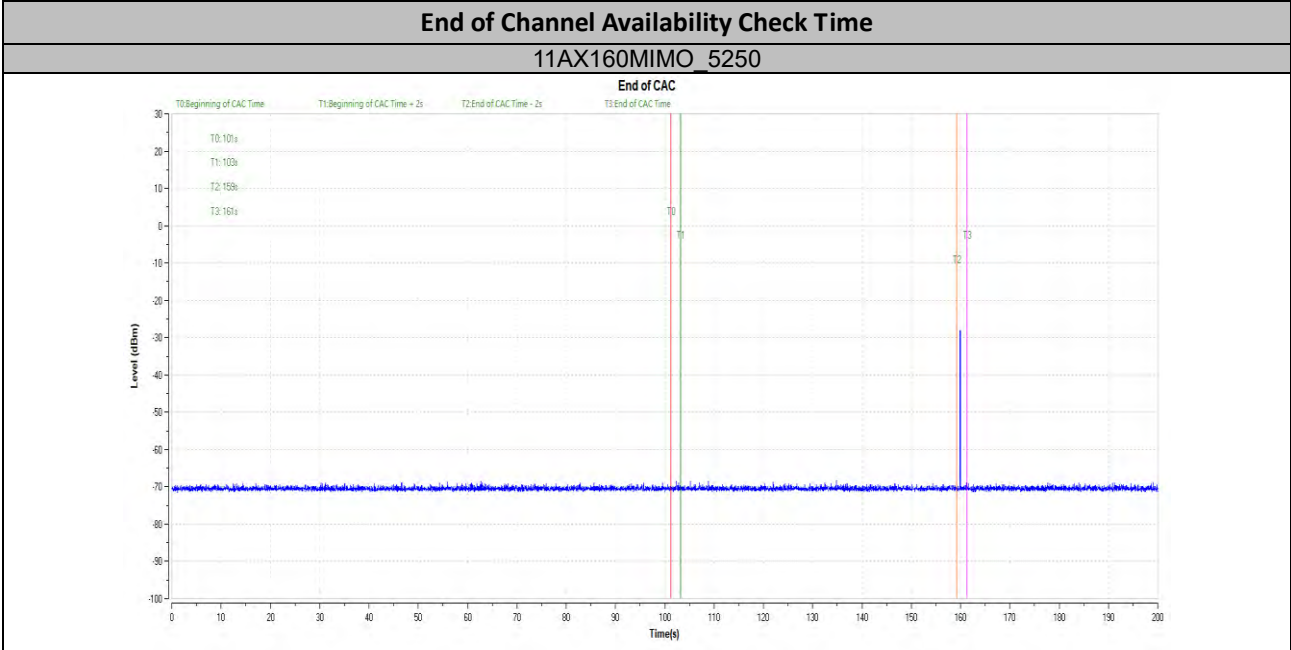

Appendix D: Channel Move Time and Channel Closing Transmission Time Test Result

Test Mode	Frequency[MHz]	CCTT[ms]	Limit[ms]	CMT[ms]	Limit[ms]	Verdict
11AX160MIMO	5250	200+5.2	200+60	440.4	10000	PASS


Test Graphs

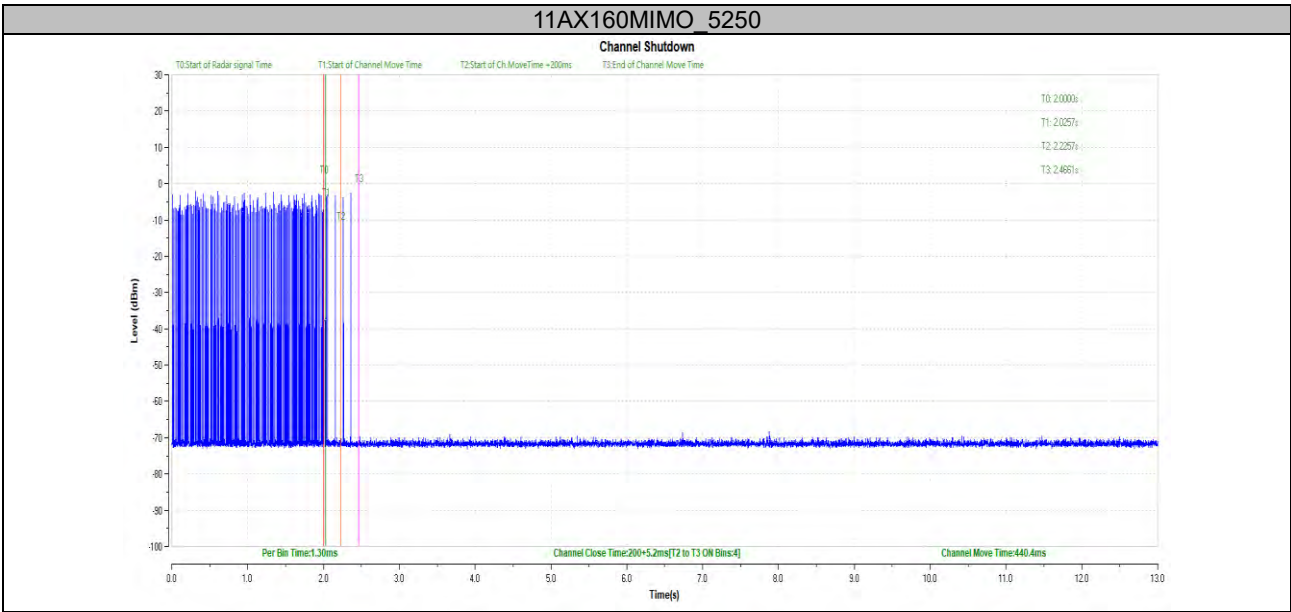

Appendix E: Non-Occupancy Period
Test Result

Test Mode	Frequency[MHz]	Result	Limit[s]	Verdict
11AX160MIMO	5250	see test graph	≥1800	PASS

Test Graphs

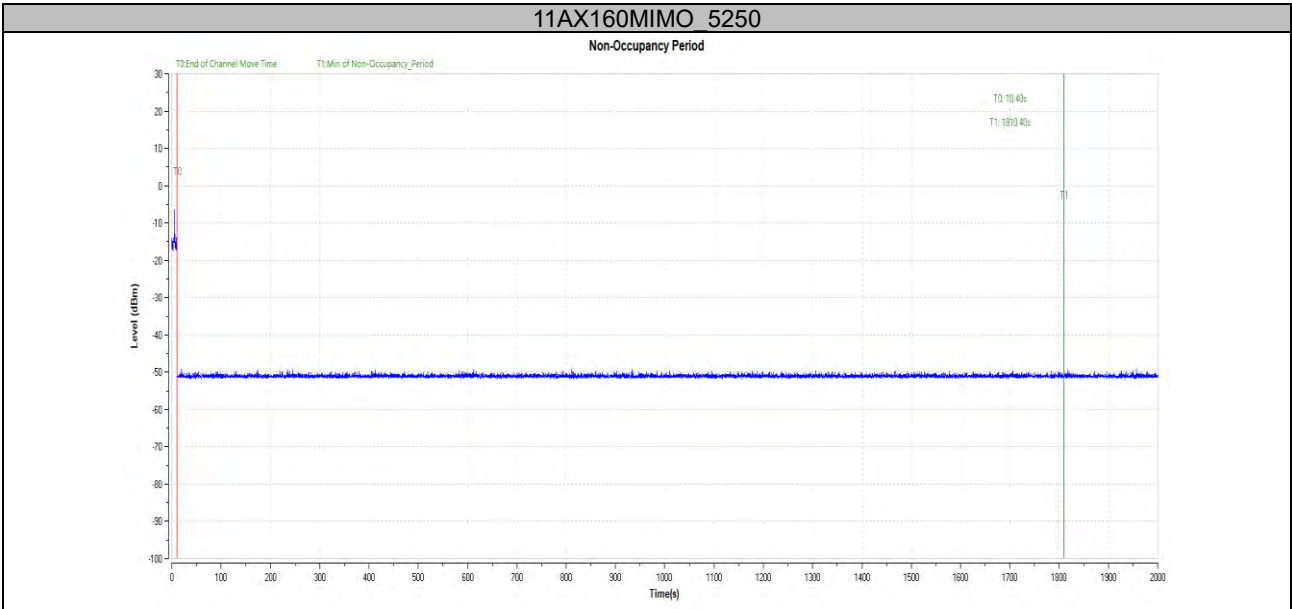

Appendix F: U-NII Detection Bandwidth Test Result

Test Mode	Frequency[MHz]	FL[MHz]	FH[MHz]	Detection Bandwidth [MHz]	OCB [MHz]	Limit [%]	Verdict
11AX20MIMO	5260	5250	5270	20	19.301	≥OCB	PASS
11AX40MIMO	5270	5250	5290	40	37.882	≥OCB	PASS
11AX80MIMO	5290	5250	5330	80	77.522	≥OCB	PASS
11AX160MIMO	5250	5250	5330	160	155.684	≥OCB*	PASS

Note*: the detection bandwidth covered the OBW within 5250-5350MHz range.

Test Mode	Frequency [MHz]	Radar Freq.	Trial 1	Trial 2	Trial 3	Trial 4	Trial 5	Trial 6	Trial 7	Trial 8	Trial 9	Trial 10	Ratio (%)
11AX20 MIMO	5260	5250	1	1	1	1	1	1	1	1	1	1	100
		5255	1	1	1	1	1	1	1	1	1	1	100
		5260	1	1	1	1	1	1	1	1	1	1	100
		5265	1	1	1	1	1	1	1	1	1	0	90
		5266	1	1	1	1	1	1	1	1	1	1	100
		5267	1	1	1	1	1	1	1	1	1	1	100
		5268	1	1	1	1	1	1	1	1	1	1	100
		5269	1	1	1	1	1	1	1	1	1	1	100
11AX40 MIMO	5270	5250	1	1	1	1	1	1	1	1	1	1	100
		5255	1	1	1	1	1	1	1	1	1	1	100
		5260	1	1	1	1	1	1	1	1	1	1	100
		5265	1	1	1	1	1	1	1	1	1	1	100
		5270	1	1	1	1	1	1	1	1	1	1	100
		5275	1	1	1	1	1	1	1	1	1	1	100
		5280	1	1	1	1	1	1	1	1	1	1	100
		5285	1	1	1	1	1	1	1	1	1	1	100
11AX80 MIMO	5290	5290	1	1	1	1	1	1	1	1	1	1	100
		5250	1	1	1	1	1	1	1	1	1	1	100
		5255	1	1	1	1	1	1	1	1	1	1	100
		5260	1	1	1	1	1	1	1	1	1	1	100
		5265	1	1	1	1	1	1	1	1	1	1	100
		5270	1	1	1	1	1	1	1	1	1	1	100
		5275	1	1	1	1	1	1	1	1	1	1	100
		5280	1	1	1	1	1	1	1	1	1	1	100
		5285	1	1	1	1	1	1	1	1	1	1	100
		5290	1	1	1	1	1	1	1	1	1	1	100
		5295	1	1	1	1	1	1	1	1	1	1	100
		5300	1	1	1	1	1	1	1	1	1	1	100
		5305	1	1	1	1	1	1	1	1	1	1	100
		5310	1	1	1	1	1	1	1	1	1	1	100
		5315	1	1	1	1	1	1	1	1	1	1	100
		5320	1	1	1	1	1	1	1	1	1	1	100
		5325	1	1	1	1	1	1	1	1	1	1	100
		5330	1	1	1	1	1	1	1	1	1	1	100

Test Mode	Frequency [MHz]	Radar Freq.	Trial 1	Trial 2	Trial 3	Trial 4	Trial 5	Trial 6	Trial 7	Trial 8	Trial 9	Trial 10	Ratio (%)
11AX160 MIMO	5250	5250	1	1	1	1	1	1	1	1	1	1	100
		5255	1	1	1	1	1	1	1	1	1	1	100
		5260	1	1	1	1	1	1	1	1	1	1	100
		5265	1	1	1	1	1	1	1	1	1	1	100
		5270	1	1	1	1	1	1	1	1	1	1	100
		5275	1	1	1	1	1	1	1	1	1	1	100
		5280	1	1	1	1	1	1	1	1	1	1	100
		5285	1	1	1	1	1	1	1	1	1	1	100
		5290	1	1	1	1	1	1	1	1	1	1	100
		5295	1	1	1	1	1	1	1	1	1	1	100
		5300	1	1	1	1	1	1	1	1	1	1	100
		5305	1	1	1	1	1	1	1	1	1	1	100
		5310	1	1	1	1	1	1	1	1	1	1	100
		5315	1	1	1	1	1	1	1	1	1	1	100
		5320	1	1	1	1	1	1	1	1	1	1	100
		5325	1	1	1	1	1	1	1	1	1	1	100
		5330	1	1	1	1	1	1	1	1	1	1	100

Appendix G: Statistical Performance check

Test Result

Test Mode	Channel	Radar Type	Pass Times	Fail Times	Probability (%)	Limit (%)	Verdict
11AX20MIMO	5260	Type1	30	0	100.00	60	PASS
		Type2	29	1	96.67	60	PASS
		Type3	30	0	100.00	60	PASS
		Type4	30	0	100.00	60	PASS
		Aggregate (Types 1-4)	119	1	99.17	80	PASS
		Type5	28	2	93.33	80	PASS
		Type6	30	0	100.00	70	PASS
11AX40MIMO	5270	Type1	30	0	100.00	60	PASS
		Type2	30	0	100.00	60	PASS
		Type3	30	0	100.00	60	PASS
		Type4	30	0	100.00	60	PASS
		Aggregate (Types 1-4)	120	0	100.00	80	PASS
		Type5	30	0	100.00	80	PASS
		Type6	30	0	100.00	70	PASS
11AX80MIMO	5290	Type1	29	1	96.67	60	PASS
		Type2	28	2	93.33	60	PASS
		Type3	30	0	100.00	60	PASS
		Type4	30	0	100.00	60	PASS
		Aggregate (Types 1-4)	117	3	97.50	80	PASS
		Type5	29	1	96.67	80	PASS
		Type6	30	0	100.00	70	PASS
11AX160MIMO	5250	Type1	28	2	93.33	60	PASS
		Type2	30	0	100.00	60	PASS
		Type3	30	0	100.00	60	PASS
		Type4	28	2	93.33	60	PASS
		Aggregate (Types 1-4)	116	4	96.67	80	PASS
		Type5	30	0	100.00	80	PASS
		Type6	30	0	100.00	70	PASS

Bridge mode:

Test Mode	Channel	Radar Type	Pass Times	Fail Times	Probability(%)	Limit(%)	Verdict
11AX40MIMO	5270	Type4	30	0	100.00	60	PASS

Test Mode	Channel	Radar Type	Trial ID	Pulse width(μs)	PRI(μs)	Pulses per Burst	Detection (1: Yes; 0: No)
11AX20MIMO	5260	Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	1
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	1
		Type2	8	3.1	164.0	26	1
		Type2	9	1.2	156.0	23	1
		Type2	10	3.9	210.0	27	1
		Type2	11	4.6	201.0	29	1
		Type2	12	3.2	162.0	26	1
		Type2	13	2.2	197.0	25	1
		Type2	14	4.5	163.0	29	1
		Type2	15	3.0	203.0	26	1
		Type2	16	5.0	168.0	29	1
		Type2	17	2.4	217.0	25	1
		Type2	18	2.9	191.0	26	1
		Type2	19	2.3	166.0	25	1
		Type2	20	3.7	150.0	27	1
		Type2	21	2.2	176.0	25	1
		Type2	22	4.9	195.0	29	1
		Type2	23	2.9	202.0	26	1
		Type2	24	2.5	178.0	25	1
		Type2	25	1.1	206.0	23	1
		Type2	26	3.8	155.0	27	1
		Type2	27	4.7	157.0	29	0

11AX20MIMO	5260	Type2	28	2.4	224.0	25	1
		Type2	29	4.2	159.0	28	1
		Type3	0	8.2	355.0	17	1
		Type3	1	6.1	487.0	16	1
		Type3	2	7.1	344.0	16	1
		Type3	3	9.8	288.0	18	1
		Type3	4	8.9	230.0	18	1
		Type3	5	7.9	432.0	17	1
		Type3	6	8.2	207.0	17	1
		Type3	7	7.5	443.0	17	1
		Type3	8	8.1	439.0	17	1
		Type3	9	6.2	223.0	16	1
		Type3	10	8.9	208.0	18	1
		Type3	11	9.6	463.0	18	1
		Type3	12	8.2	441.0	17	1
		Type3	13	7.2	323.0	16	1
		Type3	14	9.5	297.0	18	1
		Type3	15	8.0	412.0	17	1
		Type3	16	10.0	324.0	18	1
		Type3	17	7.4	271.0	17	1
		Type3	18	7.9	349.0	17	1
		Type3	19	7.3	409.0	16	1
		Type3	20	8.7	373.0	18	1
		Type3	21	7.2	254.0	16	1
		Type3	22	9.9	274.0	18	1
		Type3	23	7.9	278.0	17	1
		Type3	24	7.5	317.0	17	1
		Type3	25	6.1	260.0	16	1
		Type3	26	8.8	211.0	18	1
		Type3	27	9.7	272.0	18	1
		Type3	28	7.4	264.0	17	1
		Type3	29	9.2	284.0	18	1
		Type4	0	16.0	355.0	14	1
		Type4	1	11.3	487.0	12	1
		Type4	2	13.5	344.0	13	1
		Type4	3	19.4	288.0	16	1
		Type4	4	17.5	230.0	15	1
		Type4	5	15.3	432.0	14	1
		Type4	6	15.9	207.0	14	1
		Type4	7	14.3	443.0	13	1
		Type4	8	15.8	439.0	14	1
		Type4	9	11.5	223.0	12	1
		Type4	10	17.4	208.0	15	1
		Type4	11	19.0	463.0	16	1
		Type4	12	16.0	441.0	14	1
		Type4	13	13.8	323.0	13	1
		Type4	14	18.9	297.0	16	1
		Type4	15	15.5	412.0	14	1
		Type4	16	19.9	324.0	16	1
		Type4	17	14.1	271.0	13	1
		Type4	18	15.2	349.0	14	1
		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1

11AX40MIMO	5270	Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1
		Type1	0	1.0	938.0	57	1
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	1
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	1
		Type2	8	3.1	164.0	26	1
		Type2	9	1.2	156.0	23	1
		Type2	10	3.9	210.0	27	1
		Type2	11	4.6	201.0	29	1
		Type2	12	3.2	162.0	26	1
		Type2	13	2.2	197.0	25	1
		Type2	14	4.5	163.0	29	1
		Type2	15	3.0	203.0	26	1
		Type2	16	5.0	168.0	29	1
		Type2	17	2.4	217.0	25	1
		Type2	18	2.9	191.0	26	1
		Type2	19	2.3	166.0	25	1
		Type2	20	3.7	150.0	27	1
		Type2	21	2.2	176.0	25	1
		Type2	22	4.9	195.0	29	1
		Type2	23	2.9	202.0	26	1
		Type2	24	2.5	178.0	25	1
		Type2	25	1.1	206.0	23	1
		Type2	26	3.8	155.0	27	1
		Type2	27	4.7	157.0	29	1
		Type2	28	2.4	224.0	25	1

11AX40MIMO	5270	Type2	29	4.2	159.0	28	1
		Type3	0	8.2	355.0	17	1
		Type3	1	6.1	487.0	16	1
		Type3	2	7.1	344.0	16	1
		Type3	3	9.8	288.0	18	1
		Type3	4	8.9	230.0	18	1
		Type3	5	7.9	432.0	17	1
		Type3	6	8.2	207.0	17	1
		Type3	7	7.5	443.0	17	1
		Type3	8	8.1	439.0	17	1
		Type3	9	6.2	223.0	16	1
		Type3	10	8.9	208.0	18	1
		Type3	11	9.6	463.0	18	1
		Type3	12	8.2	441.0	17	1
		Type3	13	7.2	323.0	16	1
		Type3	14	9.5	297.0	18	1
		Type3	15	8.0	412.0	17	1
		Type3	16	10.0	324.0	18	1
		Type3	17	7.4	271.0	17	1
		Type3	18	7.9	349.0	17	1
		Type3	19	7.3	409.0	16	1
		Type3	20	8.7	373.0	18	1
		Type3	21	7.2	254.0	16	1
		Type3	22	9.9	274.0	18	1
		Type3	23	7.9	278.0	17	1
		Type3	24	7.5	317.0	17	1
		Type3	25	6.1	260.0	16	1
		Type3	26	8.8	211.0	18	1
		Type3	27	9.7	272.0	18	1
		Type3	28	7.4	264.0	17	1
		Type3	29	9.2	284.0	18	1
		Type4	0	16.0	355.0	14	1
		Type4	1	11.3	487.0	12	1
		Type4	2	13.5	344.0	13	1
		Type4	3	19.4	288.0	16	1
		Type4	4	17.5	230.0	15	1
		Type4	5	15.3	432.0	14	1
		Type4	6	15.9	207.0	14	1
		Type4	7	14.3	443.0	13	1
		Type4	8	15.8	439.0	14	1
		Type4	9	11.5	223.0	12	1
		Type4	10	17.4	208.0	15	1
		Type4	11	19.0	463.0	16	1
		Type4	12	16.0	441.0	14	1
		Type4	13	13.8	323.0	13	1
		Type4	14	18.9	297.0	16	1
		Type4	15	15.5	412.0	14	1
		Type4	16	19.9	324.0	16	1
		Type4	17	14.1	271.0	13	1
		Type4	18	15.2	349.0	14	1
		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1

11AX80MIMO	5290	Type4	29	18.2	284.0	15	1
		Type1	0	1.0	938.0	57	0
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	1
		Type2	0	3.2	179.0	26	0
		Type2	1	1.1	207.0	23	0
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	1
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	1
		Type2	8	3.1	164.0	26	1
		Type2	9	1.2	156.0	23	1
		Type2	10	3.9	210.0	27	1
		Type2	11	4.6	201.0	29	1
		Type2	12	3.2	162.0	26	1
		Type2	13	2.2	197.0	25	1
		Type2	14	4.5	163.0	29	1
		Type2	15	3.0	203.0	26	1
		Type2	16	5.0	168.0	29	1
		Type2	17	2.4	217.0	25	1
		Type2	18	2.9	191.0	26	1
		Type2	19	2.3	166.0	25	1
		Type2	20	3.7	150.0	27	1
		Type2	21	2.2	176.0	25	1
		Type2	22	4.9	195.0	29	1
		Type2	23	2.9	202.0	26	1
		Type2	24	2.5	178.0	25	1
		Type2	25	1.1	206.0	23	1
		Type2	26	3.8	155.0	27	1
		Type2	27	4.7	157.0	29	1
		Type2	28	2.4	224.0	25	1
		Type2	29	2.4	214.0	25	1

11AX80MIMO	5290	Type3	0	8.2	355.0	17	1
		Type3	1	6.1	487.0	16	1
		Type3	2	7.1	344.0	16	1
		Type3	3	9.8	288.0	18	1
		Type3	4	8.9	230.0	18	1
		Type3	5	7.9	432.0	17	1
		Type3	6	8.2	207.0	17	1
		Type3	7	7.5	443.0	17	1
		Type3	8	8.1	439.0	17	1
		Type3	9	6.2	223.0	16	1
		Type3	10	8.9	208.0	18	1
		Type3	11	9.6	463.0	18	1
		Type3	12	8.2	441.0	17	1
		Type3	13	7.2	323.0	16	1
		Type3	14	9.5	297.0	18	1
		Type3	15	8.0	412.0	17	1
		Type3	16	10.0	324.0	18	1
		Type3	17	7.4	271.0	17	1
		Type3	18	7.9	349.0	17	1
		Type3	19	7.3	409.0	16	1
		Type3	20	8.7	373.0	18	1
		Type3	21	7.2	254.0	16	1
		Type3	22	9.9	274.0	18	1
		Type3	23	7.9	278.0	17	1
		Type3	24	7.5	317.0	17	1
		Type3	25	6.1	260.0	16	1
		Type3	26	8.8	211.0	18	1
		Type3	27	9.7	272.0	18	1
		Type3	28	7.4	264.0	17	1
		Type3	29	9.2	284.0	18	1
		Type4	0	16.0	355.0	14	1
		Type4	1	11.3	487.0	12	1
		Type4	2	13.5	344.0	13	1
		Type4	3	19.4	288.0	16	1
		Type4	4	17.5	230.0	15	1
		Type4	5	15.3	432.0	14	1
		Type4	6	15.9	207.0	14	1
		Type4	7	14.3	443.0	13	1
		Type4	8	15.8	439.0	14	1
		Type4	9	11.5	223.0	12	1
		Type4	10	17.4	208.0	15	1
		Type4	11	19.0	463.0	16	1
		Type4	12	16.0	441.0	14	1
		Type4	13	13.8	323.0	13	1
		Type4	14	18.9	297.0	16	1
		Type4	15	15.5	412.0	14	1
		Type4	16	19.9	324.0	16	1
		Type4	17	14.1	271.0	13	1
		Type4	18	15.2	349.0	14	1
		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1

11AX160MIMO	5250	Type1	0	1.0	938.0	57	0
		Type1	1	1.0	698.0	76	1
		Type1	2	1.0	618.0	86	1
		Type1	3	1.0	538.0	99	1
		Type1	4	1.0	878.0	61	1
		Type1	5	1.0	3066.0	18	1
		Type1	6	1.0	638.0	83	1
		Type1	7	1.0	918.0	58	1
		Type1	8	1.0	838.0	63	1
		Type1	9	1.0	858.0	62	1
		Type1	10	1.0	798.0	67	1
		Type1	11	1.0	718.0	74	1
		Type1	12	1.0	578.0	92	1
		Type1	13	1.0	598.0	89	1
		Type1	14	1.0	558.0	95	1
		Type1	15	1.0	2536.0	21	1
		Type1	16	1.0	966.0	55	1
		Type1	17	1.0	827.0	64	1
		Type1	18	1.0	2501.0	22	1
		Type1	19	1.0	2595.0	21	1
		Type1	20	1.0	1114.0	48	1
		Type1	21	1.0	1302.0	41	1
		Type1	22	1.0	3045.0	18	1
		Type1	23	1.0	1624.0	33	1
		Type1	24	1.0	2878.0	19	1
		Type1	25	1.0	1027.0	52	1
		Type1	26	1.0	2485.0	22	1
		Type1	27	1.0	1600.0	33	1
		Type1	28	1.0	1172.0	46	1
		Type1	29	1.0	1177.0	45	0
		Type2	0	3.2	179.0	26	1
		Type2	1	1.1	207.0	23	1
		Type2	2	2.1	230.0	24	1
		Type2	3	4.8	200.0	29	1
		Type2	4	3.9	214.0	28	1
		Type2	5	2.9	222.0	26	1
		Type2	6	3.2	204.0	26	1
		Type2	7	2.5	192.0	25	1
		Type2	8	3.1	164.0	26	1
		Type2	9	1.2	156.0	23	1
		Type2	10	3.9	210.0	27	1
		Type2	11	4.6	201.0	29	1
		Type2	12	3.2	162.0	26	1
		Type2	13	2.2	197.0	25	1
		Type2	14	4.5	163.0	29	1
		Type2	15	3.0	203.0	26	1
		Type2	16	5.0	168.0	29	1
		Type2	17	2.4	217.0	25	1
		Type2	18	2.9	191.0	26	1
		Type2	19	2.3	166.0	25	1
		Type2	20	3.7	150.0	27	1
		Type2	21	2.2	176.0	25	1
		Type2	22	4.9	195.0	29	1
		Type2	23	2.9	202.0	26	1
		Type2	24	2.5	178.0	25	1
		Type2	25	1.1	206.0	23	1
		Type2	26	3.8	155.0	27	1
		Type2	27	4.7	157.0	29	1
		Type2	28	2.4	224.0	25	1
		Type2	29	2.4	214.0	25	1
		Type3	0	8.2	355.0	17	1

11AX160MIMO	5250	Type3	1	6.1	487.0	16	1
		Type3	2	7.1	344.0	16	1
		Type3	3	9.8	288.0	18	1
		Type3	4	8.9	230.0	18	1
		Type3	5	7.9	432.0	17	1
		Type3	6	8.2	207.0	17	1
		Type3	7	7.5	443.0	17	1
		Type3	8	8.1	439.0	17	1
		Type3	9	6.2	223.0	16	1
		Type3	10	8.9	208.0	18	1
		Type3	11	9.6	463.0	18	1
		Type3	12	8.2	441.0	17	1
		Type3	13	7.2	323.0	16	1
		Type3	14	9.5	297.0	18	1
		Type3	15	8.0	412.0	17	1
		Type3	16	10.0	324.0	18	1
		Type3	17	7.4	271.0	17	1
		Type3	18	7.9	349.0	17	1
		Type3	19	7.3	409.0	16	1
		Type3	20	8.7	373.0	18	1
		Type3	21	7.2	254.0	16	1
		Type3	22	9.9	274.0	18	1
		Type3	23	7.9	278.0	17	1
		Type3	24	7.5	317.0	17	1
		Type3	25	6.1	260.0	16	1
		Type3	26	8.8	211.0	18	1
		Type3	27	9.7	272.0	18	1
		Type3	28	7.4	264.0	17	1
		Type3	29	9.2	284.0	18	1
		Type4	0	16.0	355.0	14	1
		Type4	1	11.3	487.0	12	1
		Type4	2	13.5	344.0	13	0
		Type4	3	19.4	288.0	16	0
		Type4	4	17.5	230.0	15	1
		Type4	5	15.3	432.0	14	1
		Type4	6	15.9	207.0	14	1
		Type4	7	14.3	443.0	13	1
		Type4	8	15.8	439.0	14	1
		Type4	9	11.5	223.0	12	1
		Type4	10	17.4	208.0	15	1
		Type4	11	19.0	463.0	16	1
		Type4	12	16.0	441.0	14	1
		Type4	13	13.8	323.0	13	1
		Type4	14	18.9	297.0	16	1
		Type4	15	15.5	412.0	14	1
		Type4	16	19.9	324.0	16	1
		Type4	17	14.1	271.0	13	1
		Type4	18	15.2	349.0	14	1
		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
		Type4	29	18.2	284.0	15	1

Test Mode	Channel	Radar Type	Trial ID	Number Of Bursts	Waveform Length (s)	Radar Frequency	Detection (1: Yes; 0: No)
11AX20MIMO	5260	Type5	0	15	12	5260	1
		Type5	1	8	12	5260	1
		Type5	2	11	12	5260	1
		Type5	3	20	12	5260	1
		Type5	4	17	12	5260	1
		Type5	5	14	12	5260	1
		Type5	6	15	12	5260	1
		Type5	7	12	12	5260	1
		Type5	8	14	12	5260	1
		Type5	9	8	12	5260	1
		Type5	10	17	12	5256.4	1
		Type5	11	19	12	5257.6	1
		Type5	12	15	12	5255.2	1
		Type5	13	12	12	5254	0
		Type5	14	19	12	5257.2	1
		Type5	15	14	12	5254.8	1
		Type5	16	20	12	5258	1
		Type5	17	12	12	5254	0
		Type5	18	14	12	5254.8	1
		Type5	19	12	12	5254	1
		Type5	20	16	12	5264	1
		Type5	21	12	12	5266.4	1
		Type5	22	20	12	5262	1
		Type5	23	14	12	5265.2	1
		Type5	24	13	12	5265.6	1
		Type5	25	8	12	5268	1
		Type5	26	17	12	5263.6	1
		Type5	27	19	12	5262.4	1
		Type5	28	12	12	5266	1
		Type5	29	18	12	5263.2	1
11AX40MIMO	5270	Type5	0	15	12	5270	1
		Type5	1	8	12	5270	1
		Type5	2	11	12	5270	1
		Type5	3	20	12	5270	1
		Type5	4	17	12	5270	1
		Type5	5	14	12	5270	1
		Type5	6	15	12	5270	1
		Type5	7	12	12	5270	1
		Type5	8	14	12	5270	1
		Type5	9	8	12	5270	1
		Type5	10	17	12	5256.4	1
		Type5	11	19	12	5257.6	1
		Type5	12	15	12	5255.2	1
		Type5	13	12	12	5254	1
		Type5	14	19	12	5257.2	1
		Type5	15	14	12	5254.8	1
		Type5	16	20	12	5258	1
		Type5	17	12	12	5254	1
		Type5	18	14	12	5254.8	1
		Type5	19	12	12	5254	1
		Type5	20	16	12	5284	1
		Type5	21	12	12	5286.4	1
		Type5	22	20	12	5282	1
		Type5	23	14	12	5285.2	1
		Type5	24	13	12	5285.6	1
		Type5	25	8	12	5288	1
		Type5	26	17	12	5283.6	1
		Type5	27	19	12	5282.4	1

11AX80MIMO	5290	Type5	28	12	12	5286	1
		Type5	29	18	12	5283.2	1
		Type5	0	15	12	5290	1
		Type5	1	8	12	5290	1
		Type5	2	11	12	5290	1
		Type5	3	20	12	5290	1
		Type5	4	17	12	5290	1
		Type5	5	14	12	5290	1
		Type5	6	15	12	5290	1
		Type5	7	12	12	5290	1
		Type5	8	14	12	5290	1
		Type5	9	8	12	5290	1
		Type5	10	17	12	5256.4	0
		Type5	11	19	12	5257.6	1
		Type5	12	15	12	5255.2	1
		Type5	13	12	12	5254	1
		Type5	14	19	12	5257.2	1
		Type5	15	14	12	5254.8	1
		Type5	16	20	12	5258	1
		Type5	17	12	12	5254	1
		Type5	18	14	12	5254.8	1
		Type5	19	12	12	5254	1
		Type5	20	16	12	5324	1
		Type5	21	12	12	5326.4	1
		Type5	22	20	12	5322	1
		Type5	23	14	12	5325.2	1
		Type5	24	13	12	5325.6	1
		Type5	25	8	12	5328	1
		Type5	26	17	12	5323.6	1
		Type5	27	19	12	5322.4	1
		Type5	28	12	12	5326	1
		Type5	29	18	12	5323.2	1

Test Mode	Channel	Radar Type	Trial ID	Number Of Bursts	Wavform Length (s)	Radar Frequency	Detection (1: Yes; 0: No)
11AX160MIMO	5250	Type5	0	15	12	5290	1
		Type5	1	8	12	5290	1
		Type5	2	11	12	5290	1
		Type5	3	20	12	5290	1
		Type5	4	17	12	5290	1
		Type5	5	14	12	5290	1
		Type5	6	15	12	5290	1
		Type5	7	12	12	5290	1
		Type5	8	14	12	5290	1
		Type5	9	8	12	5290	1
		Type5	10	17	12	5256.4	1
		Type5	11	19	12	5257.6	1
		Type5	12	15	12	5255.2	1
		Type5	13	12	12	5254	1
		Type5	14	19	12	5257.2	1
		Type5	15	14	12	5254.8	1
		Type5	16	20	12	5258	1
		Type5	17	12	12	5254	1
		Type5	18	14	12	5254.8	1
		Type5	19	12	12	5254	1
		Type5	20	16	12	5324	1
		Type5	21	12	12	5326.4	1
		Type5	22	20	12	5322	1
		Type5	23	14	12	5325.2	1
		Type5	24	13	12	5325.6	1
		Type5	25	8	12	5328	1
		Type5	26	17	12	5323.6	1
		Type5	27	19	12	5322.4	1
		Type5	28	12	12	5326	1
		Type5	29	18	12	5323.2	1

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	0	0	306087.0	13	2	66.0	1827.0	1441.0	---
		Type5	0	1	598928.0	13	1	85.0	1410.0	---	---
		Type5	0	2	90244.0	13	1	80.0	1648.0	---	---
		Type5	0	3	440330.0	13	3	84.0	1716.0	1225.0	1843.0
		Type5	0	4	131191.0	13	3	68.0	1233.0	1147.0	1729.0
		Type5	0	5	239779.0	13	2	76.0	1406.0	1285.0	---
		Type5	0	6	309957.0	13	2	89.0	1876.0	1698.0	---
		Type5	0	7	511630.0	13	2	85.0	1886.0	1525.0	---
		Type5	0	8	405562.0	13	2	86.0	1458.0	1224.0	---
		Type5	0	9	501932.0	13	1	78.0	1505.0	---	---
		Type5	0	10	195785.0	13	3	73.0	1517.0	1555.0	1394.0
		Type5	0	11	381713.0	13	3	87.0	1362.0	1656.0	1935.0
		Type5	0	12	461517.0	13	2	72.0	1594.0	1457.0	---
		Type5	0	13	120755.0	13	1	84.0	1856.0	---	---
		Type5	0	14	330567.0	13	3	86.0	1860.0	1130.0	1468.0
11AX40MIMO	5270	Type5	0	0	306087.0	13	2	66.0	1827.0	1441.0	---
		Type5	0	1	598928.0	13	1	85.0	1410.0	---	---
		Type5	0	2	90244.0	13	1	80.0	1648.0	---	---
		Type5	0	3	440330.0	13	3	84.0	1716.0	1225.0	1843.0
		Type5	0	4	131191.0	13	3	68.0	1233.0	1147.0	1729.0
		Type5	0	5	239779.0	13	2	76.0	1406.0	1285.0	---
		Type5	0	6	309957.0	13	2	89.0	1876.0	1698.0	---
		Type5	0	7	511630.0	13	2	85.0	1886.0	1525.0	---
		Type5	0	8	405562.0	13	2	86.0	1458.0	1224.0	---
		Type5	0	9	501932.0	13	1	78.0	1505.0	---	---
		Type5	0	10	195785.0	13	3	73.0	1517.0	1555.0	1394.0
		Type5	0	11	381713.0	13	3	87.0	1362.0	1656.0	1935.0
		Type5	0	12	461517.0	13	2	72.0	1594.0	1457.0	---
		Type5	0	13	120755.0	13	1	84.0	1856.0	---	---
		Type5	0	14	330567.0	13	3	86.0	1860.0	1130.0	1468.0
11AX80MIMO	5290	Type5	0	0	306087.0	13	2	66.0	1827.0	1441.0	---
		Type5	0	1	598928.0	13	1	85.0	1410.0	---	---
		Type5	0	2	90244.0	13	1	80.0	1648.0	---	---
		Type5	0	3	440330.0	13	3	84.0	1716.0	1225.0	1843.0
		Type5	0	4	131191.0	13	3	68.0	1233.0	1147.0	1729.0
		Type5	0	5	239779.0	13	2	76.0	1406.0	1285.0	---
		Type5	0	6	309957.0	13	2	89.0	1876.0	1698.0	---
		Type5	0	7	511630.0	13	2	85.0	1886.0	1525.0	---
		Type5	0	8	405562.0	13	2	86.0	1458.0	1224.0	---
		Type5	0	9	501932.0	13	1	78.0	1505.0	---	---
		Type5	0	10	195785.0	13	3	73.0	1517.0	1555.0	1394.0
		Type5	0	11	381713.0	13	3	87.0	1362.0	1656.0	1935.0
		Type5	0	12	461517.0	13	2	72.0	1594.0	1457.0	---
		Type5	0	13	120755.0	13	1	84.0	1856.0	---	---
		Type5	0	14	330567.0	13	3	86.0	1860.0	1130.0	1468.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX160MIMO	5250	Type5	0	0	306087.0	13	2	66.0	1827.0	1441.0	---
		Type5	0	1	598928.0	13	1	85.0	1410.0	---	---
		Type5	0	2	90244.0	13	1	80.0	1648.0	---	---
		Type5	0	3	440330.0	13	3	84.0	1716.0	1225.0	1843.0
		Type5	0	4	131191.0	13	3	68.0	1233.0	1147.0	1729.0
		Type5	0	5	239779.0	13	2	76.0	1406.0	1285.0	---
		Type5	0	6	309957.0	13	2	89.0	1876.0	1698.0	---
		Type5	0	7	511630.0	13	2	85.0	1886.0	1525.0	---
		Type5	0	8	405562.0	13	2	86.0	1458.0	1224.0	---
		Type5	0	9	501932.0	13	1	78.0	1505.0	---	---
		Type5	0	10	195785.0	13	3	73.0	1517.0	1555.0	1394.0
		Type5	0	11	381713.0	13	3	87.0	1362.0	1656.0	1935.0
		Type5	0	12	461517.0	13	2	72.0	1594.0	1457.0	---
		Type5	0	13	120755.0	13	1	84.0	1856.0	---	---
		Type5	0	14	330567.0	13	3	86.0	1860.0	1130.0	1468.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	1	0	510886.0	5	2	88.0	1566.0	1527.0	---
		Type5	1	1	669726.0	5	3	84.0	1839.0	1262.0	1257.0
		Type5	1	2	661132.0	5	2	73.0	1722.0	1403.0	---
		Type5	1	3	572929.0	5	2	83.0	1208.0	1041.0	---
		Type5	1	4	700970.0	5	1	65.0	1683.0	---	---
		Type5	1	5	179012.0	5	3	89.0	1204.0	1292.0	1419.0
		Type5	1	6	336050.0	5	1	78.0	1498.0	---	---
		Type5	1	7	179629.0	5	3	85.0	1427.0	1796.0	1728.0
11AX40MIMO	5270	Type5	1	0	510886.0	5	2	88.0	1566.0	1527.0	---
		Type5	1	1	669726.0	5	3	84.0	1839.0	1262.0	1257.0
		Type5	1	2	661132.0	5	2	73.0	1722.0	1403.0	---
		Type5	1	3	572929.0	5	2	83.0	1208.0	1041.0	---
		Type5	1	4	700970.0	5	1	65.0	1683.0	---	---
		Type5	1	5	179012.0	5	3	89.0	1204.0	1292.0	1419.0
		Type5	1	6	336050.0	5	1	78.0	1498.0	---	---
		Type5	1	7	179629.0	5	3	85.0	1427.0	1796.0	1728.0
11AX80MIMO	5290	Type5	1	0	510886.0	5	2	88.0	1566.0	1527.0	---
		Type5	1	1	669726.0	5	3	84.0	1839.0	1262.0	1257.0
		Type5	1	2	661132.0	5	2	73.0	1722.0	1403.0	---
		Type5	1	3	572929.0	5	2	83.0	1208.0	1041.0	---
		Type5	1	4	700970.0	5	1	65.0	1683.0	---	---
		Type5	1	5	179012.0	5	3	89.0	1204.0	1292.0	1419.0
		Type5	1	6	336050.0	5	1	78.0	1498.0	---	---
		Type5	1	7	179629.0	5	3	85.0	1427.0	1796.0	1728.0
11AX160MIMO	5250	Type5	1	0	510886.0	5	2	88.0	1566.0	1527.0	---
		Type5	1	1	669726.0	5	3	84.0	1839.0	1262.0	1257.0
		Type5	1	2	661132.0	5	2	73.0	1722.0	1403.0	---
		Type5	1	3	572929.0	5	2	83.0	1208.0	1041.0	---
		Type5	1	4	700970.0	5	1	65.0	1683.0	---	---
		Type5	1	5	179012.0	5	3	89.0	1204.0	1292.0	1419.0
		Type5	1	6	336050.0	5	1	78.0	1498.0	---	---
		Type5	1	7	179629.0	5	3	85.0	1427.0	1796.0	1728.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	2	0	525342	9	2	75.0	1270	1554.0	---
		Type5	2	1	218737	9	2	95.1	1106	1645.0	---
		Type5	2	2	754392	9	1	92.9	1955	---	---
		Type5	2	3	564961	9	3	56.7	1309	1067.0	1336.0
		Type5	2	4	129989	9	3	77.0	1511	1918.0	1254.0
		Type5	2	5	464609	9	2	76.0	1185	1365.0	---
		Type5	2	6	901141	9	3	92.9	1636	1535.0	1441.0
		Type5	2	7	762631	9	2	83.1	1348	1673.0	---
		Type5	2	8	919716	9	3	57.7	1441	1328.0	1657.0
		Type5	2	9	82060	9	1	59.3	1762	---	---
11AX40MIMO	5270	Type5	2	0	525342	9	2	75.0	1270	1554.0	---
		Type5	2	1	218737	9	2	95.1	1106	1645.0	---
		Type5	2	2	754392	9	1	92.9	1955	---	---
		Type5	2	3	564961	9	3	56.7	1309	1067.0	1336.0
		Type5	2	4	129989	9	3	77.0	1511	1918.0	1254.0
		Type5	2	5	464609	9	2	76.0	1185	1365.0	---
		Type5	2	6	901141	9	3	92.9	1636	1535.0	1441.0
		Type5	2	7	762631	9	2	83.1	1348	1673.0	---
		Type5	2	8	919716	9	3	57.7	1441	1328.0	1657.0
		Type5	2	9	82060	9	1	59.3	1762	---	---
11AX80MIMO	5290	Type5	2	0	525342	9	2	75.0	1270	1554.0	---
		Type5	2	1	218737	9	2	95.1	1106	1645.0	---
		Type5	2	2	754392	9	1	92.9	1955	---	---
		Type5	2	3	564961	9	3	56.7	1309	1067.0	1336.0
		Type5	2	4	129989	9	3	77.0	1511	1918.0	1254.0
		Type5	2	5	464609	9	2	76.0	1185	1365.0	---
		Type5	2	6	901141	9	3	92.9	1636	1535.0	1441.0
		Type5	2	7	762631	9	2	83.1	1348	1673.0	---
		Type5	2	8	919716	9	3	57.7	1441	1328.0	1657.0
		Type5	2	9	82060	9	1	59.3	1762	---	---
11AX160MIMO	5250	Type5	2	0	525342	9	2	75.0	1270	1554.0	---
		Type5	2	1	218737	9	2	95.1	1106	1645.0	---
		Type5	2	2	754392	9	1	92.9	1955	---	---
		Type5	2	3	564961	9	3	56.7	1309	1067.0	1336.0
		Type5	2	4	129989	9	3	77.0	1511	1918.0	1254.0
		Type5	2	5	464609	9	2	76.0	1185	1365.0	---
		Type5	2	6	901141	9	3	92.9	1636	1535.0	1441.0
		Type5	2	7	762631	9	2	83.1	1348	1673.0	---
		Type5	2	8	919716	9	3	57.7	1441	1328.0	1657.0
		Type5	2	9	82060	9	1	59.3	1762	---	---
11AX160MIMO	5250	Type5	2	10	746767	9	3	89.5	1150	1113.0	1038.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	3	0	26659	19	2	69.1	1190	1359.0	---
		Type5	3	1	171693	19	1	60.0	1285	---	---
		Type5	3	2	316351	19	2	76.1	1011	1645.0	---
		Type5	3	3	461913	19	1	57.8	1873	---	---
		Type5	3	4	8618	19	3	99.1	1059	1724.0	1252.0
		Type5	3	5	154117	19	1	57.1	1153	---	---
		Type5	3	6	299238	19	1	59.9	1201	---	---
		Type5	3	7	443250	19	2	79.0	1581	1256.0	---
		Type5	3	8	587663	19	2	82.1	1943	1332.0	---
		Type5	3	9	135698	19	2	85.0	1953	1988.0	---
		Type5	3	10	279945	19	3	89.5	1124	1223.0	1306.0
		Type5	3	11	424379	19	3	92.7	1348	1319.0	1665.0
		Type5	3	12	570098	19	2	69.0	1596	1586.0	---
		Type5	3	13	117498	19	3	97.0	1221	1752.0	1353.0
		Type5	3	14	262606	19	2	82.0	1755	1694.0	---
		Type5	3	15	406608	19	3	99.3	2042	1144.0	1046.0
		Type5	3	16	553245	19	1	65.5	1869	---	---
		Type5	3	17	99734	19	3	83.6	864	1134.0	1232.0
		Type5	3	18	244167	19	3	91.7	1795	1695.0	1698.0
		Type5	3	19	389933	19	2	66.8	1221	1858.0	---
11AX40MIMO	5270	Type5	3	0	26659	19	2	69.1	1190	1359.0	---
		Type5	3	1	171693	19	1	60.0	1285	---	---
		Type5	3	2	316351	19	2	76.1	1011	1645.0	---
		Type5	3	3	461913	19	1	57.8	1873	---	---
		Type5	3	4	8618	19	3	99.1	1059	1724.0	1252.0
		Type5	3	5	154117	19	1	57.1	1153	---	---
		Type5	3	6	299238	19	1	59.9	1201	---	---
		Type5	3	7	443250	19	2	79.0	1581	1256.0	---
		Type5	3	8	587663	19	2	82.1	1943	1332.0	---
		Type5	3	9	135698	19	2	85.0	1953	1988.0	---
		Type5	3	10	279945	19	3	89.5	1124	1223.0	1306.0
		Type5	3	11	424379	19	3	92.7	1348	1319.0	1665.0
		Type5	3	12	570098	19	2	69.0	1596	1586.0	---
		Type5	3	13	117498	19	3	97.0	1221	1752.0	1353.0
		Type5	3	14	262606	19	2	82.0	1755	1694.0	---
		Type5	3	15	406608	19	3	99.3	2042	1144.0	1046.0
		Type5	3	16	553245	19	1	65.5	1869	---	---
		Type5	3	17	99734	19	3	83.6	864	1134.0	1232.0
		Type5	3	18	244167	19	3	91.7	1795	1695.0	1698.0
		Type5	3	19	389933	19	2	66.8	1221	1858.0	---
11AX80MIMO	5290	Type5	3	0	26659	19	2	69.1	1190	1359.0	---
		Type5	3	1	171693	19	1	60.0	1285	---	---
		Type5	3	2	316351	19	2	76.1	1011	1645.0	---
		Type5	3	3	461913	19	1	57.8	1873	---	---
		Type5	3	4	8618	19	3	99.1	1059	1724.0	1252.0
		Type5	3	5	154117	19	1	57.1	1153	---	---
		Type5	3	6	299238	19	1	59.9	1201	---	---
		Type5	3	7	443250	19	2	79.0	1581	1256.0	---
		Type5	3	8	587663	19	2	82.1	1943	1332.0	---
		Type5	3	9	135698	19	2	85.0	1953	1988.0	---
		Type5	3	10	279945	19	3	89.5	1124	1223.0	1306.0
		Type5	3	11	424379	19	3	92.7	1348	1319.0	1665.0
		Type5	3	12	570098	19	2	69.0	1596	1586.0	---
		Type5	3	13	117498	19	3	97.0	1221	1752.0	1353.0
		Type5	3	14	262606	19	2	82.0	1755	1694.0	---
		Type5	3	15	406608	19	3	99.3	2042	1144.0	1046.0
		Type5	3	16	553245	19	1	65.5	1869	---	---

11AX160MIMO	5250	Type5	3	17	99734	19	3	83.6	864	1134.0	1232.0
		Type5	3	18	244167	19	3	91.7	1795	1695.0	1698.0
		Type5	3	19	389933	19	2	66.8	1221	1858.0	---
		Type5	3	0	26659	19	2	69.1	1190	1359.0	---
		Type5	3	1	171693	19	1	60.0	1285	---	---
		Type5	3	2	316351	19	2	76.1	1011	1645.0	---
		Type5	3	3	461913	19	1	57.8	1873	---	---
		Type5	3	4	8618	19	3	99.1	1059	1724.0	1252.0
		Type5	3	5	154117	19	1	57.1	1153	---	---
		Type5	3	6	299238	19	1	59.9	1201	---	---
		Type5	3	7	443250	19	2	79.0	1581	1256.0	---
		Type5	3	8	587663	19	2	82.1	1943	1332.0	---
		Type5	3	9	135698	19	2	85.0	1953	1988.0	---
		Type5	3	10	279945	19	3	89.5	1124	1223.0	1306.0
		Type5	3	11	424379	19	3	92.7	1348	1319.0	1665.0
		Type5	3	12	570098	19	2	69.0	1596	1586.0	---
		Type5	3	13	117498	19	3	97.0	1221	1752.0	1353.0
		Type5	3	14	262606	19	2	82.0	1755	1694.0	---
		Type5	3	15	406608	19	3	99.3	2042	1144.0	1046.0
		Type5	3	16	553245	19	1	65.5	1869	---	---
		Type5	3	17	99734	19	3	83.6	864	1134.0	1232.0
		Type5	3	18	244167	19	3	91.7	1795	1695.0	1698.0
		Type5	3	19	389933	19	2	66.8	1221	1858.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	4	0	582177	16	2	62.1	1869	1124.0	---
		Type5	4	1	152234	16	1	76.4	1775	---	---
		Type5	4	2	36588	16	1	77.5	1046	---	---
		Type5	4	3	502672	16	3	85.7	1494	1358.0	1117.0
		Type5	4	4	100461	16	2	67.1	1825	1587.0	---
		Type5	4	5	213277	16	3	79.2	1355	1355.0	1264.0
		Type5	4	6	96623	16	3	67.1	1193	1967.0	1366.0
		Type5	4	7	123376	16	2	83.4	989	1555.0	---
		Type5	4	8	303996	16	1	54.6	1614	---	---
		Type5	4	9	560160	16	3	88.3	1180	1554.0	1474.0
		Type5	4	10	82051	16	2	80.4	1281	1192.0	---
		Type5	4	11	356658	16	3	78.4	1172	1683.0	1191.0
		Type5	4	12	409920	16	3	91.4	1550	1352.0	1352.0
		Type5	4	13	402548	16	3	55.7	1768	1442.0	1695.0
		Type5	4	14	340601	16	3	88.1	1797	1714.0	1632.0
		Type5	4	15	385394	16	3	76.5	1220	1315.0	1151.0
		Type5	4	16	36648	16	3	64.6	1518	1321.0	1322.0
11AX40MIMO	5270	Type5	4	0	582177	16	2	62.1	1869	1124.0	---
		Type5	4	1	152234	16	1	76.4	1775	---	---
		Type5	4	2	36588	16	1	77.5	1046	---	---
		Type5	4	3	502672	16	3	85.7	1494	1358.0	1117.0
		Type5	4	4	100461	16	2	67.1	1825	1587.0	---
		Type5	4	5	213277	16	3	79.2	1355	1355.0	1264.0
		Type5	4	6	96623	16	3	67.1	1193	1967.0	1366.0
		Type5	4	7	123376	16	2	83.4	989	1555.0	---
		Type5	4	8	303996	16	1	54.6	1614	---	---
		Type5	4	9	560160	16	3	88.3	1180	1554.0	1474.0
		Type5	4	10	82051	16	2	80.4	1281	1192.0	---
		Type5	4	11	356658	16	3	78.4	1172	1683.0	1191.0
		Type5	4	12	409920	16	3	91.4	1550	1352.0	1352.0
		Type5	4	13	402548	16	3	55.7	1768	1442.0	1695.0
		Type5	4	14	340601	16	3	88.1	1797	1714.0	1632.0
		Type5	4	15	385394	16	3	76.5	1220	1315.0	1151.0
		Type5	4	16	36648	16	3	64.6	1518	1321.0	1322.0
11AX80MIMO	5290	Type5	4	0	582177	16	2	62.1	1869	1124.0	---
		Type5	4	1	152234	16	1	76.4	1775	---	---
		Type5	4	2	36588	16	1	77.5	1046	---	---
		Type5	4	3	502672	16	3	85.7	1494	1358.0	1117.0
		Type5	4	4	100461	16	2	67.1	1825	1587.0	---
		Type5	4	5	213277	16	3	79.2	1355	1355.0	1264.0
		Type5	4	6	96623	16	3	67.1	1193	1967.0	1366.0
		Type5	4	7	123376	16	2	83.4	989	1555.0	---
		Type5	4	8	303996	16	1	54.6	1614	---	---
		Type5	4	9	560160	16	3	88.3	1180	1554.0	1474.0
		Type5	4	10	82051	16	2	80.4	1281	1192.0	---
		Type5	4	11	356658	16	3	78.4	1172	1683.0	1191.0
		Type5	4	12	409920	16	3	91.4	1550	1352.0	1352.0
		Type5	4	13	402548	16	3	55.7	1768	1442.0	1695.0
		Type5	4	14	340601	16	3	88.1	1797	1714.0	1632.0
		Type5	4	15	385394	16	3	76.5	1220	1315.0	1151.0
		Type5	4	16	36648	16	3	64.6	1518	1321.0	1322.0
11AX160MIMO	5250	Type5	4	0	582177	16	2	62.1	1869	1124.0	---
		Type5	4	1	152234	16	1	76.4	1775	---	---
		Type5	4	2	36588	16	1	77.5	1046	---	---

	Type5	4	3	502672	16	3	85.7	1494	1358.0	1117.0
	Type5	4	4	100461	16	2	67.1	1825	1587.0	---
	Type5	4	5	213277	16	3	79.2	1355	1355.0	1264.0
	Type5	4	6	96623	16	3	67.1	1193	1967.0	1366.0
	Type5	4	7	123376	16	2	83.4	989	1555.0	---
	Type5	4	8	303996	16	1	54.6	1614	---	---
	Type5	4	9	560160	16	3	88.3	1180	1554.0	1474.0
	Type5	4	10	82051	16	2	80.4	1281	1192.0	---
	Type5	4	11	356658	16	3	78.4	1172	1683.0	1191.0
	Type5	4	12	409920	16	3	91.4	1550	1352.0	1352.0
	Type5	4	13	402548	16	3	55.7	1768	1442.0	1695.0
	Type5	4	14	340601	16	3	88.1	1797	1714.0	1632.0
	Type5	4	15	385394	16	3	76.5	1220	1315.0	1151.0
	Type5	4	16	36648	16	3	64.6	1518	1321.0	1322.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	5	0	33152	12	3	65.6	1058	1518.0	1412.0
		Type5	5	1	327484	12	2	59.9	1379	1543.0	---
		Type5	5	2	427760	12	1	60.6	1506	---	---
		Type5	5	3	173562	12	1	57.5	1131	---	---
		Type5	5	4	174514	12	1	75.0	1293	---	---
		Type5	5	5	458756	12	3	54.8	1494	1633.0	1966.0
		Type5	5	6	216752	12	1	95.9	952	---	---
		Type5	5	7	574317	12	3	80.0	1233	1285.0	1466.0
		Type5	5	8	227258	12	2	81.8	1278	1639.0	---
		Type5	5	9	506799	12	2	58.5	1240	1572.0	---
		Type5	5	10	333007	12	3	69.6	1273	1247.0	1253.0
		Type5	5	11	120800	12	1	87.0	1592	---	---
		Type5	5	12	417685	12	2	98.2	1177	1352.0	---
11AX40MIMO	5270	Type5	5	0	33152	12	3	65.6	1058	1518.0	1412.0
		Type5	5	1	327484	12	2	59.9	1379	1543.0	---
		Type5	5	2	427760	12	1	60.6	1506	---	---
		Type5	5	3	173562	12	1	57.5	1131	---	---
		Type5	5	4	174514	12	1	75.0	1293	---	---
		Type5	5	5	458756	12	3	54.8	1494	1633.0	1966.0
		Type5	5	6	216752	12	1	95.9	952	---	---
		Type5	5	7	574317	12	3	80.0	1233	1285.0	1466.0
		Type5	5	8	227258	12	2	81.8	1278	1639.0	---
		Type5	5	9	506799	12	2	58.5	1240	1572.0	---
		Type5	5	10	333007	12	3	69.6	1273	1247.0	1253.0
		Type5	5	11	120800	12	1	87.0	1592	---	---
		Type5	5	12	417685	12	2	98.2	1177	1352.0	---
11AX80MIMO	5290	Type5	5	0	33152	12	3	65.6	1058	1518.0	1412.0
		Type5	5	1	327484	12	2	59.9	1379	1543.0	---
		Type5	5	2	427760	12	1	60.6	1506	---	---
		Type5	5	3	173562	12	1	57.5	1131	---	---
		Type5	5	4	174514	12	1	75.0	1293	---	---
		Type5	5	5	458756	12	3	54.8	1494	1633.0	1966.0
		Type5	5	6	216752	12	1	95.9	952	---	---
		Type5	5	7	574317	12	3	80.0	1233	1285.0	1466.0
		Type5	5	8	227258	12	2	81.8	1278	1639.0	---
		Type5	5	9	506799	12	2	58.5	1240	1572.0	---
		Type5	5	10	333007	12	3	69.6	1273	1247.0	1253.0
		Type5	5	11	120800	12	1	87.0	1592	---	---
		Type5	5	12	417685	12	2	98.2	1177	1352.0	---
		Type5	5	13	296773	12	2	54.2	1926	1623.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PR1 (μs)	PR2 (μs)	PR3 (μs)
11AX160MIMO	5250	Type5	5	0	33152	12	3	65.6	1058	1518.0	1412.0
		Type5	5	1	327484	12	2	59.9	1379	1543.0	---
		Type5	5	2	427760	12	1	60.6	1506	---	---
		Type5	5	3	173562	12	1	57.5	1131	---	---
		Type5	5	4	174514	12	1	75.0	1293	---	---
		Type5	5	5	458756	12	3	54.8	1494	1633.0	1966.0
		Type5	5	6	216752	12	1	95.9	952	---	---
		Type5	5	7	574317	12	3	80.0	1233	1285.0	1466.0
		Type5	5	8	227258	12	2	81.8	1278	1639.0	---
		Type5	5	9	506799	12	2	58.5	1240	1572.0	---
		Type5	5	10	333007	12	3	69.6	1273	1247.0	1253.0
		Type5	5	11	120800	12	1	87.0	1592	---	---
		Type5	5	12	417685	12	2	98.2	1177	1352.0	---
		Type5	5	13	296773	12	2	54.2	1926	1623.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	6	0	445998	13	3	55.9	1197	1549.0	1151.0
		Type5	6	1	478333	13	3	74.5	1765	1633.0	1754.0
		Type5	6	2	99414	13	3	76.6	2046	1185.0	1355.0
		Type5	6	3	132675	13	2	93.9	1279	1685.0	---
		Type5	6	4	375401	13	1	90.4	1354	---	---
		Type5	6	5	168333	13	1	74.7	1307	---	---
		Type5	6	6	303072	13	3	74.0	1914	1771.0	1530.0
		Type5	6	7	208010	13	2	96.4	1460	1635.0	---
		Type5	6	8	225333	13	1	89.1	1639	---	---
		Type5	6	9	49246	13	2	80.0	1142	1123.0	---
		Type5	6	10	356399	13	2	58.7	1530	1585.0	---
		Type5	6	11	599591	13	2	53.8	1969	1131.0	---
		Type5	6	12	564972	13	3	62.3	1044	1369.0	1139.0
		Type5	6	13	558430	13	1	68.8	1444	---	---
		Type5	6	14	438176	13	3	54.5	1086	1162.0	1867.0
11AX40MIMO	5270	Type5	6	0	445998	13	3	55.9	1197	1549.0	1151.0
		Type5	6	1	478333	13	3	74.5	1765	1633.0	1754.0
		Type5	6	2	99414	13	3	76.6	2046	1185.0	1355.0
		Type5	6	3	132675	13	2	93.9	1279	1685.0	---
		Type5	6	4	375401	13	1	90.4	1354	---	---
		Type5	6	5	168333	13	1	74.7	1307	---	---
		Type5	6	6	303072	13	3	74.0	1914	1771.0	1530.0
		Type5	6	7	208010	13	2	96.4	1460	1635.0	---
		Type5	6	8	225333	13	1	89.1	1639	---	---
		Type5	6	9	49246	13	2	80.0	1142	1123.0	---
		Type5	6	10	356399	13	2	58.7	1530	1585.0	---
		Type5	6	11	599591	13	2	53.8	1969	1131.0	---
		Type5	6	12	564972	13	3	62.3	1044	1369.0	1139.0
		Type5	6	13	558430	13	1	68.8	1444	---	---
		Type5	6	14	438176	13	3	54.5	1086	1162.0	1867.0
11AX80MIMO	5290	Type5	6	0	445998	13	3	55.9	1197	1549.0	1151.0
		Type5	6	1	478333	13	3	74.5	1765	1633.0	1754.0
		Type5	6	2	99414	13	3	76.6	2046	1185.0	1355.0
		Type5	6	3	132675	13	2	93.9	1279	1685.0	---
		Type5	6	4	375401	13	1	90.4	1354	---	---
		Type5	6	5	168333	13	1	74.7	1307	---	---
		Type5	6	6	303072	13	3	74.0	1914	1771.0	1530.0
		Type5	6	7	208010	13	2	96.4	1460	1635.0	---
		Type5	6	8	225333	13	1	89.1	1639	---	---
		Type5	6	9	49246	13	2	80.0	1142	1123.0	---
		Type5	6	10	356399	13	2	58.7	1530	1585.0	---
		Type5	6	11	599591	13	2	53.8	1969	1131.0	---
		Type5	6	12	564972	13	3	62.3	1044	1369.0	1139.0
		Type5	6	13	558430	13	1	68.8	1444	---	---
		Type5	6	14	438176	13	3	54.5	1086	1162.0	1867.0
11AX160MIMO	5250	Type5	6	0	445998	13	3	55.9	1197	1549.0	1151.0
		Type5	6	1	478333	13	3	74.5	1765	1633.0	1754.0
		Type5	6	2	99414	13	3	76.6	2046	1185.0	1355.0
		Type5	6	3	132675	13	2	93.9	1279	1685.0	---
		Type5	6	4	375401	13	1	90.4	1354	---	---
		Type5	6	5	168333	13	1	74.7	1307	---	---
		Type5	6	6	303072	13	3	74.0	1914	1771.0	1530.0
		Type5	6	7	208010	13	2	96.4	1460	1635.0	---
		Type5	6	8	225333	13	1	89.1	1639	---	---

		Type5	6	9	49246	13	2	80.0	1142	1123.0	---
		Type5	6	10	356399	13	2	58.7	1530	1585.0	---
		Type5	6	11	599591	13	2	53.8	1969	1131.0	---
		Type5	6	12	564972	13	3	62.3	1044	1369.0	1139.0
		Type5	6	13	558430	13	1	68.8	1444	---	---
		Type5	6	14	438176	13	3	54.5	1086	1162.0	1867.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	7	0	482677	10	1	47.9	2113	---	---
		Type5	7	1	547695	10	3	76.3	1269	1255.0	1429.0
		Type5	7	2	175724	10	3	33.7	1221	1368.0	1635.0
		Type5	7	3	204723	10	3	60.0	1692	1356.0	1155.0
		Type5	7	4	350281	10	3	32.6	1828	1776.0	1552.0
		Type5	7	5	369989	10	2	88.9	1284	1984.0	---
		Type5	7	6	154970	10	2	64.0	1680	1127.0	---
		Type5	7	7	308118	10	2	47.9	1384	1351.0	---
		Type5	7	8	127059	10	1	27.7	1740	---	---
		Type5	7	9	193024	10	1	69.5	1636	---	---
		Type5	7	10	178530	10	2	28.9	1485	1334.0	---
11AX40MIMO	5270	Type5	7	0	482677	10	1	47.9	2113	---	---
		Type5	7	1	547695	10	3	76.3	1269	1255.0	1429.0
		Type5	7	2	175724	10	3	33.7	1221	1368.0	1635.0
		Type5	7	3	204723	10	3	60.0	1692	1356.0	1155.0
		Type5	7	4	350281	10	3	32.6	1828	1776.0	1552.0
		Type5	7	5	369989	10	2	88.9	1284	1984.0	---
		Type5	7	6	154970	10	2	64.0	1680	1127.0	---
		Type5	7	7	308118	10	2	47.9	1384	1351.0	---
		Type5	7	8	127059	10	1	27.7	1740	---	---
		Type5	7	9	193024	10	1	69.5	1636	---	---
		Type5	7	10	178530	10	2	28.9	1485	1334.0	---
11AX80MIMO	5290	Type5	7	0	482677	10	1	47.9	2113	---	---
		Type5	7	1	547695	10	3	76.3	1269	1255.0	1429.0
		Type5	7	2	175724	10	3	33.7	1221	1368.0	1635.0
		Type5	7	3	204723	10	3	60.0	1692	1356.0	1155.0
		Type5	7	4	350281	10	3	32.6	1828	1776.0	1552.0
		Type5	7	5	369989	10	2	88.9	1284	1984.0	---
		Type5	7	6	154970	10	2	64.0	1680	1127.0	---
		Type5	7	7	308118	10	2	47.9	1384	1351.0	---
		Type5	7	8	127059	10	1	27.7	1740	---	---
		Type5	7	9	193024	10	1	69.5	1636	---	---
		Type5	7	10	178530	10	2	28.9	1485	1334.0	---
11AX160MIMO	5250	Type5	7	0	482677	10	1	47.9	2113	---	---
		Type5	7	1	547695	10	3	76.3	1269	1255.0	1429.0
		Type5	7	2	175724	10	3	33.7	1221	1368.0	1635.0
		Type5	7	3	204723	10	3	60.0	1692	1356.0	1155.0
		Type5	7	4	350281	10	3	32.6	1828	1776.0	1552.0
		Type5	7	5	369989	10	2	88.9	1284	1984.0	---
		Type5	7	6	154970	10	2	64.0	1680	1127.0	---
		Type5	7	7	308118	10	2	47.9	1384	1351.0	---
		Type5	7	8	127059	10	1	27.7	1740	---	---
		Type5	7	9	193024	10	1	69.5	1636	---	---
		Type5	7	10	178530	10	2	28.9	1485	1334.0	---
11AX160MIMO	5250	Type5	7	11	526349	10	3	64.5	1247	1422.0	1583.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PR11 (μs)	PR12 (μs)	PR13 (μs)
11AX20MIMO	5260	Type5	8	0	622731	13	1	81.4	1184	---	---
		Type5	8	1	586027	13	1	83.8	1969	---	---
		Type5	8	2	327243	13	1	62.3	1522	---	---
		Type5	8	3	210425	13	3	54.8	1622	1466.0	1949.0
		Type5	8	4	577682	13	2	82.8	1671	1129.0	---
		Type5	8	5	289222	13	2	23.8	1942	1755.0	---
		Type5	8	6	672365	13	1	21.6	1732	---	---
		Type5	8	7	296466	13	2	24.3	1801	1334.0	---
		Type5	8	8	636633	13	1	80.2	1413	---	---
		Type5	8	9	234218	13	1	77.6	1898	---	---
		Type5	8	10	376396	13	1	61.2	2003	---	---
		Type5	8	11	472176	13	3	48.4	1669	1650.0	1347.0
		Type5	8	12	690719	13	2	26.8	1605	1742.0	---
11AX40MIMO	5270	Type5	8	0	622731	13	1	81.4	1184	---	---
		Type5	8	1	586027	13	1	83.8	1969	---	---
		Type5	8	2	327243	13	1	62.3	1522	---	---
		Type5	8	3	210425	13	3	54.8	1622	1466.0	1949.0
		Type5	8	4	577682	13	2	82.8	1671	1129.0	---
		Type5	8	5	289222	13	2	23.8	1942	1755.0	---
		Type5	8	6	672365	13	1	21.6	1732	---	---
		Type5	8	7	296466	13	2	24.3	1801	1334.0	---
		Type5	8	8	636633	13	1	80.2	1413	---	---
		Type5	8	9	234218	13	1	77.6	1898	---	---
		Type5	8	10	376396	13	1	61.2	2003	---	---
		Type5	8	11	472176	13	3	48.4	1669	1650.0	1347.0
		Type5	8	12	690719	13	2	26.8	1605	1742.0	---
11AX80MIMO	5290	Type5	8	0	622731	13	1	81.4	1184	---	---
		Type5	8	1	586027	13	1	83.8	1969	---	---
		Type5	8	2	327243	13	1	62.3	1522	---	---
		Type5	8	3	210425	13	3	54.8	1622	1466.0	1949.0
		Type5	8	4	577682	13	2	82.8	1671	1129.0	---
		Type5	8	5	289222	13	2	23.8	1942	1755.0	---
		Type5	8	6	672365	13	1	21.6	1732	---	---
		Type5	8	7	296466	13	2	24.3	1801	1334.0	---
		Type5	8	8	636633	13	1	80.2	1413	---	---
		Type5	8	9	234218	13	1	77.6	1898	---	---
		Type5	8	10	376396	13	1	61.2	2003	---	---
		Type5	8	11	472176	13	3	48.4	1669	1650.0	1347.0
		Type5	8	12	690719	13	2	26.8	1605	1742.0	---
		Type5	8	13	178266	13	1	78.4	1751	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX160MIMO	5250	Type5	8	0	622731	13	1	81.4	1184	---	---
		Type5	8	1	586027	13	1	83.8	1969	---	---
		Type5	8	2	327243	13	1	62.3	1522	---	---
		Type5	8	3	210425	13	3	54.8	1622	1466.0	1949.0
		Type5	8	4	577682	13	2	82.8	1671	1129.0	---
		Type5	8	5	289222	13	2	23.8	1942	1755.0	---
		Type5	8	6	672365	13	1	21.6	1732	---	---
		Type5	8	7	296466	13	2	24.3	1801	1334.0	---
		Type5	8	8	636633	13	1	80.2	1413	---	---
		Type5	8	9	234218	13	1	77.6	1898	---	---
		Type5	8	10	376396	13	1	61.2	2003	---	---
		Type5	8	11	472176	13	3	48.4	1669	1650.0	1347.0
		Type5	8	12	690719	13	2	26.8	1605	1742.0	---
		Type5	8	13	178266	13	1	78.4	1751	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	9	0	65588	6	1	72.0	1375	---	---
		Type5	9	1	725411	6	1	80.0	1399	---	---
		Type5	9	2	670303	6	3	50.9	1747	1125.0	1893.0
		Type5	9	3	726389	6	2	63.8	2102	1453.0	---
		Type5	9	4	303514	6	2	83.1	1632	1362.0	---
		Type5	9	5	219323	6	3	61.3	1525	1444.0	1414.0
		Type5	9	6	504920	6	1	50.0	1215	---	---
		Type5	9	7	263329	6	3	85.4	1227	1955.0	1258.0
11AX40MIMO	5270	Type5	9	0	65588	6	1	72.0	1375	---	---
		Type5	9	1	725411	6	1	80.0	1399	---	---
		Type5	9	2	670303	6	3	50.9	1747	1125.0	1893.0
		Type5	9	3	726389	6	2	63.8	2102	1453.0	---
		Type5	9	4	303514	6	2	83.1	1632	1362.0	---
		Type5	9	5	219323	6	3	61.3	1525	1444.0	1414.0
		Type5	9	6	504920	6	1	50.0	1215	---	---
		Type5	9	7	263329	6	3	85.4	1227	1955.0	1258.0
11AX80MIMO	5290	Type5	9	0	65588	6	1	72.0	1375	---	---
		Type5	9	1	725411	6	1	80.0	1399	---	---
		Type5	9	2	670303	6	3	50.9	1747	1125.0	1893.0
		Type5	9	3	726389	6	2	63.8	2102	1453.0	---
		Type5	9	4	303514	6	2	83.1	1632	1362.0	---
		Type5	9	5	219323	6	3	61.3	1525	1444.0	1414.0
		Type5	9	6	504920	6	1	50.0	1215	---	---
		Type5	9	7	263329	6	3	85.4	1227	1955.0	1258.0
11AX160MIMO	5250	Type5	9	0	65588	6	1	72.0	1375	---	---
		Type5	9	1	725411	6	1	80.0	1399	---	---
		Type5	9	2	670303	6	3	50.9	1747	1125.0	1893.0
		Type5	9	3	726389	6	2	63.8	2102	1453.0	---
		Type5	9	4	303514	6	2	83.1	1632	1362.0	---
		Type5	9	5	219323	6	3	61.3	1525	1444.0	1414.0
		Type5	9	6	504920	6	1	50.0	1215	---	---
		Type5	9	7	263329	6	3	85.4	1227	1955.0	1258.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PR1 (μs)	PR2 (μs)	PR3 (μs)
11AX20MIMO	5260	Type5	10	0	572790	16	2	47.5	1390	1857.0	---
		Type5	10	1	421712	16	3	39.4	2034	1212.0	1213.0
		Type5	10	2	250836	16	3	73.0	1803	1322.0	1672.0
		Type5	10	3	681769	16	1	67.3	1972	---	---
		Type5	10	4	293733	16	2	29.0	1255	1131.0	---
		Type5	10	5	325506	16	1	82.7	1799	---	---
		Type5	10	6	679170	16	2	23.0	1518	1534.0	---
		Type5	10	7	153913	16	2	85.6	1175	1564.0	---
		Type5	10	8	167869	16	2	58.7	1527	1112.0	---
		Type5	10	9	355971	16	1	62.7	1393	---	---
		Type5	10	10	618653	16	2	69.4	1286	1344.0	---
		Type5	10	11	695503	16	2	39.9	1410	1533.0	---
		Type5	10	12	477192	16	2	34.5	1994	1762.0	---
		Type5	10	13	456450	16	2	31.2	1759	1881.0	---
		Type5	10	14	146537	16	1	31.0	1080	---	---
		Type5	10	15	88092	16	2	75.3	1284	1453.0	---
11AX40MIMO	5270	Type5	10	0	572790	16	2	47.5	1390	1857.0	---
		Type5	10	1	421712	16	3	39.4	2034	1212.0	1213.0
		Type5	10	2	250836	16	3	73.0	1803	1322.0	1672.0
		Type5	10	3	681769	16	1	67.3	1972	---	---
		Type5	10	4	293733	16	2	29.0	1255	1131.0	---
		Type5	10	5	325506	16	1	82.7	1799	---	---
		Type5	10	6	679170	16	2	23.0	1518	1534.0	---
		Type5	10	7	153913	16	2	85.6	1175	1564.0	---
		Type5	10	8	167869	16	2	58.7	1527	1112.0	---
		Type5	10	9	355971	16	1	62.7	1393	---	---
		Type5	10	10	618653	16	2	69.4	1286	1344.0	---
		Type5	10	11	695503	16	2	39.9	1410	1533.0	---
		Type5	10	12	477192	16	2	34.5	1994	1762.0	---
		Type5	10	13	456450	16	2	31.2	1759	1881.0	---
		Type5	10	14	146537	16	1	31.0	1080	---	---
		Type5	10	15	88092	16	2	75.3	1284	1453.0	---
11AX80MIMO	5290	Type5	10	0	572790	16	2	47.5	1390	1857.0	---
		Type5	10	1	421712	16	3	39.4	2034	1212.0	1213.0
		Type5	10	2	250836	16	3	73.0	1803	1322.0	1672.0
		Type5	10	3	681769	16	1	67.3	1972	---	---
		Type5	10	4	293733	16	2	29.0	1255	1131.0	---
		Type5	10	5	325506	16	1	82.7	1799	---	---
		Type5	10	6	679170	16	2	23.0	1518	1534.0	---
		Type5	10	7	153913	16	2	85.6	1175	1564.0	---
		Type5	10	8	167869	16	2	58.7	1527	1112.0	---
		Type5	10	9	355971	16	1	62.7	1393	---	---
		Type5	10	10	618653	16	2	69.4	1286	1344.0	---
		Type5	10	11	695503	16	2	39.9	1410	1533.0	---
		Type5	10	12	477192	16	2	34.5	1994	1762.0	---
		Type5	10	13	456450	16	2	31.2	1759	1881.0	---
		Type5	10	14	146537	16	1	31.0	1080	---	---
		Type5	10	15	88092	16	2	75.3	1284	1453.0	---
11AX160MIMO	5250	Type5	10	0	572790	16	2	47.5	1390	1857.0	---
		Type5	10	1	421712	16	3	39.4	2034	1212.0	1213.0
		Type5	10	2	250836	16	3	73.0	1803	1322.0	1672.0

	Type5	10	3	681769	16	1	67.3	1972	---	---
	Type5	10	4	293733	16	2	29.0	1255	1131.0	---
	Type5	10	5	325506	16	1	82.7	1799	---	---
	Type5	10	6	679170	16	2	23.0	1518	1534.0	---
	Type5	10	7	153913	16	2	85.6	1175	1564.0	---
	Type5	10	8	167869	16	2	58.7	1527	1112.0	---
	Type5	10	9	355971	16	1	62.7	1393	---	---
	Type5	10	10	618653	16	2	69.4	1286	1344.0	---
	Type5	10	11	695503	16	2	39.9	1410	1533.0	---
	Type5	10	12	477192	16	2	34.5	1994	1762.0	---
	Type5	10	13	456450	16	2	31.2	1759	1881.0	---
	Type5	10	14	146537	16	1	31.0	1080	---	---
	Type5	10	15	88092	16	2	75.3	1284	1453.0	---
	Type5	10	16	158212	16	1	53.3	1730	---	---
	Type5	10	15	572790	16	2	47.5	1390	1857.0	---
	Type5	10	16	421712	16	3	39.4	2034	1212.0	1213.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	11	0	174583	19	3	60.7	1723	1250.0	1348.0
		Type5	11	1	444021	19	2	53.6	1995	1645.0	---
		Type5	11	2	356589	19	3	28.0	1586	1120.0	1656.0
		Type5	11	3	176226	19	3	75.9	1334	1568.0	1752.0
		Type5	11	4	303698	19	3	74.3	1826	1784.0	1341.0
		Type5	11	5	386062	19	2	86.8	1907	1129.0	---
		Type5	11	6	429255	19	1	62.8	1816	---	---
		Type5	11	7	489431	19	2	37.7	1485	1752.0	---
		Type5	11	8	122899	19	3	76.7	1611	1237.0	1233.0
		Type5	11	9	338475	19	1	58.4	1466	---	---
		Type5	11	10	336187	19	1	56.0	1795	---	---
		Type5	11	11	460102	19	2	26.4	1891	1794.0	---
		Type5	11	12	203107	19	2	86.2	1305	1456.0	---
		Type5	11	13	311682	19	3	56.0	1755	1661.0	1866.0
		Type5	11	14	297112	19	3	87.7	1479	1659.0	1220.0
		Type5	11	15	336849	19	2	39.3	1653	1421.0	---
		Type5	11	16	128005	19	1	66.4	1534	---	---
		Type5	11	17	326140	19	2	61.9	1405	1397.0	---
		Type5	11	18	458317	19	1	82.0	1450	---	---
11AX40MIMO	5270	Type5	11	0	174583	19	3	60.7	1723	1250.0	1348.0
		Type5	11	1	444021	19	2	53.6	1995	1645.0	---
		Type5	11	2	356589	19	3	28.0	1586	1120.0	1656.0
		Type5	11	3	176226	19	3	75.9	1334	1568.0	1752.0
		Type5	11	4	303698	19	3	74.3	1826	1784.0	1341.0
		Type5	11	5	386062	19	2	86.8	1907	1129.0	---
		Type5	11	6	429255	19	1	62.8	1816	---	---
		Type5	11	7	489431	19	2	37.7	1485	1752.0	---
		Type5	11	8	122899	19	3	76.7	1611	1237.0	1233.0
		Type5	11	9	338475	19	1	58.4	1466	---	---
		Type5	11	10	336187	19	1	56.0	1795	---	---
		Type5	11	11	460102	19	2	26.4	1891	1794.0	---
		Type5	11	12	203107	19	2	86.2	1305	1456.0	---
		Type5	11	13	311682	19	3	56.0	1755	1661.0	1866.0
		Type5	11	14	297112	19	3	87.7	1479	1659.0	1220.0
		Type5	11	15	336849	19	2	39.3	1653	1421.0	---
		Type5	11	16	128005	19	1	66.4	1534	---	---
		Type5	11	17	326140	19	2	61.9	1405	1397.0	---
		Type5	11	18	458317	19	1	82.0	1450	---	---
11AX80MIMO	5290	Type5	11	0	174583	19	3	60.7	1723	1250.0	1348.0
		Type5	11	1	444021	19	2	53.6	1995	1645.0	---
		Type5	11	2	356589	19	3	28.0	1586	1120.0	1656.0
		Type5	11	3	176226	19	3	75.9	1334	1568.0	1752.0
		Type5	11	4	303698	19	3	74.3	1826	1784.0	1341.0
		Type5	11	5	386062	19	2	86.8	1907	1129.0	---
		Type5	11	6	429255	19	1	62.8	1816	---	---
		Type5	11	7	489431	19	2	37.7	1485	1752.0	---
		Type5	11	8	122899	19	3	76.7	1611	1237.0	1233.0
		Type5	11	9	338475	19	1	58.4	1466	---	---
		Type5	11	10	336187	19	1	56.0	1795	---	---
		Type5	11	11	460102	19	2	26.4	1891	1794.0	---
		Type5	11	12	203107	19	2	86.2	1305	1456.0	---
		Type5	11	13	311682	19	3	56.0	1755	1661.0	1866.0
		Type5	11	14	297112	19	3	87.7	1479	1659.0	1220.0

		Type5	11	15	336849	19	2	39.3	1653	1421.0	---
		Type5	11	16	128005	19	1	66.4	1534	---	---
		Type5	11	17	326140	19	2	61.9	1405	1397.0	---
		Type5	11	18	458317	19	1	82.0	1450	---	---
11AX160MIMO	5250	Type5	11	0	174583	19	3	60.7	1723	1250.0	1348.0
		Type5	11	1	444021	19	2	53.6	1995	1645.0	---
		Type5	11	2	356589	19	3	28.0	1586	1120.0	1656.0
		Type5	11	3	176226	19	3	75.9	1334	1568.0	1752.0
		Type5	11	4	303698	19	3	74.3	1826	1784.0	1341.0
		Type5	11	5	386062	19	2	86.8	1907	1129.0	---
		Type5	11	6	429255	19	1	62.8	1816	---	---
		Type5	11	7	489431	19	2	37.7	1485	1752.0	---
		Type5	11	8	122899	19	3	76.7	1611	1237.0	1233.0
		Type5	11	9	338475	19	1	58.4	1466	---	---
		Type5	11	10	336187	19	1	56.0	1795	---	---
		Type5	11	11	460102	19	2	26.4	1891	1794.0	---
		Type5	11	12	203107	19	2	86.2	1305	1456.0	---
		Type5	11	13	311682	19	3	56.0	1755	1661.0	1866.0
		Type5	11	14	297112	19	3	87.7	1479	1659.0	1220.0
		Type5	11	15	336849	19	2	39.3	1653	1421.0	---
		Type5	11	16	128005	19	1	66.4	1534	---	---
		Type5	11	17	326140	19	2	61.9	1405	1397.0	---
		Type5	11	18	458317	19	1	82.0	1450	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	12	0	22933	13	1	58.3	1884	---	---
		Type5	12	1	216380	13	1	52.3	1925	---	---
		Type5	12	2	410120	13	1	58.8	1920	---	---
		Type5	12	3	603796	13	1	59.1	1672	---	---
		Type5	12	4	794231	13	3	97.0	1337	1236.0	1531.0
		Type5	12	5	192251	13	2	81.8	1647	1969.0	---
		Type5	12	6	385608	13	2	79.4	1263	1224.0	---
		Type5	12	7	579834	13	1	52.2	1779	---	---
		Type5	12	8	773400	13	1	64.6	1734	---	---
		Type5	12	9	169040	13	1	61.6	1332	---	---
		Type5	12	10	361499	13	2	81.2	1680	1367.0	---
		Type5	12	11	553756	13	3	84.4	1421	1754.0	1879.0
		Type5	12	12	747341	13	3	89.2	1640	1794.0	1258.0
		Type5	12	13	144636	13	2	77.1	1171	1664.0	---
		Type5	12	14	337813	13	2	70.8	1655	1612.0	---
11AX40MIMO	5270	Type5	12	0	22933	13	1	58.3	1884	---	---
		Type5	12	1	216380	13	1	52.3	1925	---	---
		Type5	12	2	410120	13	1	58.8	1920	---	---
		Type5	12	3	603796	13	1	59.1	1672	---	---
		Type5	12	4	794231	13	3	97.0	1337	1236.0	1531.0
		Type5	12	5	192251	13	2	81.8	1647	1969.0	---
		Type5	12	6	385608	13	2	79.4	1263	1224.0	---
		Type5	12	7	579834	13	1	52.2	1779	---	---
		Type5	12	8	773400	13	1	64.6	1734	---	---
		Type5	12	9	169040	13	1	61.6	1332	---	---
		Type5	12	10	361499	13	2	81.2	1680	1367.0	---
		Type5	12	11	553756	13	3	84.4	1421	1754.0	1879.0
		Type5	12	12	747341	13	3	89.2	1640	1794.0	1258.0
		Type5	12	13	144636	13	2	77.1	1171	1664.0	---
		Type5	12	14	337813	13	2	70.8	1655	1612.0	---
11AX80MIMO	5290	Type5	12	0	22933	13	1	58.3	1884	---	---
		Type5	12	1	216380	13	1	52.3	1925	---	---
		Type5	12	2	410120	13	1	58.8	1920	---	---
		Type5	12	3	603796	13	1	59.1	1672	---	---
		Type5	12	4	794231	13	3	97.0	1337	1236.0	1531.0
		Type5	12	5	192251	13	2	81.8	1647	1969.0	---
		Type5	12	6	385608	13	2	79.4	1263	1224.0	---
		Type5	12	7	579834	13	1	52.2	1779	---	---
		Type5	12	8	773400	13	1	64.6	1734	---	---
		Type5	12	9	169040	13	1	61.6	1332	---	---
		Type5	12	10	361499	13	2	81.2	1680	1367.0	---
		Type5	12	11	553756	13	3	84.4	1421	1754.0	1879.0
		Type5	12	12	747341	13	3	89.2	1640	1794.0	1258.0
		Type5	12	13	144636	13	2	77.1	1171	1664.0	---
		Type5	12	14	337813	13	2	70.8	1655	1612.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PR1 (μs)	PR2 (μs)	PR3 (μs)
11AX160MIMO	5250	Type5	12	0	22933	13	1	58.3	1884	---	---
		Type5	12	1	216380	13	1	52.3	1925	---	---
		Type5	12	2	410120	13	1	58.8	1920	---	---
		Type5	12	3	603796	13	1	59.1	1672	---	---
		Type5	12	4	794231	13	3	97.0	1337	1236.0	1531.0
		Type5	12	5	192251	13	2	81.8	1647	1969.0	---
		Type5	12	6	385608	13	2	79.4	1263	1224.0	---
		Type5	12	7	579834	13	1	52.2	1779	---	---
		Type5	12	8	773400	13	1	64.6	1734	---	---
		Type5	12	9	169040	13	1	61.6	1332	---	---
		Type5	12	10	361499	13	2	81.2	1680	1367.0	---
		Type5	12	11	553756	13	3	84.4	1421	1754.0	1879.0
		Type5	12	12	747341	13	3	89.2	1640	1794.0	1258.0
		Type5	12	13	144636	13	2	77.1	1171	1664.0	---
		Type5	12	14	337813	13	2	70.8	1655	1612.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PR11 (μs)	PR12 (μs)	PR13 (μs)
11AX20MIMO	5260	Type5	13	0	664292	10	2	74.2	1865	1342.0	---
		Type5	13	1	908010	10	1	56.1	1407	---	---
		Type5	13	2	151433	10	2	68.9	1497	1965.0	---
		Type5	13	3	393891	10	1	54.1	1455	---	---
		Type5	13	4	635092	10	2	77.7	1464	1237.0	---
		Type5	13	5	876857	10	2	78.3	1378	1654.0	---
		Type5	13	6	121379	10	3	85.8	1628	1237.0	1914.0
		Type5	13	7	362842	10	3	98.9	1865	1645.0	1312.0
		Type5	13	8	604299	10	3	85.9	1662	1352.0	1188.0
		Type5	13	9	846491	10	3	95.4	1164	1355.0	1344.0
		Type5	13	10	92015	10	1	65.3	1357	---	---
11AX40MIMO	5270	Type5	13	11	333012	10	3	92.5	1491	1963.0	1396.0
		Type5	13	0	664292	10	2	74.2	1865	1342.0	---
		Type5	13	1	908010	10	1	56.1	1407	---	---
		Type5	13	2	151433	10	2	68.9	1497	1965.0	---
		Type5	13	3	393891	10	1	54.1	1455	---	---
		Type5	13	4	635092	10	2	77.7	1464	1237.0	---
		Type5	13	5	876857	10	2	78.3	1378	1654.0	---
		Type5	13	6	121379	10	3	85.8	1628	1237.0	1914.0
		Type5	13	7	362842	10	3	98.9	1865	1645.0	1312.0
		Type5	13	8	604299	10	3	85.9	1662	1352.0	1188.0
		Type5	13	9	846491	10	3	95.4	1164	1355.0	1344.0
11AX80MIMO	5290	Type5	13	10	92015	10	1	65.3	1357	---	---
		Type5	13	11	333012	10	3	92.5	1491	1963.0	1396.0
		Type5	13	0	664292	10	2	74.2	1865	1342.0	---
		Type5	13	1	908010	10	1	56.1	1407	---	---
		Type5	13	2	151433	10	2	68.9	1497	1965.0	---
		Type5	13	3	393891	10	1	54.1	1455	---	---
		Type5	13	4	635092	10	2	77.7	1464	1237.0	---
		Type5	13	5	876857	10	2	78.3	1378	1654.0	---
		Type5	13	6	121379	10	3	85.8	1628	1237.0	1914.0
		Type5	13	7	362842	10	3	98.9	1865	1645.0	1312.0
		Type5	13	8	604299	10	3	85.9	1662	1352.0	1188.0
11AX160MIMO	5250	Type5	13	9	846491	10	3	95.4	1164	1355.0	1344.0
		Type5	13	10	92015	10	1	65.3	1357	---	---
		Type5	13	11	333012	10	3	92.5	1491	1963.0	1396.0
		Type5	13	0	664292	10	2	74.2	1865	1342.0	---
		Type5	13	1	908010	10	1	56.1	1407	---	---
		Type5	13	2	151433	10	2	68.9	1497	1965.0	---
		Type5	13	3	393891	10	1	54.1	1455	---	---
		Type5	13	4	635092	10	2	77.7	1464	1237.0	---
		Type5	13	5	876857	10	2	78.3	1378	1654.0	---
		Type5	13	6	121379	10	3	85.8	1628	1237.0	1914.0
		Type5	13	7	362842	10	3	98.9	1865	1645.0	1312.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	14	0	361322	18	3	92.1	1567	1252.0	1646.0
		Type5	14	1	515206	18	2	71.2	1041	1684.0	---
		Type5	14	2	39106	18	3	88.1	1123	1662.0	1685.0
		Type5	14	3	191015	18	3	85.4	1867	1852.0	1682.0
		Type5	14	4	343914	18	2	71.8	984	1644.0	---
		Type5	14	5	497649	18	1	52.1	1480	---	---
		Type5	14	6	20315	18	1	58.4	1405	---	---
		Type5	14	7	173117	18	1	60.7	1535	---	---
		Type5	14	8	325869	18	1	56.4	1630	---	---
		Type5	14	9	475940	18	3	87.9	1954	1674.0	1681.0
		Type5	14	10	1563	18	2	69.9	1877	1353.0	---
		Type5	14	11	153544	18	3	91.8	1246	1528.0	1840.0
		Type5	14	12	307081	18	1	58.7	1654	---	---
		Type5	14	13	458900	18	2	68.4	1812	1411.0	---
		Type5	14	14	610804	18	2	69.5	1748	1445.0	---
		Type5	14	15	134745	18	3	90.8	1276	1684.0	1631.0
		Type5	14	16	288250	18	1	55.2	1520	---	---
		Type5	14	17	441246	18	1	51.2	1284	---	---
		Type5	14	18	592836	18	2	74.9	1454	1658.0	---
11AX40MIMO	5270	Type5	14	0	361322	18	3	92.1	1567	1252.0	1646.0
		Type5	14	1	515206	18	2	71.2	1041	1684.0	---
		Type5	14	2	39106	18	3	88.1	1123	1662.0	1685.0
		Type5	14	3	191015	18	3	85.4	1867	1852.0	1682.0
		Type5	14	4	343914	18	2	71.8	984	1644.0	---
		Type5	14	5	497649	18	1	52.1	1480	---	---
		Type5	14	6	20315	18	1	58.4	1405	---	---
		Type5	14	7	173117	18	1	60.7	1535	---	---
		Type5	14	8	325869	18	1	56.4	1630	---	---
		Type5	14	9	475940	18	3	87.9	1954	1674.0	1681.0
		Type5	14	10	1563	18	2	69.9	1877	1353.0	---
		Type5	14	11	153544	18	3	91.8	1246	1528.0	1840.0
		Type5	14	12	307081	18	1	58.7	1654	---	---
		Type5	14	13	458900	18	2	68.4	1812	1411.0	---
		Type5	14	14	610804	18	2	69.5	1748	1445.0	---
		Type5	14	15	134745	18	3	90.8	1276	1684.0	1631.0
		Type5	14	16	288250	18	1	55.2	1520	---	---
		Type5	14	17	441246	18	1	51.2	1284	---	---
		Type5	14	18	592836	18	2	74.9	1454	1658.0	---
11AX80MIMO	5290	Type5	14	0	361322	18	3	92.1	1567	1252.0	1646.0
		Type5	14	1	515206	18	2	71.2	1041	1684.0	---
		Type5	14	2	39106	18	3	88.1	1123	1662.0	1685.0
		Type5	14	3	191015	18	3	85.4	1867	1852.0	1682.0
		Type5	14	4	343914	18	2	71.8	984	1644.0	---
		Type5	14	5	497649	18	1	52.1	1480	---	---
		Type5	14	6	20315	18	1	58.4	1405	---	---
		Type5	14	7	173117	18	1	60.7	1535	---	---
		Type5	14	8	325869	18	1	56.4	1630	---	---
		Type5	14	9	475940	18	3	87.9	1954	1674.0	1681.0
		Type5	14	10	1563	18	2	69.9	1877	1353.0	---
		Type5	14	11	153544	18	3	91.8	1246	1528.0	1840.0
		Type5	14	12	307081	18	1	58.7	1654	---	---
		Type5	14	13	458900	18	2	68.4	1812	1411.0	---
		Type5	14	14	610804	18	2	69.5	1748	1445.0	---

		Type5	14	15	134745	18	3	90.8	1276	1684.0	1631.0
		Type5	14	16	288250	18	1	55.2	1520	---	---
		Type5	14	17	441246	18	1	51.2	1284	---	---
		Type5	14	18	592836	18	2	74.9	1454	1658.0	---
11AX160MIMO	5250	Type5	14	0	361322	18	3	92.1	1567	1252.0	1646.0
		Type5	14	1	515206	18	2	71.2	1041	1684.0	---
		Type5	14	2	39106	18	3	88.1	1123	1662.0	1685.0
		Type5	14	3	191015	18	3	85.4	1867	1852.0	1682.0
		Type5	14	4	343914	18	2	71.8	984	1644.0	---
		Type5	14	5	497649	18	1	52.1	1480	---	---
		Type5	14	6	20315	18	1	58.4	1405	---	---
		Type5	14	7	173117	18	1	60.7	1535	---	---
		Type5	14	8	325869	18	1	56.4	1630	---	---
		Type5	14	9	475940	18	3	87.9	1954	1674.0	1681.0
		Type5	14	10	1563	18	2	69.9	1877	1353.0	---
		Type5	14	11	153544	18	3	91.8	1246	1528.0	1840.0
		Type5	14	12	307081	18	1	58.7	1654	---	---
		Type5	14	13	458900	18	2	68.4	1812	1411.0	---
		Type5	14	14	610804	18	2	69.5	1748	1445.0	---
		Type5	14	15	134745	18	3	90.8	1276	1684.0	1631.0
		Type5	14	16	288250	18	1	55.2	1520	---	---
		Type5	14	17	441246	18	1	51.2	1284	---	---
		Type5	14	18	592836	18	2	74.9	1454	1658.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PR1 (μs)	PR2 (μs)	PR3 (μs)
11AX20MIMO	5260	Type5	15	0	158353	12	2	77.3	1177	1380.0	---
		Type5	15	1	365883	12	1	50.8	1402	---	---
		Type5	15	2	573388	12	1	63.4	1549	---	---
		Type5	15	3	780552	12	1	64.3	1867	---	---
		Type5	15	4	132587	12	3	84.5	1396	1873.0	1681.0
		Type5	15	5	340161	12	1	64.6	1938	---	---
		Type5	15	6	548138	12	1	54.7	913	---	---
		Type5	15	7	755408	12	1	51.1	1499	---	---
		Type5	15	8	107139	12	2	78.2	1774	1658.0	---
		Type5	15	9	314494	12	2	73.4	1007	1343.0	---
		Type5	15	10	522535	12	1	51.7	1409	---	---
		Type5	15	11	728610	12	2	73.9	1505	1553.0	---
		Type5	15	12	81461	12	2	68.8	1792	1662.0	---
		Type5	15	13	289055	12	2	79.6	1425	1689.0	---
11AX40MIMO	5270	Type5	15	0	158353	12	2	77.3	1177	1380.0	---
		Type5	15	1	365883	12	1	50.8	1402	---	---
		Type5	15	2	573388	12	1	63.4	1549	---	---
		Type5	15	3	780552	12	1	64.3	1867	---	---
		Type5	15	4	132587	12	3	84.5	1396	1873.0	1681.0
		Type5	15	5	340161	12	1	64.6	1938	---	---
		Type5	15	6	548138	12	1	54.7	913	---	---
		Type5	15	7	755408	12	1	51.1	1499	---	---
		Type5	15	8	107139	12	2	78.2	1774	1658.0	---
		Type5	15	9	314494	12	2	73.4	1007	1343.0	---
		Type5	15	10	522535	12	1	51.7	1409	---	---
		Type5	15	11	728610	12	2	73.9	1505	1553.0	---
		Type5	15	12	81461	12	2	68.8	1792	1662.0	---
		Type5	15	13	289055	12	2	79.6	1425	1689.0	---
11AX80MIMO	5290	Type5	15	0	158353	12	2	77.3	1177	1380.0	---
		Type5	15	1	365883	12	1	50.8	1402	---	---
		Type5	15	2	573388	12	1	63.4	1549	---	---
		Type5	15	3	780552	12	1	64.3	1867	---	---
		Type5	15	4	132587	12	3	84.5	1396	1873.0	1681.0
		Type5	15	5	340161	12	1	64.6	1938	---	---
		Type5	15	6	548138	12	1	54.7	913	---	---
		Type5	15	7	755408	12	1	51.1	1499	---	---
		Type5	15	8	107139	12	2	78.2	1774	1658.0	---
		Type5	15	9	314494	12	2	73.4	1007	1343.0	---
		Type5	15	10	522535	12	1	51.7	1409	---	---
		Type5	15	11	728610	12	2	73.9	1505	1553.0	---
		Type5	15	12	81461	12	2	68.8	1792	1662.0	---
		Type5	15	13	289055	12	2	79.6	1425	1689.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PR1 (μs)	PR2 (μs)	PR3 (μs)
11AX160MIMO	5250	Type5	15	0	158353	12	2	77.3	1177	1380.0	---
		Type5	15	1	365883	12	1	50.8	1402	---	---
		Type5	15	2	573388	12	1	63.4	1549	---	---
		Type5	15	3	780552	12	1	64.3	1867	---	---
		Type5	15	4	132587	12	3	84.5	1396	1873.0	1681.0
		Type5	15	5	340161	12	1	64.6	1938	---	---
		Type5	15	6	548138	12	1	54.7	913	---	---
		Type5	15	7	755408	12	1	51.1	1499	---	---
		Type5	15	8	107139	12	2	78.2	1774	1658.0	---
		Type5	15	9	314494	12	2	73.4	1007	1343.0	---
		Type5	15	10	522535	12	1	51.7	1409	---	---
		Type5	15	11	728610	12	2	73.9	1505	1553.0	---
		Type5	15	12	81461	12	2	68.8	1792	1662.0	---
		Type5	15	13	289055	12	2	79.6	1425	1689.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	16	0	345720	20	3	86.4	1316	1112.0	1991.0
		Type5	16	1	490109	20	3	86.7	1677	1258.0	1688.0
		Type5	16	2	39034	20	3	84.9	1782	1415.0	1653.0
		Type5	16	3	183818	20	2	77.5	1561	1358.0	---
		Type5	16	4	328831	20	2	76.1	1325	1545.0	---
		Type5	16	5	474851	20	1	58.9	1321	---	---
		Type5	16	6	21521	20	2	81.1	1216	1630.0	---
		Type5	16	7	165888	20	2	78.0	1230	1058.0	---
		Type5	16	8	310910	20	2	67.7	1638	1651.0	---
		Type5	16	9	456839	20	1	64.0	1684	---	---
		Type5	16	10	3591	20	3	87.3	1730	1656.0	1113.0
		Type5	16	11	147894	20	3	84.6	1541	1198.0	1548.0
		Type5	16	12	293295	20	2	75.0	1321	1257.0	---
		Type5	16	13	436934	20	3	95.8	1138	1388.0	1654.0
		Type5	16	14	583957	20	1	55.3	1698	---	---
		Type5	16	15	130759	20	1	61.2	1342	---	---
		Type5	16	16	274575	20	3	95.0	1266	1660.0	1683.0
		Type5	16	17	418609	20	3	90.4	1859	1369.0	1685.0
		Type5	16	18	563533	20	3	86.8	1778	1571.0	1529.0
		Type5	16	19	112755	20	2	68.2	1103	1685.0	---
11AX40MIMO	5270	Type5	16	0	345720	20	3	86.4	1316	1112.0	1991.0
		Type5	16	1	490109	20	3	86.7	1677	1258.0	1688.0
		Type5	16	2	39034	20	3	84.9	1782	1415.0	1653.0
		Type5	16	3	183818	20	2	77.5	1561	1358.0	---
		Type5	16	4	328831	20	2	76.1	1325	1545.0	---
		Type5	16	5	474851	20	1	58.9	1321	---	---
		Type5	16	6	21521	20	2	81.1	1216	1630.0	---
		Type5	16	7	165888	20	2	78.0	1230	1058.0	---
		Type5	16	8	310910	20	2	67.7	1638	1651.0	---
		Type5	16	9	456839	20	1	64.0	1684	---	---
		Type5	16	10	3591	20	3	87.3	1730	1656.0	1113.0
		Type5	16	11	147894	20	3	84.6	1541	1198.0	1548.0
		Type5	16	12	293295	20	2	75.0	1321	1257.0	---
		Type5	16	13	436934	20	3	95.8	1138	1388.0	1654.0
		Type5	16	14	583957	20	1	55.3	1698	---	---
		Type5	16	15	130759	20	1	61.2	1342	---	---
		Type5	16	16	274575	20	3	95.0	1266	1660.0	1683.0
		Type5	16	17	418609	20	3	90.4	1859	1369.0	1685.0
		Type5	16	18	563533	20	3	86.8	1778	1571.0	1529.0
		Type5	16	19	112755	20	2	68.2	1103	1685.0	---
11AX80MIMO	5290	Type5	16	0	345720	20	3	86.4	1316	1112.0	1991.0
		Type5	16	1	490109	20	3	86.7	1677	1258.0	1688.0
		Type5	16	2	39034	20	3	84.9	1782	1415.0	1653.0
		Type5	16	3	183818	20	2	77.5	1561	1358.0	---
		Type5	16	4	328831	20	2	76.1	1325	1545.0	---
		Type5	16	5	474851	20	1	58.9	1321	---	---
		Type5	16	6	21521	20	2	81.1	1216	1630.0	---
		Type5	16	7	165888	20	2	78.0	1230	1058.0	---
		Type5	16	8	310910	20	2	67.7	1638	1651.0	---
		Type5	16	9	456839	20	1	64.0	1684	---	---
		Type5	16	10	3591	20	3	87.3	1730	1656.0	1113.0
		Type5	16	11	147894	20	3	84.6	1541	1198.0	1548.0
		Type5	16	12	293295	20	2	75.0	1321	1257.0	---

		Type5	16	13	436934	20	3	95.8	1138	1388.0	1654.0
		Type5	16	14	583957	20	1	55.3	1698	---	---
		Type5	16	15	130759	20	1	61.2	1342	---	---
		Type5	16	16	274575	20	3	95.0	1266	1660.0	1683.0
		Type5	16	17	418609	20	3	90.4	1859	1369.0	1685.0
		Type5	16	18	563533	20	3	86.8	1778	1571.0	1529.0
		Type5	16	19	112755	20	2	68.2	1103	1685.0	---
11AX160MIMO	5250	Type5	16	0	345720	20	3	86.4	1316	1112.0	1991.0
		Type5	16	1	490109	20	3	86.7	1677	1258.0	1688.0
		Type5	16	2	39034	20	3	84.9	1782	1415.0	1653.0
		Type5	16	3	183818	20	2	77.5	1561	1358.0	---
		Type5	16	4	328831	20	2	76.1	1325	1545.0	---
		Type5	16	5	474851	20	1	58.9	1321	---	---
		Type5	16	6	21521	20	2	81.1	1216	1630.0	---
		Type5	16	7	165888	20	2	78.0	1230	1058.0	---
		Type5	16	8	310910	20	2	67.7	1638	1651.0	---
		Type5	16	9	456839	20	1	64.0	1684	---	---
		Type5	16	10	3591	20	3	87.3	1730	1656.0	1113.0
		Type5	16	11	147894	20	3	84.6	1541	1198.0	1548.0
		Type5	16	12	293295	20	2	75.0	1321	1257.0	---
		Type5	16	13	436934	20	3	95.8	1138	1388.0	1654.0
		Type5	16	14	583957	20	1	55.3	1698	---	---
		Type5	16	15	130759	20	1	61.2	1342	---	---
		Type5	16	16	274575	20	3	95.0	1266	1660.0	1683.0
		Type5	16	17	418609	20	3	90.4	1859	1369.0	1685.0
		Type5	16	18	563533	20	3	86.8	1778	1571.0	1529.0
		Type5	16	19	112755	20	2	68.2	1103	1685.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	17	0	429305	10	3	86.8	1163	1681.0	1115.0
		Type5	17	1	670227	10	3	94.0	1710	1529.0	1585.0
		Type5	17	2	912913	10	2	79.9	1728	1663.0	---
		Type5	17	3	158595	10	1	54.4	1194	---	---
		Type5	17	4	400702	10	1	54.5	1404	---	---
		Type5	17	5	641976	10	2	69.6	1601	1685.0	---
		Type5	17	6	883768	10	2	69.2	1139	1258.0	---
		Type5	17	7	128406	10	3	98.3	1523	1476.0	1368.0
		Type5	17	8	370467	10	2	80.8	1225	1711.0	---
		Type5	17	9	611117	10	3	88.0	1227	1352.0	1523.0
		Type5	17	10	855679	10	1	54.3	1088	---	---
		Type5	17	11	98752	10	1	67.5	1630	---	---
11AX40MIMO	5270	Type5	17	0	429305	10	3	86.8	1163	1681.0	1115.0
		Type5	17	1	670227	10	3	94.0	1710	1529.0	1585.0
		Type5	17	2	912913	10	2	79.9	1728	1663.0	---
		Type5	17	3	158595	10	1	54.4	1194	---	---
		Type5	17	4	400702	10	1	54.5	1404	---	---
		Type5	17	5	641976	10	2	69.6	1601	1685.0	---
		Type5	17	6	883768	10	2	69.2	1139	1258.0	---
		Type5	17	7	128406	10	3	98.3	1523	1476.0	1368.0
		Type5	17	8	370467	10	2	80.8	1225	1711.0	---
		Type5	17	9	611117	10	3	88.0	1227	1352.0	1523.0
		Type5	17	10	855679	10	1	54.3	1088	---	---
		Type5	17	11	98752	10	1	67.5	1630	---	---
11AX80MIMO	5290	Type5	17	0	429305	10	3	86.8	1163	1681.0	1115.0
		Type5	17	1	670227	10	3	94.0	1710	1529.0	1585.0
		Type5	17	2	912913	10	2	79.9	1728	1663.0	---
		Type5	17	3	158595	10	1	54.4	1194	---	---
		Type5	17	4	400702	10	1	54.5	1404	---	---
		Type5	17	5	641976	10	2	69.6	1601	1685.0	---
		Type5	17	6	883768	10	2	69.2	1139	1258.0	---
		Type5	17	7	128406	10	3	98.3	1523	1476.0	1368.0
		Type5	17	8	370467	10	2	80.8	1225	1711.0	---
		Type5	17	9	611117	10	3	88.0	1227	1352.0	1523.0
		Type5	17	10	855679	10	1	54.3	1088	---	---
		Type5	17	11	98752	10	1	67.5	1630	---	---
11AX160MIMO	5250	Type5	17	0	429305	10	3	86.8	1163	1681.0	1115.0
		Type5	17	1	670227	10	3	94.0	1710	1529.0	1585.0
		Type5	17	2	912913	10	2	79.9	1728	1663.0	---
		Type5	17	3	158595	10	1	54.4	1194	---	---
		Type5	17	4	400702	10	1	54.5	1404	---	---
		Type5	17	5	641976	10	2	69.6	1601	1685.0	---
		Type5	17	6	883768	10	2	69.2	1139	1258.0	---
		Type5	17	7	128406	10	3	98.3	1523	1476.0	1368.0
		Type5	17	8	370467	10	2	80.8	1225	1711.0	---
		Type5	17	9	611117	10	3	88.0	1227	1352.0	1523.0
		Type5	17	10	855679	10	1	54.3	1088	---	---
		Type5	17	11	98752	10	1	67.5	1630	---	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	18	0	292109	12	1	55.8	1288	---	---
		Type5	18	1	499623	12	1	59.6	1635	---	---
		Type5	18	2	706426	12	2	70.8	1273	1222.0	---
		Type5	18	3	59087	12	3	85.5	1582	1351.0	1681.0
		Type5	18	4	266077	12	2	82.0	1661	1771.0	---
		Type5	18	5	474585	12	1	62.9	1358	---	---
		Type5	18	6	680621	12	2	79.9	1684	1561.0	---
		Type5	18	7	33401	12	3	89.3	1110	1253.0	1153.0
		Type5	18	8	240176	12	3	89.9	1285	1353.0	1487.0
		Type5	18	9	447420	12	3	97.2	1144	168.0	1344.0
		Type5	18	10	654415	12	2	81.9	975	1990.0	---
		Type5	18	11	8091	12	1	51.4	1612	---	---
		Type5	18	12	215569	12	2	77.0	1291	1359.0	---
		Type5	18	13	421360	12	3	98.6	1216	1355.0	1889.0
11AX40MIMO	5270	Type5	18	0	292109	12	1	55.8	1288	---	---
		Type5	18	1	499623	12	1	59.6	1635	---	---
		Type5	18	2	706426	12	2	70.8	1273	1222.0	---
		Type5	18	3	59087	12	3	85.5	1582	1351.0	1681.0
		Type5	18	4	266077	12	2	82.0	1661	1771.0	---
		Type5	18	5	474585	12	1	62.9	1358	---	---
		Type5	18	6	680621	12	2	79.9	1684	1561.0	---
		Type5	18	7	33401	12	3	89.3	1110	1253.0	1153.0
		Type5	18	8	240176	12	3	89.9	1285	1353.0	1487.0
		Type5	18	9	447420	12	3	97.2	1144	168.0	1344.0
		Type5	18	10	654415	12	2	81.9	975	1990.0	---
		Type5	18	11	8091	12	1	51.4	1612	---	---
		Type5	18	12	215569	12	2	77.0	1291	1359.0	---
		Type5	18	13	421360	12	3	98.6	1216	1355.0	1889.0
11AX80MIMO	5290	Type5	18	0	292109	12	1	55.8	1288	---	---
		Type5	18	1	499623	12	1	59.6	1635	---	---
		Type5	18	2	706426	12	2	70.8	1273	1222.0	---
		Type5	18	3	59087	12	3	85.5	1582	1351.0	1681.0
		Type5	18	4	266077	12	2	82.0	1661	1771.0	---
		Type5	18	5	474585	12	1	62.9	1358	---	---
		Type5	18	6	680621	12	2	79.9	1684	1561.0	---
		Type5	18	7	33401	12	3	89.3	1110	1253.0	1153.0
		Type5	18	8	240176	12	3	89.9	1285	1353.0	1487.0
		Type5	18	9	447420	12	3	97.2	1144	168.0	1344.0
		Type5	18	10	654415	12	2	81.9	975	1990.0	---
		Type5	18	11	8091	12	1	51.4	1612	---	---
		Type5	18	12	215569	12	2	77.0	1291	1359.0	---
		Type5	18	13	421360	12	3	98.6	1216	1355.0	1889.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX160MIMO	5250	Type5	18	0	292109	12	1	55.8	1288	---	---
		Type5	18	1	499623	12	1	59.6	1635	---	---
		Type5	18	2	706426	12	2	70.8	1273	1222.0	---
		Type5	18	3	59087	12	3	85.5	1582	1351.0	1681.0
		Type5	18	4	266077	12	2	82.0	1661	1771.0	---
		Type5	18	5	474585	12	1	62.9	1358	---	---
		Type5	18	6	680621	12	2	79.9	1684	1561.0	---
		Type5	18	7	33401	12	3	89.3	1110	1253.0	1153.0
		Type5	18	8	240176	12	3	89.9	1285	1353.0	1487.0
		Type5	18	9	447420	12	3	97.2	1144	168.0	1344.0
		Type5	18	10	654415	12	2	81.9	975	1990.0	---
		Type5	18	11	8091	12	1	51.4	1612	---	---
		Type5	18	12	215569	12	2	77.0	1291	1359.0	---
		Type5	18	13	421360	12	3	98.6	1216	1355.0	1889.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	19	0	733830	10	3	87.4	1415	1267.0	1347.0
		Type5	19	1	977959	10	1	56.1	1633	---	---
		Type5	19	2	221172	10	3	96.2	1205	1028.0	1324.0
		Type5	19	3	462879	10	2	70.2	1896	1385.0	---
		Type5	19	4	705012	10	2	80.3	1700	1317.0	---
		Type5	19	5	948033	10	1	62.1	1834	---	---
		Type5	19	6	191241	10	3	88.1	2025	1219.0	1645.0
		Type5	19	7	432500	10	3	96.4	1874	1365.0	1367.0
		Type5	19	8	674034	10	3	97.4	1534	1798.0	1123.0
		Type5	19	9	915731	10	3	96.2	1006	1364.0	1567.0
		Type5	19	10	162171	10	1	55.3	1035	---	---
		Type5	19	11	403592	10	2	80.8	1965	1113.0	---
11AX40MIMO	5270	Type5	19	0	733830	10	3	87.4	1415	1267.0	1347.0
		Type5	19	1	977959	10	1	56.1	1633	---	---
		Type5	19	2	221172	10	3	96.2	1205	1028.0	1324.0
		Type5	19	3	462879	10	2	70.2	1896	1385.0	---
		Type5	19	4	705012	10	2	80.3	1700	1317.0	---
		Type5	19	5	948033	10	1	62.1	1834	---	---
		Type5	19	6	191241	10	3	88.1	2025	1219.0	1645.0
		Type5	19	7	432500	10	3	96.4	1874	1365.0	1367.0
		Type5	19	8	674034	10	3	97.4	1534	1798.0	1123.0
		Type5	19	9	915731	10	3	96.2	1006	1364.0	1567.0
		Type5	19	10	162171	10	1	55.3	1035	---	---
		Type5	19	11	403592	10	2	80.8	1965	1113.0	---
11AX80MIMO	5290	Type5	19	0	733830	10	3	87.4	1415	1267.0	1347.0
		Type5	19	1	977959	10	1	56.1	1633	---	---
		Type5	19	2	221172	10	3	96.2	1205	1028.0	1324.0
		Type5	19	3	462879	10	2	70.2	1896	1385.0	---
		Type5	19	4	705012	10	2	80.3	1700	1317.0	---
		Type5	19	5	948033	10	1	62.1	1834	---	---
		Type5	19	6	191241	10	3	88.1	2025	1219.0	1645.0
		Type5	19	7	432500	10	3	96.4	1874	1365.0	1367.0
		Type5	19	8	674034	10	3	97.4	1534	1798.0	1123.0
		Type5	19	9	915731	10	3	96.2	1006	1364.0	1567.0
		Type5	19	10	162171	10	1	55.3	1035	---	---
		Type5	19	11	403592	10	2	80.8	1965	1113.0	---
11AX160MIMO	5250	Type5	19	0	733830	10	3	87.4	1415	1267.0	1347.0
		Type5	19	1	977959	10	1	56.1	1633	---	---
		Type5	19	2	221172	10	3	96.2	1205	1028.0	1324.0
		Type5	19	3	462879	10	2	70.2	1896	1385.0	---
		Type5	19	4	705012	10	2	80.3	1700	1317.0	---
		Type5	19	5	948033	10	1	62.1	1834	---	---
		Type5	19	6	191241	10	3	88.1	2025	1219.0	1645.0
		Type5	19	7	432500	10	3	96.4	1874	1365.0	1367.0
		Type5	19	8	674034	10	3	97.4	1534	1798.0	1123.0
		Type5	19	9	915731	10	3	96.2	1006	1364.0	1567.0
		Type5	19	10	162171	10	1	55.3	1035	---	---
		Type5	19	11	403592	10	2	80.8	1965	1113.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	20	0	483438	15	2	75.8	1766	1111.0	---
		Type5	20	1	666132	15	1	55.4	1463	---	---
		Type5	20	2	98924	15	3	91.6	1518	1255.0	1266.0
		Type5	20	3	279767	15	2	82.7	1945	1865.0	---
		Type5	20	4	462619	15	1	49.9	973	---	---
		Type5	20	5	642198	15	2	78.0	1539	1581.0	---
		Type5	20	6	76968	15	1	57.6	1066	---	---
		Type5	20	7	257844	15	2	71.6	1411	1602.0	---
		Type5	20	8	438580	15	2	81.5	1710	1670.0	---
		Type5	20	9	620315	15	2	68.1	1431	1770.0	---
		Type5	20	10	54281	15	2	72.0	1977	1654.0	---
		Type5	20	11	235511	15	2	70.5	1806	1115.0	---
		Type5	20	12	417173	15	2	77.0	1029	1300.0	---
		Type5	20	13	597937	15	2	78.6	1199	1655.0	---
		Type5	20	14	32183	15	1	61.6	1172	---	---
		Type5	20	15	212666	15	3	95.7	1366	1666.0	1680.0
11AX40MIMO	5270	Type5	20	0	483438	15	2	75.8	1766	1111.0	---
		Type5	20	1	666132	15	1	55.4	1463	---	---
		Type5	20	2	98924	15	3	91.6	1518	1255.0	1266.0
		Type5	20	3	279767	15	2	82.7	1945	1865.0	---
		Type5	20	4	462619	15	1	49.9	973	---	---
		Type5	20	5	642198	15	2	78.0	1539	1581.0	---
		Type5	20	6	76968	15	1	57.6	1066	---	---
		Type5	20	7	257844	15	2	71.6	1411	1602.0	---
		Type5	20	8	438580	15	2	81.5	1710	1670.0	---
		Type5	20	9	620315	15	2	68.1	1431	1770.0	---
		Type5	20	10	54281	15	2	72.0	1977	1654.0	---
		Type5	20	11	235511	15	2	70.5	1806	1115.0	---
		Type5	20	12	417173	15	2	77.0	1029	1300.0	---
		Type5	20	13	597937	15	2	78.6	1199	1655.0	---
		Type5	20	14	32183	15	1	61.6	1172	---	---
		Type5	20	15	212666	15	3	95.7	1366	1666.0	1680.0
11AX80MIMO	5290	Type5	20	0	483438	15	2	75.8	1766	1111.0	---
		Type5	20	1	666132	15	1	55.4	1463	---	---
		Type5	20	2	98924	15	3	91.6	1518	1255.0	1266.0
		Type5	20	3	279767	15	2	82.7	1945	1865.0	---
		Type5	20	4	462619	15	1	49.9	973	---	---
		Type5	20	5	642198	15	2	78.0	1539	1581.0	---
		Type5	20	6	76968	15	1	57.6	1066	---	---
		Type5	20	7	257844	15	2	71.6	1411	1602.0	---
		Type5	20	8	438580	15	2	81.5	1710	1670.0	---
		Type5	20	9	620315	15	2	68.1	1431	1770.0	---
		Type5	20	10	54281	15	2	72.0	1977	1654.0	---
		Type5	20	11	235511	15	2	70.5	1806	1115.0	---
		Type5	20	12	417173	15	2	77.0	1029	1300.0	---
		Type5	20	13	597937	15	2	78.6	1199	1655.0	---
		Type5	20	14	32183	15	1	61.6	1172	---	---
		Type5	20	15	212666	15	3	95.7	1366	1666.0	1680.0
11AX160MIMO	5250	Type5	20	0	483438	15	2	75.8	1766	1111.0	---
		Type5	20	1	666132	15	1	55.4	1463	---	---
		Type5	20	2	98924	15	3	91.6	1518	1255.0	1266.0
		Type5	20	3	279767	15	2	82.7	1945	1865.0	---
		Type5	20	4	462619	15	1	49.9	973	---	---

	Type5	20	5	642198	15	2	78.0	1539	1581.0	---
	Type5	20	6	76968	15	1	57.6	1066	---	---
	Type5	20	7	257844	15	2	71.6	1411	1602.0	---
	Type5	20	8	438580	15	2	81.5	1710	1670.0	---
	Type5	20	9	620315	15	2	68.1	1431	1770.0	---
	Type5	20	10	54281	15	2	72.0	1977	1654.0	---
	Type5	20	11	235511	15	2	70.5	1806	1115.0	---
	Type5	20	12	417173	15	2	77.0	1029	1300.0	---
	Type5	20	13	597937	15	2	78.6	1199	1655.0	---
	Type5	20	14	32183	15	1	61.6	1172	---	---
	Type5	20	15	212666	15	3	95.7	1366	1666.0	1680.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	21	0	696635	9	2	92.0	1720	1338.0	---
		Type5	21	1	329171	9	3	95.3	1969	1966.0	1228.0
		Type5	21	2	141230	9	1	75.3	1396	---	---
		Type5	21	3	377283	9	2	71.6	1713	1690.0	---
		Type5	21	4	228186	9	2	70.2	1351	1441.0	---
		Type5	21	5	13463	9	1	71.6	1660	---	---
		Type5	21	6	486235	9	2	71.0	1347	1963.0	---
		Type5	21	7	785093	9	1	80.1	1744	---	---
		Type5	21	8	484938	9	1	93.3	1359	---	---
		Type5	21	9	574995	9	1	87.4	1465	---	---
		Type5	21	10	38566	9	1	59.3	1483	---	---
		Type5	21	11	937132	9	3	82.9	1384	1123.0	1336.0
11AX40MIMO	5270	Type5	21	0	696635	9	2	92.0	1720	1338.0	---
		Type5	21	1	329171	9	3	95.3	1969	1966.0	1228.0
		Type5	21	2	141230	9	1	75.3	1396	---	---
		Type5	21	3	377283	9	2	71.6	1713	1690.0	---
		Type5	21	4	228186	9	2	70.2	1351	1441.0	---
		Type5	21	5	13463	9	1	71.6	1660	---	---
		Type5	21	6	486235	9	2	71.0	1347	1963.0	---
		Type5	21	7	785093	9	1	80.1	1744	---	---
		Type5	21	8	484938	9	1	93.3	1359	---	---
		Type5	21	9	574995	9	1	87.4	1465	---	---
		Type5	21	10	38566	9	1	59.3	1483	---	---
		Type5	21	11	937132	9	3	82.9	1384	1123.0	1336.0
11AX80MIMO	5290	Type5	21	0	696635	9	2	92.0	1720	1338.0	---
		Type5	21	1	329171	9	3	95.3	1969	1966.0	1228.0
		Type5	21	2	141230	9	1	75.3	1396	---	---
		Type5	21	3	377283	9	2	71.6	1713	1690.0	---
		Type5	21	4	228186	9	2	70.2	1351	1441.0	---
		Type5	21	5	13463	9	1	71.6	1660	---	---
		Type5	21	6	486235	9	2	71.0	1347	1963.0	---
		Type5	21	7	785093	9	1	80.1	1744	---	---
		Type5	21	8	484938	9	1	93.3	1359	---	---
		Type5	21	9	574995	9	1	87.4	1465	---	---
		Type5	21	10	38566	9	1	59.3	1483	---	---
		Type5	21	11	937132	9	3	82.9	1384	1123.0	1336.0
11AX160MIMO	5250	Type5	21	0	696635	9	2	92.0	1720	1338.0	---
		Type5	21	1	329171	9	3	95.3	1969	1966.0	1228.0
		Type5	21	2	141230	9	1	75.3	1396	---	---
		Type5	21	3	377283	9	2	71.6	1713	1690.0	---
		Type5	21	4	228186	9	2	70.2	1351	1441.0	---
		Type5	21	5	13463	9	1	71.6	1660	---	---
		Type5	21	6	486235	9	2	71.0	1347	1963.0	---
		Type5	21	7	785093	9	1	80.1	1744	---	---
		Type5	21	8	484938	9	1	93.3	1359	---	---
		Type5	21	9	574995	9	1	87.4	1465	---	---
		Type5	21	10	38566	9	1	59.3	1483	---	---
		Type5	21	11	937132	9	3	82.9	1384	1123.0	1336.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	22	0	290695	20	2	51.7	1898	1213.0	---
		Type5	22	1	109009	20	1	83.6	1466	---	---
		Type5	22	2	421324	20	1	70.7	1365	---	---
		Type5	22	3	758791	20	2	84.1	1681	1351.0	---
		Type5	22	4	91873	20	2	76.9	1507	1532.0	---
		Type5	22	5	927107	20	1	51.0	1438	---	---
		Type5	22	6	236282	20	3	71.0	2122	1686.0	1105.0
		Type5	22	7	702033	20	2	70.6	1088	1687.0	---
		Type5	22	8	905124	20	3	77.2	1062	1675.0	1056.0
		Type5	22	9	772228	20	1	75.4	1819	---	---
		Type5	22	10	762755	20	3	59.6	1350	1641.0	1115.0
		Type5	22	11	397641	20	1	96.9	1102	---	---
		Type5	22	12	792250	20	3	81.8	1680	1554.0	1681.0
		Type5	22	13	500638	20	1	53.7	1546	---	---
		Type5	22	14	680717	20	2	79.6	1824	1656.0	---
		Type5	22	15	834319	20	2	73.8	1752	1664.0	---
		Type5	22	16	748424	20	3	87.3	1904	1630.0	1176.0
		Type5	22	17	693167	20	2	95.0	2001	1057.0	---
		Type5	22	18	791684	20	3	90.0	1483	1018.0	1681.0
		Type5	22	19	712052	20	3	62.7	1706	1614.0	1027.0
11AX40MIMO	5270	Type5	22	0	290695	20	2	51.7	1898	1213.0	---
		Type5	22	1	109009	20	1	83.6	1466	---	---
		Type5	22	2	421324	20	1	70.7	1365	---	---
		Type5	22	3	758791	20	2	84.1	1681	1351.0	---
		Type5	22	4	91873	20	2	76.9	1507	1532.0	---
		Type5	22	5	927107	20	1	51.0	1438	---	---
		Type5	22	6	236282	20	3	71.0	2122	1686.0	1105.0
		Type5	22	7	702033	20	2	70.6	1088	1687.0	---
		Type5	22	8	905124	20	3	77.2	1062	1675.0	1056.0
		Type5	22	9	772228	20	1	75.4	1819	---	---
		Type5	22	10	762755	20	3	59.6	1350	1641.0	1115.0
		Type5	22	11	397641	20	1	96.9	1102	---	---
		Type5	22	12	792250	20	3	81.8	1680	1554.0	1681.0
		Type5	22	13	500638	20	1	53.7	1546	---	---
		Type5	22	14	680717	20	2	79.6	1824	1656.0	---
		Type5	22	15	834319	20	2	73.8	1752	1664.0	---
		Type5	22	16	748424	20	3	87.3	1904	1630.0	1176.0
		Type5	22	17	693167	20	2	95.0	2001	1057.0	---
		Type5	22	18	791684	20	3	90.0	1483	1018.0	1681.0
		Type5	22	19	712052	20	3	62.7	1706	1614.0	1027.0
11AX80MIMO	5290	Type5	22	0	290695	20	2	51.7	1898	1213.0	---
		Type5	22	1	109009	20	1	83.6	1466	---	---
		Type5	22	2	421324	20	1	70.7	1365	---	---
		Type5	22	3	758791	20	2	84.1	1681	1351.0	---
		Type5	22	4	91873	20	2	76.9	1507	1532.0	---
		Type5	22	5	927107	20	1	51.0	1438	---	---
		Type5	22	6	236282	20	3	71.0	2122	1686.0	1105.0
		Type5	22	7	702033	20	2	70.6	1088	1687.0	---
		Type5	22	8	905124	20	3	77.2	1062	1675.0	1056.0
		Type5	22	9	772228	20	1	75.4	1819	---	---
		Type5	22	10	762755	20	3	59.6	1350	1641.0	1115.0
		Type5	22	11	397641	20	1	96.9	1102	---	---
		Type5	22	12	792250	20	3	81.8	1680	1554.0	1681.0

		Type5	22	13	500638	20	1	53.7	1546	---	---
		Type5	22	14	680717	20	2	79.6	1824	1656.0	---
		Type5	22	15	834319	20	2	73.8	1752	1664.0	---
		Type5	22	16	748424	20	3	87.3	1904	1630.0	1176.0
		Type5	22	17	693167	20	2	95.0	2001	1057.0	---
		Type5	22	18	791684	20	3	90.0	1483	1018.0	1681.0
		Type5	22	19	712052	20	3	62.7	1706	1614.0	1027.0
11AX160MIMO	5250	Type5	22	0	290695	20	2	51.7	1898	1213.0	---
		Type5	22	1	109009	20	1	83.6	1466	---	---
		Type5	22	2	421324	20	1	70.7	1365	---	---
		Type5	22	3	758791	20	2	84.1	1681	1351.0	---
		Type5	22	4	91873	20	2	76.9	1507	1532.0	---
		Type5	22	5	927107	20	1	51.0	1438	---	---
		Type5	22	6	236282	20	3	71.0	2122	1686.0	1105.0
		Type5	22	7	702033	20	2	70.6	1088	1687.0	---
		Type5	22	8	905124	20	3	77.2	1062	1675.0	1056.0
		Type5	22	9	772228	20	1	75.4	1819	---	---
		Type5	22	10	762755	20	3	59.6	1350	1641.0	1115.0
		Type5	22	11	397641	20	1	96.9	1102	---	---
		Type5	22	12	792250	20	3	81.8	1680	1554.0	1681.0
		Type5	22	13	500638	20	1	53.7	1546	---	---
		Type5	22	14	680717	20	2	79.6	1824	1656.0	---
		Type5	22	15	834319	20	2	73.8	1752	1664.0	---
		Type5	22	16	748424	20	3	87.3	1904	1630.0	1176.0
		Type5	22	17	693167	20	2	95.0	2001	1057.0	---
		Type5	22	18	791684	20	3	90.0	1483	1018.0	1681.0
		Type5	22	19	712052	20	3	62.7	1706	1614.0	1027.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PR1 (μs)	PR2 (μs)	PR3 (μs)
11AX20MIMO	5260	Type5	23	0	794486	12	1	91.4	1352	---	---
		Type5	23	1	691015	12	3	87.5	1454	1442.0	1435.0
		Type5	23	2	387036	12	2	67.9	1470	1433.0	---
		Type5	23	3	208796	12	1	77.8	1755	---	---
		Type5	23	4	132612	12	3	62.1	1069	167.0	1777.0
		Type5	23	5	789713	12	2	86.2	1685	1329.0	---
		Type5	23	6	413872	12	1	54.8	1617	---	---
		Type5	23	7	806593	12	2	85.4	1784	1984.0	---
		Type5	23	8	403201	12	2	76.2	1216	1761.0	---
		Type5	23	9	492525	12	2	83.0	1820	1877.0	---
		Type5	23	10	792631	12	2	91.5	1296	145.0	---
		Type5	23	11	519848	12	3	74.2	1445	1652.0	1109.0
		Type5	23	12	405793	12	2	70.6	1664	1421.0	---
		Type5	23	13	234096	12	2	55.5	1064	1233.0	---
11AX40MIMO	5270	Type5	23	0	794486	12	1	91.4	1352	---	---
		Type5	23	1	691015	12	3	87.5	1454	1442.0	1435.0
		Type5	23	2	387036	12	2	67.9	1470	1433.0	---
		Type5	23	3	208796	12	1	77.8	1755	---	---
		Type5	23	4	132612	12	3	62.1	1069	167.0	1777.0
		Type5	23	5	789713	12	2	86.2	1685	1329.0	---
		Type5	23	6	413872	12	1	54.8	1617	---	---
		Type5	23	7	806593	12	2	85.4	1784	1984.0	---
		Type5	23	8	403201	12	2	76.2	1216	1761.0	---
		Type5	23	9	492525	12	2	83.0	1820	1877.0	---
		Type5	23	10	792631	12	2	91.5	1296	145.0	---
		Type5	23	11	519848	12	3	74.2	1445	1652.0	1109.0
		Type5	23	12	405793	12	2	70.6	1664	1421.0	---
		Type5	23	13	234096	12	2	55.5	1064	1233.0	---
11AX80MIMO	5290	Type5	23	0	794486	12	1	91.4	1352	---	---
		Type5	23	1	691015	12	3	87.5	1454	1442.0	1435.0
		Type5	23	2	387036	12	2	67.9	1470	1433.0	---
		Type5	23	3	208796	12	1	77.8	1755	---	---
		Type5	23	4	132612	12	3	62.1	1069	167.0	1777.0
		Type5	23	5	789713	12	2	86.2	1685	1329.0	---
		Type5	23	6	413872	12	1	54.8	1617	---	---
		Type5	23	7	806593	12	2	85.4	1784	1984.0	---
		Type5	23	8	403201	12	2	76.2	1216	1761.0	---
		Type5	23	9	492525	12	2	83.0	1820	1877.0	---
		Type5	23	10	792631	12	2	91.5	1296	145.0	---
		Type5	23	11	519848	12	3	74.2	1445	1652.0	1109.0
		Type5	23	12	405793	12	2	70.6	1664	1421.0	---
		Type5	23	13	234096	12	2	55.5	1064	1233.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX160MIMO	5250	Type5	23	0	794486	12	1	91.4	1352	---	---
		Type5	23	1	691015	12	3	87.5	1454	1442.0	1435.0
		Type5	23	2	387036	12	2	67.9	1470	1433.0	---
		Type5	23	3	208796	12	1	77.8	1755	---	---
		Type5	23	4	132612	12	3	62.1	1069	167.0	1777.0
		Type5	23	5	789713	12	2	86.2	1685	1329.0	---
		Type5	23	6	413872	12	1	54.8	1617	---	---
		Type5	23	7	806593	12	2	85.4	1784	1984.0	---
		Type5	23	8	403201	12	2	76.2	1216	1761.0	---
		Type5	23	9	492525	12	2	83.0	1820	1877.0	---
		Type5	23	10	792631	12	2	91.5	1296	145.0	---
		Type5	23	11	519848	12	3	74.2	1445	1652.0	1109.0
		Type5	23	12	405793	12	2	70.6	1664	1421.0	---
		Type5	23	13	234096	12	2	55.5	1064	1233.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	24	0	512665	11	3	72.1	1876	1538.0	1941.0
		Type5	24	1	244168	11	2	75.7	1603	1265.0	---
		Type5	24	2	288824	11	1	65.9	1396	---	---
		Type5	24	3	887365	11	3	88.2	1970	1396.0	1332.0
		Type5	24	4	625336	11	3	60.0	1284	1798.0	1498.0
		Type5	24	5	664932	11	2	74.2	1843	1336.0	---
		Type5	24	6	265737	11	3	57.2	1513	1646.0	1222.0
		Type5	24	7	482703	11	3	75.6	1261	1565.0	1380.0
		Type5	24	8	500562	11	3	85.2	1790	1234.0	1602.0
		Type5	24	9	293063	11	2	75.0	1649	1178.0	---
		Type5	24	10	799706	11	3	75.4	1499	1339.0	1956.0
		Type5	24	11	403292	11	1	56.6	1882	---	---
11AX40MIMO	5270	Type5	24	12	658169	11	3	66.9	1958	1224.0	1164.0
		Type5	24	0	512665	11	3	72.1	1876	1538.0	1941.0
		Type5	24	1	244168	11	2	75.7	1603	1265.0	---
		Type5	24	2	288824	11	1	65.9	1396	---	---
		Type5	24	3	887365	11	3	88.2	1970	1396.0	1332.0
		Type5	24	4	625336	11	3	60.0	1284	1798.0	1498.0
		Type5	24	5	664932	11	2	74.2	1843	1336.0	---
		Type5	24	6	265737	11	3	57.2	1513	1646.0	1222.0
		Type5	24	7	482703	11	3	75.6	1261	1565.0	1380.0
		Type5	24	8	500562	11	3	85.2	1790	1234.0	1602.0
		Type5	24	9	293063	11	2	75.0	1649	1178.0	---
		Type5	24	10	799706	11	3	75.4	1499	1339.0	1956.0
11AX80MIMO	5290	Type5	24	11	403292	11	1	56.6	1882	---	---
		Type5	24	12	658169	11	3	66.9	1958	1224.0	1164.0
		Type5	24	0	512665	11	3	72.1	1876	1538.0	1941.0
		Type5	24	1	244168	11	2	75.7	1603	1265.0	---
		Type5	24	2	288824	11	1	65.9	1396	---	---
		Type5	24	3	887365	11	3	88.2	1970	1396.0	1332.0
		Type5	24	4	625336	11	3	60.0	1284	1798.0	1498.0
		Type5	24	5	664932	11	2	74.2	1843	1336.0	---
		Type5	24	6	265737	11	3	57.2	1513	1646.0	1222.0
		Type5	24	7	482703	11	3	75.6	1261	1565.0	1380.0
		Type5	24	8	500562	11	3	85.2	1790	1234.0	1602.0
		Type5	24	9	293063	11	2	75.0	1649	1178.0	---
11AX160MIMO	5250	Type5	24	10	799706	11	3	75.4	1499	1339.0	1956.0
		Type5	24	11	403292	11	1	56.6	1882	---	---
		Type5	24	12	658169	11	3	66.9	1958	1224.0	1164.0
		Type5	24	0	512665	11	3	72.1	1876	1538.0	1941.0
		Type5	24	1	244168	11	2	75.7	1603	1265.0	---
		Type5	24	2	288824	11	1	65.9	1396	---	---
		Type5	24	3	887365	11	3	88.2	1970	1396.0	1332.0
		Type5	24	4	625336	11	3	60.0	1284	1798.0	1498.0
		Type5	24	5	664932	11	2	74.2	1843	1336.0	---
		Type5	24	6	265737	11	3	57.2	1513	1646.0	1222.0
		Type5	24	7	482703	11	3	75.6	1261	1565.0	1380.0
		Type5	24	8	500562	11	3	85.2	1790	1234.0	1602.0
		Type5	24	9	293063	11	2	75.0	1649	1178.0	---
		Type5	24	10	799706	11	3	75.4	1499	1339.0	1956.0
		Type5	24	11	403292	11	1	56.6	1882	---	---
		Type5	24	12	658169	11	3	66.9	1958	1224.0	1164.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PR1 (μs)	PR2 (μs)	PR3 (μs)
11AX20MIMO	5260	Type5	25	0	291249	5	2	69.3	1204	1381.0	---
		Type5	25	1	191389	5	2	81.0	1328	1638.0	---
		Type5	25	2	794850	5	1	62.1	1555	---	---
		Type5	25	3	1002296	5	2	79.7	1703	1332.0	---
		Type5	25	4	100791	5	2	76.5	1929	1002.0	---
		Type5	25	5	146302	5	2	67.4	1519	1988.0	---
		Type5	25	6	1102374	5	1	64.2	1377	---	---
		Type5	25	7	1104738	5	3	91.1	1508	1234.0	1361.0
11AX40MIMO	5270	Type5	25	0	291249	5	2	69.3	1204	1381.0	---
		Type5	25	1	191389	5	2	81.0	1328	1638.0	---
		Type5	25	2	794850	5	1	62.1	1555	---	---
		Type5	25	3	1002296	5	2	79.7	1703	1332.0	---
		Type5	25	4	100791	5	2	76.5	1929	1002.0	---
		Type5	25	5	146302	5	2	67.4	1519	1988.0	---
		Type5	25	6	1102374	5	1	64.2	1377	---	---
		Type5	25	7	1104738	5	3	91.1	1508	1234.0	1361.0
11AX80MIMO	5290	Type5	25	0	291249	5	2	69.3	1204	1381.0	---
		Type5	25	1	191389	5	2	81.0	1328	1638.0	---
		Type5	25	2	794850	5	1	62.1	1555	---	---
		Type5	25	3	1002296	5	2	79.7	1703	1332.0	---
		Type5	25	4	100791	5	2	76.5	1929	1002.0	---
		Type5	25	5	146302	5	2	67.4	1519	1988.0	---
		Type5	25	6	1102374	5	1	64.2	1377	---	---
		Type5	25	7	1104738	5	3	91.1	1508	1234.0	1361.0
11AX160MIMO	5250	Type5	25	0	291249	5	2	69.3	1204	1381.0	---
		Type5	25	1	191389	5	2	81.0	1328	1638.0	---
		Type5	25	2	794850	5	1	62.1	1555	---	---
		Type5	25	3	1002296	5	2	79.7	1703	1332.0	---
		Type5	25	4	100791	5	2	76.5	1929	1002.0	---
		Type5	25	5	146302	5	2	67.4	1519	1988.0	---
		Type5	25	6	1102374	5	1	64.2	1377	---	---
		Type5	25	7	1104738	5	3	91.1	1508	1234.0	1361.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	26	0	176741	16	3	90.5	1122	1336.0	1245.0
		Type5	26	1	17419	16	3	73.0	1953	1321.0	1637.0
		Type5	26	2	354210	16	1	86.2	1142	---	---
		Type5	26	3	509985	16	3	86.3	1261	1364.0	1451.0
		Type5	26	4	46750	16	1	90.2	1213	---	---
		Type5	26	5	334158	16	3	80.3	1389	1302.0	1780.0
		Type5	26	6	386321	16	2	63.7	1472	1852.0	---
		Type5	26	7	280785	16	3	57.6	1489	1123.0	1566.0
		Type5	26	8	315353	16	2	82.4	1222	1334.0	---
		Type5	26	9	209017	16	2	88.7	1788	1312.0	---
		Type5	26	10	511532	16	1	92.7	1584	---	---
		Type5	26	11	322203	16	3	68.2	1487	1336.0	1289.0
		Type5	26	12	629739	16	2	80.3	1513	1466.0	---
		Type5	26	13	414472	16	1	82.1	1848	---	---
		Type5	26	14	249251	16	3	64.6	1538	1115.0	1300.0
		Type5	26	15	362743	16	1	64.2	2037	---	---
		Type5	26	16	376294	16	3	85.8	1409	1051.0	1831.0
11AX40MIMO	5270	Type5	26	0	176741	16	3	90.5	1122	1336.0	1245.0
		Type5	26	1	17419	16	3	73.0	1953	1321.0	1637.0
		Type5	26	2	354210	16	1	86.2	1142	---	---
		Type5	26	3	509985	16	3	86.3	1261	1364.0	1451.0
		Type5	26	4	46750	16	1	90.2	1213	---	---
		Type5	26	5	334158	16	3	80.3	1389	1302.0	1780.0
		Type5	26	6	386321	16	2	63.7	1472	1852.0	---
		Type5	26	7	280785	16	3	57.6	1489	1123.0	1566.0
		Type5	26	8	315353	16	2	82.4	1222	1334.0	---
		Type5	26	9	209017	16	2	88.7	1788	1312.0	---
		Type5	26	10	511532	16	1	92.7	1584	---	---
		Type5	26	11	322203	16	3	68.2	1487	1336.0	1289.0
		Type5	26	12	629739	16	2	80.3	1513	1466.0	---
		Type5	26	13	414472	16	1	82.1	1848	---	---
		Type5	26	14	249251	16	3	64.6	1538	1115.0	1300.0
		Type5	26	15	362743	16	1	64.2	2037	---	---
		Type5	26	16	376294	16	3	85.8	1409	1051.0	1831.0
11AX80MIMO	5290	Type5	26	0	176741	16	3	90.5	1122	1336.0	1245.0
		Type5	26	1	17419	16	3	73.0	1953	1321.0	1637.0
		Type5	26	2	354210	16	1	86.2	1142	---	---
		Type5	26	3	509985	16	3	86.3	1261	1364.0	1451.0
		Type5	26	4	46750	16	1	90.2	1213	---	---
		Type5	26	5	334158	16	3	80.3	1389	1302.0	1780.0
		Type5	26	6	386321	16	2	63.7	1472	1852.0	---
		Type5	26	7	280785	16	3	57.6	1489	1123.0	1566.0
		Type5	26	8	315353	16	2	82.4	1222	1334.0	---
		Type5	26	9	209017	16	2	88.7	1788	1312.0	---
		Type5	26	10	511532	16	1	92.7	1584	---	---
		Type5	26	11	322203	16	3	68.2	1487	1336.0	1289.0
		Type5	26	12	629739	16	2	80.3	1513	1466.0	---
		Type5	26	13	414472	16	1	82.1	1848	---	---
		Type5	26	14	249251	16	3	64.6	1538	1115.0	1300.0
		Type5	26	15	362743	16	1	64.2	2037	---	---
		Type5	26	16	376294	16	3	85.8	1409	1051.0	1831.0

11AX160MIMO	5250	Type5	26	0	176741	16	3	90.5	1122	1336.0	1245.0
		Type5	26	1	17419	16	3	73.0	1953	1321.0	1637.0
		Type5	26	2	354210	16	1	86.2	1142	---	---
		Type5	26	3	509985	16	3	86.3	1261	1364.0	1451.0
		Type5	26	4	46750	16	1	90.2	1213	---	---
		Type5	26	5	334158	16	3	80.3	1389	1302.0	1780.0
		Type5	26	6	386321	16	2	63.7	1472	1852.0	---
		Type5	26	7	280785	16	3	57.6	1489	1123.0	1566.0
		Type5	26	8	315353	16	2	82.4	1222	1334.0	---
		Type5	26	9	209017	16	2	88.7	1788	1312.0	---
		Type5	26	10	511532	16	1	92.7	1584	---	---
		Type5	26	11	322203	16	3	68.2	1487	1336.0	1289.0
		Type5	26	12	629739	16	2	80.3	1513	1466.0	---
		Type5	26	13	414472	16	1	82.1	1848	---	---
		Type5	26	14	249251	16	3	64.6	1538	1115.0	1300.0
		Type5	26	15	362743	16	1	64.2	2037	---	---
		Type5	26	16	376294	16	3	85.8	1409	1051.0	1831.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PR1 (μs)	PR2 (μs)	PR3 (μs)
11AX20MIMO	5260	Type5	27	0	127217	19	3	85.5	1185	1638.0	1655.0
		Type5	27	1	405316	19	2	79.8	1494	1220.0	---
		Type5	27	2	410012	19	1	66.1	2091	---	---
		Type5	27	3	414921	19	1	78.9	1695	---	---
		Type5	27	4	501237	19	3	72.1	1967	1634.0	1690.0
		Type5	27	5	450987	19	3	80.9	1598	1699.0	1352.0
		Type5	27	6	430723	19	1	84.7	1983	---	---
		Type5	27	7	228624	19	2	69.5	1284	1669.0	---
		Type5	27	8	486188	19	3	84.3	2005	1778.0	1698.0
		Type5	27	9	245217	19	3	81.0	1599	1128.0	1495.0
		Type5	27	10	171581	19	3	69.5	1676	1964.0	1366.0
		Type5	27	11	230274	19	1	83.7	1914	---	---
		Type5	27	12	481047	19	1	74.5	1180	---	---
		Type5	27	13	405103	19	1	62.0	1282	---	---
		Type5	27	14	327285	19	2	75.1	1776	1360.0	---
		Type5	27	15	222426	19	1	85.0	1542	---	---
		Type5	27	16	215079	19	2	71.6	2080	1302.0	---
		Type5	27	17	274233	19	1	89.0	1195	---	---
		Type5	27	18	463564	19	2	79.8	1629	1982.0	---
11AX40MIMO	5270	Type5	27	0	127217	19	3	85.5	1185	1638.0	1655.0
		Type5	27	1	405316	19	2	79.8	1494	1220.0	---
		Type5	27	2	410012	19	1	66.1	2091	---	---
		Type5	27	3	414921	19	1	78.9	1695	---	---
		Type5	27	4	501237	19	3	72.1	1967	1634.0	1690.0
		Type5	27	5	450987	19	3	80.9	1598	1699.0	1352.0
		Type5	27	6	430723	19	1	84.7	1983	---	---
		Type5	27	7	228624	19	2	69.5	1284	1669.0	---
		Type5	27	8	486188	19	3	84.3	2005	1778.0	1698.0
		Type5	27	9	245217	19	3	81.0	1599	1128.0	1495.0
		Type5	27	10	171581	19	3	69.5	1676	1964.0	1366.0
		Type5	27	11	230274	19	1	83.7	1914	---	---
		Type5	27	12	481047	19	1	74.5	1180	---	---
		Type5	27	13	405103	19	1	62.0	1282	---	---
		Type5	27	14	327285	19	2	75.1	1776	1360.0	---
		Type5	27	15	222426	19	1	85.0	1542	---	---
		Type5	27	16	215079	19	2	71.6	2080	1302.0	---
		Type5	27	17	274233	19	1	89.0	1195	---	---
		Type5	27	18	463564	19	2	79.8	1629	1982.0	---
11AX80MIMO	5290	Type5	27	0	127217	19	3	85.5	1185	1638.0	1655.0
		Type5	27	1	405316	19	2	79.8	1494	1220.0	---
		Type5	27	2	410012	19	1	66.1	2091	---	---
		Type5	27	3	414921	19	1	78.9	1695	---	---
		Type5	27	4	501237	19	3	72.1	1967	1634.0	1690.0
		Type5	27	5	450987	19	3	80.9	1598	1699.0	1352.0
		Type5	27	6	430723	19	1	84.7	1983	---	---
		Type5	27	7	228624	19	2	69.5	1284	1669.0	---
		Type5	27	8	486188	19	3	84.3	2005	1778.0	1698.0
		Type5	27	9	245217	19	3	81.0	1599	1128.0	1495.0
		Type5	27	10	171581	19	3	69.5	1676	1964.0	1366.0
		Type5	27	11	230274	19	1	83.7	1914	---	---
		Type5	27	12	481047	19	1	74.5	1180	---	---
		Type5	27	13	405103	19	1	62.0	1282	---	---
		Type5	27	14	327285	19	2	75.1	1776	1360.0	---
		Type5	27	15	222426	19	1	85.0	1542	---	---

11AX160MIMO	5250	Type5	27	16	215079	19	2	71.6	2080	1302.0	---
		Type5	27	17	274233	19	1	89.0	1195	---	---
		Type5	27	18	463564	19	2	79.8	1629	1982.0	---
		Type5	27	0	127217	19	3	85.5	1185	1638.0	1655.0
		Type5	27	1	405316	19	2	79.8	1494	1220.0	---
		Type5	27	2	410012	19	1	66.1	2091	---	---
		Type5	27	3	414921	19	1	78.9	1695	---	---
		Type5	27	4	501237	19	3	72.1	1967	1634.0	1690.0
		Type5	27	5	450987	19	3	80.9	1598	1699.0	1352.0
		Type5	27	6	430723	19	1	84.7	1983	---	---
		Type5	27	7	228624	19	2	69.5	1284	1669.0	---
		Type5	27	8	486188	19	3	84.3	2005	1778.0	1698.0
		Type5	27	9	245217	19	3	81.0	1599	1128.0	1495.0
		Type5	27	10	171581	19	3	69.5	1676	1964.0	1366.0
		Type5	27	11	230274	19	1	83.7	1914	---	---
		Type5	27	12	481047	19	1	74.5	1180	---	---
		Type5	27	13	405103	19	1	62.0	1282	---	---
		Type5	27	14	327285	19	2	75.1	1776	1360.0	---
		Type5	27	15	222426	19	1	85.0	1542	---	---
		Type5	27	16	215079	19	2	71.6	2080	1302.0	---
		Type5	27	17	274233	19	1	89.0	1195	---	---
		Type5	27	18	463564	19	2	79.8	1629	1982.0	---

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PRI1 (μs)	PRI2 (μs)	PRI3 (μs)
11AX20MIMO	5260	Type5	28	0	306079	10	1	82.1	1669	---	---
		Type5	28	1	507987	10	1	83.5	1467	---	---
		Type5	28	2	539305	10	3	51.5	1209	1363.0	1924.0
		Type5	28	3	327566	10	2	79.6	1743	1254.0	---
		Type5	28	4	515920	10	2	57.6	1395	1352.0	---
		Type5	28	5	828828	10	3	52.0	1366	1231.0	1162.0
		Type5	28	6	558264	10	2	49.1	1203	1137.0	---
		Type5	28	7	296799	10	3	83.9	1340	1292.0	1923.0
		Type5	28	8	314808	10	3	59.2	1308	1796.0	1431.0
		Type5	28	9	431778	10	2	63.5	1602	1120.0	---
		Type5	28	10	420306	10	1	84.8	1699	---	---
11AX40MIMO	5270	Type5	28	11	634303	10	1	81.2	1673	---	---
		Type5	28	0	306079	10	1	82.1	1669	---	---
		Type5	28	1	507987	10	1	83.5	1467	---	---
		Type5	28	2	539305	10	3	51.5	1209	1363.0	1924.0
		Type5	28	3	327566	10	2	79.6	1743	1254.0	---
		Type5	28	4	515920	10	2	57.6	1395	1352.0	---
		Type5	28	5	828828	10	3	52.0	1366	1231.0	1162.0
		Type5	28	6	558264	10	2	49.1	1203	1137.0	---
		Type5	28	7	296799	10	3	83.9	1340	1292.0	1923.0
		Type5	28	8	314808	10	3	59.2	1308	1796.0	1431.0
		Type5	28	9	431778	10	2	63.5	1602	1120.0	---
11AX80MIMO	5290	Type5	28	10	420306	10	1	84.8	1699	---	---
		Type5	28	11	634303	10	1	81.2	1673	---	---
		Type5	28	0	306079	10	1	82.1	1669	---	---
		Type5	28	1	507987	10	1	83.5	1467	---	---
		Type5	28	2	539305	10	3	51.5	1209	1363.0	1924.0
		Type5	28	3	327566	10	2	79.6	1743	1254.0	---
		Type5	28	4	515920	10	2	57.6	1395	1352.0	---
		Type5	28	5	828828	10	3	52.0	1366	1231.0	1162.0
		Type5	28	6	558264	10	2	49.1	1203	1137.0	---
		Type5	28	7	296799	10	3	83.9	1340	1292.0	1923.0
		Type5	28	8	314808	10	3	59.2	1308	1796.0	1431.0
11AX160MIMO	5250	Type5	28	9	431778	10	2	63.5	1602	1120.0	---
		Type5	28	10	420306	10	1	84.8	1699	---	---
		Type5	28	11	634303	10	1	81.2	1673	---	---
		Type5	28	0	306079	10	1	82.1	1669	---	---
		Type5	28	1	507987	10	1	83.5	1467	---	---
		Type5	28	2	539305	10	3	51.5	1209	1363.0	1924.0
		Type5	28	3	327566	10	2	79.6	1743	1254.0	---
		Type5	28	4	515920	10	2	57.6	1395	1352.0	---
		Type5	28	5	828828	10	3	52.0	1366	1231.0	1162.0
		Type5	28	6	558264	10	2	49.1	1203	1137.0	---
		Type5	28	7	296799	10	3	83.9	1340	1292.0	1923.0

Test Mode	Channel	Radar Type	Trial ID	Burst ID	Burst Offset (μs)	Chirp Width (MHz)	Number Of Pulses	Pulse Width (μs)	PR1 (μs)	PR2 (μs)	PR3 (μs)
11AX20MIMO	5260	Type5	29	0	565768	17	3	68.1	1797	1338.0	1251.0
		Type5	29	1	263411	17	3	68.1	1085	1364.0	1335.0
		Type5	29	2	190744	17	3	83.3	1678	1669.0	1563.0
		Type5	29	3	584616	17	3	78.8	1319	1365.0	1822.0
		Type5	29	4	242430	17	3	68.8	1592	1396.0	1966.0
		Type5	29	5	587363	17	1	63.1	1795	---	---
		Type5	29	6	261213	17	2	63.8	1655	1336.0	---
		Type5	29	7	450062	17	3	83.6	1636	1358.0	1328.0
		Type5	29	8	192047	17	3	77.1	1676	1651.0	1202.0
		Type5	29	9	160510	17	3	77.4	1363	1321.0	1321.0
		Type5	29	10	310230	17	1	68.1	1828	---	---
		Type5	29	11	568763	17	2	90.0	1550	1693.0	---
		Type5	29	12	558084	17	1	81.6	1546	---	---
		Type5	29	13	460230	17	2	73.1	1764	1362.0	---
		Type5	29	14	383401	17	2	67.9	1643	1696.0	---
		Type5	29	15	212753	17	1	87.2	1721	---	---
		Type5	29	16	370289	17	2	66.3	1598	1631.0	---
		Type5	29	17	427890	17	2	86.5	1628	1668.0	---
11AX40MIMO	5270	Type5	29	0	565768	17	3	68.1	1797	1338.0	1251.0
		Type5	29	1	263411	17	3	68.1	1085	1364.0	1335.0
		Type5	29	2	190744	17	3	83.3	1678	1669.0	1563.0
		Type5	29	3	584616	17	3	78.8	1319	1365.0	1822.0
		Type5	29	4	242430	17	3	68.8	1592	1396.0	1966.0
		Type5	29	5	587363	17	1	63.1	1795	---	---
		Type5	29	6	261213	17	2	63.8	1655	1336.0	---
		Type5	29	7	450062	17	3	83.6	1636	1358.0	1328.0
		Type5	29	8	192047	17	3	77.1	1676	1651.0	1202.0
		Type5	29	9	160510	17	3	77.4	1363	1321.0	1321.0
		Type5	29	10	310230	17	1	68.1	1828	---	---
		Type5	29	11	568763	17	2	90.0	1550	1693.0	---
		Type5	29	12	558084	17	1	81.6	1546	---	---
		Type5	29	13	460230	17	2	73.1	1764	1362.0	---
		Type5	29	14	383401	17	2	67.9	1643	1696.0	---
		Type5	29	15	212753	17	1	87.2	1721	---	---
		Type5	29	16	370289	17	2	66.3	1598	1631.0	---
		Type5	29	17	427890	17	2	86.5	1628	1668.0	---
11AX80MIMO	5290	Type5	29	0	565768	17	3	68.1	1797	1338.0	1251.0
		Type5	29	1	263411	17	3	68.1	1085	1364.0	1335.0
		Type5	29	2	190744	17	3	83.3	1678	1669.0	1563.0
		Type5	29	3	584616	17	3	78.8	1319	1365.0	1822.0
		Type5	29	4	242430	17	3	68.8	1592	1396.0	1966.0
		Type5	29	5	587363	17	1	63.1	1795	---	---
		Type5	29	6	261213	17	2	63.8	1655	1336.0	---
		Type5	29	7	450062	17	3	83.6	1636	1358.0	1328.0
		Type5	29	8	192047	17	3	77.1	1676	1651.0	1202.0
		Type5	29	9	160510	17	3	77.4	1363	1321.0	1321.0
		Type5	29	10	310230	17	1	68.1	1828	---	---
		Type5	29	11	568763	17	2	90.0	1550	1693.0	---
		Type5	29	12	558084	17	1	81.6	1546	---	---
		Type5	29	13	460230	17	2	73.1	1764	1362.0	---
		Type5	29	14	383401	17	2	67.9	1643	1696.0	---
		Type5	29	15	212753	17	1	87.2	1721	---	---
		Type5	29	16	370289	17	2	66.3	1598	1631.0	---
		Type5	29	17	427890	17	2	86.5	1628	1668.0	---

11AX160MIMO	5250	Type5	29	0	565768	17	3	68.1	1797	1338.0	1251.0
		Type5	29	1	263411	17	3	68.1	1085	1364.0	1335.0
		Type5	29	2	190744	17	3	83.3	1678	1669.0	1563.0
		Type5	29	3	584616	17	3	78.8	1319	1365.0	1822.0
		Type5	29	4	242430	17	3	68.8	1592	1396.0	1966.0
		Type5	29	5	587363	17	1	63.1	1795	---	---
		Type5	29	6	261213	17	2	63.8	1655	1336.0	---
		Type5	29	7	450062	17	3	83.6	1636	1358.0	1328.0
		Type5	29	8	192047	17	3	77.1	1676	1651.0	1202.0
		Type5	29	9	160510	17	3	77.4	1363	1321.0	1321.0
		Type5	29	10	310230	17	1	68.1	1828	---	---
		Type5	29	11	568763	17	2	90.0	1550	1693.0	---
		Type5	29	12	558084	17	1	81.6	1546	---	---
		Type5	29	13	460230	17	2	73.1	1764	1362.0	---
		Type5	29	14	383401	17	2	67.9	1643	1696.0	---
		Type5	29	15	212753	17	1	87.2	1721	---	---
		Type5	29	16	370289	17	2	66.3	1598	1631.0	---
		Type5	29	17	427890	17	2	86.5	1628	1668.0	---

Test Mode	Frequency[MHz]	Radar Type	Trial ID	Pulse width (μs)	PRI (μs)	Pulses per Hop	Detection (1: Yes; 0: No)
11AX20MIMO	5260	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
11AX40MIMO	5270	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1

		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1
11AX80MIMO	5290	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1

11AX160MIMO	5250	Type6	0	1	333.3	9	1
		Type6	1	1	333.3	9	1
		Type6	2	1	333.3	9	1
		Type6	3	1	333.3	9	1
		Type6	4	1	333.3	9	1
		Type6	5	1	333.3	9	1
		Type6	6	1	333.3	9	1
		Type6	7	1	333.3	9	1
		Type6	8	1	333.3	9	1
		Type6	9	1	333.3	9	1
		Type6	10	1	333.3	9	1
		Type6	11	1	333.3	9	1
		Type6	12	1	333.3	9	1
		Type6	13	1	333.3	9	1
		Type6	14	1	333.3	9	1
		Type6	15	1	333.3	9	1
		Type6	16	1	333.3	9	1
		Type6	17	1	333.3	9	1
		Type6	18	1	333.3	9	1
		Type6	19	1	333.3	9	1
		Type6	20	1	333.3	9	1
		Type6	21	1	333.3	9	1
		Type6	22	1	333.3	9	1
		Type6	23	1	333.3	9	1
		Type6	24	1	333.3	9	1
		Type6	25	1	333.3	9	1
		Type6	26	1	333.3	9	1
		Type6	27	1	333.3	9	1
		Type6	28	1	333.3	9	1
		Type6	29	1	333.3	9	1

Bridge mode:

Test Mode	Channel	Radar Type	Trial ID	Pulse width(μs)	PRI(μs)	Pulses per Burst	Detection (1: Yes; 0: No)
11AX40MIMO	5270	Type4	0	16.0	355.0	14	1
		Type4	1	11.3	487.0	12	1
		Type4	2	13.5	344.0	13	1
		Type4	3	19.4	288.0	16	1
		Type4	4	17.5	230.0	15	1
		Type4	5	15.3	432.0	14	1
		Type4	6	15.9	207.0	14	1
		Type4	7	14.3	443.0	13	1
		Type4	8	15.8	439.0	14	1
		Type4	9	11.5	223.0	12	1
		Type4	10	17.4	208.0	15	1
		Type4	11	19.0	463.0	16	1
		Type4	12	16.0	441.0	14	1
		Type4	13	13.8	323.0	13	1
		Type4	14	18.9	297.0	16	1
		Type4	15	15.5	412.0	14	1
		Type4	16	19.9	324.0	16	1
		Type4	17	14.1	271.0	13	1
		Type4	18	15.2	349.0	14	1
		Type4	19	13.8	409.0	13	1
		Type4	20	17.1	373.0	15	1
		Type4	21	13.8	254.0	13	1
		Type4	22	19.8	274.0	16	1
		Type4	23	15.3	278.0	14	1
		Type4	24	14.5	317.0	13	1
		Type4	25	11.3	260.0	12	1
		Type4	26	17.3	211.0	15	1
		Type4	27	19.2	272.0	16	1
		Type4	28	14.2	264.0	13	1
Type4	29	18.2	284.0	15	1		
Detection Percentage: 100%(>60%)							

***** END OF REPORT *****