



深圳自由行通信技术有限公司

Shenzhen Free Walk Communication Technology Co. LTD

ADD: 深圳市宝安西乡鹤洲西区工业园 2 栋 3 楼

3rd Floor, Building 2, Industrial Park, Hezhou West District, Bao'an West Township,
Shenzhen

Email: zyx_sz@yeah.net

TEL: 86-0755-29955983

FAX: 86-0755-29955983

产品 (**Product**) : 2.4G antenna (L=100mm)

型号 (**Model**) : D50 home

料号 (**Part Number**) : Z02-10360-R01

The basic parameters

A. Electrical Characteristics	
Frequency	2400 MHz ~2500MHz
VSWR	≤ 2
Efficiency	>60%
Impedance	50 Ohm
Polarization	Linear
Gain	4.24dBi
B. Material & Mechanical Characteristics	
Material of Radiator	
Cable Type	2.4G Φ 1.13mm Gray
Connector Type	IPEX
Dimension	
C. Environmental	
Operation Temperature	- 20 °C ~ + 60 °C
Storage Temperature	- 40 °C ~ + 80 °C

Product Drawing:



Test Equipment & Conditions


1. Network Analyzers :

Agilent 8753D 5071C


2. Communications Test Set:

Agilent 8960 CMW500


3. 3D Chamber Test System

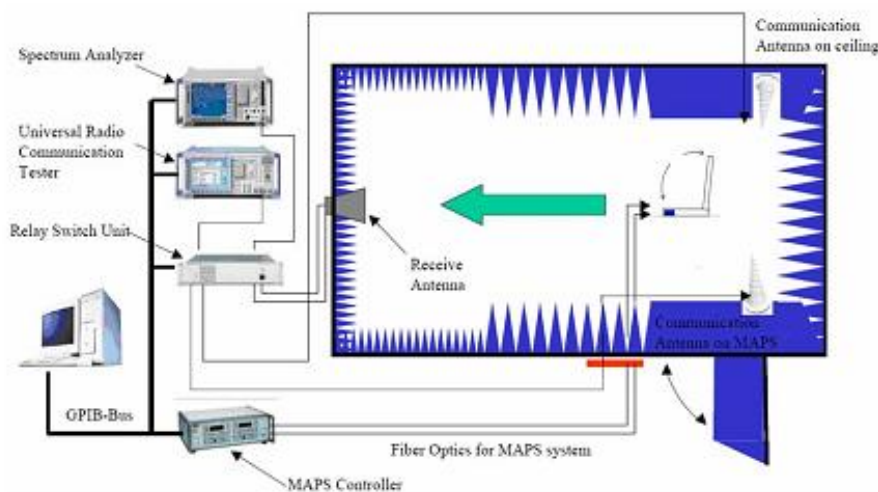

(Testing by 3D anechoic chamber)

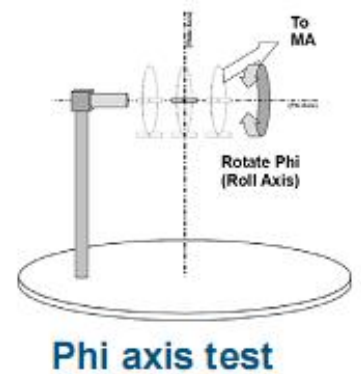


Phi axis test

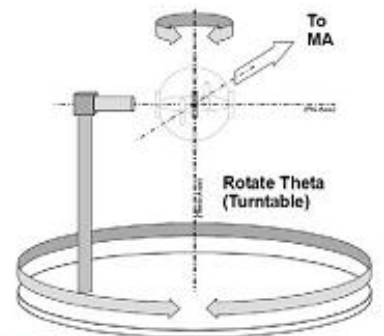


Theta axis test

(2.4G)

SWR

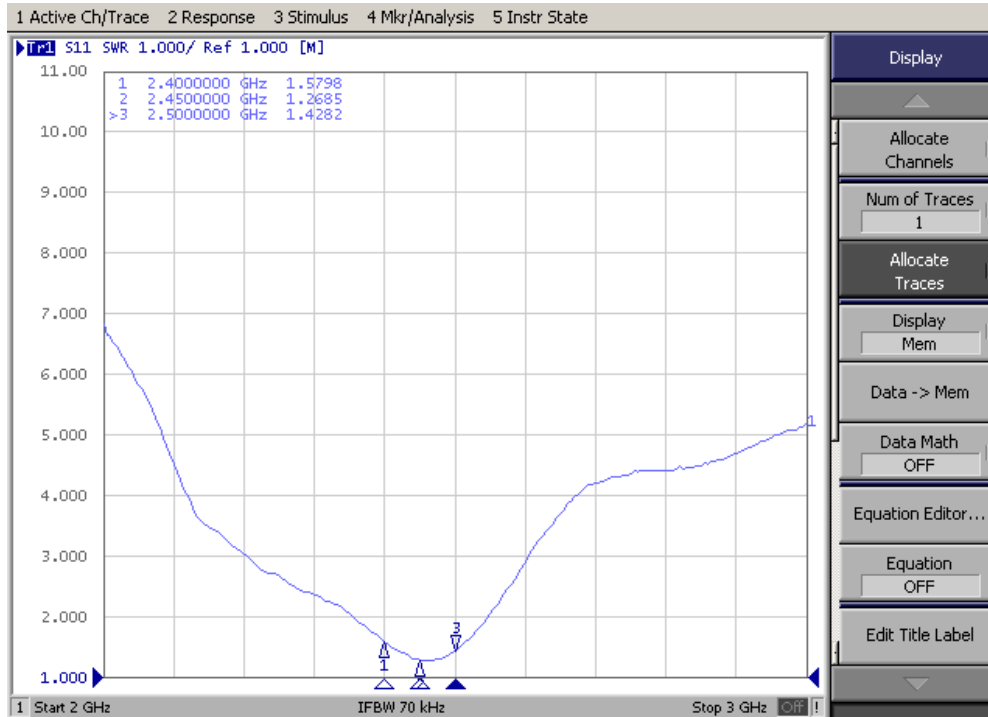

Smith

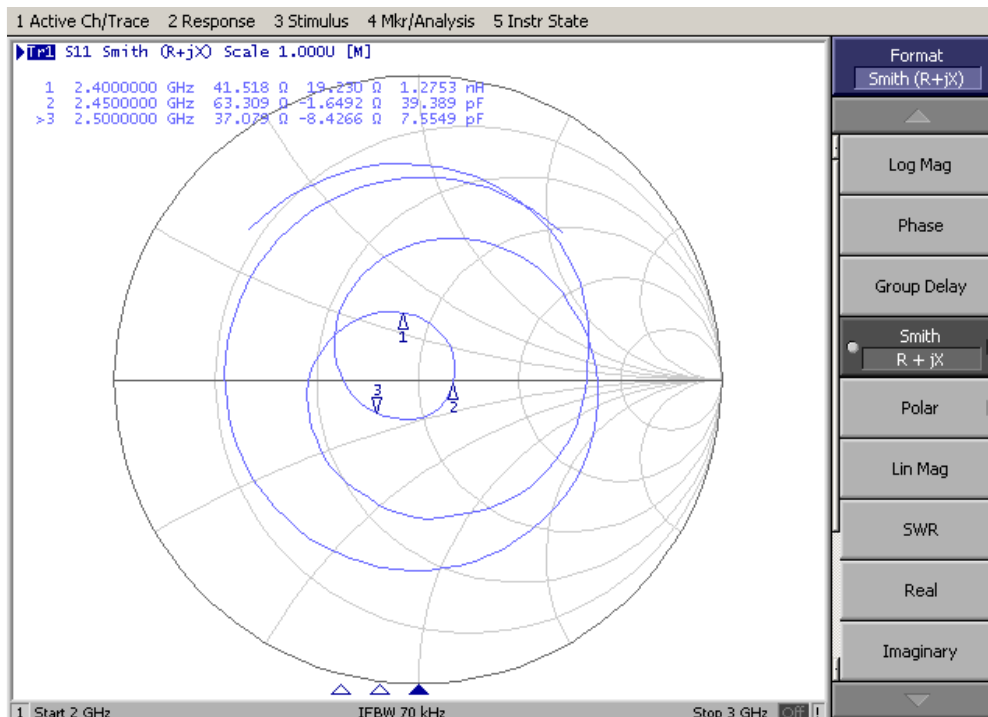



效率&增益:
Efficiency&Gain


Freq (MHz)	Effi (%)	Gain (dBi)
2400	64.55	5.00
2410	60.60	4.10
2420	60.85	3.80
2430	61.13	4.16
2440	66.76	4.24
2450	66.76	4.07
2460	65.35	3.87
2470	68.70	4.21
2480	65.98	4.19
2490	65.93	3.79
2500	63.98	3.51

方向图


Patten

3D

2400MHz

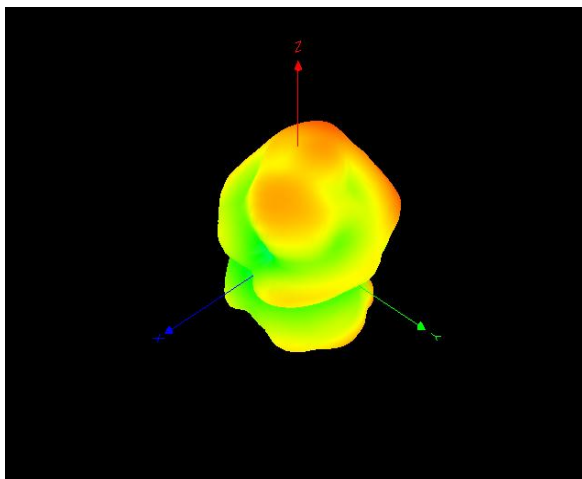

2450MHz

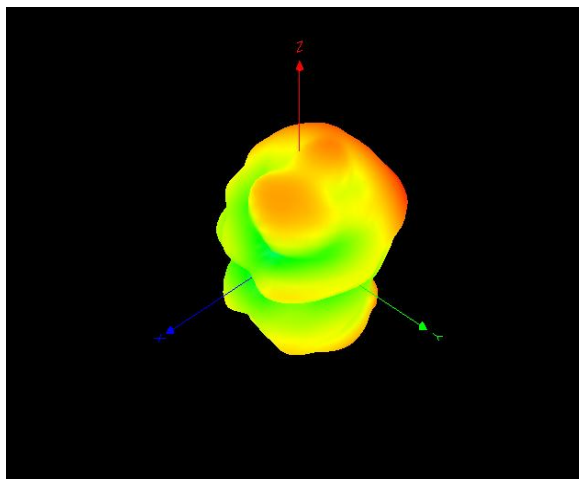

2500MHz

