




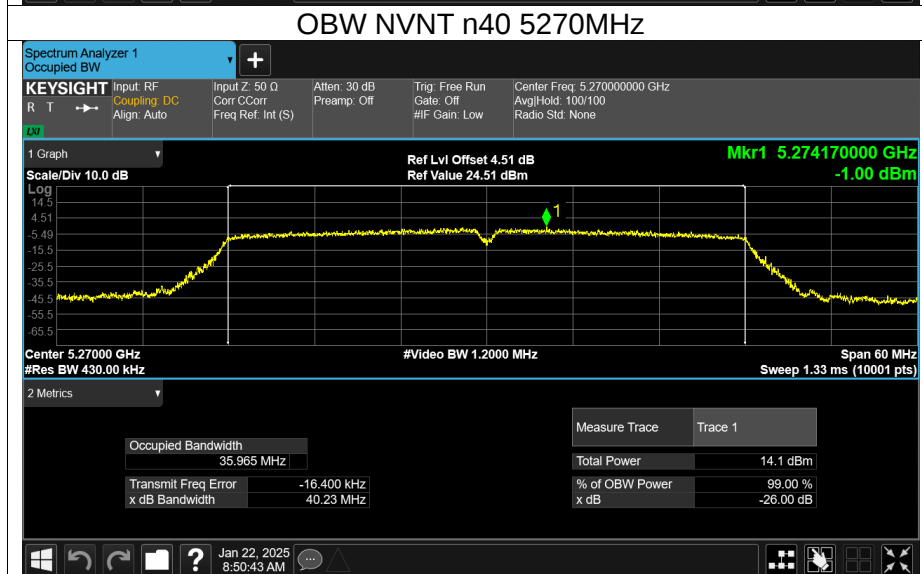
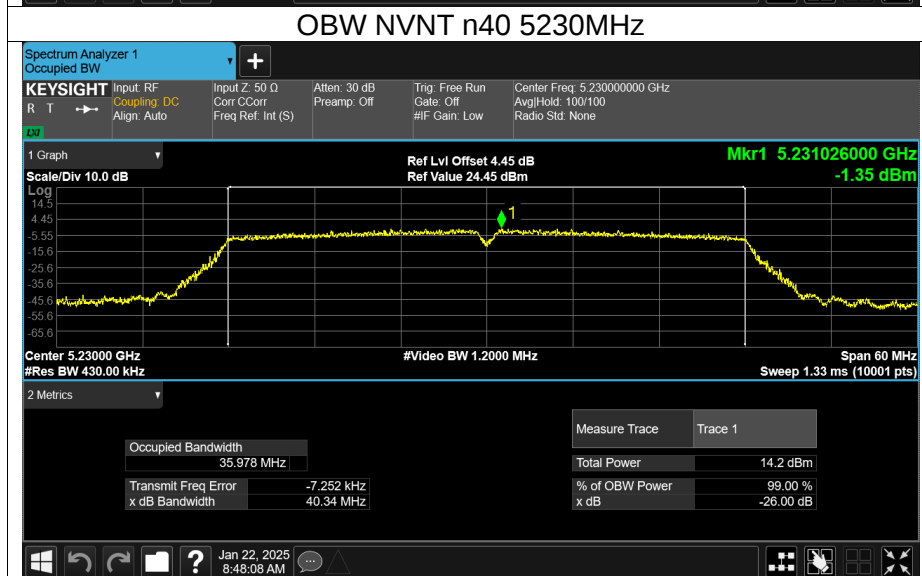
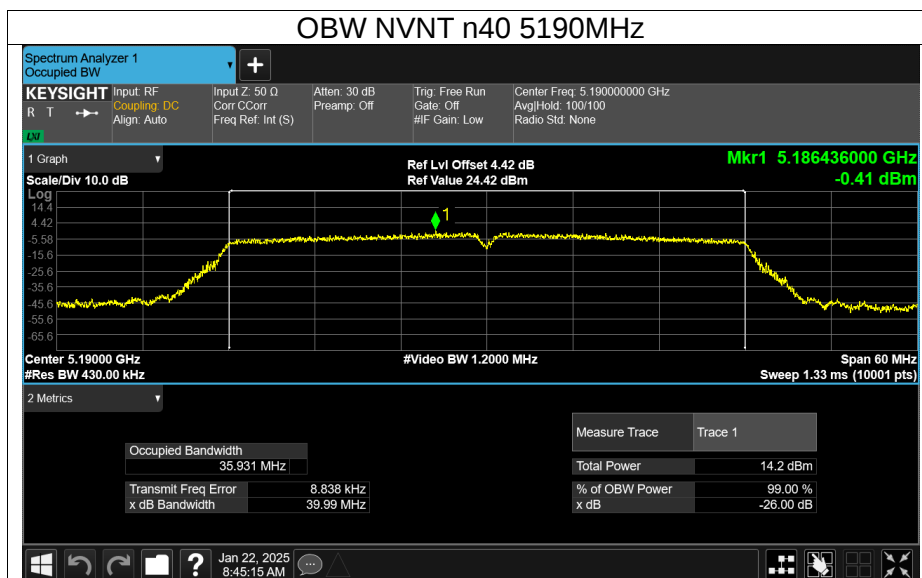
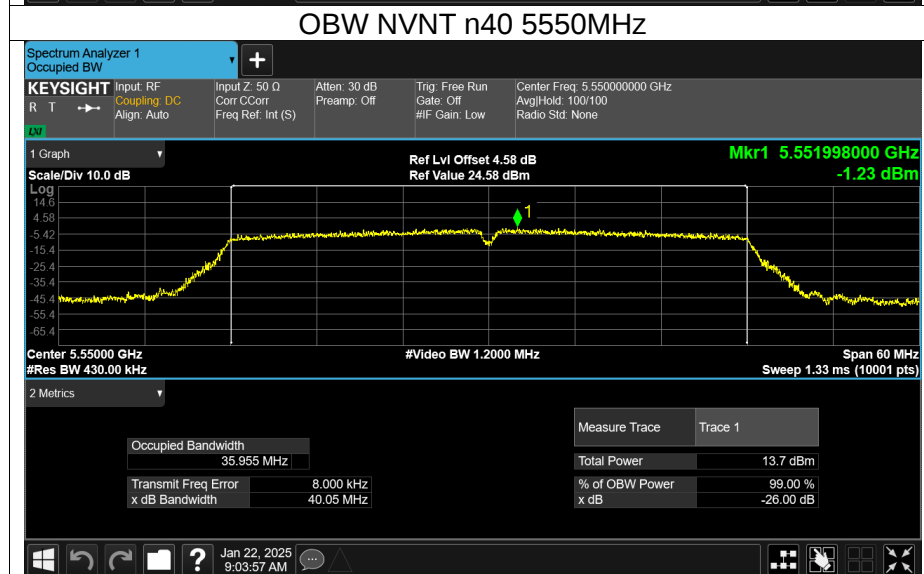
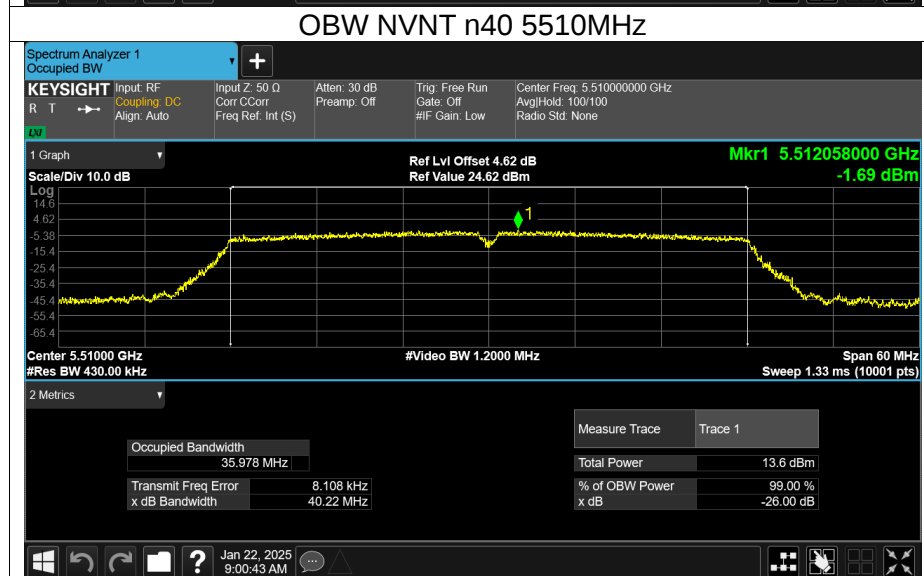
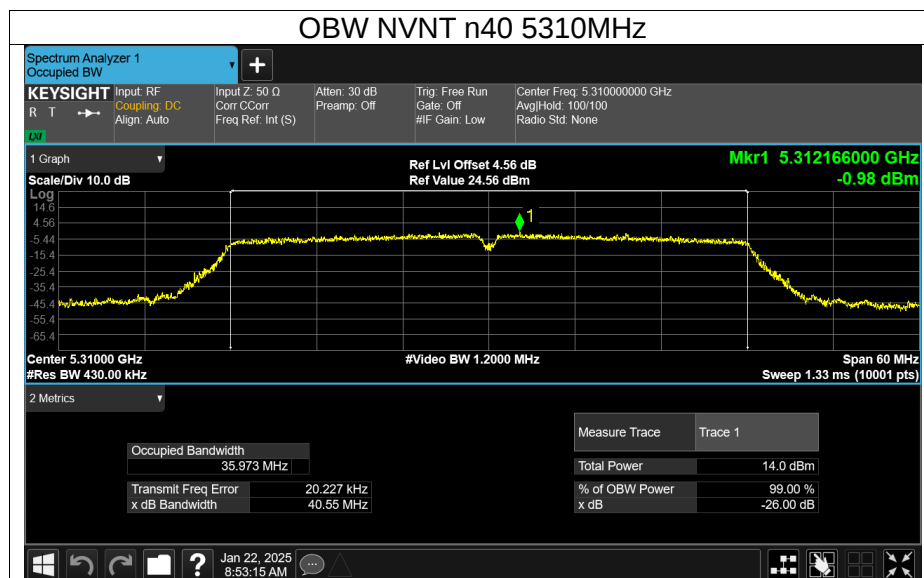
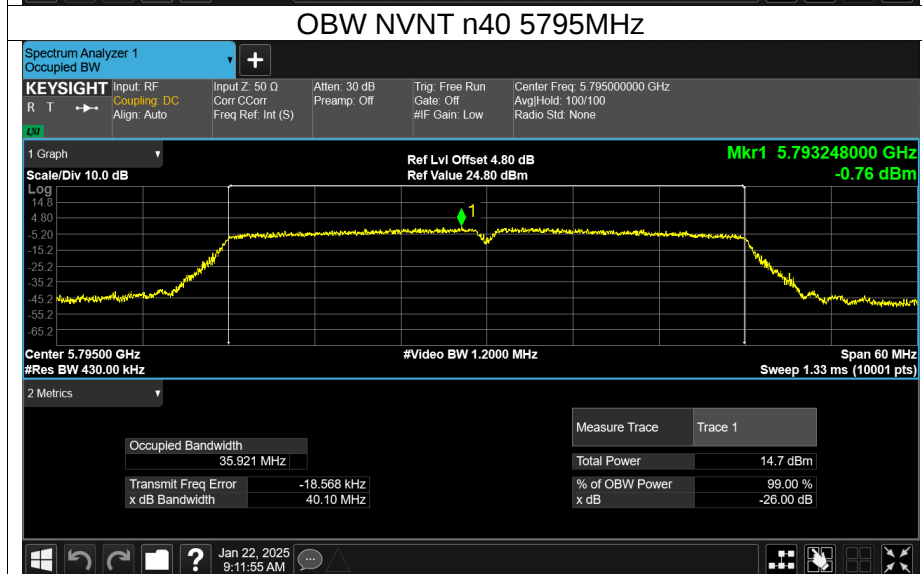
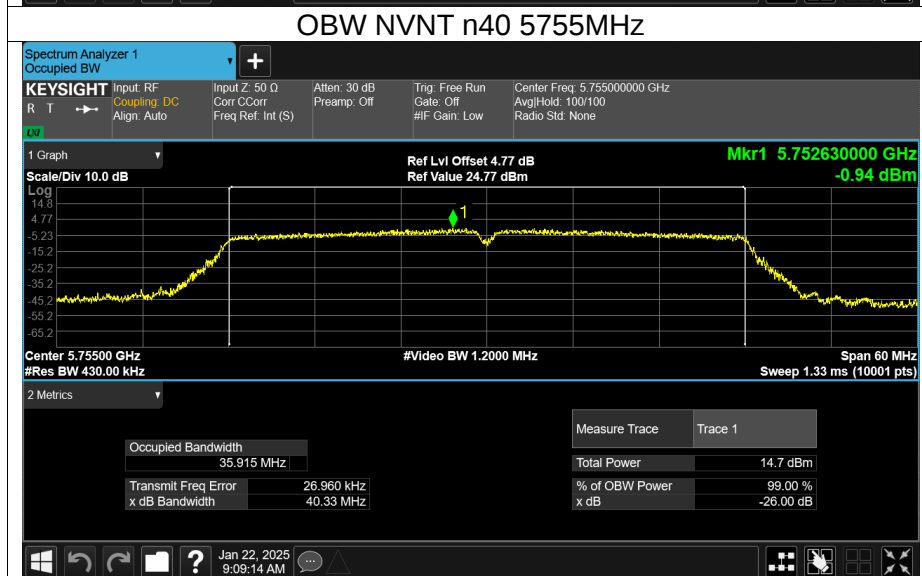
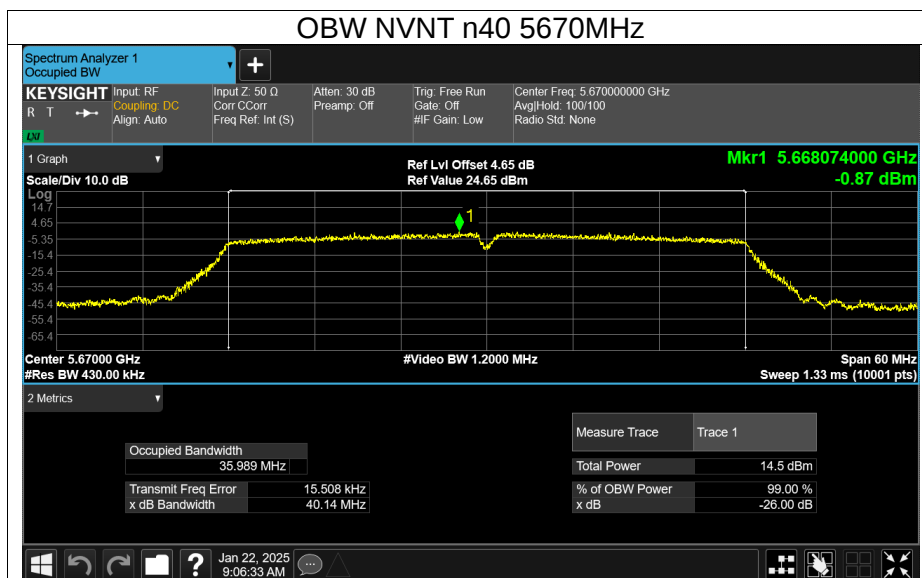
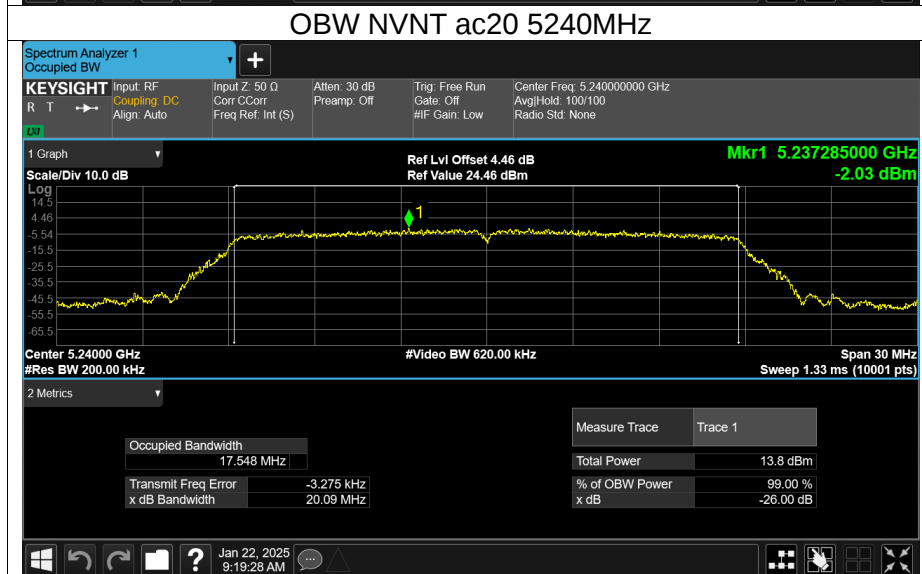




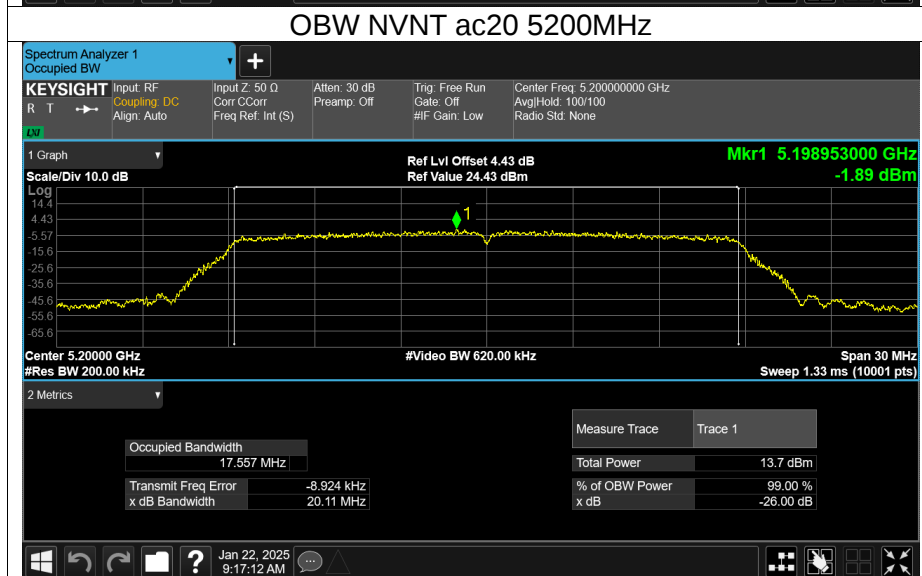




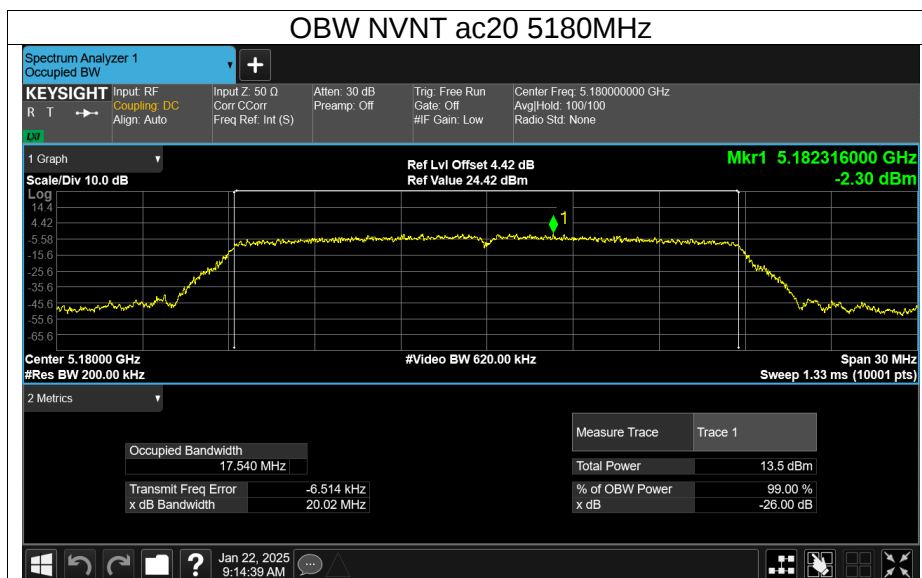




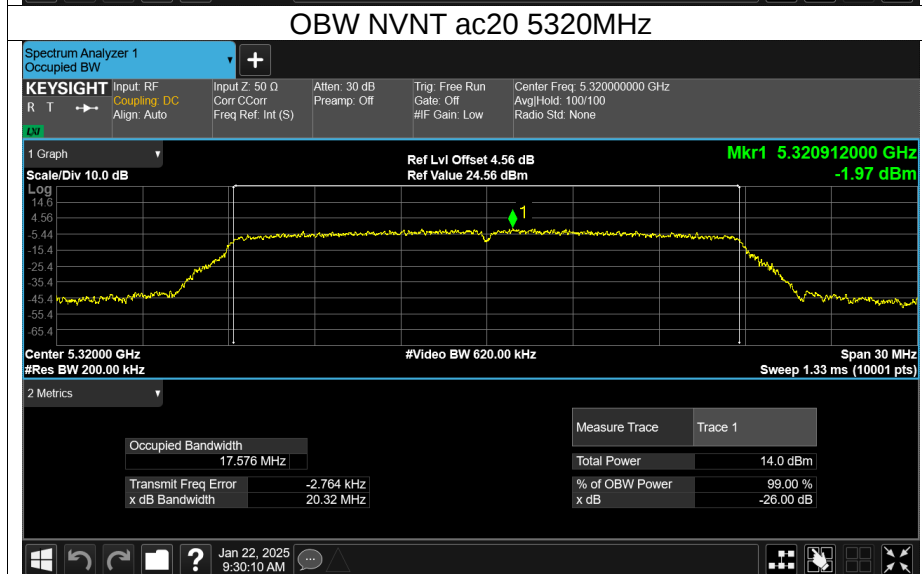




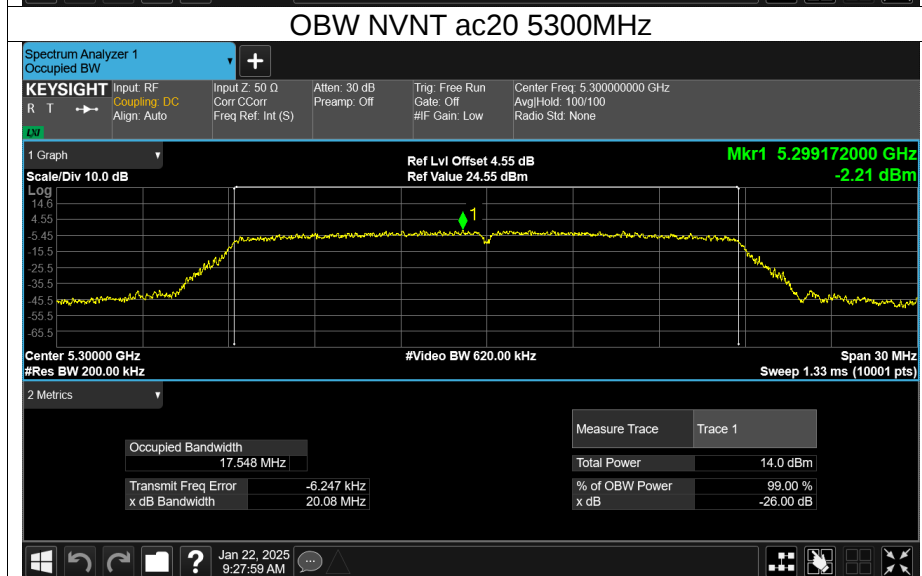




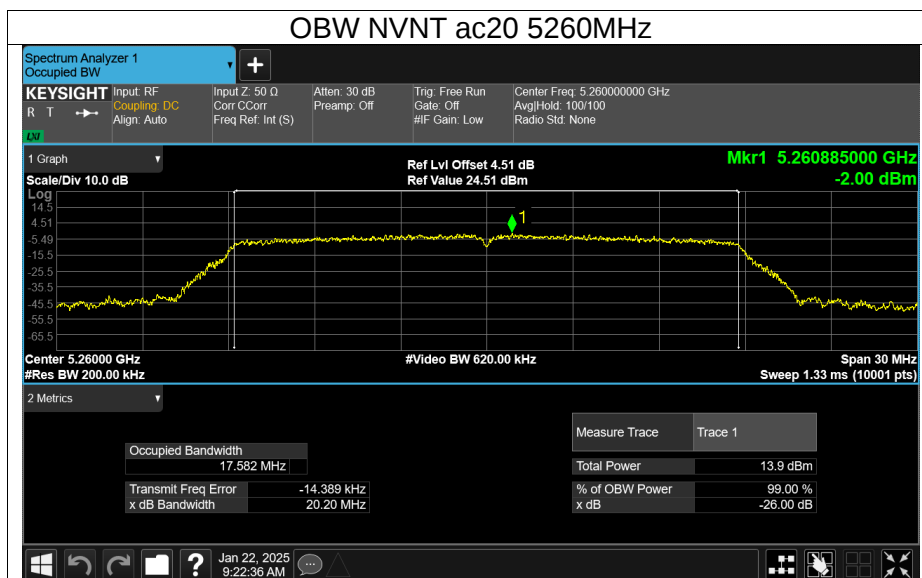


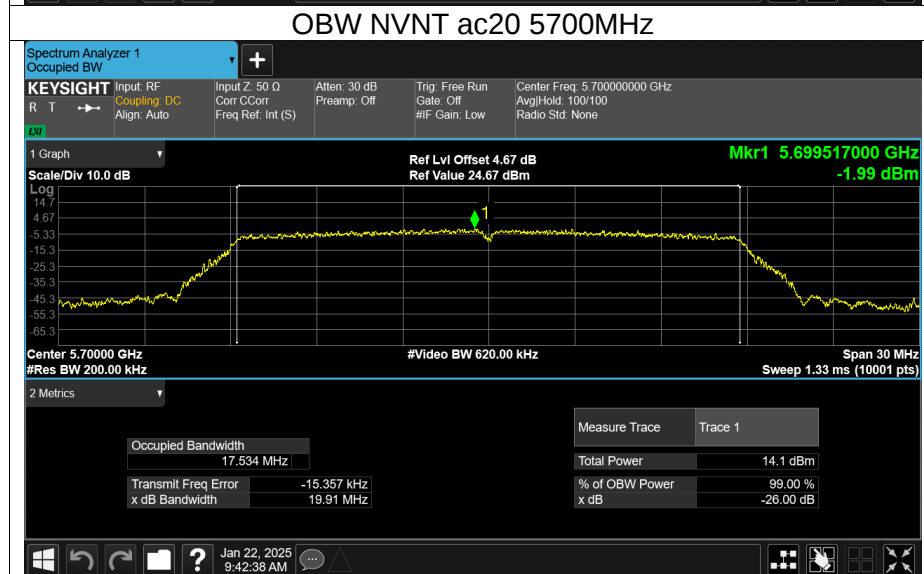
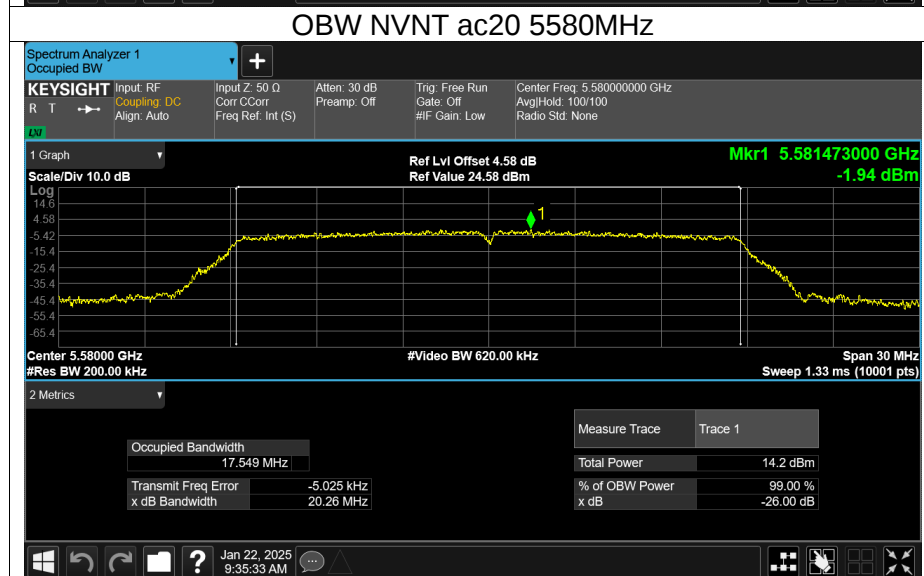
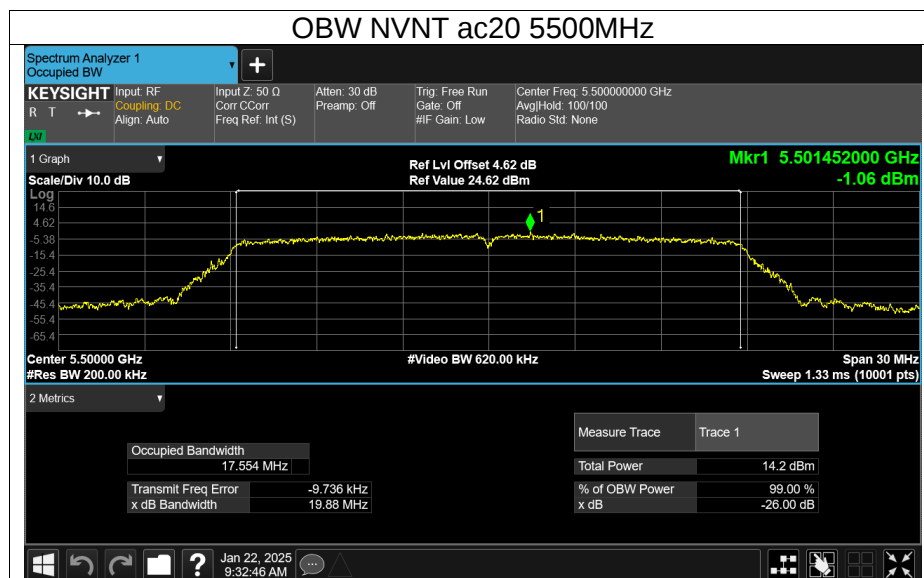


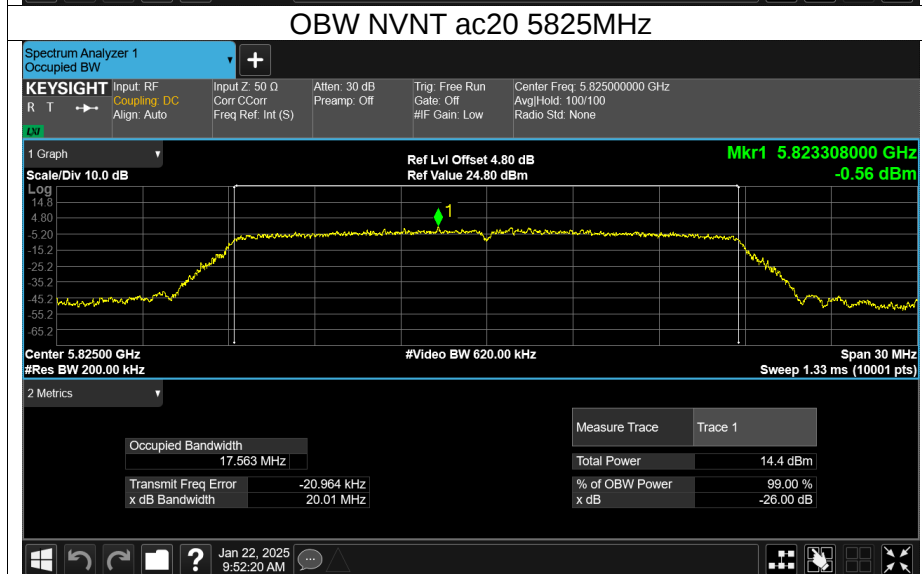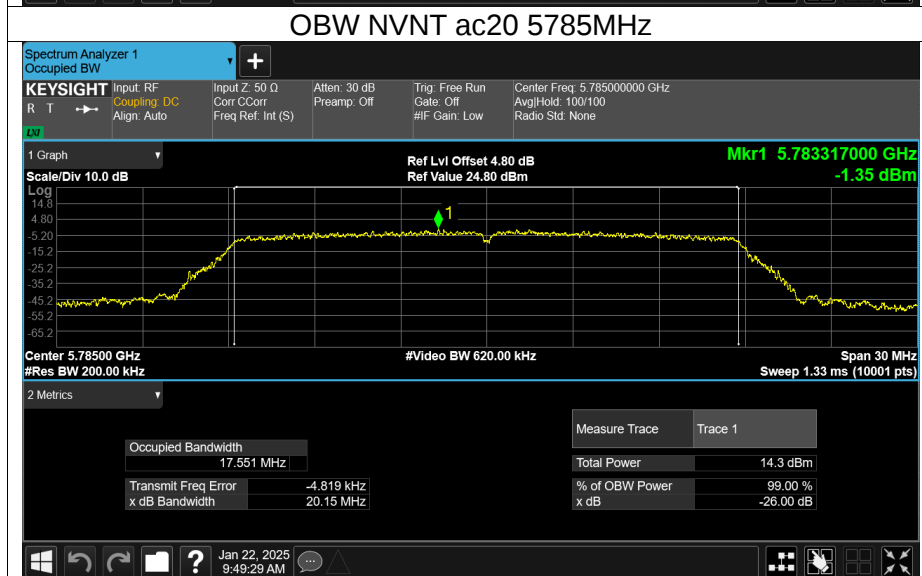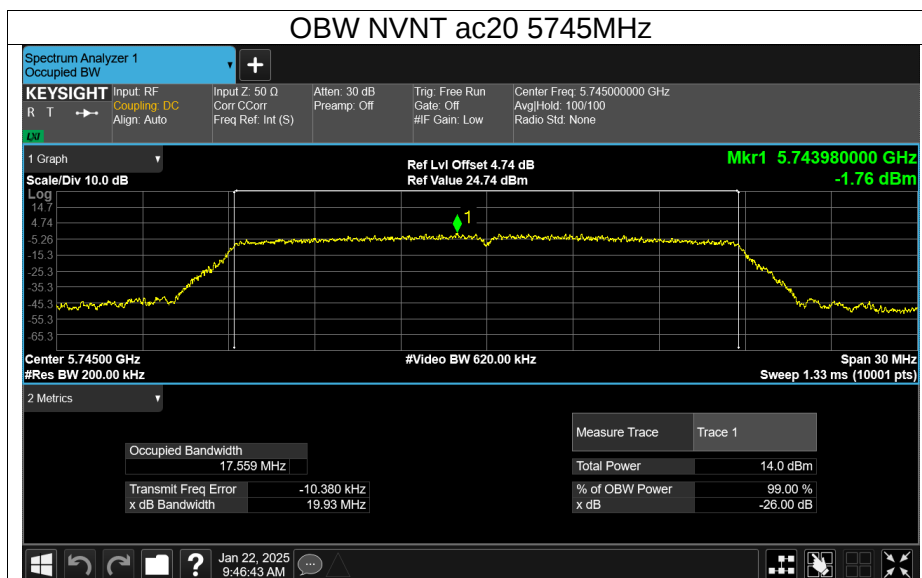


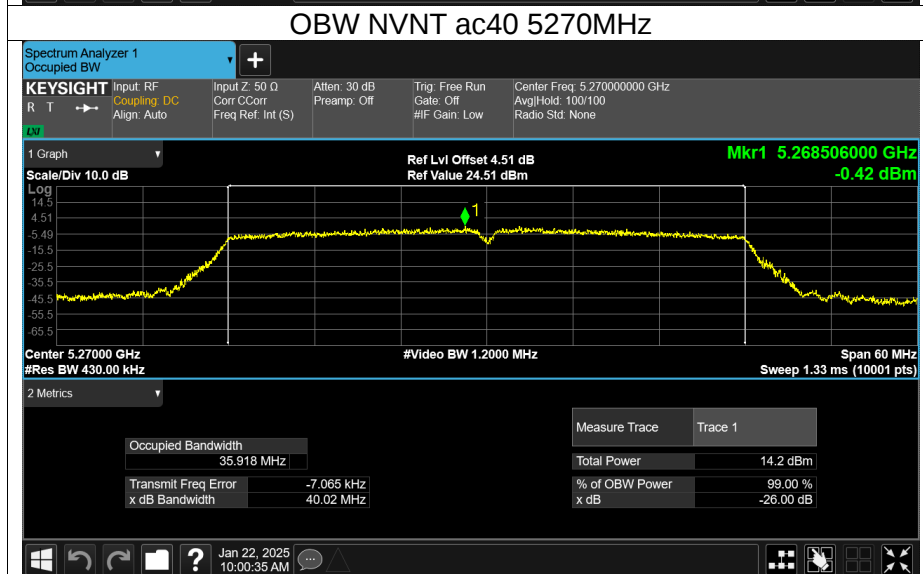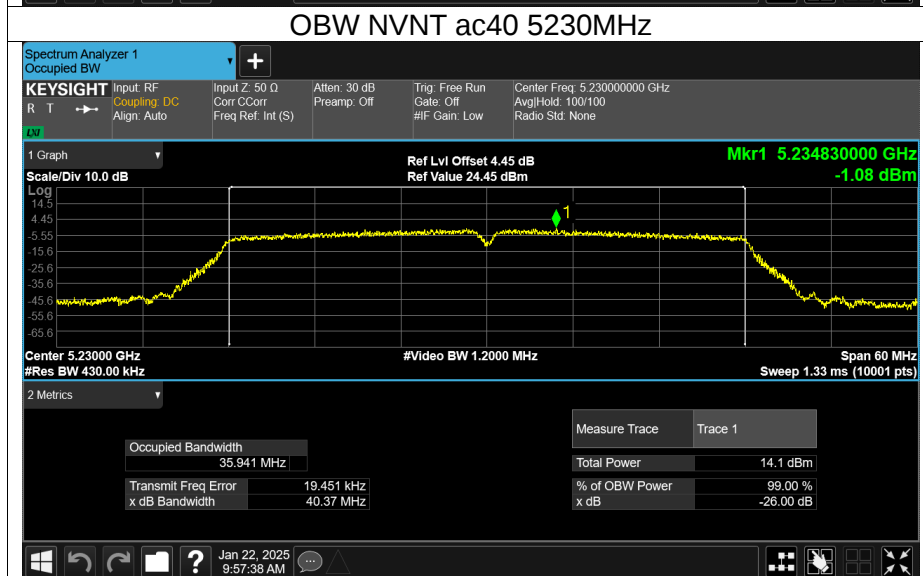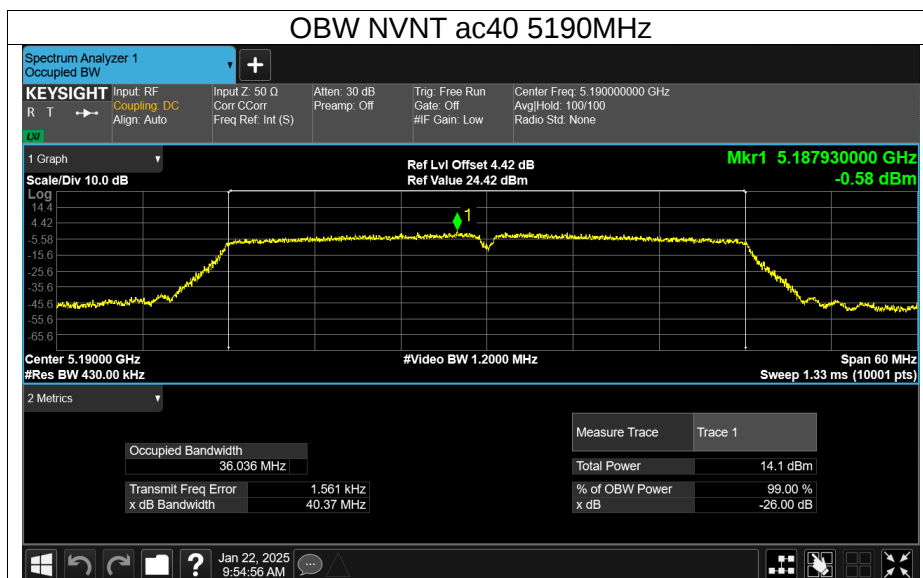

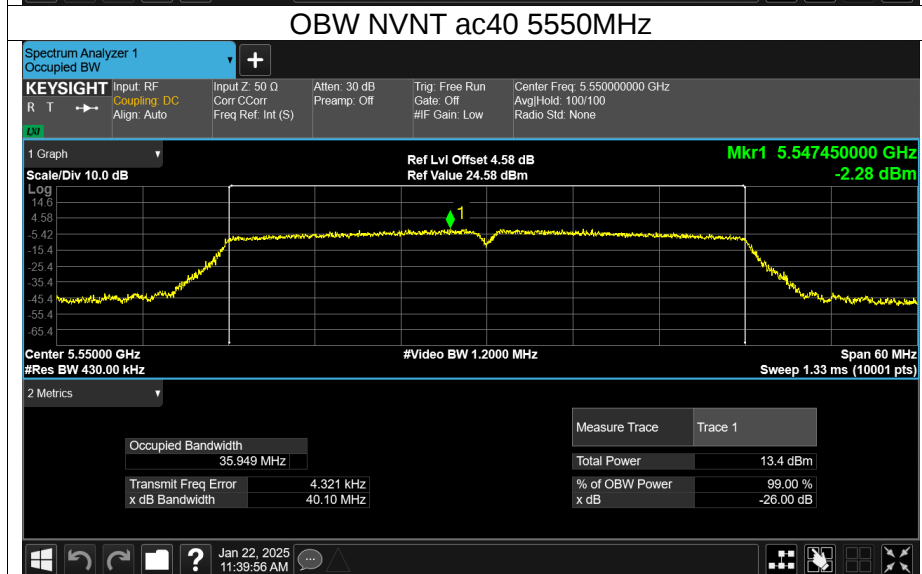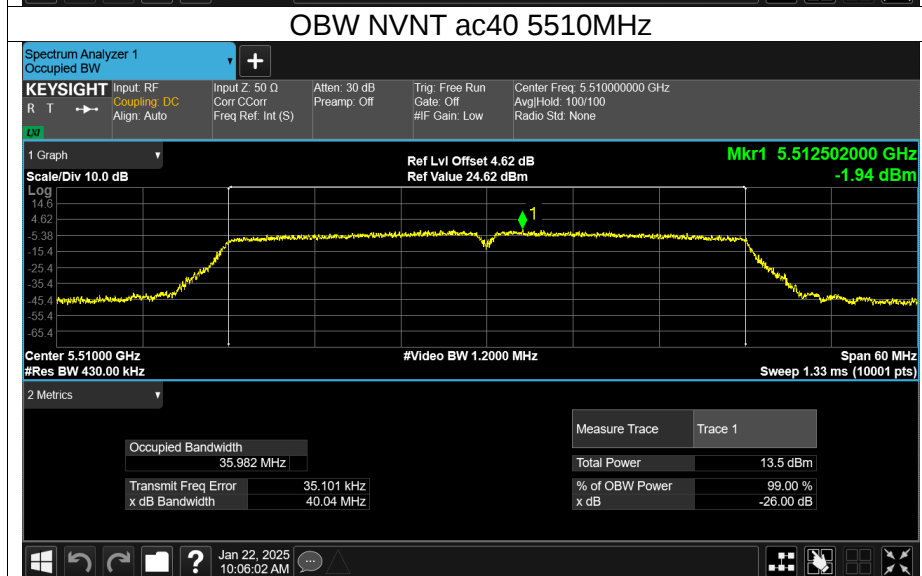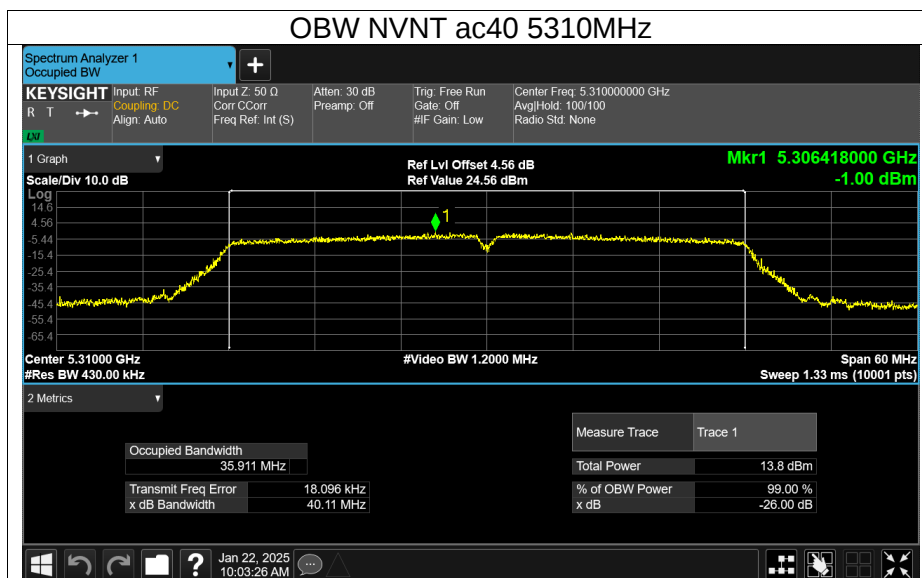

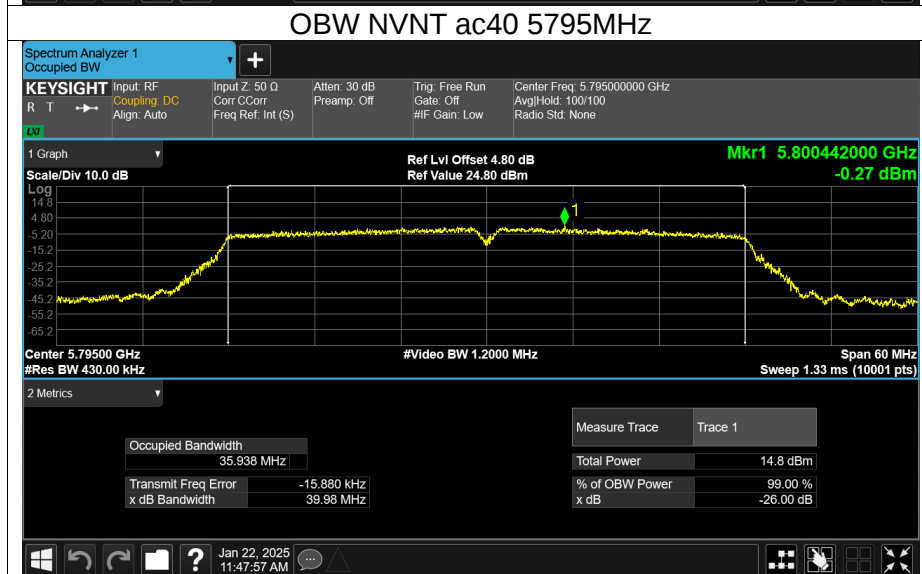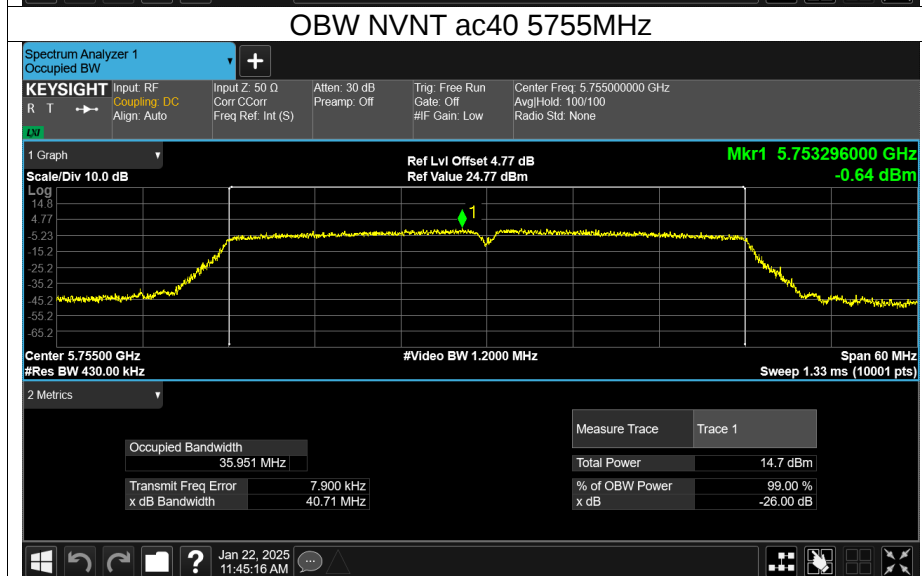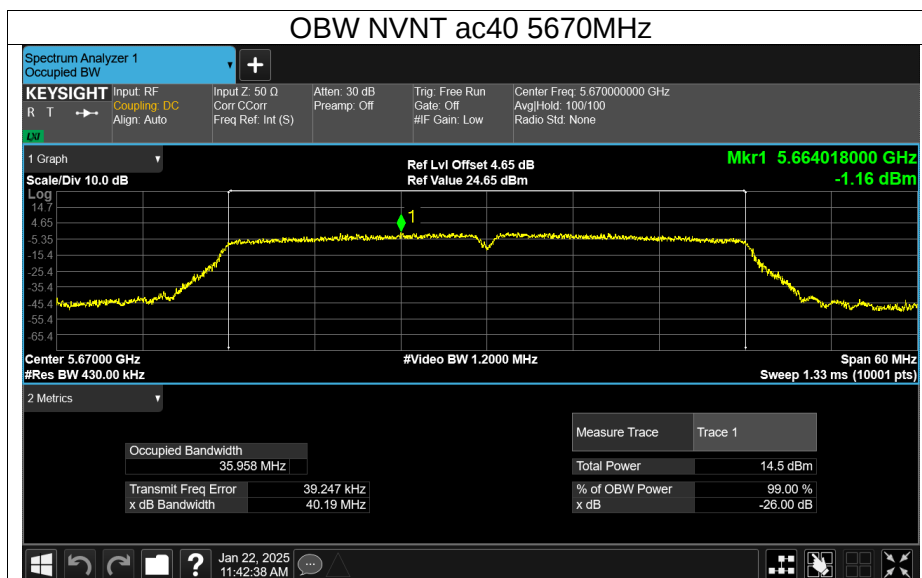

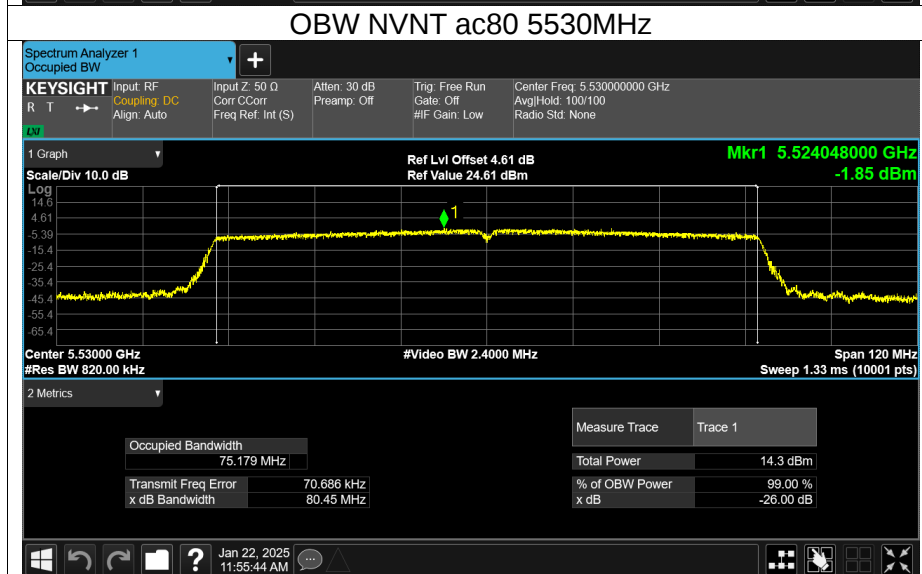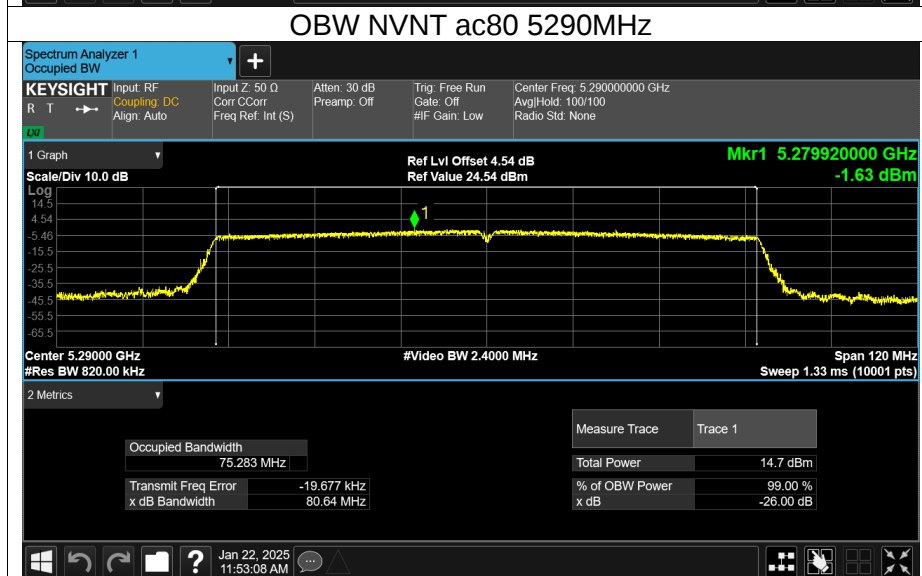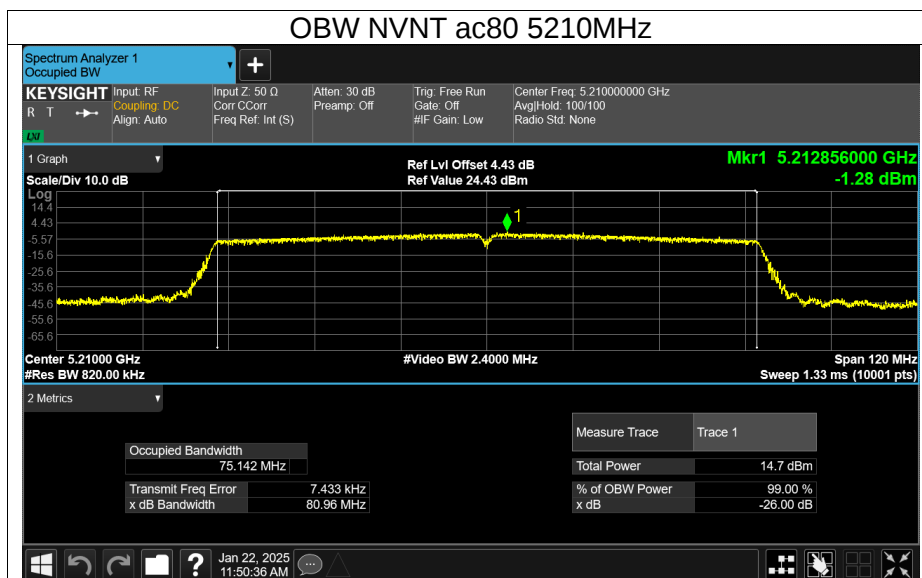

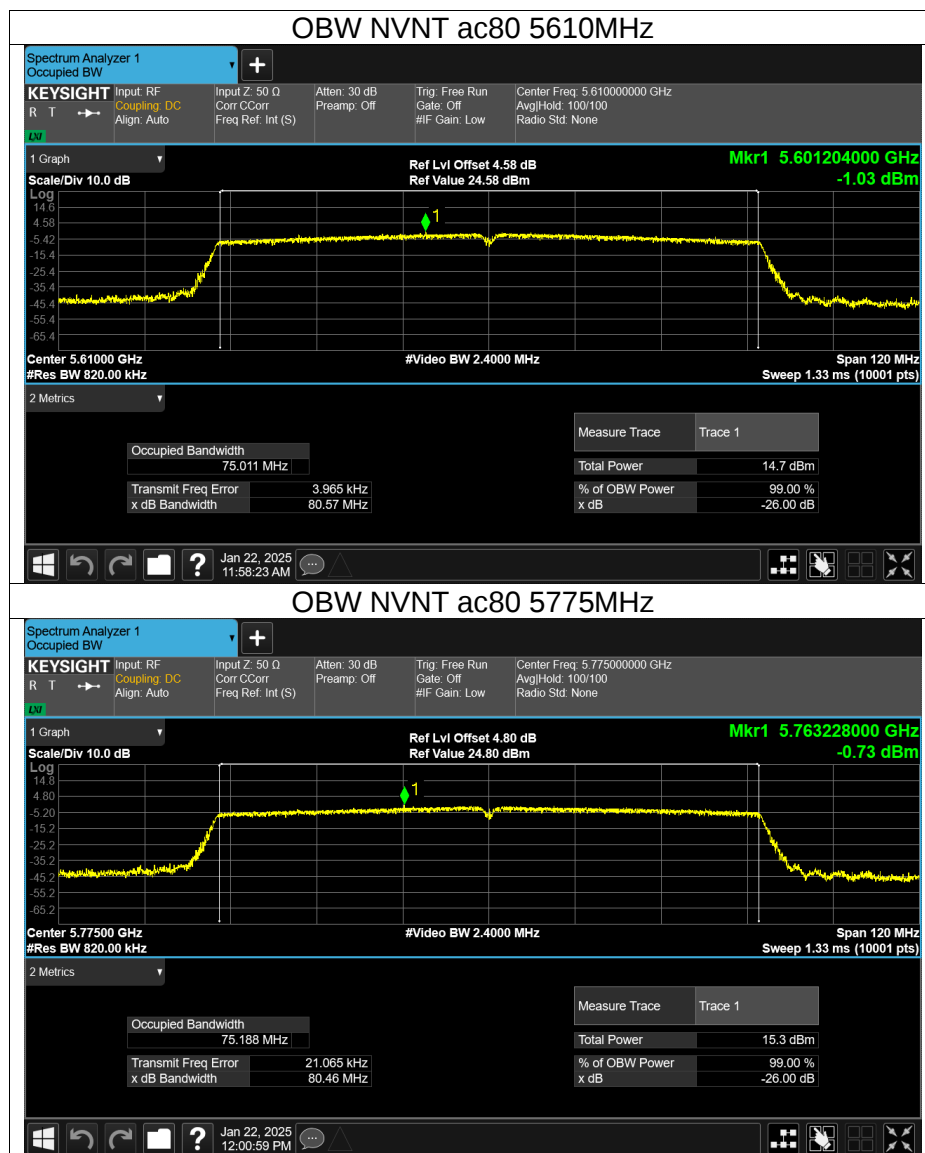



Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	-0.55	0	-0.55	11	Pass
NVNT	a	5200	-0.12	0	-0.12	11	Pass
NVNT	a	5240	-0.15	0	-0.15	11	Pass
NVNT	a	5260	-0.01	0	-0.01	11	Pass
NVNT	a	5300	-0.11	0	-0.11	11	Pass
NVNT	a	5320	0.01	0	0.01	11	Pass
NVNT	a	5500	-0.38	0	-0.38	11	Pass
NVNT	a	5580	-0.06	0	-0.06	11	Pass
NVNT	a	5700	0.15	0	0.15	11	Pass
NVNT	n20	5180	-3.13	0	-3.13	11	Pass
NVNT	n20	5200	-2.82	0	-2.82	11	Pass
NVNT	n20	5240	-2.92	0	-2.92	11	Pass
NVNT	n20	5260	-2.44	0	-2.44	11	Pass
NVNT	n20	5300	-2.99	0	-2.99	11	Pass
NVNT	n20	5320	-2.77	0	-2.77	11	Pass
NVNT	n20	5500	-2.74	0	-2.74	11	Pass
NVNT	n20	5580	-2.17	0	-2.17	11	Pass
NVNT	n20	5700	-2.15	0	-2.15	11	Pass
NVNT	n40	5190	-5.36	0	-5.36	11	Pass
NVNT	n40	5230	-5.11	0	-5.11	11	Pass
NVNT	n40	5270	-5.72	0	-5.72	11	Pass
NVNT	n40	5310	-5.79	0	-5.79	11	Pass
NVNT	n40	5510	-6.22	0	-6.22	11	Pass
NVNT	n40	5550	-5.76	0	-5.76	11	Pass
NVNT	n40	5670	-5.03	0	-5.03	11	Pass
NVNT	ac20	5180	-3.11	0	-3.11	11	Pass
NVNT	ac20	5200	-2.64	0	-2.64	11	Pass
NVNT	ac20	5240	-2.65	0	-2.65	11	Pass
NVNT	ac20	5260	-2.48	0	-2.48	11	Pass
NVNT	ac20	5300	-2.63	0	-2.63	11	Pass
NVNT	ac20	5320	-2.72	0	-2.72	11	Pass
NVNT	ac20	5500	-2.22	0	-2.22	11	Pass
NVNT	ac20	5580	-2.02	0	-2.02	11	Pass
NVNT	ac20	5700	-2.3	0	-2.3	11	Pass
NVNT	ac40	5190	-5.46	0	-5.46	11	Pass
NVNT	ac40	5230	-5.53	0	-5.53	11	Pass
NVNT	ac40	5270	-5.17	0	-5.17	11	Pass
NVNT	ac40	5310	-5.73	0	-5.73	11	Pass
NVNT	ac40	5510	-6.33	0	-6.33	11	Pass
NVNT	ac40	5550	-6.14	0	-6.14	11	Pass
NVNT	ac40	5670	-5.33	0	-5.33	11	Pass
NVNT	ac80	5210	-8.66	0	-8.66	11	Pass
NVNT	ac80	5290	-8.93	0	-8.93	11	Pass
NVNT	ac80	5530	-9.31	0	-9.31	11	Pass
NVNT	ac80	5610	-8.34	0	-8.34	11	Pass
Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
NVNT	a	5745	-3.36	0	-3.36	30	Pass
NVNT	a	5785	-2.5	0	-2.5	30	Pass
NVNT	a	5825	-2.85	0	-2.85	30	Pass



NVNT	n20	5745	-5.54	0	-5.54	30	Pass
NVNT	n20	5785	-5.52	0	-5.52	30	Pass
NVNT	n20	5825	-5.02	0	-5.02	30	Pass
NVNT	n40	5755	-7.92	0	-7.92	30	Pass
NVNT	n40	5795	-7.95	0	-7.95	30	Pass
NVNT	ac20	5745	-5.66	0	-5.66	30	Pass
NVNT	ac20	5785	-4.95	0	-4.95	30	Pass
NVNT	ac20	5825	-5.04	0	-5.04	30	Pass
NVNT	ac40	5755	-7.82	0	-7.82	30	Pass
NVNT	ac40	5795	-7.8	0	-7.8	30	Pass
NVNT	ac80	5775	-11.53	0	-11.53	30	Pass

