



RF TEST REPORT

Product Name: Smart phone

Model Name: TANK 2

FCC ID: 2BAVY-TANK2

Issued For : Shenzhen OBLUE Communication Technology Co., Ltd.

Room 702, Hepingdayou industrial and trade industrial park,
No. 41, Yonghe Road, Heping Community, Fuhai Street,
Baoan District, Shenzhen City, China

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street,
Pingshan District, Shenzhen, Guangdong, China

Report Number: LGT23E024RF04

Sample Received Date: May 15, 2023

Date of Test: May 15, 2023 ~ Jun. 09, 2023

Date of Issue: Jun. 09, 2023

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: Shenzhen OBLUE Communication Technology Co., Ltd.
Room 702, Hepingdayou industrial and trade industrial park, No.
Address: 41, Yonghe Road, Heping Community, Fuhai Street, Baoan
District, Shenzhen City, China

Manufacturer: Shenzhen OBLUE Communication Technology Co., Ltd.
Room 702, Hepingdayou industrial and trade industrial park, No.
Address: 41, Yonghe Road, Heping Community, Fuhai Street, Baoan
District, Shenzhen City, China

Product Name: Smart phone

Trademark: 8849, Unihertz

Model Name: TANK 2

Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.407, Subpart E ANSI C63.10-2013	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents

Page

1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF TEST MODES	11
2.3 TEST SOFTWARE AND POWER LEVEL	12
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	13
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	14
3 . EMC EMISSION TEST	15
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT	19
4. POWER SPECTRAL DENSITY TEST	45
4.1 LIMIT	45
4.2 TEST PROCEDURE	45
4.3 DEVIATION FROM STANDARD	45
4.4 TEST SETUP	46
4.5 EUT OPERATION CONDITIONS	46
4.6 TEST RESULTS	46
5. BANDWIDTH MEASUREMENT	47
5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	47
5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	48
5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	49
6. MAXIMUM CONDUCTED OUTPUT POWER	50
6.1 LIMIT	50
6.2 TEST PROCEDURE	50
6.3 DEVIATION FROM STANDARD	50
6.4 TEST SETUP	50
6.5 EUT OPERATION CONDITIONS	50
6.6 TEST RESULTS	50
7. AUTOMATICALLY DISCONTINUE TRANSMISSION	51
7.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	51
7.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	51
8. ANTENNA REQUIREMENT	52



Table of Contents

Page

8.1 STANDARD REQUIREMENT	52
8.2 EUT ANTENNA	52
APPENDIX I:TEST RESULTS	53
DUTY CYCLE	53
MAXIMUM CONDUCTED OUTPUT POWER	67
-26DB BANDWIDTH	68
OCCUPIED CHANNEL BANDWIDTH	79
MAXIMUM POWER SPECTRAL DENSITY LEVEL	93
-6DB BANDWIDTH	107
APPENDIX II:PHOTOS OF TEST SETUP	错误!未定义书签。



Revision History

Rev.	Issue Date	Contents
00	Jun. 09, 2023	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Part 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS
15.407 (a) /15.407 (e)	26dB/6dB &99% Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	PASS
15.407(b)/15.205/15.209	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(a)	Power Spectral Density	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
15.203/15.204	Antenna Requirement	PASS

NOTE:

(1) 'N/A' denotes test is not applicable in this Test Report.

(2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate:	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.84\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.39\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 5.10\text{dB}$
6	All emissions, radiated >6G	$\pm 5.48\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.79\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.80\text{dB}$

Note: The measurement uncertainty is not included in the test result.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	Smart phone								
Trademark:	8849,Unihertz								
Model Name:	TANK 2								
Series Model:	N/A								
Model Difference:	N/A								
Product Description:	The EUT is a Smart phone <table border="1"> <tr> <td>Operation Frequency:</td><td> IEEE 802.11a/n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz IEEE 802.11ac(VHT80): 5.210GHz IEEE 802.11a/n(HT20)/ac(VHT20): 5.260GHz-5.320GHz IEEE 802.11 n(HT40)/ac(VHT40): 5.270GHz-5.310GHz IEEE 802.11ac(VHT80): 5.290GHz IEEE 802.11a/n(HT20)/ac(VHT20): 5.500GHz-5.700GHz IEEE 802.11 n(HT40)/ac(VHT40): 5.510GHz-5.670GHz IEEE 802.11ac(VHT80): 5.530GHz-5.610GHz I IEEE 802.11a/n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11a/n(HT40)/ac(VHT40): 5.755GHz-5.795GHz IEEE 802.11ac(VHT80): 5.775GHz </td></tr> <tr> <td>Modulation Type:</td><td> 802.11a(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11n(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11ac (OFDM): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM </td></tr> <tr> <td>Antenna Designation:</td><td>Please refer to the Note 3.</td></tr> <tr> <td>Antenna Gain(dBi)</td><td>1.5</td></tr> </table> More details of EUT technical specification, please refer to the User Manual.	Operation Frequency:	IEEE 802.11a/n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz IEEE 802.11ac(VHT80): 5.210GHz IEEE 802.11a/n(HT20)/ac(VHT20): 5.260GHz-5.320GHz IEEE 802.11 n(HT40)/ac(VHT40): 5.270GHz-5.310GHz IEEE 802.11ac(VHT80): 5.290GHz IEEE 802.11a/n(HT20)/ac(VHT20): 5.500GHz-5.700GHz IEEE 802.11 n(HT40)/ac(VHT40): 5.510GHz-5.670GHz IEEE 802.11ac(VHT80): 5.530GHz-5.610GHz I IEEE 802.11a/n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11a/n(HT40)/ac(VHT40): 5.755GHz-5.795GHz IEEE 802.11ac(VHT80): 5.775GHz	Modulation Type:	802.11a(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11n(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11ac (OFDM): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM	Antenna Designation:	Please refer to the Note 3.	Antenna Gain(dBi)	1.5
Operation Frequency:	IEEE 802.11a/n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz IEEE 802.11ac(VHT80): 5.210GHz IEEE 802.11a/n(HT20)/ac(VHT20): 5.260GHz-5.320GHz IEEE 802.11 n(HT40)/ac(VHT40): 5.270GHz-5.310GHz IEEE 802.11ac(VHT80): 5.290GHz IEEE 802.11a/n(HT20)/ac(VHT20): 5.500GHz-5.700GHz IEEE 802.11 n(HT40)/ac(VHT40): 5.510GHz-5.670GHz IEEE 802.11ac(VHT80): 5.530GHz-5.610GHz I IEEE 802.11a/n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11a/n(HT40)/ac(VHT40): 5.755GHz-5.795GHz IEEE 802.11ac(VHT80): 5.775GHz								
Modulation Type:	802.11a(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11n(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11ac (OFDM): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM								
Antenna Designation:	Please refer to the Note 3.								
Antenna Gain(dBi)	1.5								
Test Channel:	Please refer to the Note 2.								
Adapter:	Model: HJ-PD66W-US Input: 100-240V, 50/60Hz, 1.5A Output: 5V, 3A 15W, OR 9V,3A 27W, OR 12V,3A 36W, OR 15V,3A 45W, OR 20V,3.25A 65W, OR 11V,6A 66W MAX								
Battery:	Capacity: 15500mAh Rated Voltage: 3.87V								
Hardware Version:	G88_V2.1								
Software Version:	TANK2_20230504								
Connecting I/O Port(s):	Please refer to the Note 1.								

Note

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.



2.

Operation Frequency of channel			
5.180GHz-5.240GHz		5.260GHz-5.320GHz	
Channel	Frequency	Channel	Frequency
36	5180	52	5260
38	5190	54	5270
40	5200	56	5280
42	5210	58	5290
44	5220	60	5300
46	5230	62	5310
48	5240	64	5320
5.500GHz-5.720GHz		5.745GHz-5.825GHz	
Channel	Frequency	Channel	Frequency
100	5500	149	5745
102	5510	151	5755
104	5520	153	5765
108	5540	157	5785
110	5550	159	5795
112	5560	161	5805
116	5580	165	5825
118	5590		
120	5600		
124	5620		
126	5630		
128	5640		
132	5660		
134	5670		
136	5680		
140	5700		
142	5710		
144	5720		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

Channel List for 802.11a/n/ac(20MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
40	5200	60	5300	116	5580	157	5785
48	5240	64	5320	140	5700	165	5825

Channel List for 802.11n/ac(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
46	5230	62	5310	110	5550	159	5795
134	5670						



Channel List for 802.11ac(80MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
122	5610						

3.

Ant	Brand	Model Name	Ant Type	Connector	Gain (dBi)	NOTE
1	8849,Unihertz	TANK 2	PIFA	N/A	1.5	WLAN Ant

Note: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH36&CH40&CH48	6 Mbps
Mode 2	TX IEEE 802.11a HT20 CH52&CH60&CH64	6 Mbps
Mode 3	TX IEEE 802.11a HT20 CH149&CH157&CH165	6 Mbps
Mode 4	TX IEEE 802.11n HT20 CH36&CH40&CH48	MCS 0
Mode 5	TX IEEE 802.11ac VHT20 CH36&CH40&CH48	NSS1 MCS0
Mode 6	TX IEEE 802.11n HT20 CH52&CH60&CH64	MCS 0
Mode 7	TX IEEE 802.11ac VHT20 CH52&CH60&CH64	NSS1 MCS0
Mode 8	TX IEEE 802.11n HT20 CH149&CH157&CH165	MCS 0
Mode 9	TX IEEE 802.11ac VHT20 CH149&CH157&CH165	NSS1 MCS0
Mode 10	TX IEEE 802.11n HT40 CH38&CH46	MCS 0
Mode 11	TX IEEE 802.11ac VHT40 CH38&CH46	NSS1 MCS0
Mode 12	TX IEEE 802.11n HT40 CH54 &CH62	MCS 0
Mode 13	TX IEEE 802.11ac VHT40 CH54 &CH62	NSS1 MCS0
Mode 14	TX IEEE 802.11n HT40 CH151&CH159	MCS 0
Mode 15	TX IEEE 802.11ac VHT40 CH151&CH159	NSS1 MCS0
Mode 16	TX IEEE 802.11ac VHT80 CH42	NSS1 MCS0
Mode 17	TX IEEE 802.11ac VHT80 CH58	NSS1 MCS0
Mode 18	TX IEEE 802.11ac VHT80 CH155	NSS1 MCS0

- Note: (1) The measurements are performed at the highest, middle, lowest available channels.
 (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
 (3) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.
 (4) The battery is fully-charged during the radited and RF conducted test.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 19: TX Mode



2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test software Version	Test program: 5G WIFI B1	
Engineering Mode	Mode Or Modulation type	Power setting
	a	16
	n20	16
	n40	16
	ac80	16
Test software Version	Test program: 5G WIFI B2	
Engineering Mode	Mode Or Modulation type	Power setting
	a	16
	n20	16
	n40	16
	ac80	16
Test software Version	Test program: 5G WIFI B3	
Engineering Mode	Mode Or Modulation type	Power setting
	a	16
	n20	16
	n40	16
	ac80	16
Test software Version	Test program: 5G WIFI B4	
Engineering Mode	Mode Or Modulation type	Power setting
	a	16
	n20	16
	n40	16
	ac80	16



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
Adapter	Shenzhen Huajin Electronics Co.,Ltd	HJ-PD66W-US	N/A	Input: 100-240V ~ 50/60Hz 1.5A Output: 5V, 3A 15W, OR 9V,3A 27W, OR 12V,3A 36W, OR 15V,3A 45W, OR 20V,3.25A 65W, OR 11V,6A 66W MAX
USB-C to USB-C Cable	N/A	N/A	N/A	1m, shielded, without ferrite core

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	HUAWEI	HKF-16	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2023.04.13	2024.04.12
LISN	COM-POWER	LI-115	02032	2023.04.07	2024.04.06
LISN	SCHWARZBECK	NNLK 8121	00847	2023.04.07	2024.04.06
LISN	SCHWARZBECK	NNLK 8122	00160	2023.04.07	2024.04.06
ISN	FCC	T4-02	91317	2022.06.08	2023.06.07
ISN	SCHWARZBECK	NTFM 8158	00303	2023.04.07	2024.04.06
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2023.04.07	2024.04.06
Temperature & Humidity	KTJ	TA218B	N.A	2023.04.24	2024.04.23
Testing Software	EMC-I_V1.4.0.3_SKET				

Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2023.04.13	2024.04.12
Active loop Antenna	ETS	6502	00049544	2022.06.02	2025.06.01
Spectrum Analyzer	Keysight	N9010B	MY60242508	2023.04.10	2024.04.09
Bilog Antenna	SCHAFFNER	CBL6112B	2705	2022.06.05	2025.06.04
Horn Antenna	SCHWARZBECK	3115	10SL0060	2022.06.02	2025.06.01
Pre-amplifier(9kHz-1GHz)	EMtrace	RP01A	02017	2023.04.07	2024.04.06
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2023.04.07	2024.04.06
Wireless Communications Test Set	R&S	CMW 500	137737	2023.04.13	2024.04.12
Temperature & Humidity	KTJ	TA218B	N.A	2023.04.24	2024.04.23
Testing Software	EMC-I_V1.4.0.3_SKET				

Conducted Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
Signal Analyzer	Keysight	N9010B	MY60242508	2023.04.10	2024.04.09
Wireless Communications Test Set	R&S	CMW 500	137737	2023.04.13	2024.04.12
MXG Vector Signal Generator	Keysight	N5182B	MY59100717	2023.04.07	2024.04.06
RF Automatic Test system	MW	MW100-RFCB	MW220324LG-33	2023.04.13	2024.04.12
Temperature & Humidity	KTJ	TA218B	N.A	2023.04.24	2024.04.23
Temperature& Humidity test chamber	AISRY	LX-1000L	171200018	2023.05.10	2024.05.09
Attenuator	eastsheep	90db	N.A	2023.04.10	2024.04.09
Testing Software	MTS8200_V2.0.0.0_MW				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz




3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

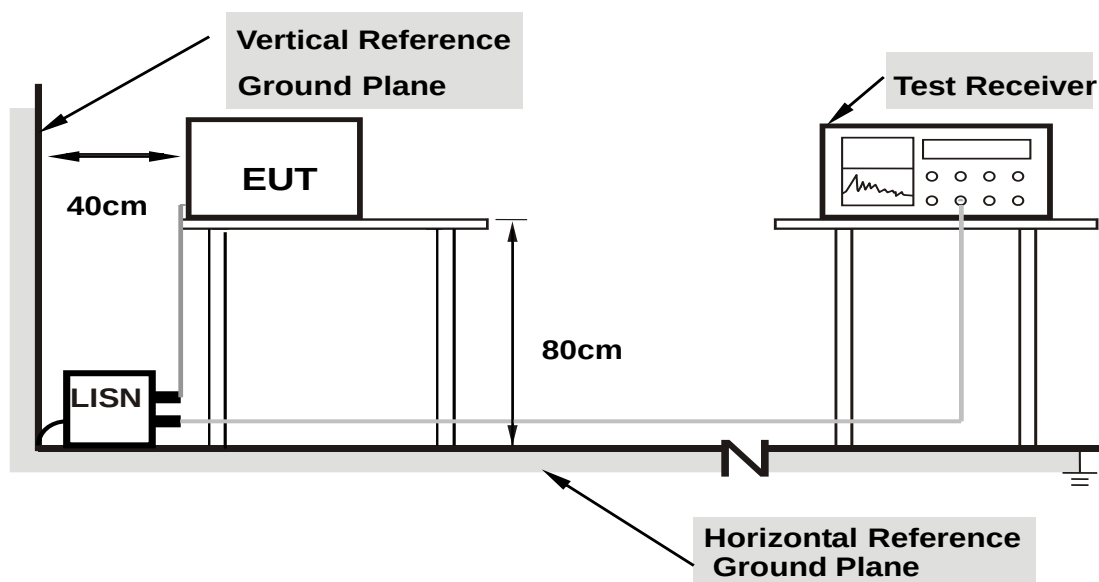

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.


3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.6 TEST RESULTS


Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 26.9°C
M/N: TANK 2	Humidity: 50%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-05-12
Test Mode: 5G Wi-Fi TX	
Note:	

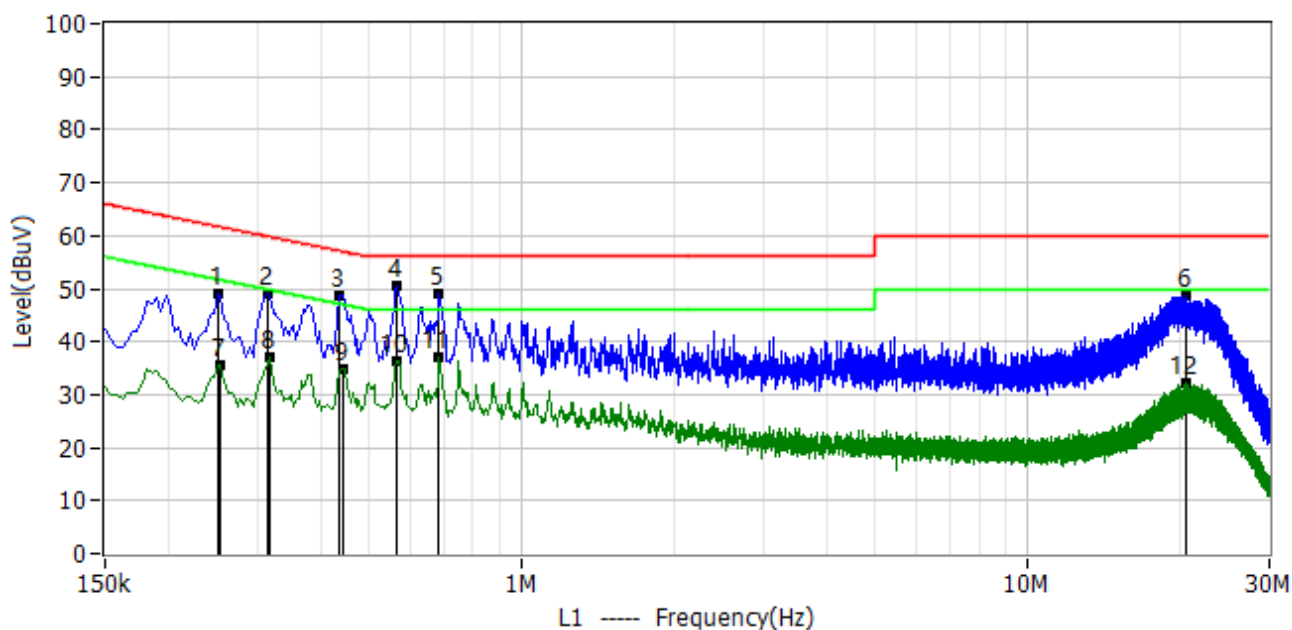

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	250.000kHz	38.45	10.60	49.05	61.76	-12.71	QP	L1
2*	314.000kHz	38.51	10.59	49.10	59.86	-10.77	QP	L1
3*	434.000kHz	38.08	10.58	48.66	57.18	-8.52	QP	L1
4*	566.000kHz	39.90	10.58	50.48	56.00	-5.52	QP	L1
5*	686.000kHz	38.57	10.58	49.15	56.00	-6.85	QP	L1
6*	20.614MHz	37.45	11.26	48.71	60.00	-11.29	QP	L1
7*	254.000kHz	25.10	10.60	35.70	51.63	-15.92	AV	L1
8*	318.000kHz	26.38	10.59	36.97	49.76	-12.79	AV	L1
9*	442.000kHz	24.40	10.58	34.98	47.02	-12.04	AV	L1
10*	566.000kHz	25.72	10.58	36.30	46.00	-9.70	AV	L1
11*	686.000kHz	26.67	10.58	37.25	46.00	-8.75	AV	L1
12*	20.614MHz	20.83	11.26	32.09	50.00	-17.91	AV	L1



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 26.9°C
M/N: TANK 2	Humidity: 50%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-05-12
Test Mode: 5G Wi-Fi TX	
Note:	

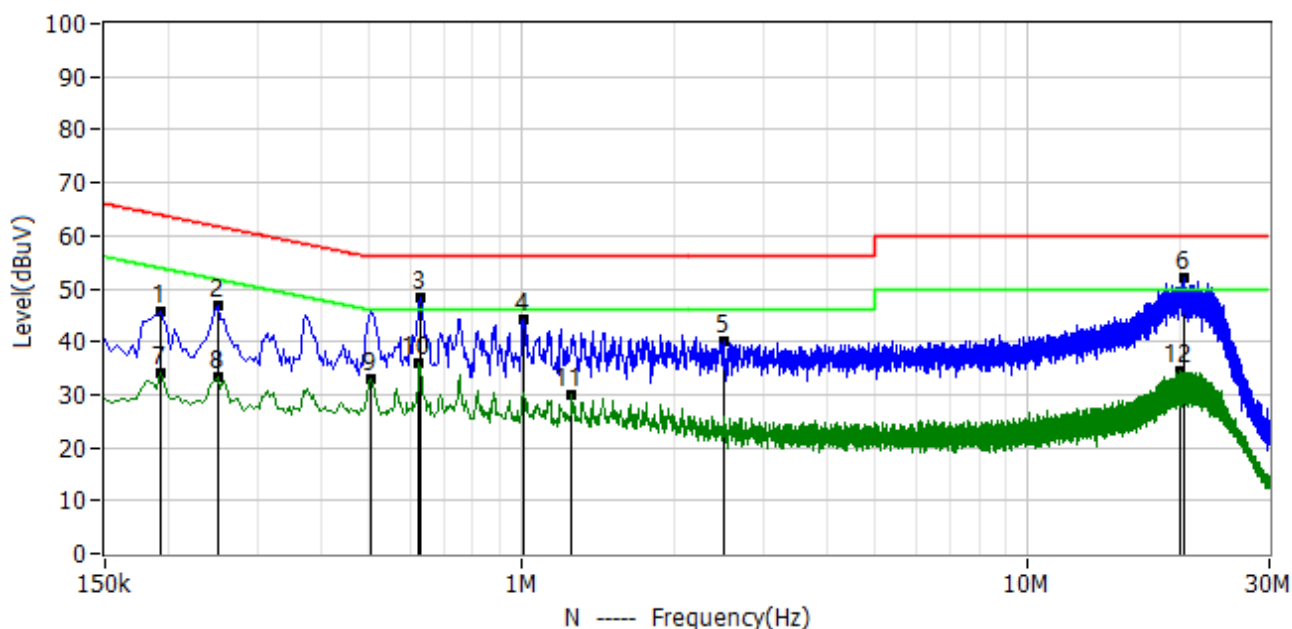

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	194.000kHz	35.05	10.59	45.64	63.86	-18.22	QP	N
2*	250.000kHz	36.37	10.59	46.96	61.76	-14.79	QP	N
3*	630.000kHz	37.80	10.58	48.38	56.00	-7.62	QP	N
4*	1.006MHz	33.49	10.59	44.08	56.00	-11.92	QP	N
5*	2.506MHz	29.43	10.74	40.17	56.00	-15.83	QP	N
6*	20.422MHz	40.59	11.34	51.93	60.00	-8.07	QP	N
7*	194.000kHz	23.53	10.59	34.12	53.86	-19.74	AV	N
8*	250.000kHz	22.73	10.59	33.32	51.76	-18.44	AV	N
9*	502.000kHz	22.41	10.58	32.99	46.00	-13.01	AV	N
10*	626.000kHz	25.25	10.58	35.83	46.00	-10.17	AV	N
11*	1.254MHz	19.50	10.63	30.13	46.00	-15.87	AV	N
12*	19.934MHz	23.14	11.34	34.48	50.00	-15.52	AV	N



3.2 RADIATED EMISSION AND (BANDEGE) MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.407(b)7&15.205/209(a), then the limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	68.2	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Note: In case the emission radiated emission above 1000MHz fall within the restricted band the restricted frequency bands, the peak limit is 74 dBuV/m.



LIMITS OF EMISSIONS OUTSIDE OF THE FREQUENCY BANDS

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note: $\text{dBuV/m(at 3M)} = \text{EIRP(dBm)} + 95.3$.

Peak Limit = $-27\text{dBm/MHz} + 95.3 = 68.3 \text{ dBuV/m}$.

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.2 DEVIATION FROM TEST STANDARD


No deviation

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

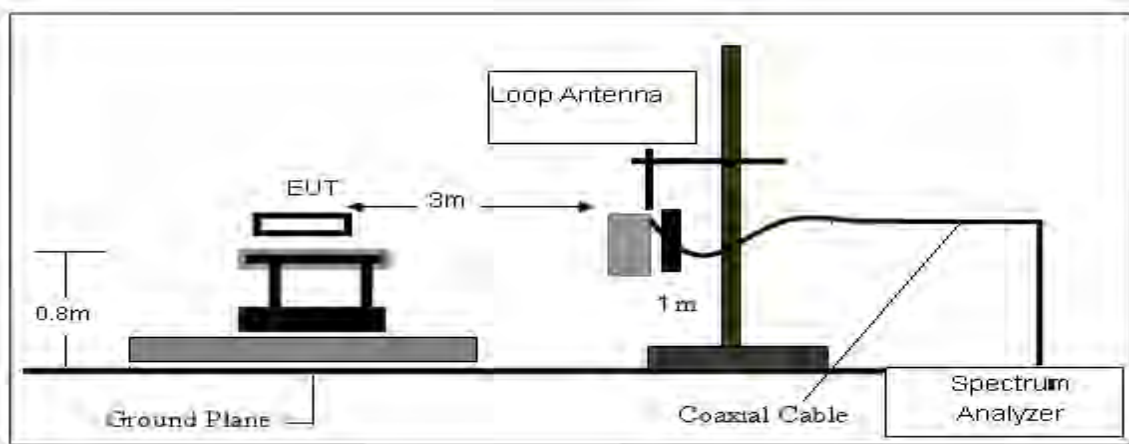

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

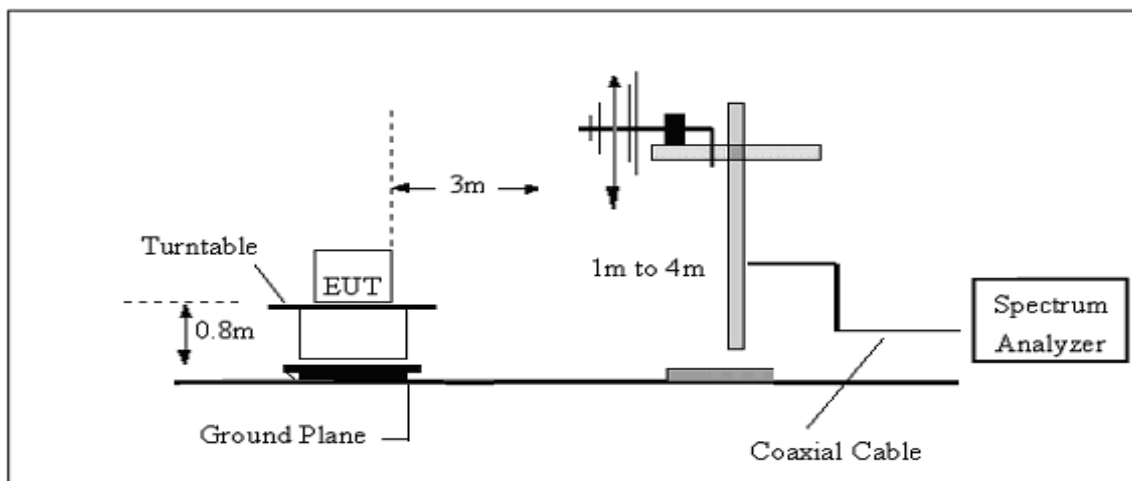

(C) Radiated Emission Test-Up Frequency Above 1GHz

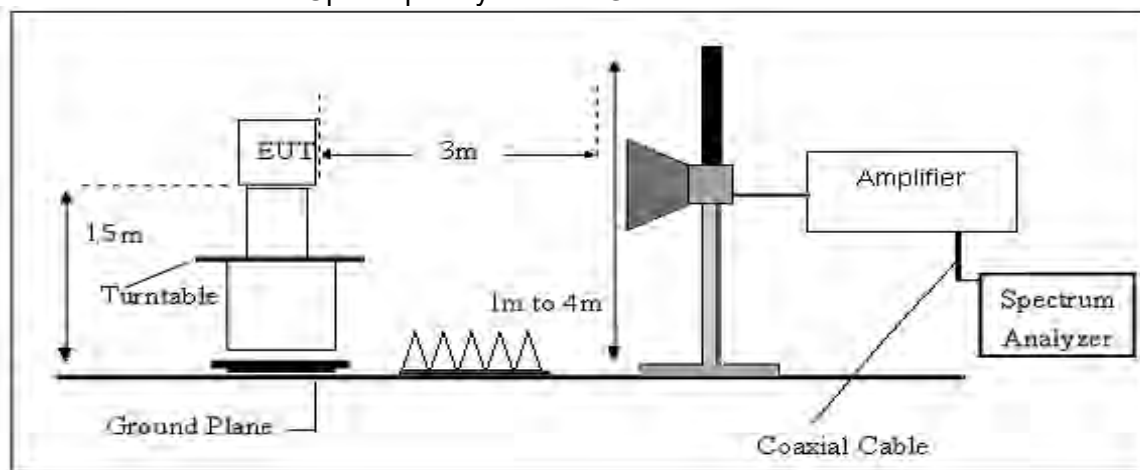



3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example


Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$




3.2.6 TEST RESULTS

Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: Battery	Test Data: 2023-05-15
Test Mode: 5G Wi-Fi TX	
Note:	

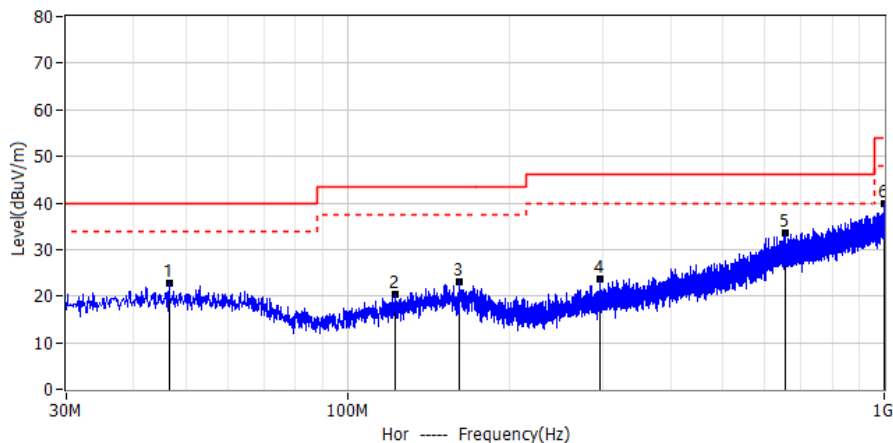

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	46.611MHz	3.60	19.27	22.87	40.00	-17.13	QP	Hor
2*	123.120MHz	2.53	17.91	20.44	43.50	-23.06	QP	Hor
3*	161.799MHz	3.18	19.83	23.01	43.50	-20.49	QP	Hor
4*	295.053MHz	3.88	19.82	23.70	46.00	-22.30	QP	Hor
5*	653.831MHz	4.41	29.29	33.70	46.00	-12.30	QP	Hor
6*	999.151MHz	5.21	34.57	39.78	54.00	-14.22	QP	Hor

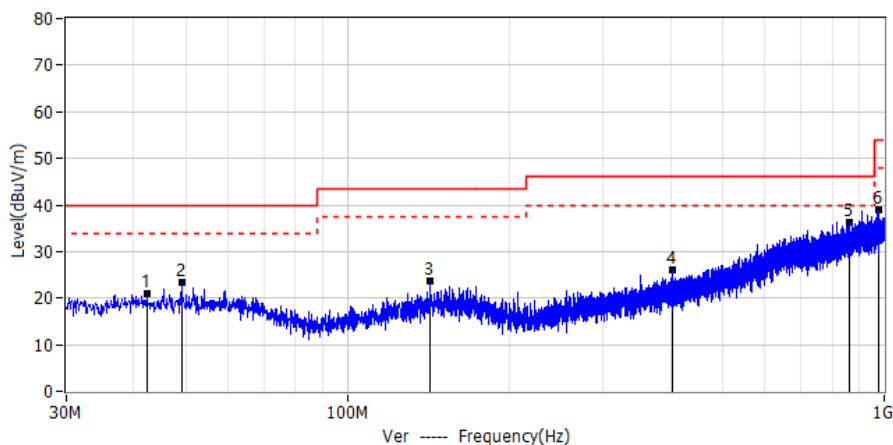


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	42.368MHz	1.80	19.30	21.10	40.00	-18.90	QP	Ver
2*	49.158MHz	4.08	19.34	23.42	40.00	-16.58	QP	Ver
3*	142.399MHz	4.32	19.27	23.59	43.50	-19.91	QP	Ver
4*	403.086MHz	3.27	22.89	26.16	46.00	-19.84	QP	Ver
5*	862.988MHz	3.77	32.62	36.39	46.00	-9.61	QP	Ver
6*	973.568MHz	4.41	34.42	38.83	54.00	-15.17	QP	Ver




3.2.7 TEST RESULTS(Above 1GHz)

Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: Battery	Test Data: 2023-06-04
Test Mode: 802.11a 5180	
Note:	

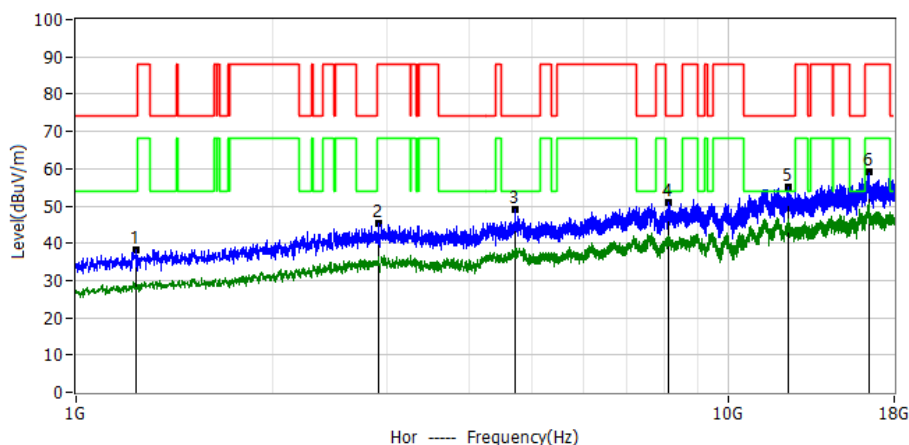


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.2380GHz	61.03	-22.67	38.36	74.00	-35.64	PK	Hor
2*	2.9061GHz	54.17	-8.84	45.33	88.20	-42.87	PK	Hor
3*	4.7272GHz	54.95	-5.93	49.02	74.00	-24.98	PK	Hor
4*	8.1017GHz	54.52	-3.71	50.81	74.00	-23.19	PK	Hor
5*	12.3921GHz	52.61	2.30	54.91	74.00	-19.09	PK	Hor
6*	16.4530GHz	52.02	6.97	58.99	88.20	-29.21	PK	Hor

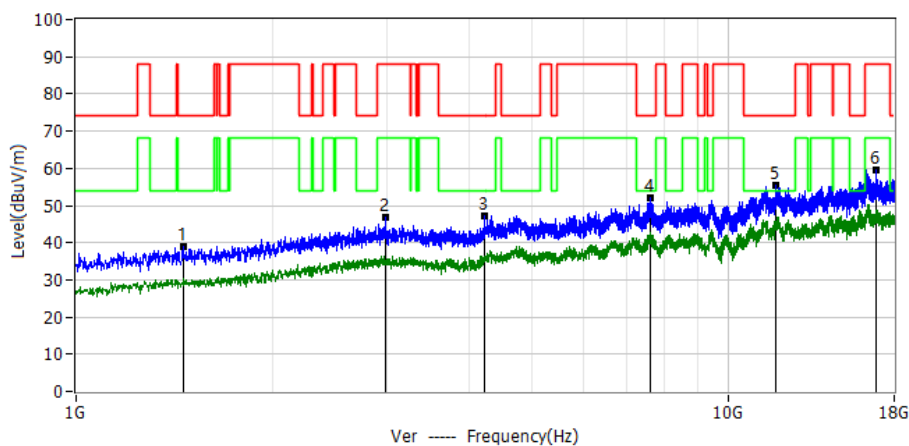


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.4590GHz	60.02	-21.06	38.96	74.00	-35.04	PK	Ver
2*	2.9890GHz	55.05	-8.40	46.65	88.20	-41.55	PK	Ver
3*	4.2300GHz	54.18	-6.90	47.28	74.00	-26.72	PK	Ver
4*	7.5854GHz	56.17	-4.24	51.93	74.00	-22.07	PK	Ver
5*	11.8630GHz	53.20	2.14	55.34	74.00	-18.66	PK	Ver
6*	16.8886GHz	52.03	7.65	59.68	88.20	-28.52	PK	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: Battery	Test Data: 2023-06-04
Test Mode: 802.11a 5200	
Note:	

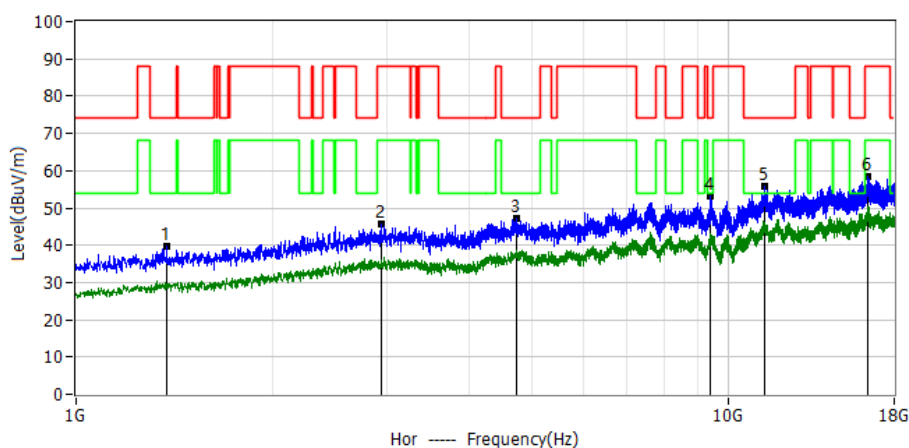


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.3761GHz	61.19	-21.57	39.62	74.00	-34.38	PK	Hor
2*	2.9444GHz	54.23	-8.63	45.60	88.20	-42.60	PK	Hor
3*	4.7357GHz	53.15	-5.94	47.21	74.00	-26.79	PK	Hor
4*	9.4192GHz	54.17	-1.17	53.00	74.00	-21.00	PK	Hor
5*	11.4061GHz	53.80	1.87	55.67	74.00	-18.33	PK	Hor
6*	16.3722GHz	51.53	6.84	58.37	88.20	-29.83	PK	Hor

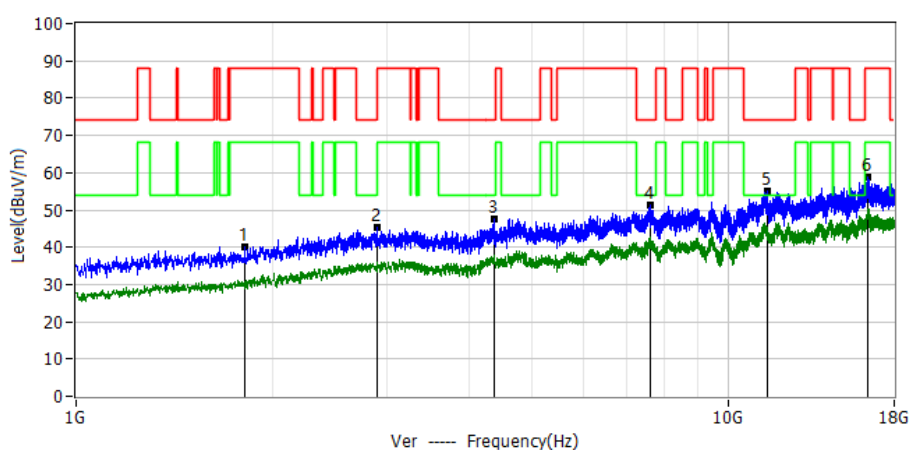


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8160GHz	58.30	-18.09	40.21	88.20	-47.99	PK	Ver
2*	2.8997GHz	54.09	-8.87	45.22	74.00	-28.78	PK	Ver
3*	4.3702GHz	53.89	-6.30	47.59	74.00	-26.41	PK	Ver
4*	7.5917GHz	55.40	-4.24	51.16	74.00	-22.84	PK	Ver
5*	11.4954GHz	53.24	1.92	55.16	74.00	-18.84	PK	Ver
6*	16.3637GHz	51.94	6.83	58.77	88.20	-29.43	PK	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: Battery	Test Data: 2023-06-04
Test Mode: 802.11a 5240	
Note:	

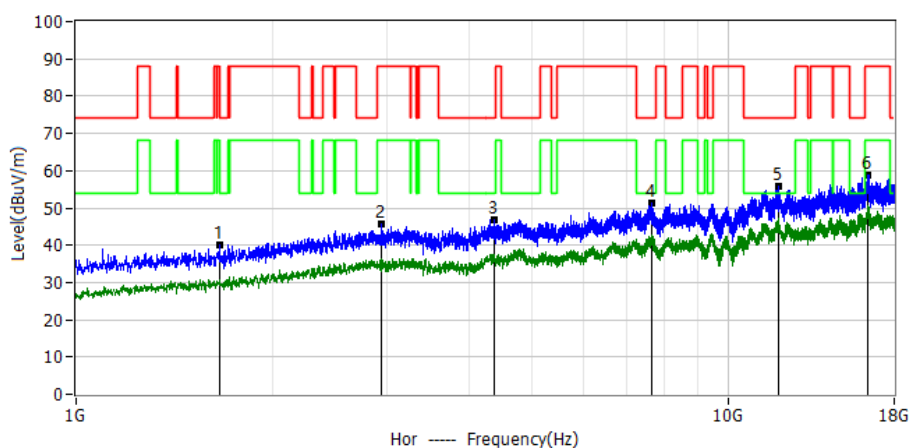


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.6587GHz	59.81	-19.61	40.20	88.20	-48.00	PK	Hor
2*	2.9401GHz	54.22	-8.66	45.56	88.20	-42.64	PK	Hor
3*	4.3872GHz	52.95	-6.23	46.72	74.00	-27.28	PK	Hor
4*	7.6555GHz	55.49	-4.20	51.29	74.00	-22.71	PK	Hor
5*	11.9352GHz	53.61	2.18	55.79	74.00	-18.21	PK	Hor
6*	16.3616GHz	52.16	6.82	58.98	88.20	-29.22	PK	Hor

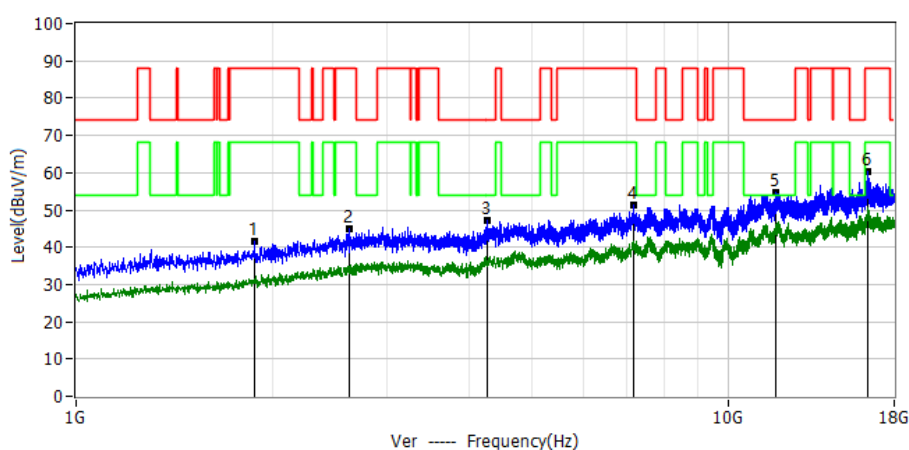


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8797GHz	58.90	-17.45	41.45	88.20	-46.75	PK	Ver
2*	2.6192GHz	55.13	-10.35	44.78	88.20	-43.42	PK	Ver
3*	4.2640GHz	53.81	-6.75	47.06	74.00	-26.94	PK	Ver
4*	7.1731GHz	56.61	-5.21	51.40	88.20	-36.80	PK	Ver
5*	11.8545GHz	52.43	2.13	54.56	74.00	-19.44	PK	Ver
6*	16.3871GHz	53.29	6.86	60.15	88.20	-28.05	PK	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: Battery	Test Data: 2023-06-04
Test Mode: 802.11a 5260	
Note:	

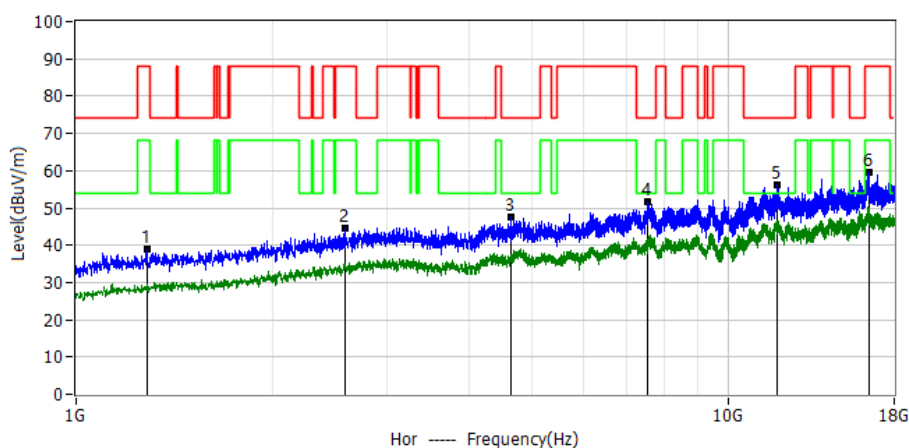


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.2826GHz	61.17	-22.31	38.86	88.20	-49.34	PK	Hor
2*	2.5810GHz	55.25	-10.56	44.69	88.20	-43.51	PK	Hor
3*	4.6507GHz	53.56	-5.87	47.69	74.00	-26.31	PK	Hor
4*	7.5471GHz	55.86	-4.27	51.59	74.00	-22.41	PK	Hor
5*	11.9246GHz	53.92	2.18	56.10	74.00	-17.90	PK	Hor
6*	16.4594GHz	52.69	6.98	59.67	88.20	-28.53	PK	Hor

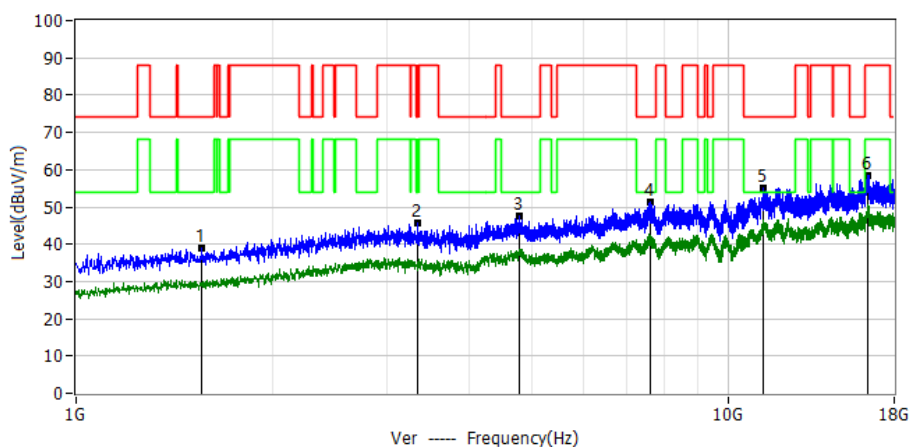


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.5610GHz	59.42	-20.44	38.98	74.00	-35.02	PK	Ver
2*	3.3460GHz	54.26	-8.45	45.81	74.00	-28.19	PK	Ver
3*	4.7867GHz	53.72	-5.98	47.74	74.00	-26.26	PK	Ver
4*	7.5960GHz	55.37	-4.24	51.13	74.00	-22.87	PK	Ver
5*	11.3424GHz	53.38	1.83	55.21	74.00	-18.79	PK	Ver
6*	16.3807GHz	51.76	6.85	58.61	88.20	-29.59	PK	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: Battery	Test Data: 2023-06-04
Test Mode: 802.11a 5300	
Note:	

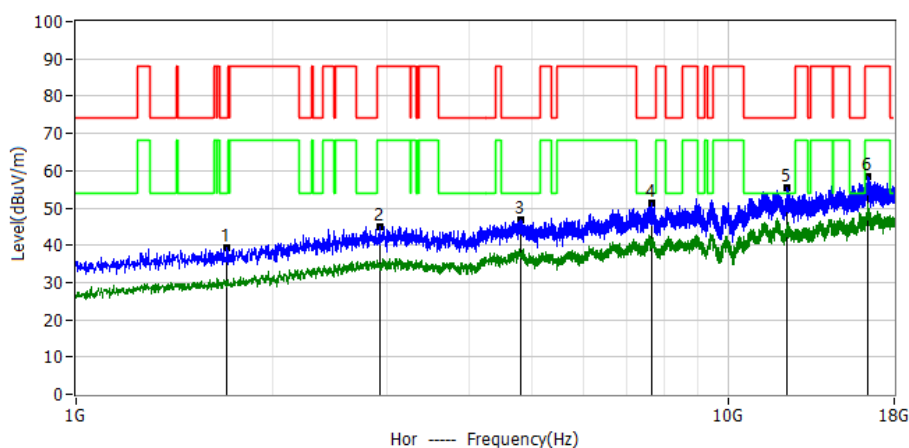


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7055GHz	58.35	-19.16	39.19	74.00	-34.81	PK	Hor
2*	2.9189GHz	53.89	-8.77	45.12	88.20	-43.08	PK	Hor
3*	4.8122GHz	52.72	-6.00	46.72	74.00	-27.28	PK	Hor
4*	7.6597GHz	55.43	-4.20	51.23	74.00	-22.77	PK	Hor
5*	12.3369GHz	52.96	2.29	55.25	74.00	-18.75	PK	Hor
6*	16.3850GHz	51.47	6.86	58.33	88.20	-29.87	PK	Hor

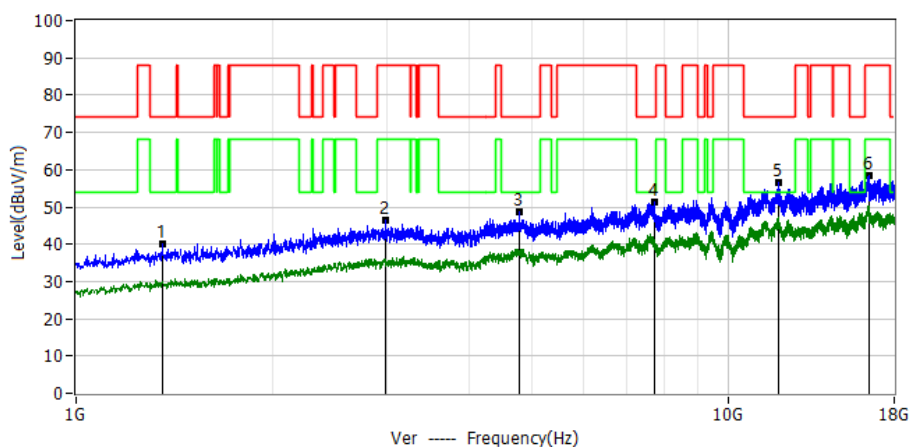


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.3549GHz	61.80	-21.74	40.06	74.00	-33.94	PK	Ver
2*	2.9784GHz	54.81	-8.45	46.36	88.20	-41.84	PK	Ver
3*	4.7825GHz	54.79	-5.97	48.82	74.00	-25.18	PK	Ver
4*	7.7086GHz	55.49	-4.17	51.32	74.00	-22.68	PK	Ver
5*	11.9905GHz	54.33	2.21	56.54	74.00	-17.46	PK	Ver
6*	16.4679GHz	51.59	6.99	58.58	88.20	-29.62	PK	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: Battery	Test Data: 2023-06-04
Test Mode: 802.11a 5320	
Note:	

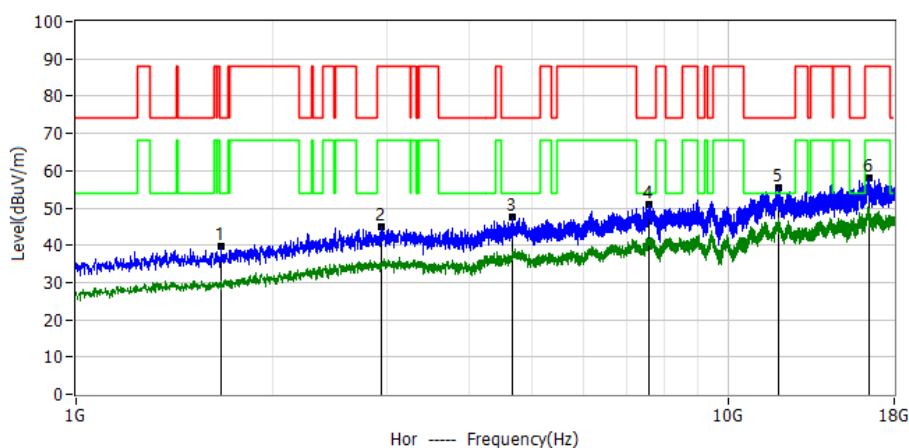


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.6651GHz	59.12	-19.55	39.57	74.00	-34.43	PK	Hor
2*	2.9380GHz	53.74	-8.67	45.07	88.20	-43.13	PK	Hor
3*	4.6677GHz	53.41	-5.88	47.53	74.00	-26.47	PK	Hor
4*	7.5790GHz	55.10	-4.25	50.85	74.00	-23.15	PK	Hor
5*	11.9522GHz	53.31	2.19	55.50	74.00	-18.50	PK	Hor
6*	16.4530GHz	51.15	6.97	58.12	88.20	-30.08	PK	Hor

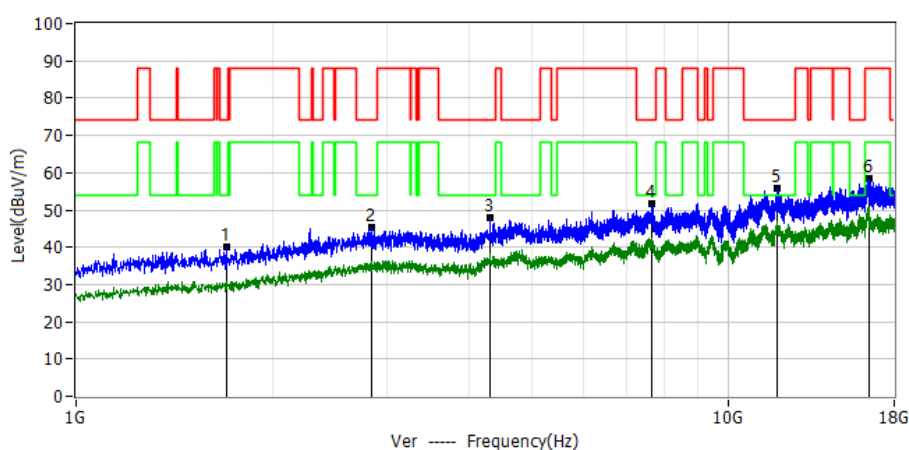


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7012GHz	59.39	-19.20	40.19	74.00	-33.81	PK	Ver
2*	2.8360GHz	54.50	-9.21	45.29	74.00	-28.71	PK	Ver
3*	4.3192GHz	54.29	-6.52	47.77	74.00	-26.23	PK	Ver
4*	7.6597GHz	55.77	-4.20	51.57	74.00	-22.43	PK	Ver
5*	11.9225GHz	53.65	2.17	55.82	74.00	-18.18	PK	Ver
6*	16.4721GHz	51.48	7.00	58.48	88.20	-29.72	PK	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: Battery	Test Data: 2023-06-04
Test Mode: 802.11a 5500	
Note:	

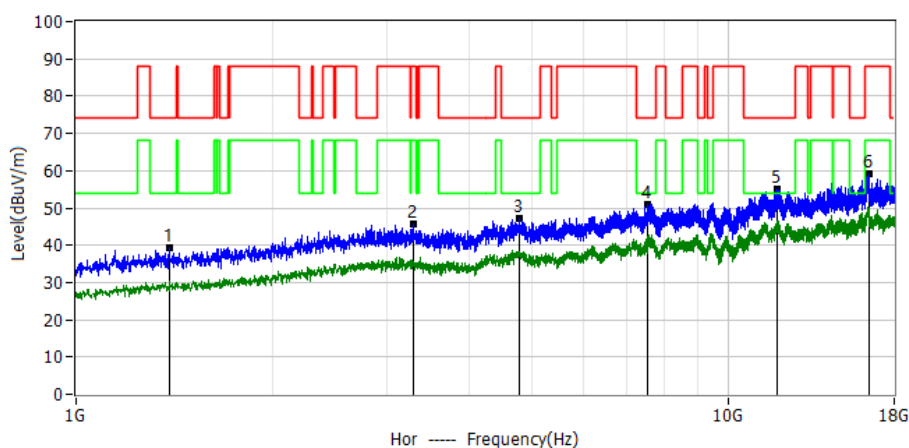


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.3889GHz	60.77	-21.47	39.30	74.00	-34.70	PK	Hor
2*	3.2886GHz	54.28	-8.44	45.84	88.20	-42.36	PK	Hor
3*	4.7846GHz	53.11	-5.97	47.14	74.00	-26.86	PK	Hor
4*	7.5386GHz	55.38	-4.27	51.11	74.00	-22.89	PK	Hor
5*	11.9246GHz	52.90	2.18	55.08	74.00	-18.92	PK	Hor
6*	16.4700GHz	52.17	6.99	59.16	88.20	-29.04	PK	Hor

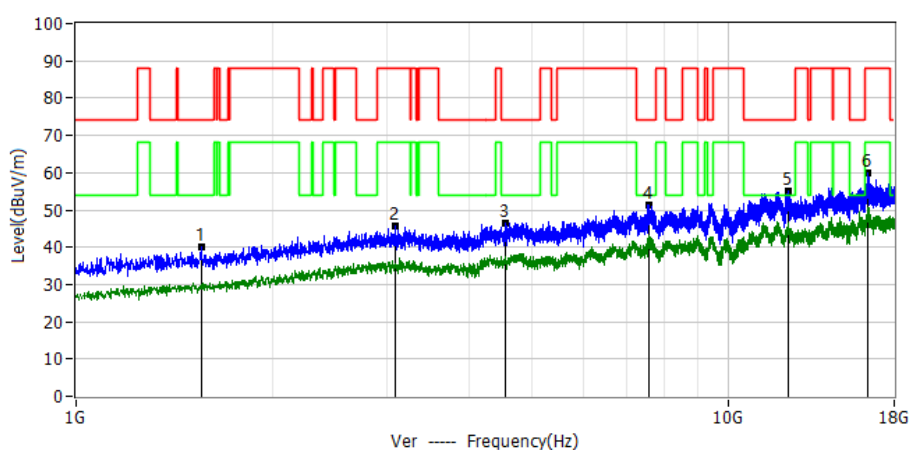


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.5546GHz	60.68	-20.48	40.20	74.00	-33.80	PK	Ver
2*	3.0910GHz	53.95	-8.37	45.58	88.20	-42.62	PK	Ver
3*	4.5509GHz	52.40	-5.79	46.61	74.00	-27.39	PK	Ver
4*	7.5790GHz	55.39	-4.25	51.14	74.00	-22.86	PK	Ver
5*	12.3709GHz	52.74	2.30	55.04	74.00	-18.96	PK	Ver
6*	16.3637GHz	53.05	6.83	59.88	88.20	-28.32	PK	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: Battery	Test Data: 2023-06-04
Test Mode: 802.11a 5580	
Note:	

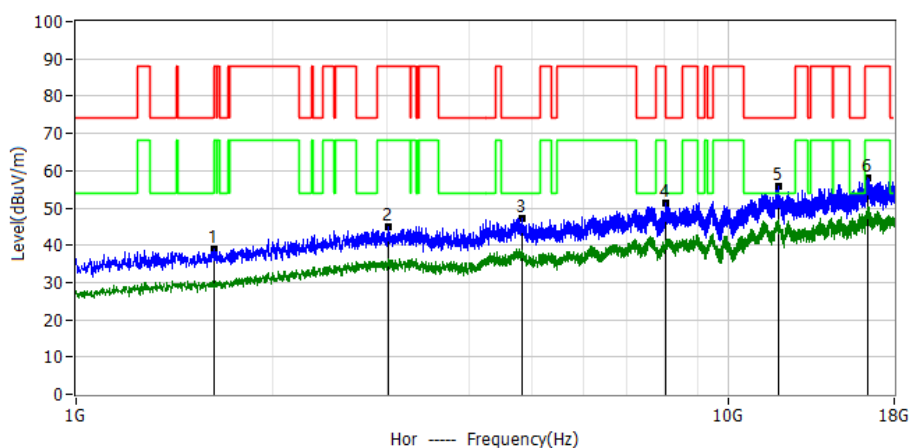


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.6247GHz	58.71	-19.94	38.77	74.00	-35.23	PK	Hor
2*	3.0102GHz	53.42	-8.34	45.08	88.20	-43.12	PK	Hor
3*	4.8399GHz	53.34	-6.02	47.32	74.00	-26.68	PK	Hor
4*	8.0146GHz	55.17	-3.96	51.21	88.20	-36.99	PK	Hor
5*	11.9395GHz	53.44	2.18	55.62	74.00	-18.38	PK	Hor
6*	16.3680GHz	51.06	6.83	57.89	88.20	-30.31	PK	Hor

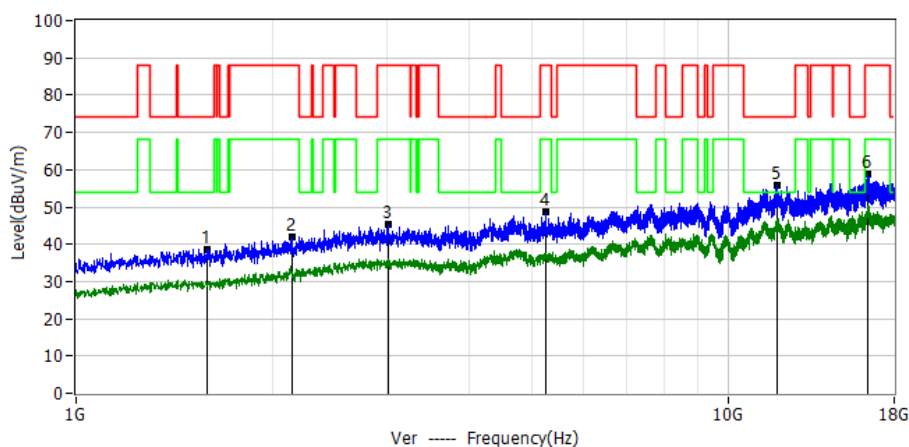


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.5907GHz	58.98	-20.24	38.74	74.00	-35.26	PK	Ver
2*	2.1432GHz	56.67	-14.73	41.94	88.20	-46.26	PK	Ver
3*	3.0166GHz	53.51	-8.35	45.16	88.20	-43.04	PK	Ver
4*	5.2436GHz	55.68	-6.92	48.76	88.20	-39.44	PK	Ver
5*	11.9289GHz	53.46	2.18	55.64	74.00	-18.36	PK	Ver
6*	16.3786GHz	51.95	6.85	58.80	88.20	-29.40	PK	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: Battery	Test Data: 2023-06-04
Test Mode: 802.11a 5700	
Note:	

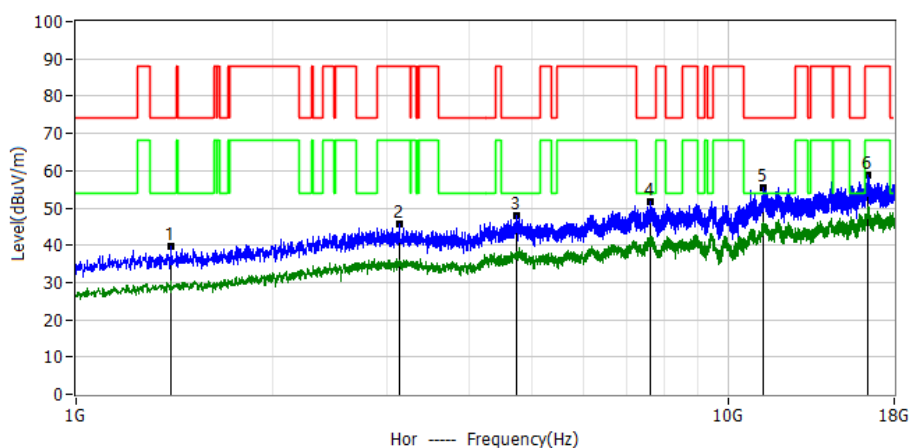


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.3952GHz	61.00	-21.42	39.58	74.00	-34.42	PK	Hor
2*	3.1377GHz	54.05	-8.39	45.66	88.20	-42.54	PK	Hor
3*	4.7485GHz	54.07	-5.95	48.12	74.00	-25.88	PK	Hor
4*	7.5939GHz	55.89	-4.24	51.65	74.00	-22.35	PK	Hor
5*	11.3381GHz	53.52	1.83	55.35	74.00	-18.65	PK	Hor
6*	16.3871GHz	51.85	6.86	58.71	88.20	-29.49	PK	Hor

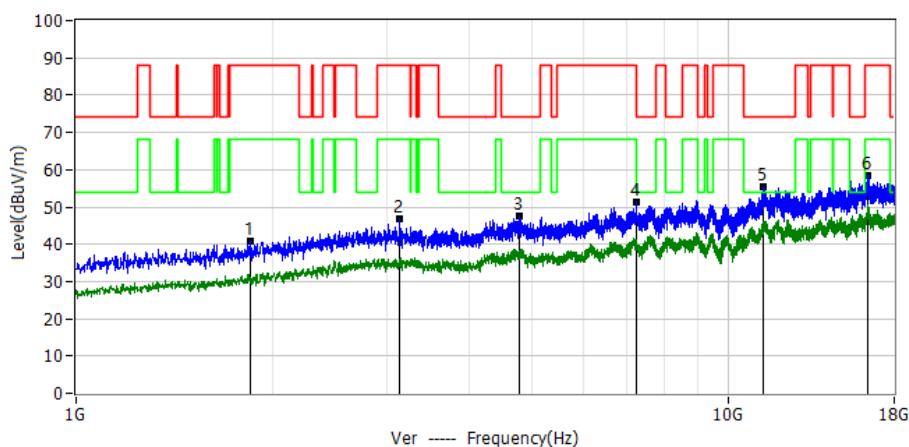


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8542GHz	58.43	-17.70	40.73	88.20	-47.47	PK	Ver
2*	3.1399GHz	55.11	-8.39	46.72	88.20	-41.48	PK	Ver
3*	4.7846GHz	53.69	-5.97	47.72	74.00	-26.28	PK	Ver
4*	7.2475GHz	56.39	-5.00	51.39	88.20	-36.81	PK	Ver
5*	11.3317GHz	53.55	1.83	55.38	74.00	-18.62	PK	Ver
6*	16.3914GHz	51.52	6.87	58.39	88.20	-29.81	PK	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: Battery	Test Data: 2023-06-04
Test Mode: 802.11a 5745	
Note:	

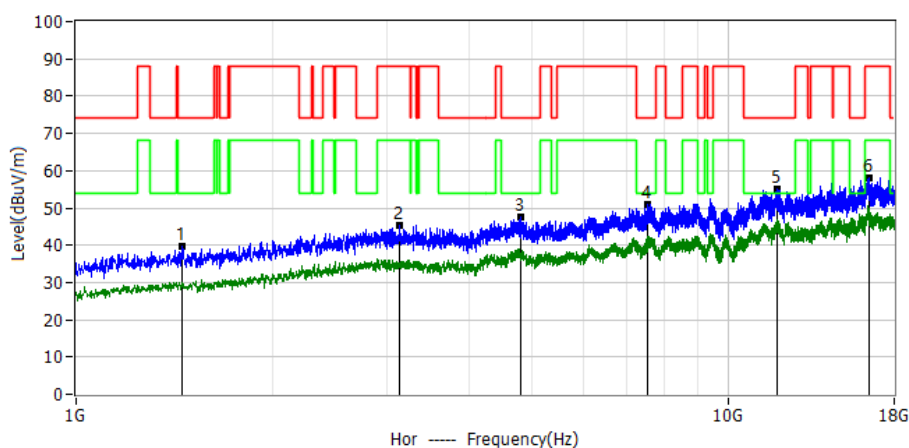


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.4505GHz	60.67	-21.11	39.56	74.00	-34.44	PK	Hor
2*	3.1335GHz	53.81	-8.38	45.43	88.20	-42.77	PK	Hor
3*	4.8122GHz	53.52	-6.00	47.52	74.00	-26.48	PK	Hor
4*	7.5386GHz	55.23	-4.27	50.96	74.00	-23.04	PK	Hor
5*	11.9246GHz	52.97	2.18	55.15	74.00	-18.85	PK	Hor
6*	16.4487GHz	51.06	6.96	58.02	88.20	-30.18	PK	Hor

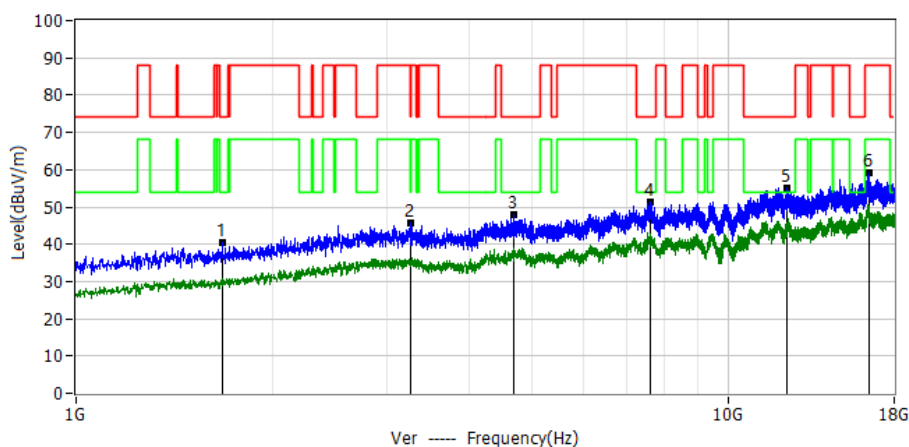


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.6736GHz	59.80	-19.47	40.33	74.00	-33.67	PK	Ver
2*	3.2674GHz	54.23	-8.43	45.80	88.20	-42.40	PK	Ver
3*	4.6975GHz	53.70	-5.91	47.79	74.00	-26.21	PK	Ver
4*	7.5875GHz	55.42	-4.24	51.18	74.00	-22.82	PK	Ver
5*	12.3390GHz	52.75	2.29	55.04	74.00	-18.96	PK	Ver
6*	16.4466GHz	52.09	6.96	59.05	88.20	-29.15	PK	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: Battery	Test Data: 2023-06-04
Test Mode: 802.11a 5785	
Note:	

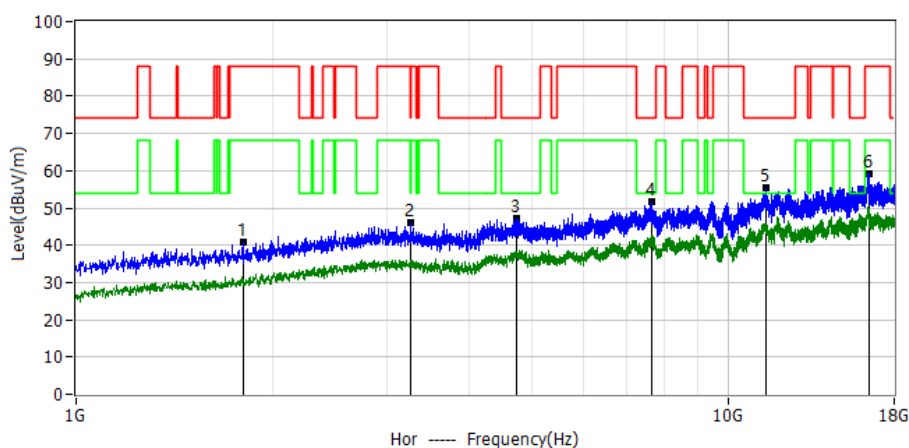


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.8032GHz	59.01	-18.22	40.79	88.20	-47.41	PK	Hor
2*	3.2567GHz	54.49	-8.42	46.07	88.20	-42.13	PK	Hor
3*	4.7400GHz	53.02	-5.94	47.08	74.00	-26.92	PK	Hor
4*	7.6470GHz	55.92	-4.21	51.71	74.00	-22.29	PK	Hor
5*	11.4295GHz	53.39	1.88	55.27	74.00	-18.73	PK	Hor
6*	16.4764GHz	52.06	7.00	59.06	88.20	-29.14	PK	Hor

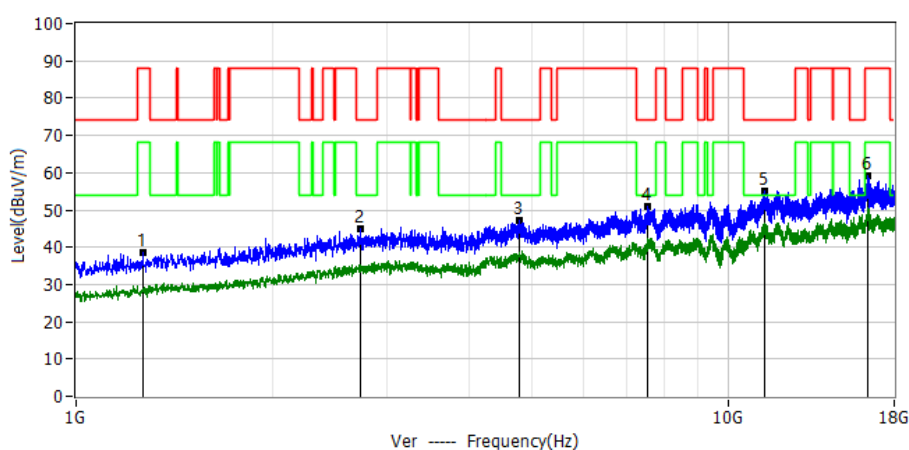


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.2656GHz	61.06	-22.45	38.61	88.20	-49.59	PK	Ver
2*	2.7361GHz	54.65	-9.74	44.91	74.00	-29.09	PK	Ver
3*	4.7761GHz	53.27	-5.97	47.30	74.00	-26.70	PK	Ver
4*	7.5259GHz	55.31	-4.28	51.03	74.00	-22.97	PK	Ver
5*	11.3700GHz	53.14	1.85	54.99	74.00	-19.01	PK	Ver
6*	16.3786GHz	52.25	6.85	59.10	88.20	-29.10	PK	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: Battery	Test Data: 2023-06-04
Test Mode: 802.11a 5825	
Note:	

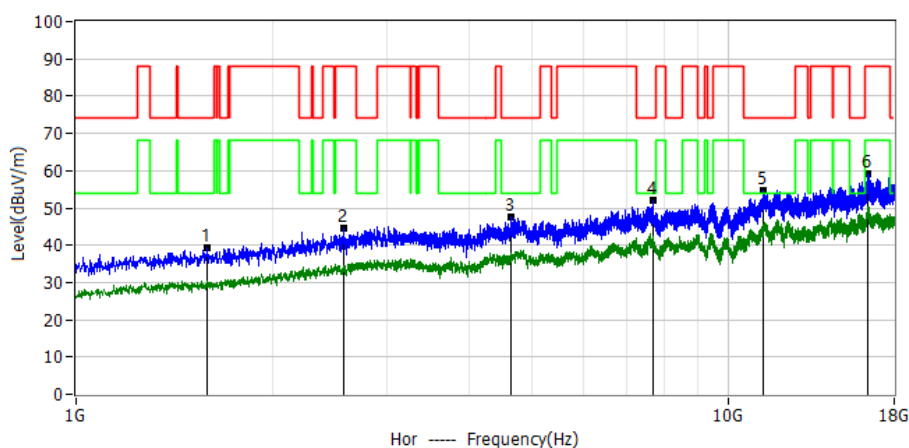

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.5886GHz	59.42	-20.25	39.17	74.00	-34.83	PK	Hor
2*	2.5746GHz	55.13	-10.59	44.54	88.20	-43.66	PK	Hor
3*	4.6529GHz	53.61	-5.87	47.74	74.00	-26.26	PK	Hor
4*	7.6619GHz	56.35	-4.20	52.15	74.00	-21.85	PK	Hor
5*	11.3424GHz	52.84	1.83	54.67	74.00	-19.33	PK	Hor
6*	16.3722GHz	52.35	6.84	59.19	88.20	-29.01	PK	Hor

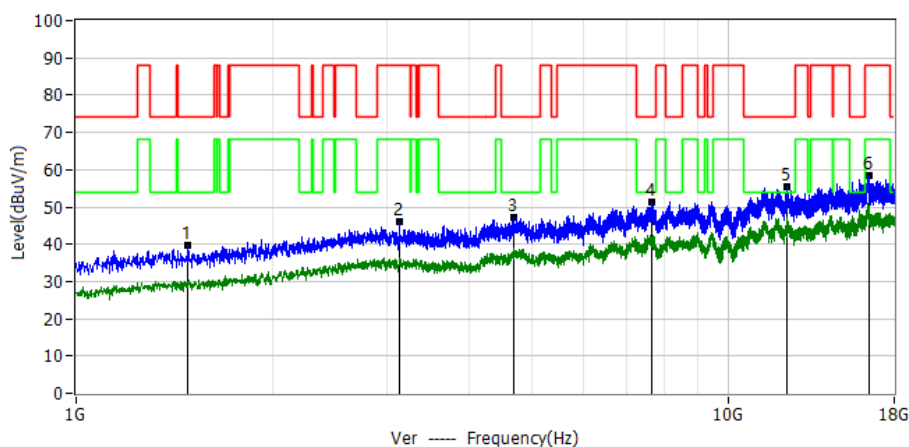


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.4824GHz	60.52	-20.94	39.58	74.00	-34.42	PK	Ver
2*	3.1377GHz	54.60	-8.39	46.21	88.20	-41.99	PK	Ver
3*	4.6911GHz	53.01	-5.90	47.11	74.00	-26.89	PK	Ver
4*	7.6597GHz	55.53	-4.20	51.33	74.00	-22.67	PK	Ver
5*	12.3475GHz	52.98	2.29	55.27	74.00	-18.73	PK	Ver
6*	16.4594GHz	51.41	6.98	58.39	88.20	-29.81	PK	Ver

Note: The 18-40GHz emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.




3.2.7 TEST RESULTS(Band edge Requirements)

Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: AC 230V/50Hz	Test Data: 2023-05-15
Test Mode: 802.11a 5180	
Note:	

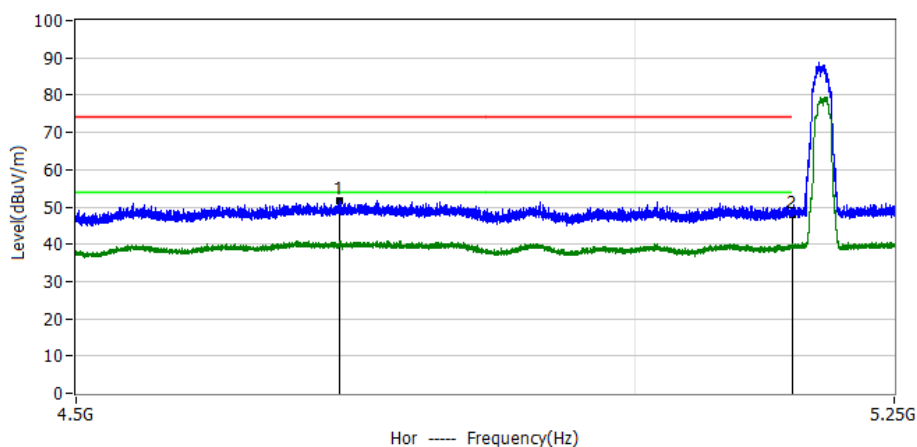


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	4.7294GHz	57.66	-5.93	51.73	74.00	-22.27	PK	Hor
2*	5.1500GHz	54.52	-6.62	47.90	74.00	-26.10	PK	Hor

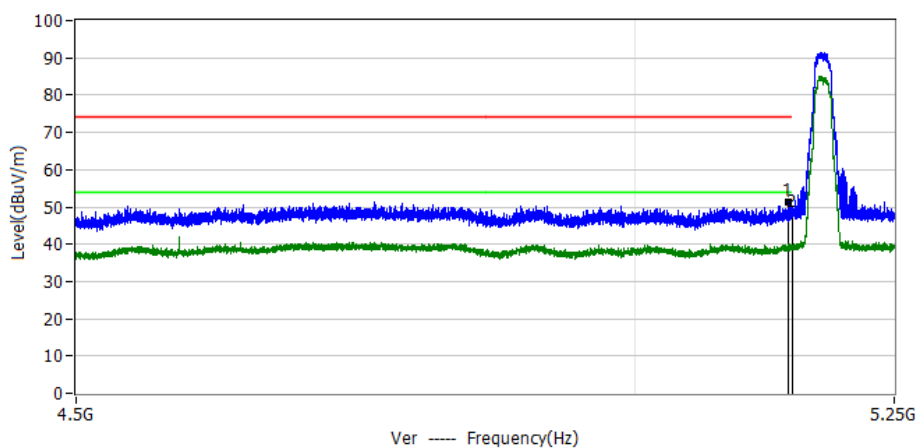


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.1466GHz	57.95	-6.61	51.34	74.00	-22.66	PK	Ver
2*	5.1500GHz	55.02	-6.62	48.40	74.00	-25.60	PK	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: AC 230V/50Hz	Test Data: 2023-05-15
Test Mode: 802.11a 5240	
Note:	

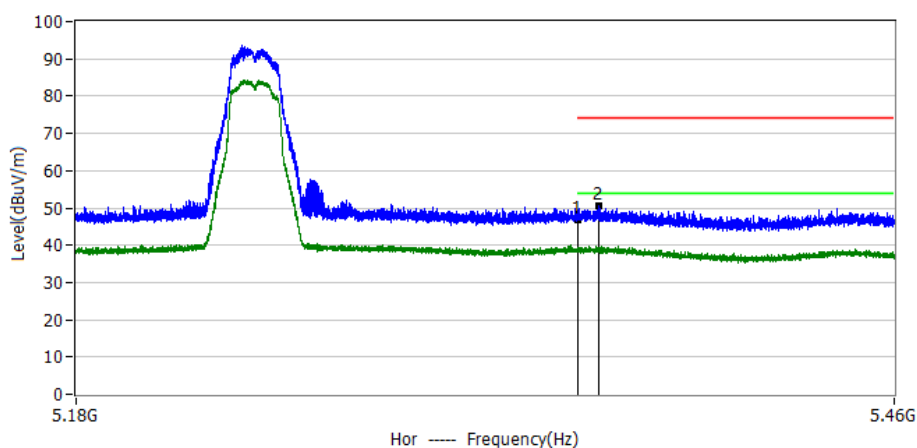


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.3500GHz	54.26	-7.26	47.00	74.00	-27.00	PK	Hor
2*	5.3570GHz	57.81	-7.28	50.53	74.00	-23.47	PK	Hor

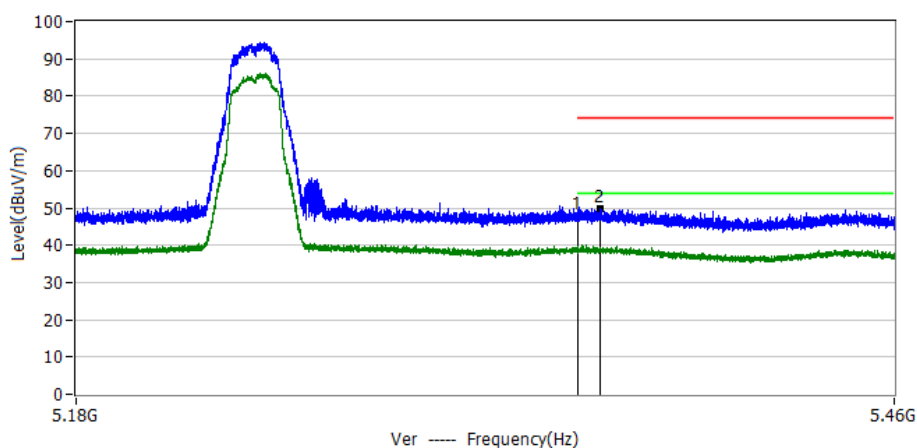


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.3500GHz	55.26	-7.26	48.00	74.00	-26.00	PK	Ver
2*	5.3577GHz	57.25	-7.28	49.97	74.00	-24.03	PK	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: AC 230V/50Hz	Test Data: 2023-05-15
Test Mode: 802.11a 5260	
Note:	

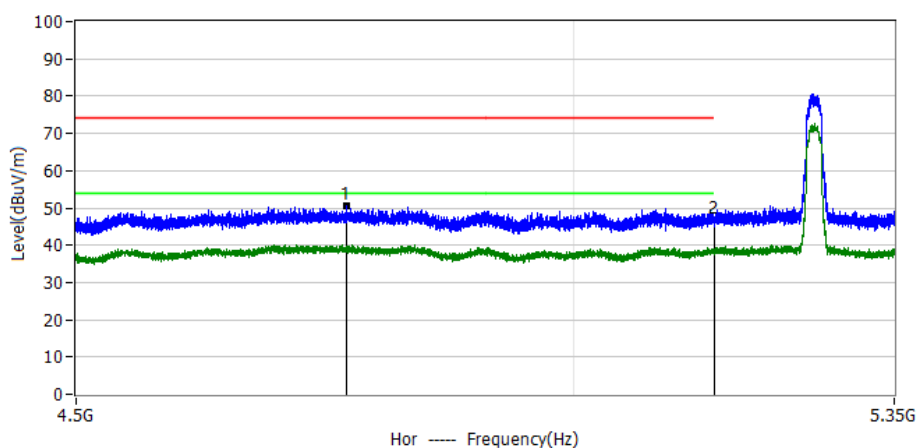


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	4.7651GHz	56.38	-5.96	50.42	74.00	-23.58	PK	Hor
2*	5.1500GHz	53.62	-6.62	47.00	74.00	-27.00	PK	Hor

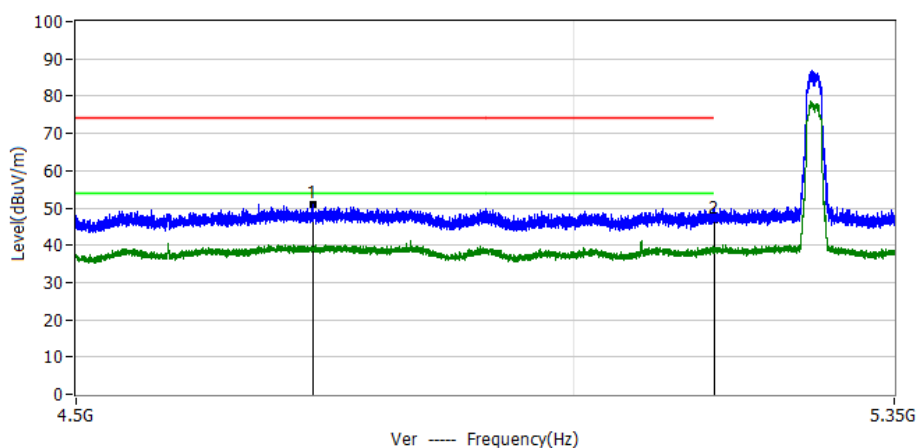


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	4.7314GHz	56.88	-5.93	50.95	74.00	-23.05	PK	Ver
2*	5.1500GHz	53.32	-6.62	46.70	74.00	-27.30	PK	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: AC 230V/50Hz	Test Data: 2023-05-15
Test Mode: 802.11a 5320	
Note:	

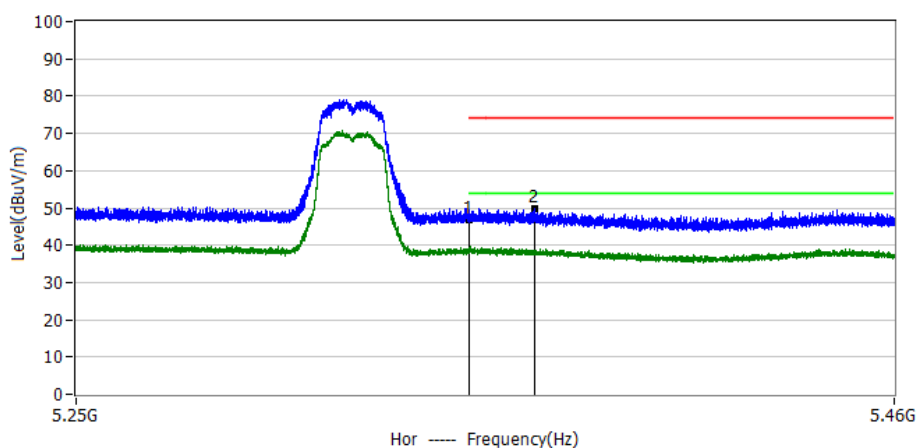


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.3500GHz	54.06	-7.26	46.80	74.00	-27.20	PK	Hor
2*	5.3667GHz	57.21	-7.31	49.90	74.00	-24.10	PK	Hor

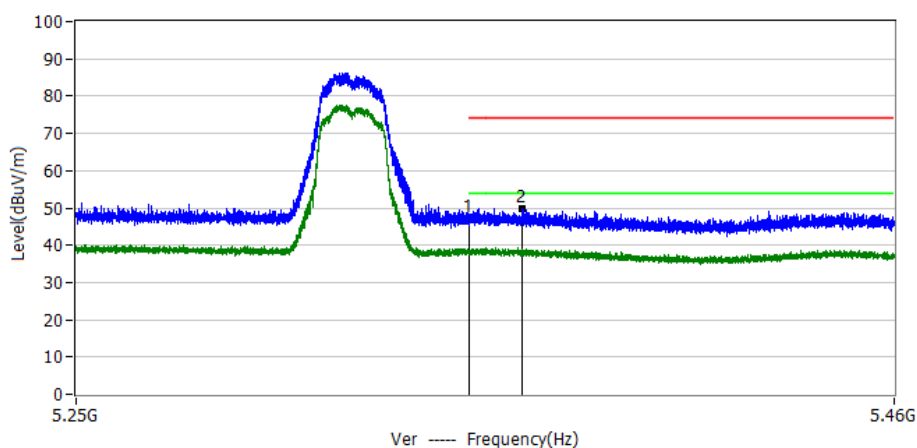


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.3500GHz	54.36	-7.26	47.10	74.00	-26.90	PK	Ver
2*	5.3633GHz	57.23	-7.30	49.93	74.00	-24.07	PK	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: AC 230V/50Hz	Test Data: 2023-05-15
Test Mode: 802.11a 5500	
Note:	

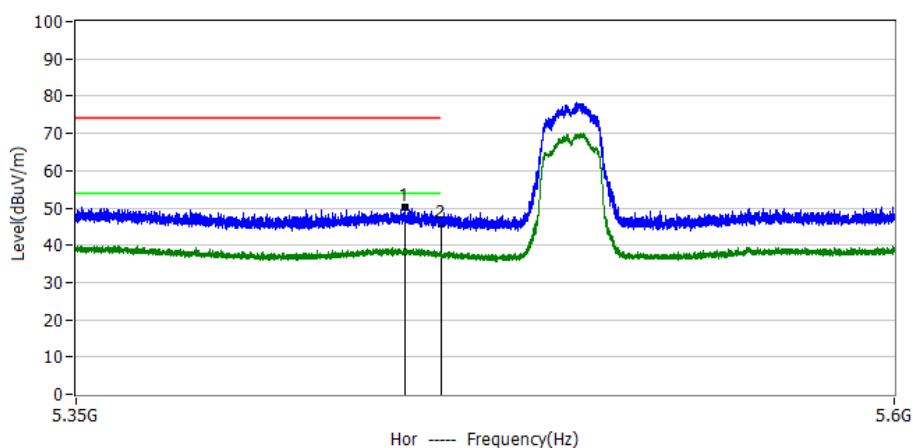


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.4490GHz	57.83	-7.58	50.25	74.00	-23.75	PK	Hor
2*	5.4600GHz	53.31	-7.61	45.70	74.00	-28.30	PK	Hor

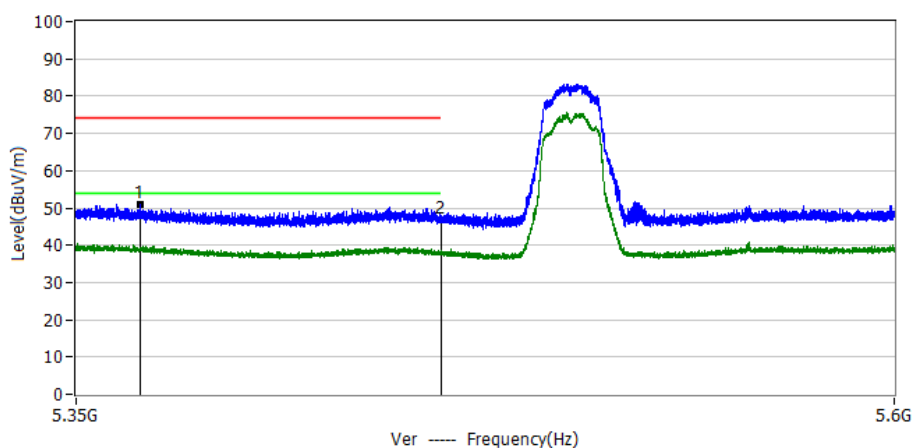


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.3692GHz	58.18	-7.32	50.86	74.00	-23.14	PK	Ver
2*	5.4600GHz	54.41	-7.61	46.80	74.00	-27.20	PK	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: AC 230V/50Hz	Test Data: 2023-05-15
Test Mode: 802.11a 5700	
Note:	

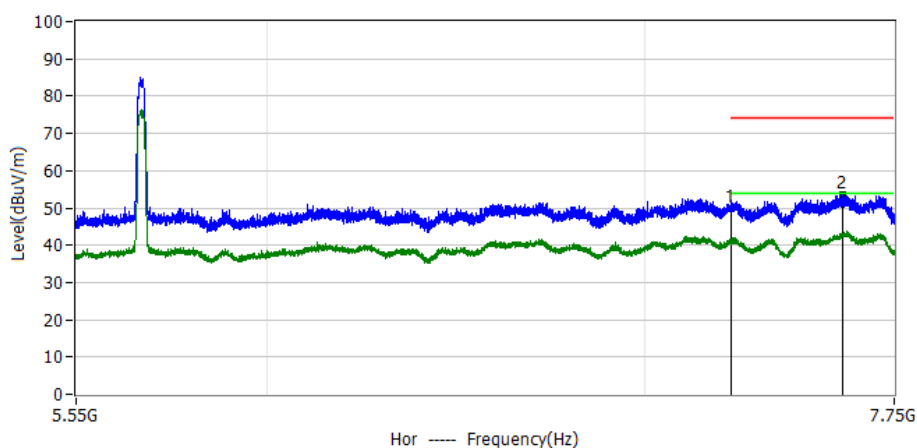


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	7.2500GHz	54.89	-4.99	49.90	74.00	-24.10	PK	Hor
2*	7.5905GHz	57.79	-4.24	53.55	74.00	-20.45	PK	Hor

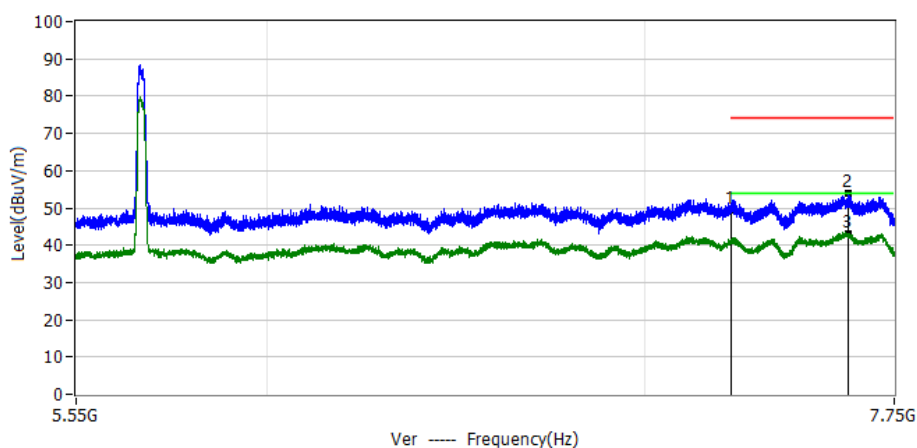


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	7.2500GHz	54.29	-4.99	49.30	74.00	-24.70	PK	Ver
2*	7.6051GHz	58.26	-4.23	54.03	74.00	-19.97	PK	Ver
3*	7.6051GHz	47.13	-4.23	42.90	54.00	-11.10	AV	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: AC 230V/50Hz	Test Data: 2023-05-15
Test Mode: 802.11a 5745	
Note:	

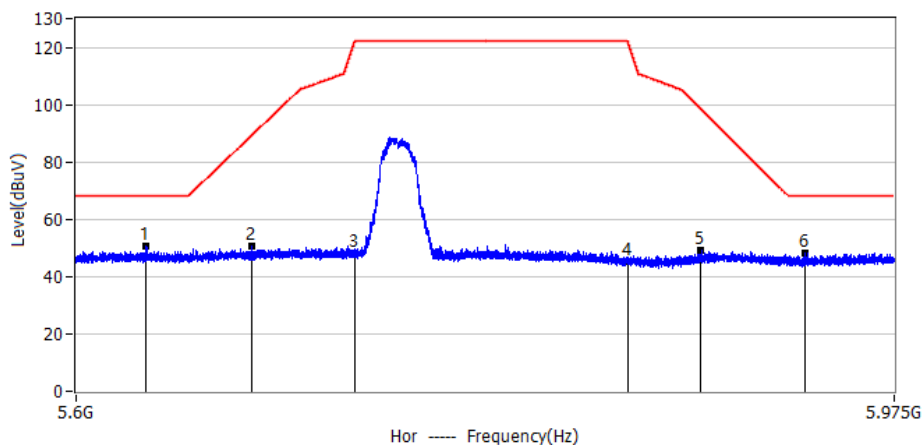


No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	5.6310GHz	58.17	-7.69	50.48	68.20	-17.72	PK	Hor
2*	5.6785GHz	58.13	-7.67	50.46	89.34	-38.88	PK	Hor
3*	5.7250GHz	56.05	-7.65	48.40	122.20	-73.80	PK	Hor
4*	5.8500GHz	52.80	-7.60	45.20	122.20	-77.00	PK	Hor
5*	5.8843GHz	56.62	-7.59	49.03	98.26	-49.23	PK	Hor
6*	5.9329GHz	56.01	-7.57	48.44	68.20	-19.76	PK	Hor

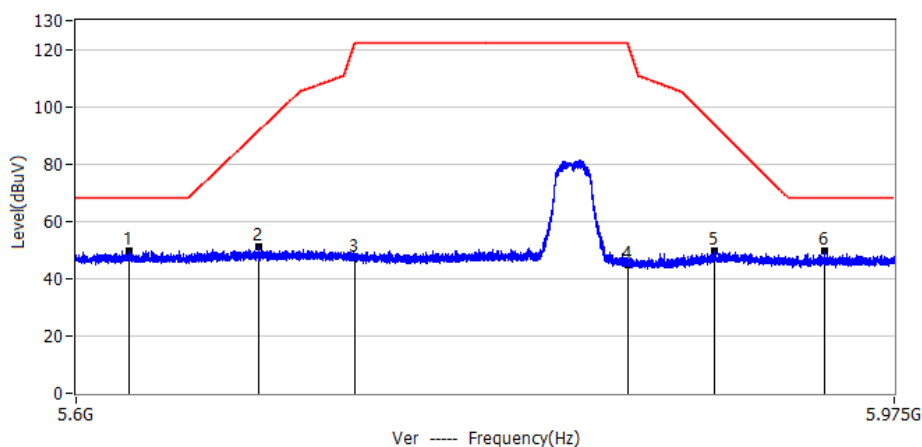


No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	5.6233GHz	57.17	-7.69	49.48	68.20	-18.72	PK	Ver
2*	5.6817GHz	58.91	-7.67	51.24	91.66	-40.43	PK	Ver
3*	5.7250GHz	54.65	-7.65	47.00	122.20	-75.20	PK	Ver
4*	5.8500GHz	52.50	-7.60	44.90	122.20	-77.30	PK	Ver
5*	5.8903GHz	57.21	-7.58	49.63	93.81	-44.18	PK	Ver
6*	5.9420GHz	56.98	-7.56	49.42	68.20	-18.78	PK	Ver



Project: LGT23E024	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 27.9°C
M/N: TANK 2	Humidity: 55%RH
Test Voltage: AC 230V/50Hz	Test Data: 2023-05-15
Test Mode: 802.11a 5745	
Note:	

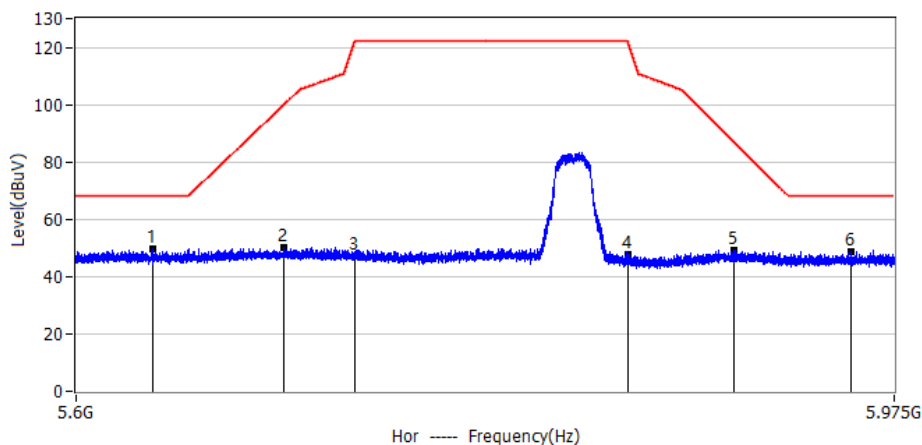

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	5.6344GHz	57.58	-7.69	49.89	68.20	-18.31	PK	Hor
2*	5.6931GHz	57.83	-7.66	50.17	100.14	-49.98	PK	Hor
3*	5.7250GHz	54.75	-7.65	47.10	122.20	-75.10	PK	Hor
4*	5.8500GHz	55.20	-7.60	47.60	122.20	-74.60	PK	Hor
5*	5.8995GHz	56.98	-7.58	49.40	87.01	-37.61	PK	Hor
6*	5.9545GHz	56.32	-7.56	48.76	68.20	-19.44	PK	Hor

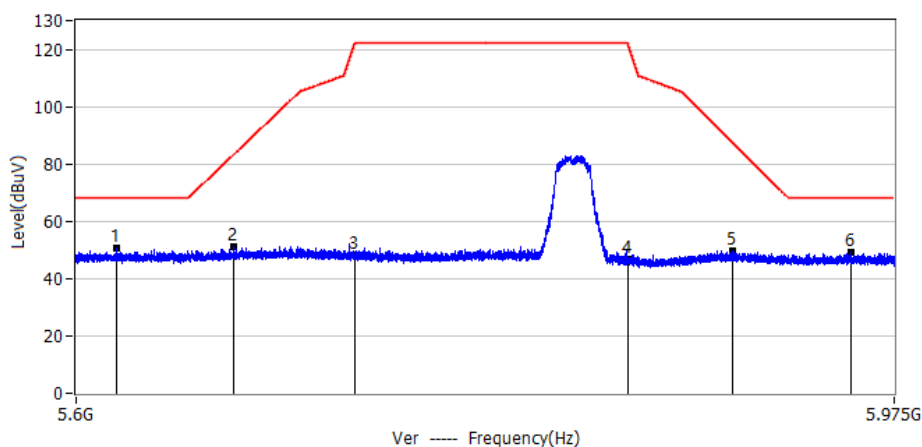

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	5.6177GHz	58.26	-7.69	50.57	68.20	-17.63	PK	Ver
2*	5.6703GHz	58.88	-7.67	51.21	83.27	-32.06	PK	Ver
3*	5.7250GHz	55.65	-7.65	48.00	122.20	-74.20	PK	Ver
4*	5.8500GHz	54.20	-7.60	46.60	122.20	-75.60	PK	Ver
5*	5.8987GHz	57.40	-7.58	49.82	87.60	-37.78	PK	Ver
6*	5.9548GHz	56.65	-7.56	49.09	68.20	-19.11	PK	Ver
7*	5.7250GHz	NaN	-7.65	NaN	NaN	NaN		Ver
8*	5.8500GHz	NaN	-7.60	NaN	NaN	NaN		Ver



4. POWER SPECTRAL DENSITY TEST

4.1 LIMIT

1. For mobile and portable client devices in the 5.15-5.25 GHz band, , the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 TEST PROCEDURE

1. The setting follows Method SA-1 of FCC KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.
For devices operating in the band, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:
 - a) Set RBW $\geq 1/T$, where T is defined in section II.B.I.a).
 - b) Set VBW ≥ 3 RBW.
 - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 - d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 - e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 KHz is available on nearly all spectrum analyzers.

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

For the measurement records, refer to the appendix I.



5. BANDWIDTH MEASUREMENT

5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT

The following procedure shall be used for measuring 26 bandwidth.

5.1.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW $\geq$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

For the measurement records · refer to the appendix I.



5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT

The following procedure shall be used for measuring (99 %) power bandwidth.

5.2.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

5.2.2 DEVIATION FROM STANDARD

No deviation.

5.2.3 TEST SETUP



5.2.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.2.5 TEST RESULTS

For the measurement records, refer to the appendix I.



5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth.

5.3.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.
 - a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.2 DEVIATION FROM STANDARD

No deviation.

5.3.3 TEST SETUP



5.3.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.3.5 TEST RESULTS

For the measurement records , refer to the appendix I.



6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz, If transmitting antennas of directional gain greater than 6 dBi are used.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used.

FCC Part15 (15.407) , Subpart E				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a) (1) (iv)	Peak Output Power	0.25 watt	5150-5250	PASS
		The lesser of 250 mW or $11 \text{ dBm} + 10 \log (26 \text{ dB emission bandwidth})$	5250-5350 5470-5725	
15.407(a) (3)		1 watt	5725-5825	


6.2 TEST PROCEDURE

The EUT was directly connected to the Power Sensor&PC

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

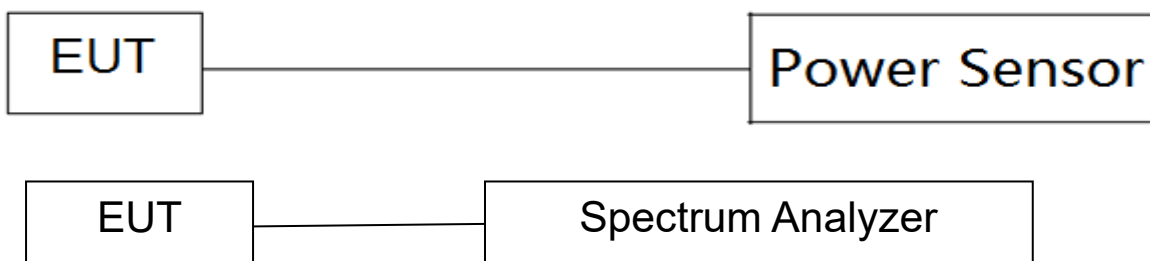

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

For the measurement records , refer to the appendix I.



7. AUTOMATICALLY DISCONTINUE TRANSMISSION

7.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

7.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

Part 15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA


The EUT antenna is PIFA Antenna. It comply with the standard requirement.





APPENDIX I:TEST RESULTS


Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	97.55	0.11	0.72
NVNT	a	5200	Ant1	97.55	0.11	0.72
NVNT	a	5240	Ant1	97.55	0.11	0.72
NVNT	a	5260	Ant1	97.55	0.11	0.72
NVNT	a	5300	Ant1	97.55	0.11	0.72
NVNT	a	5320	Ant1	97.55	0.11	0.72
NVNT	a	5500	Ant1	97.55	0.11	0.72
NVNT	a	5580	Ant1	97.48	0.11	0.72
NVNT	a	5700	Ant1	97.55	0.11	0.72
NVNT	a	5745	Ant1	97.55	0.11	0.72
NVNT	a	5785	Ant1	97.55	0.11	0.72
NVNT	a	5825	Ant1	97.55	0.11	0.72
NVNT	n20	5180	Ant1	97.38	0.12	0.77
NVNT	n20	5200	Ant1	97.38	0.12	0.77
NVNT	n20	5240	Ant1	97.38	0.12	0.77
NVNT	n20	5260	Ant1	97.38	0.12	0.77
NVNT	n20	5300	Ant1	97.38	0.12	0.77
NVNT	n20	5320	Ant1	97.38	0.12	0.77
NVNT	n20	5500	Ant1	97.38	0.12	0.77
NVNT	n20	5580	Ant1	97.38	0.12	0.77
NVNT	n20	5700	Ant1	97.38	0.12	0.77
NVNT	n20	5745	Ant1	97.38	0.12	0.77
NVNT	n20	5785	Ant1	97.38	0.12	0.77
NVNT	n20	5825	Ant1	97.38	0.12	0.77
NVNT	n40	5190	Ant1	95.17	0.21	1.54
NVNT	n40	5230	Ant1	95.17	0.21	1.54
NVNT	n40	5270	Ant1	95.17	0.21	1.54
NVNT	n40	5310	Ant1	95.17	0.21	1.54
NVNT	n40	5510	Ant1	95.17	0.21	1.54
NVNT	n40	5550	Ant1	95.17	0.21	1.54
NVNT	n40	5670	Ant1	95.17	0.21	1.54
NVNT	n40	5755	Ant1	95.17	0.21	1.54
NVNT	n40	5795	Ant1	95.18	0.21	1.54
NVNT	ac80	5210	Ant1	90.53	0.43	3.08
NVNT	ac80	5290	Ant1	90.78	0.42	3.08
NVNT	ac80	5530	Ant1	90.81	0.42	3.07
NVNT	ac80	5610	Ant1	90.78	0.42	3.08
NVNT	ac80	5775	Ant1	90.81	0.42	3.07

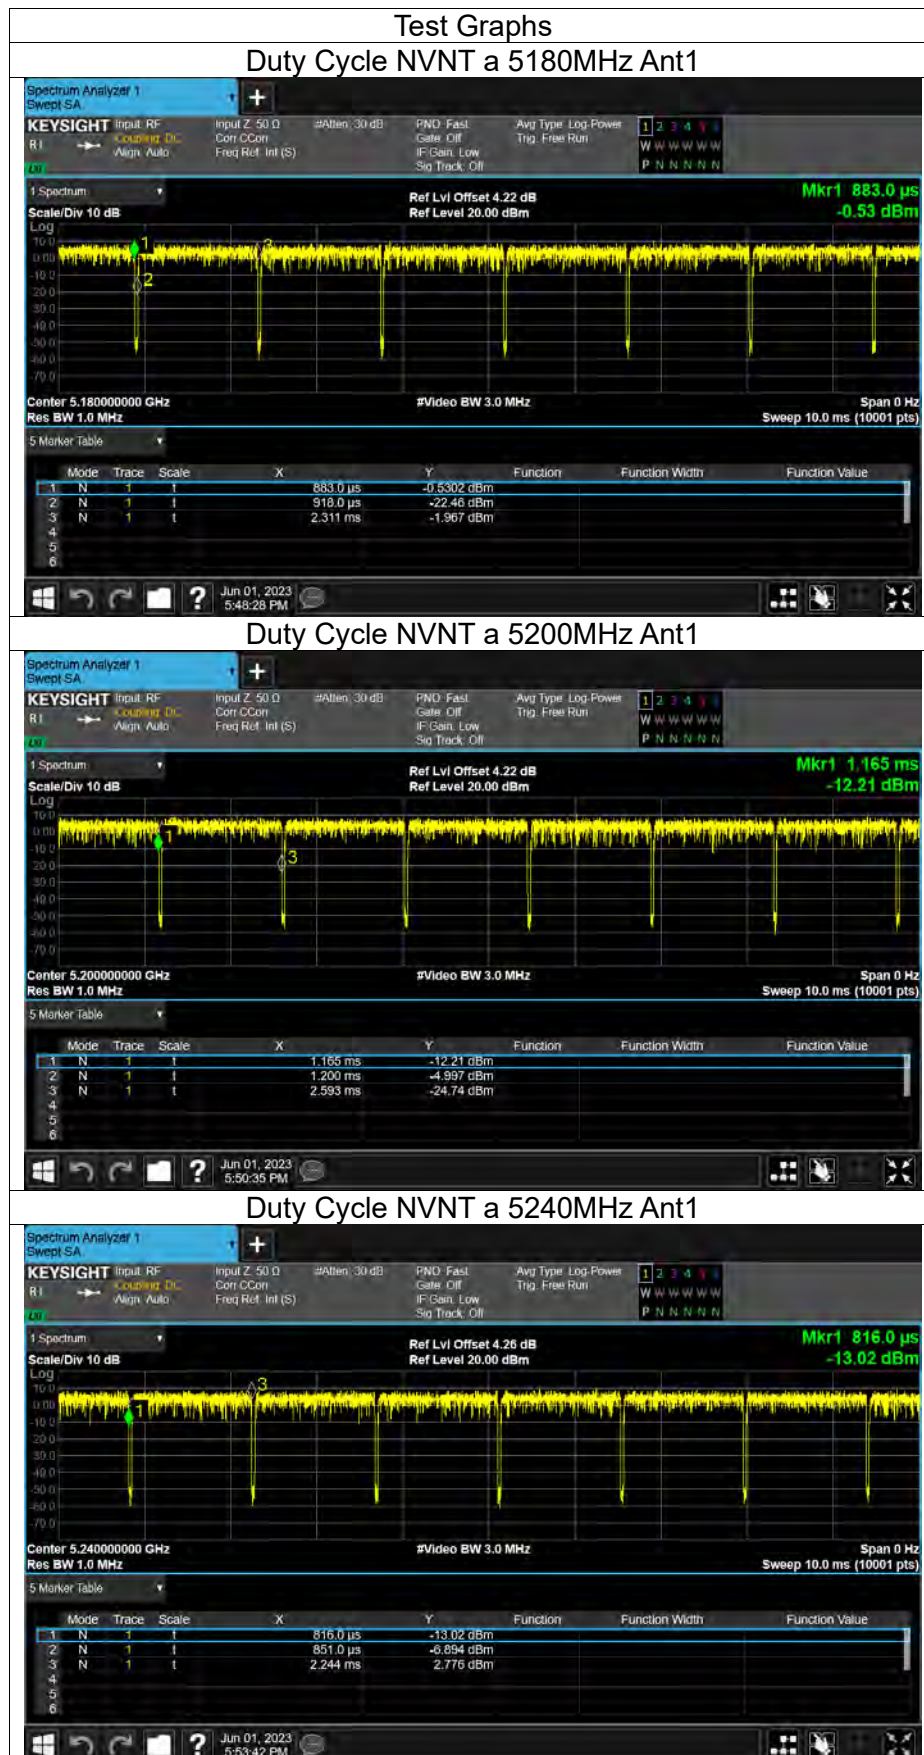


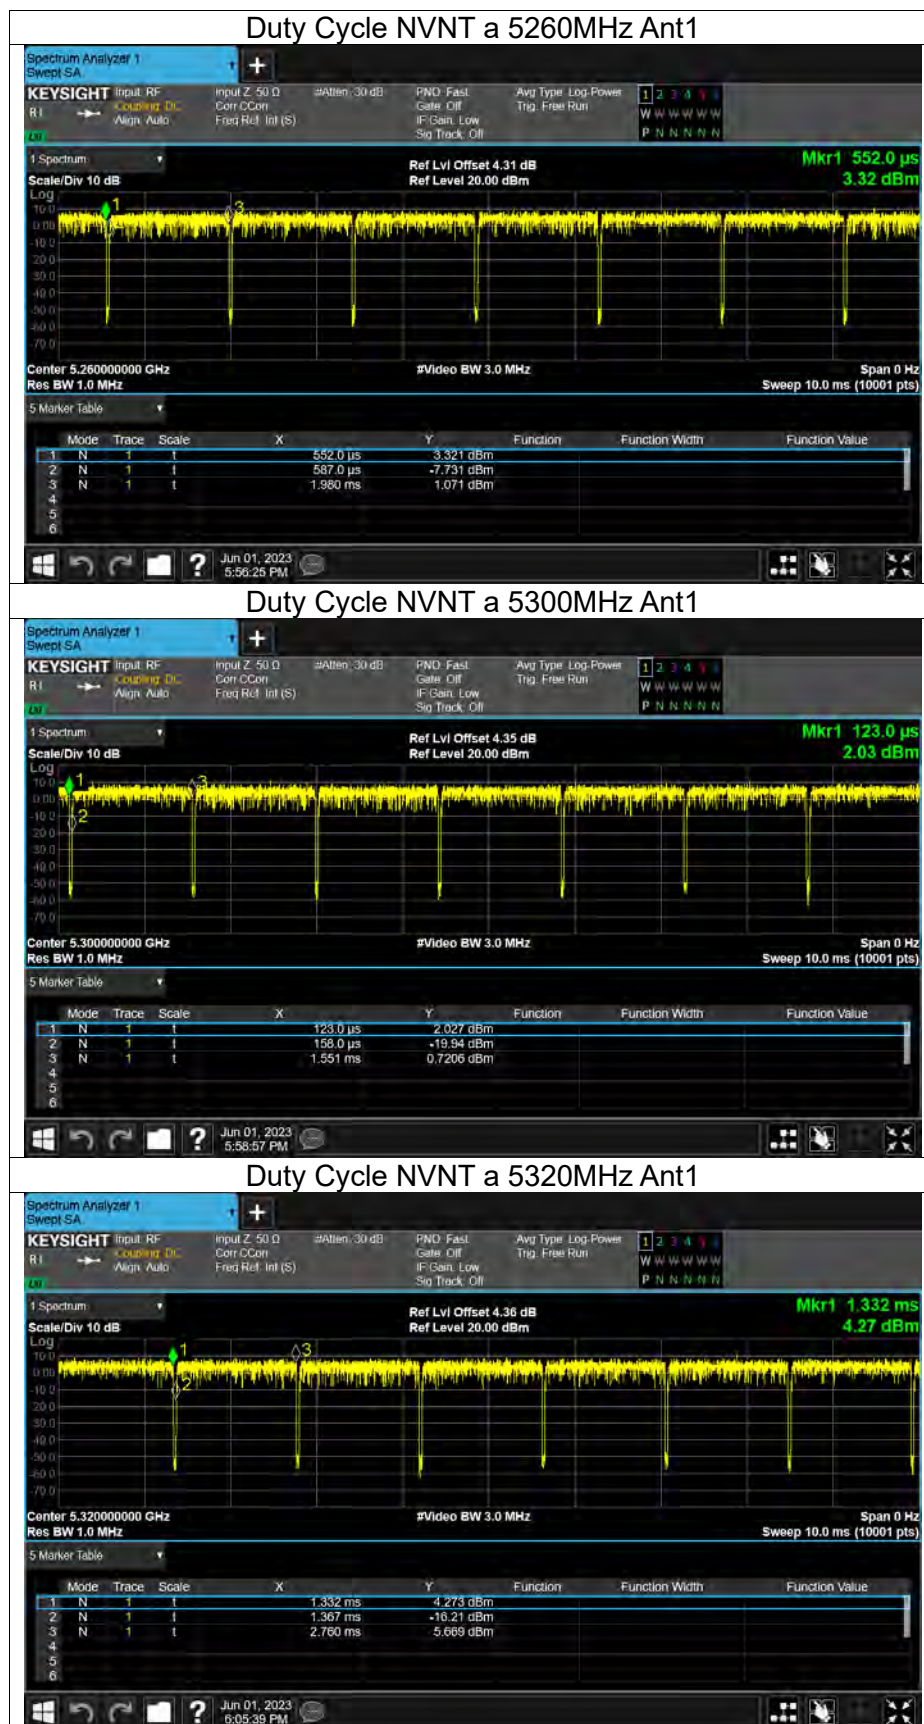


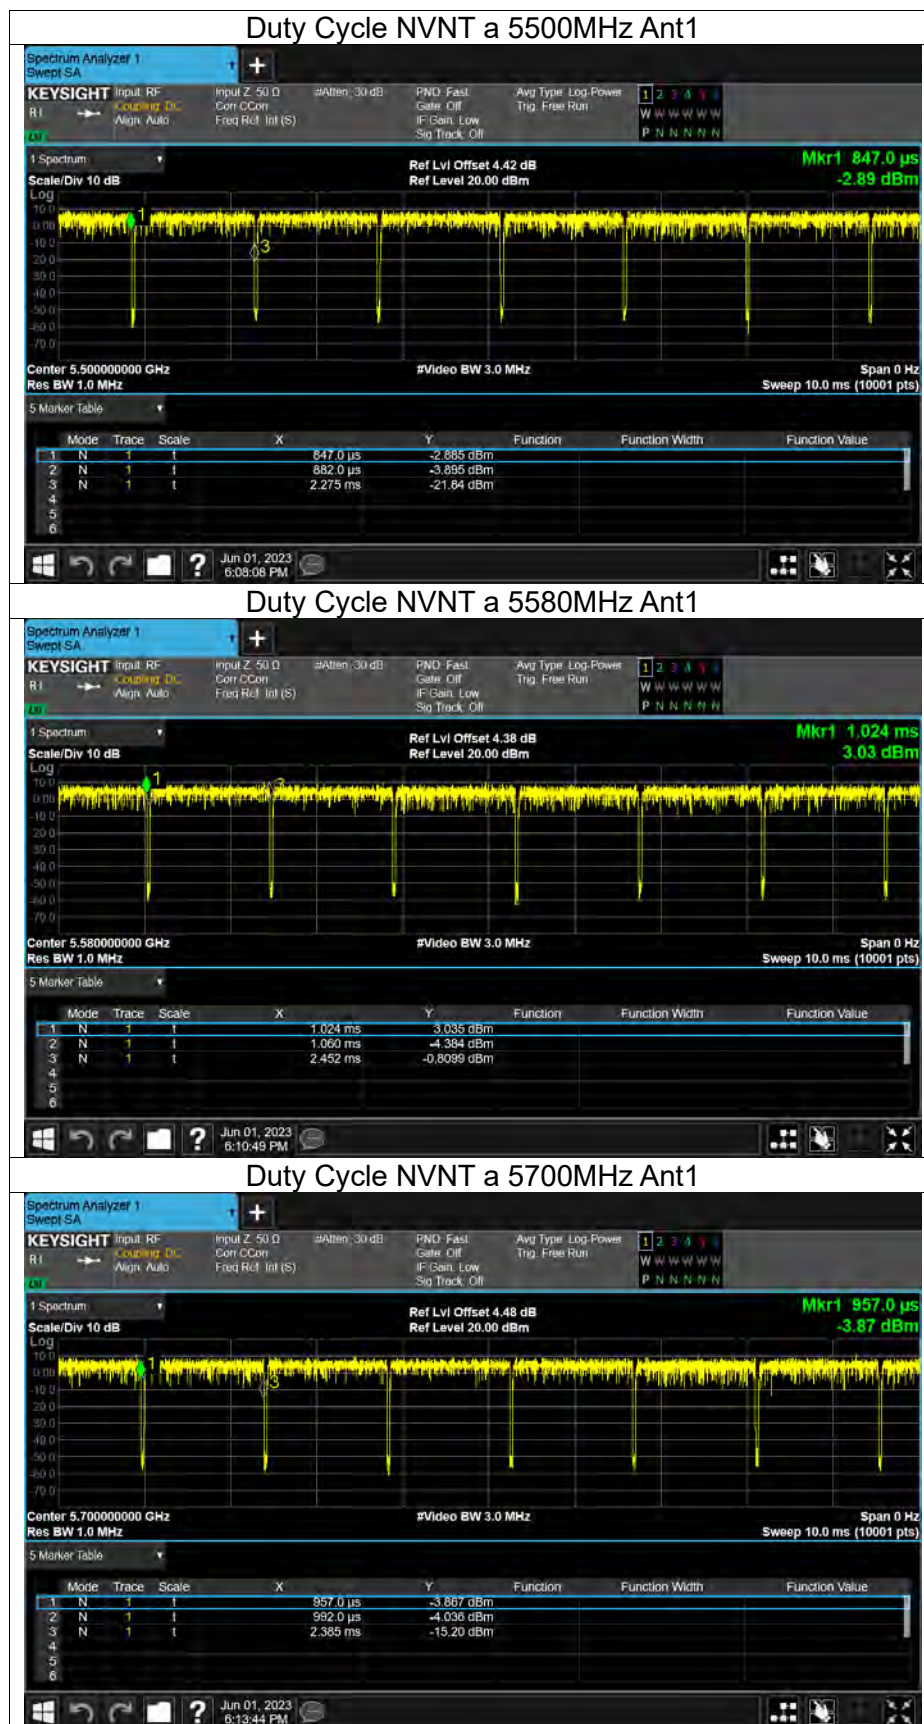


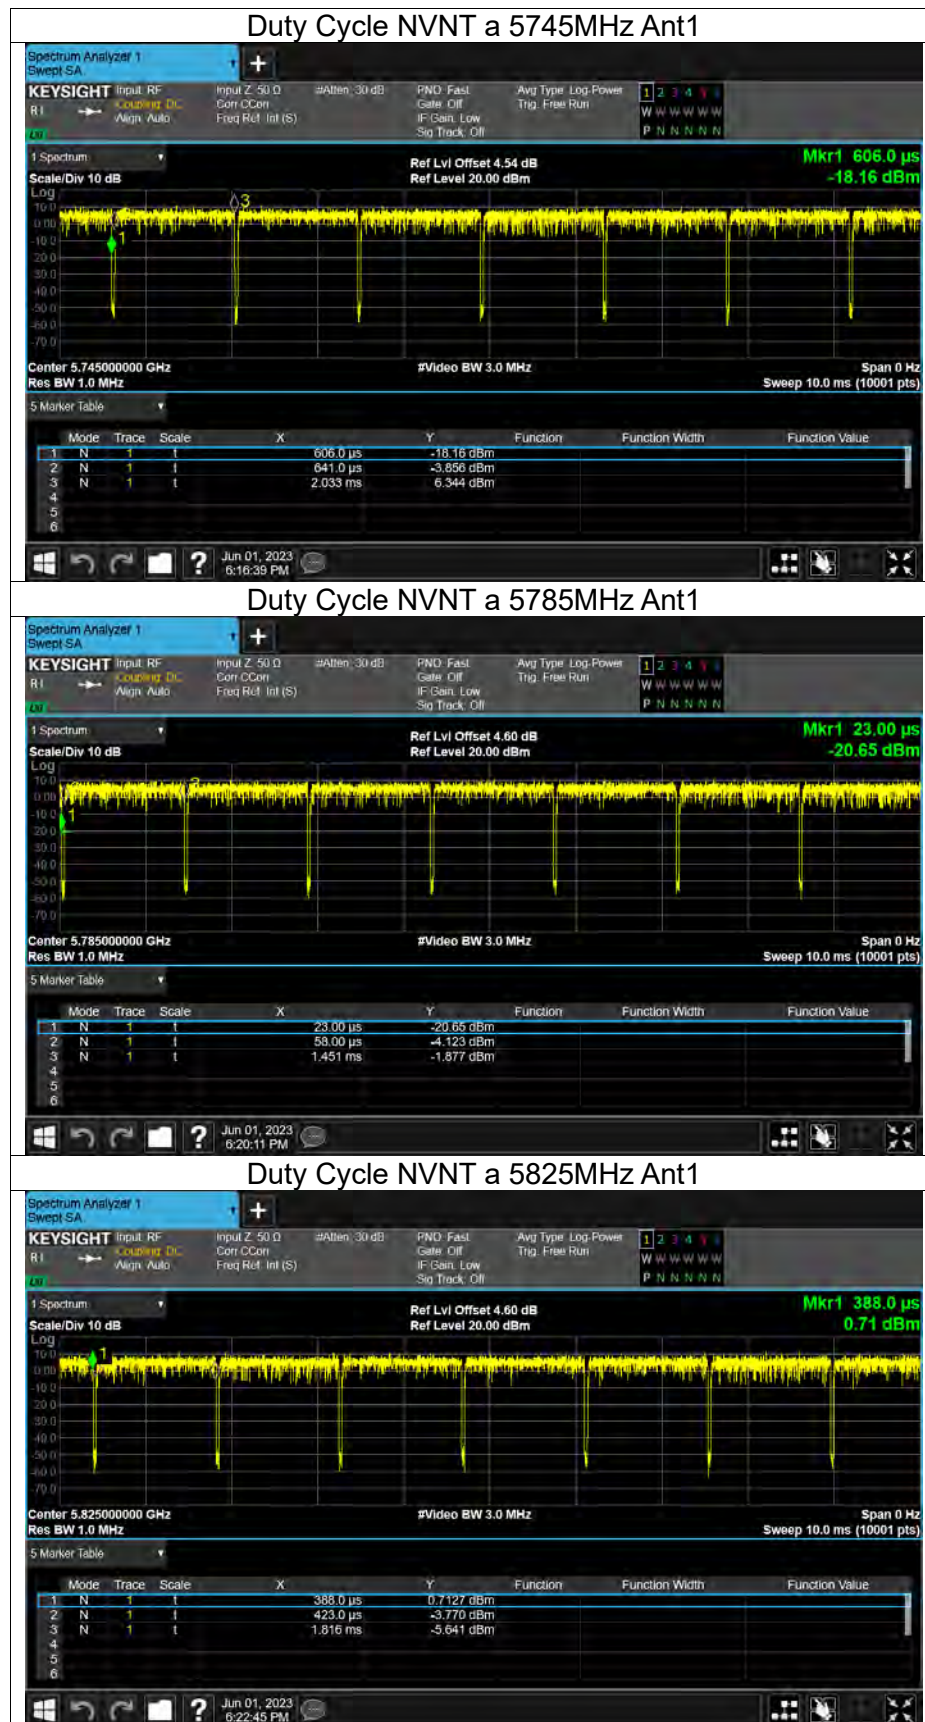


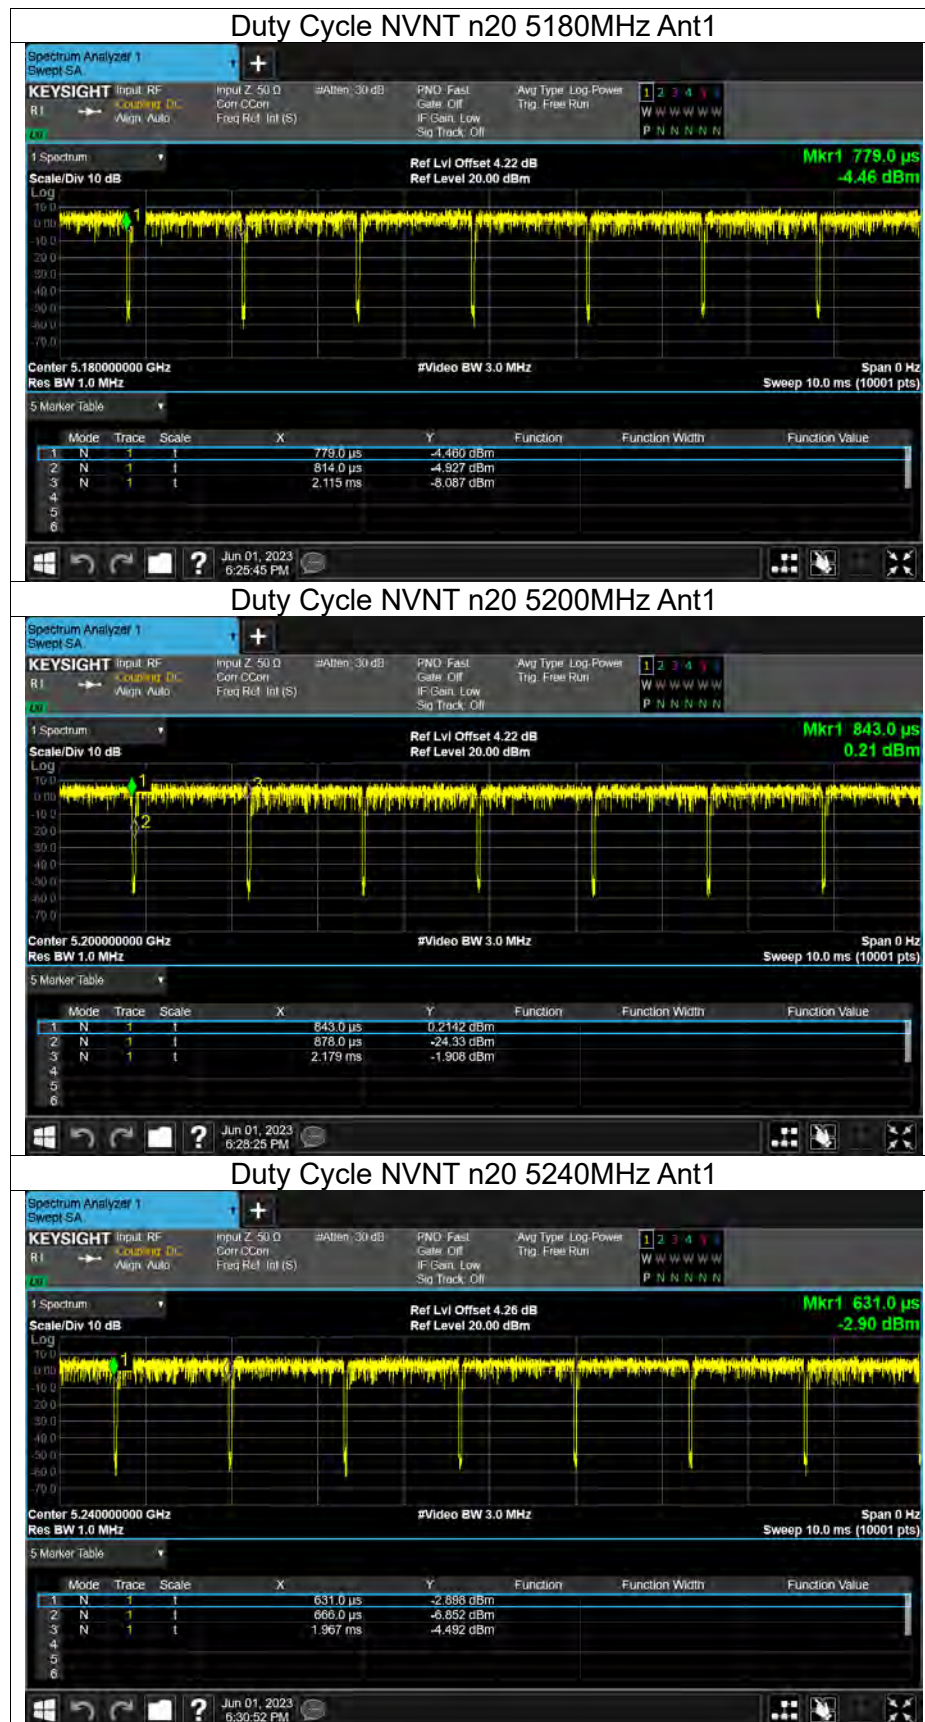

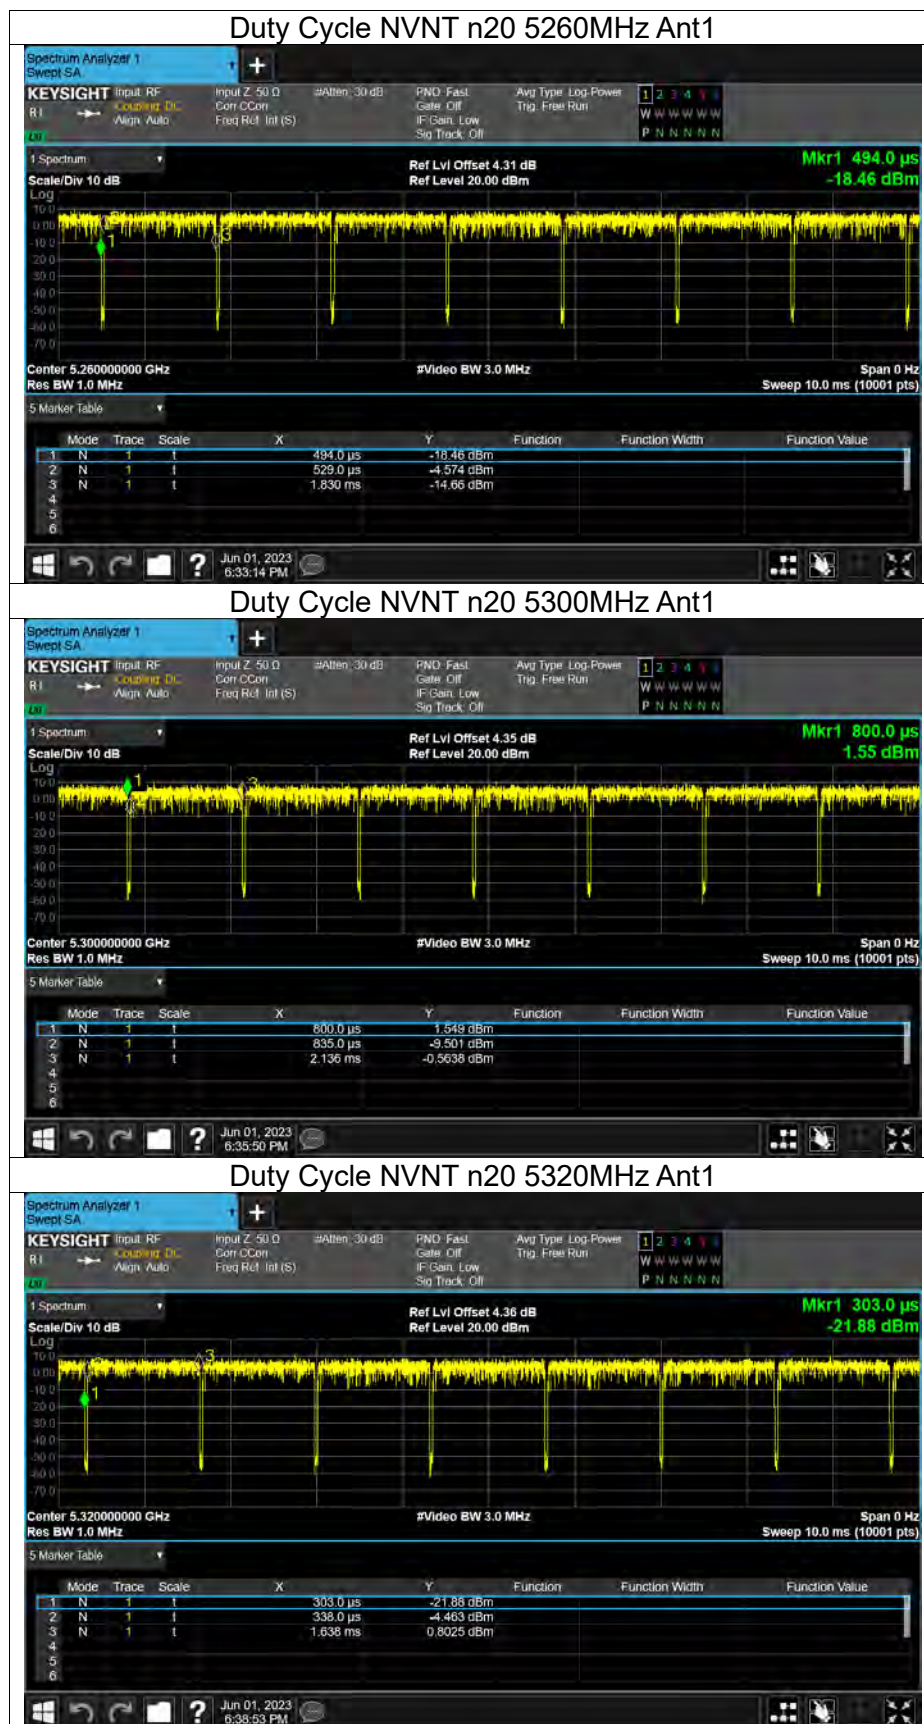


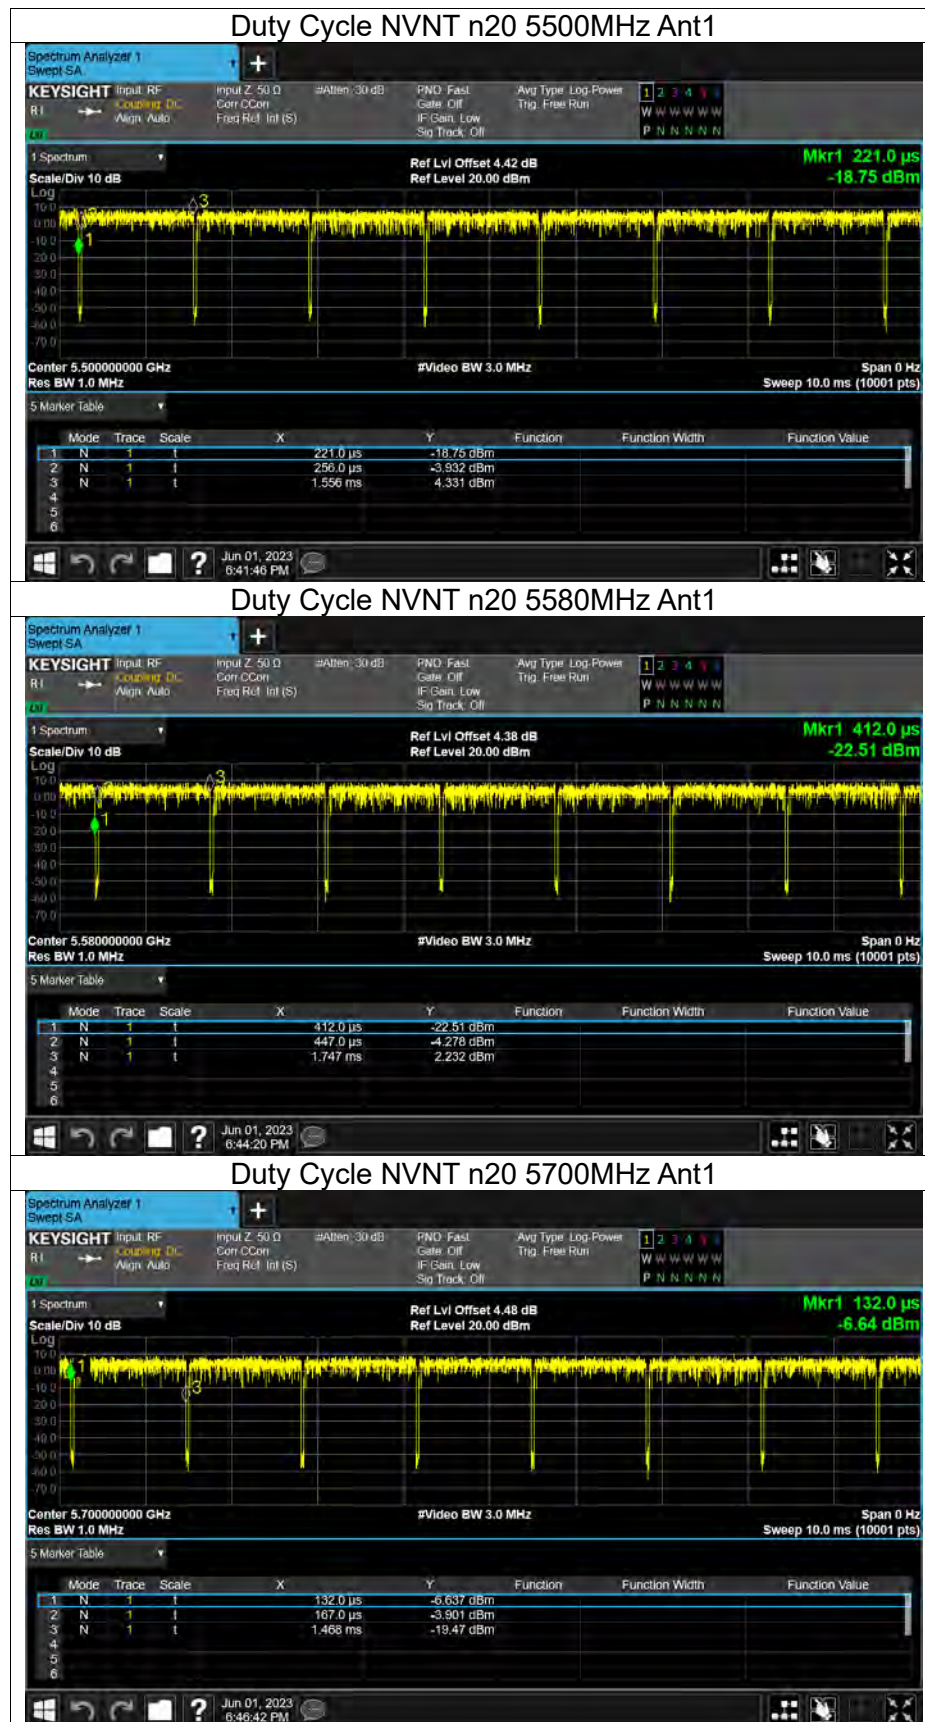


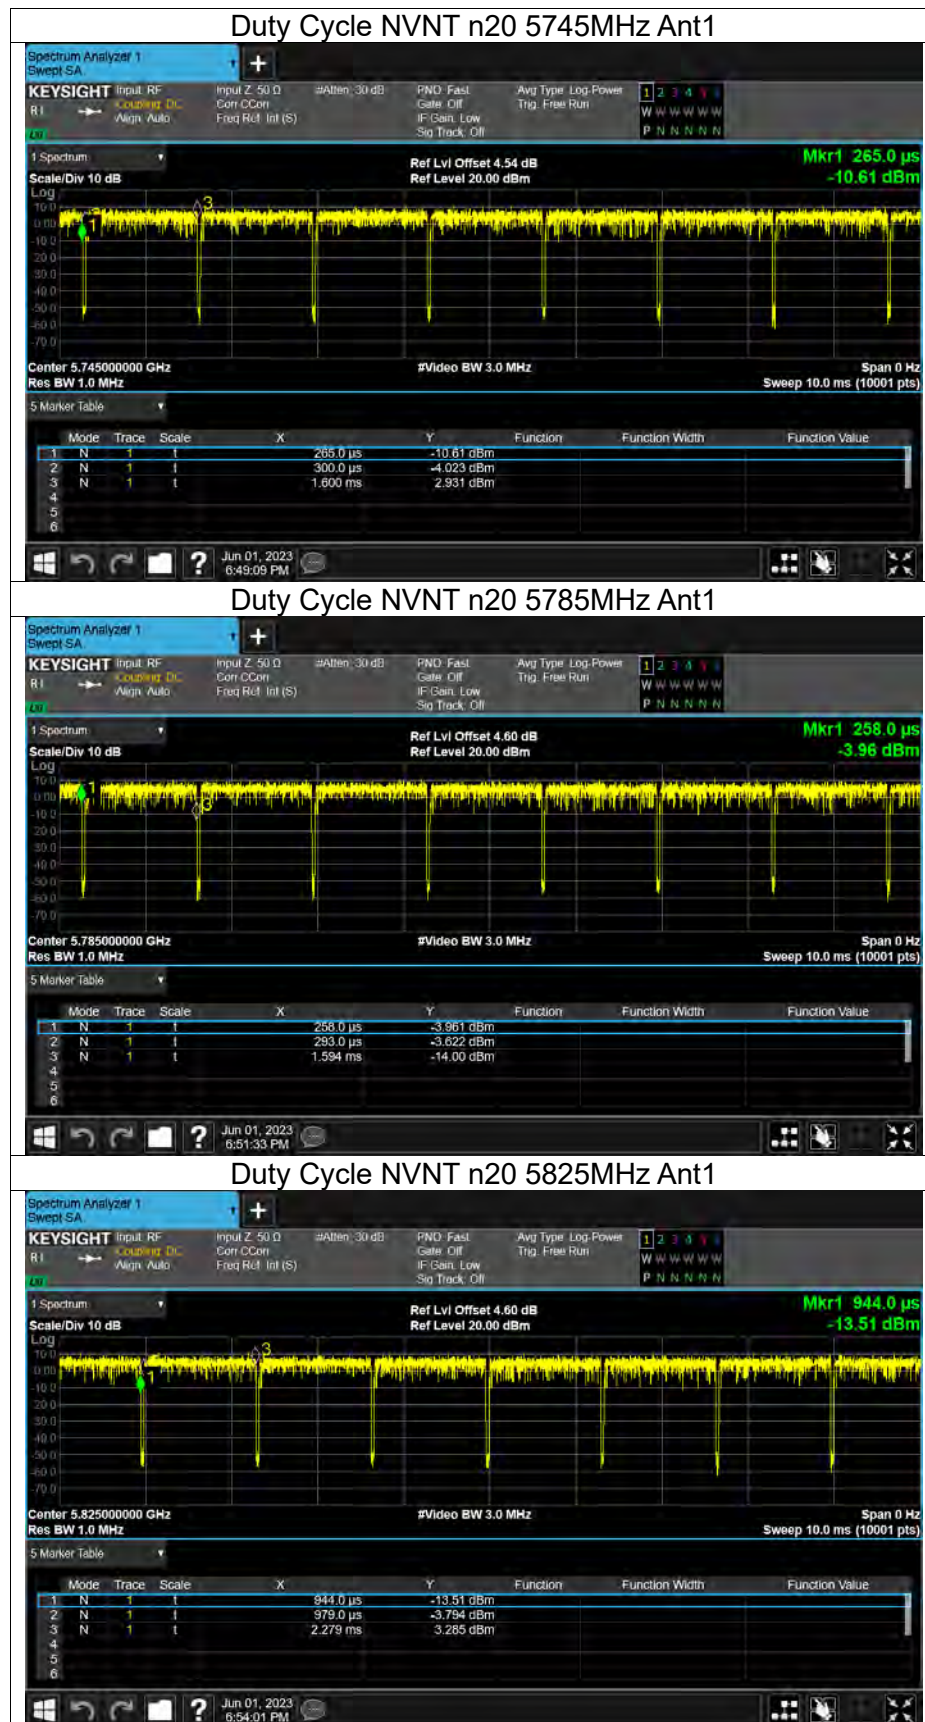


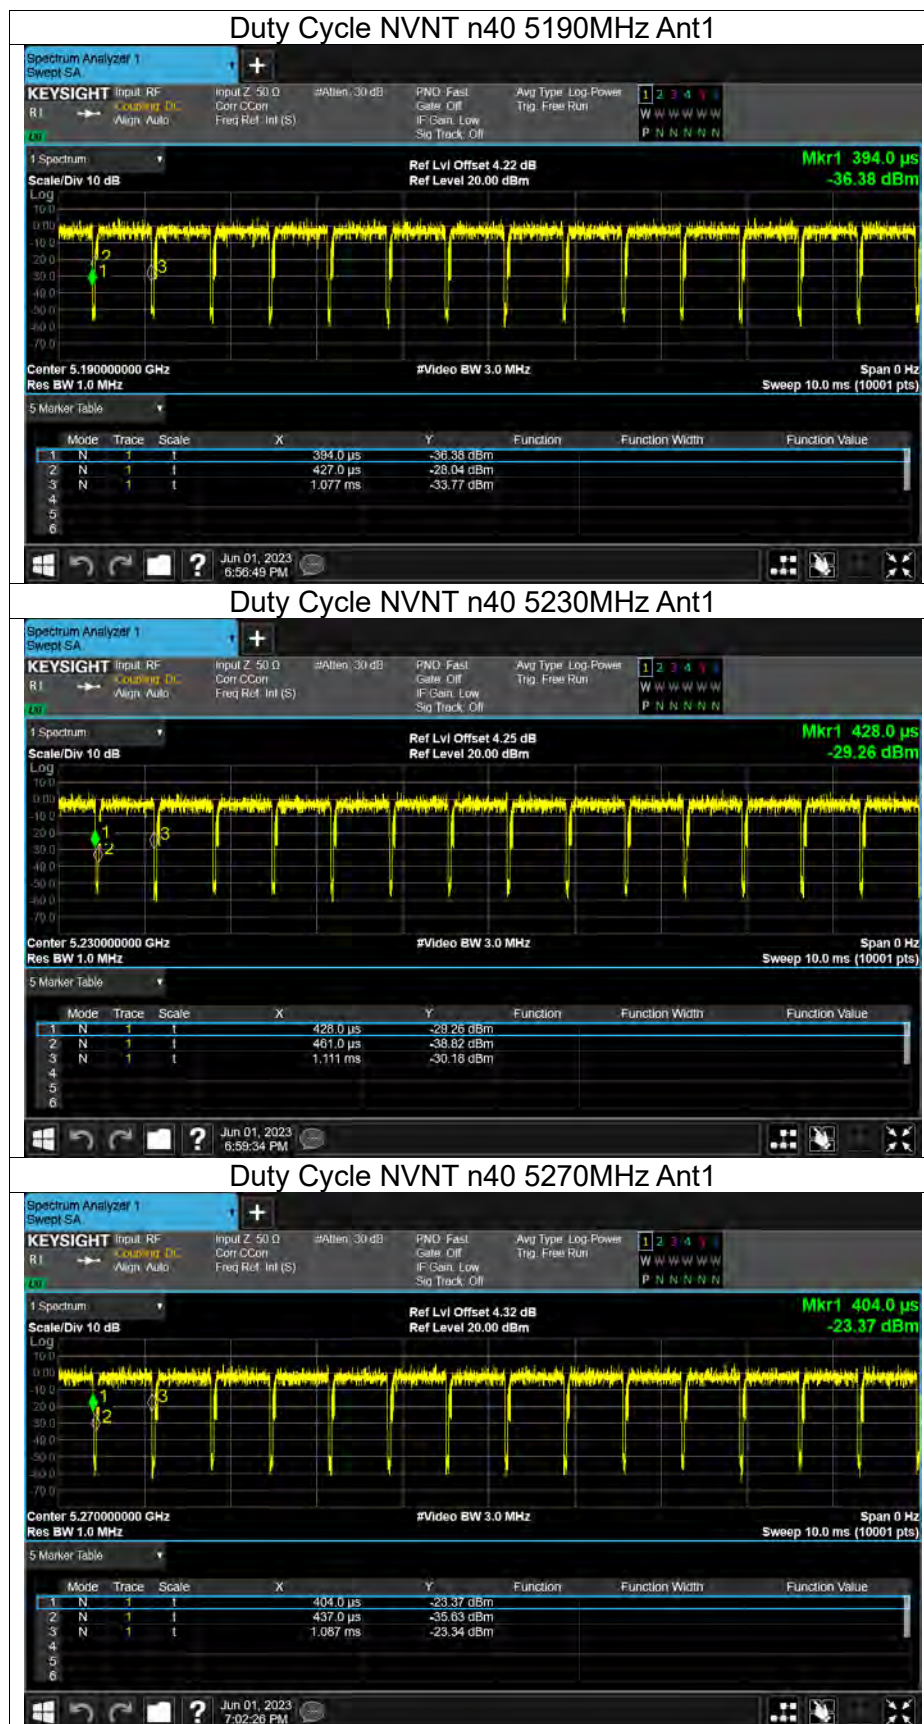



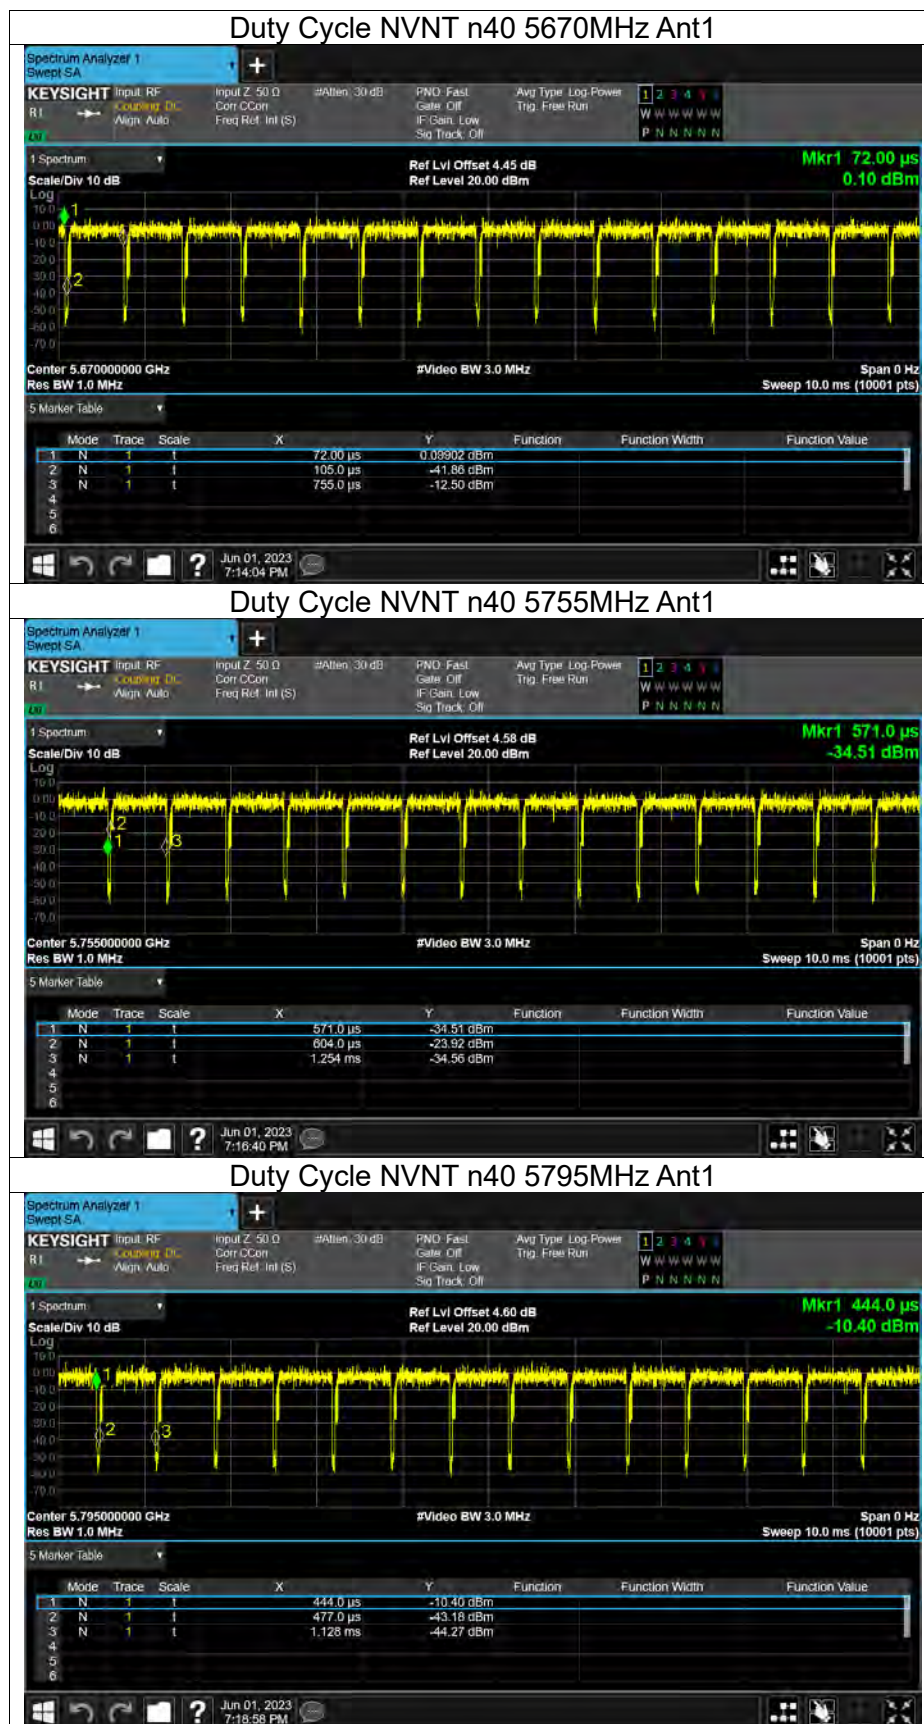

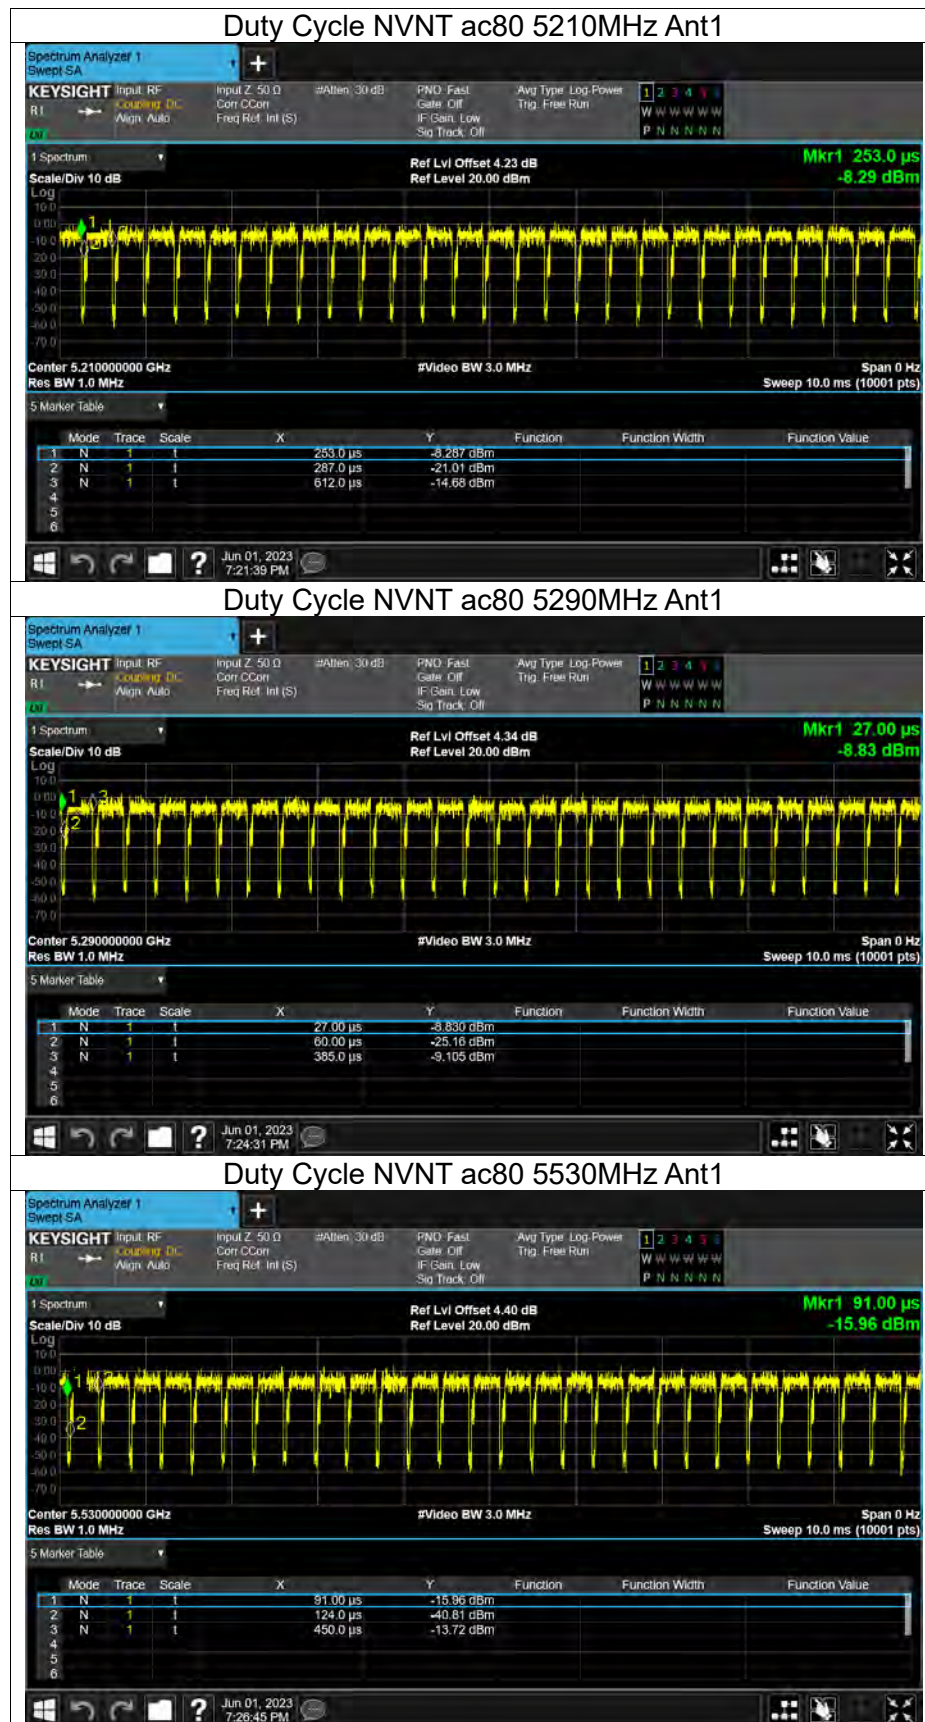

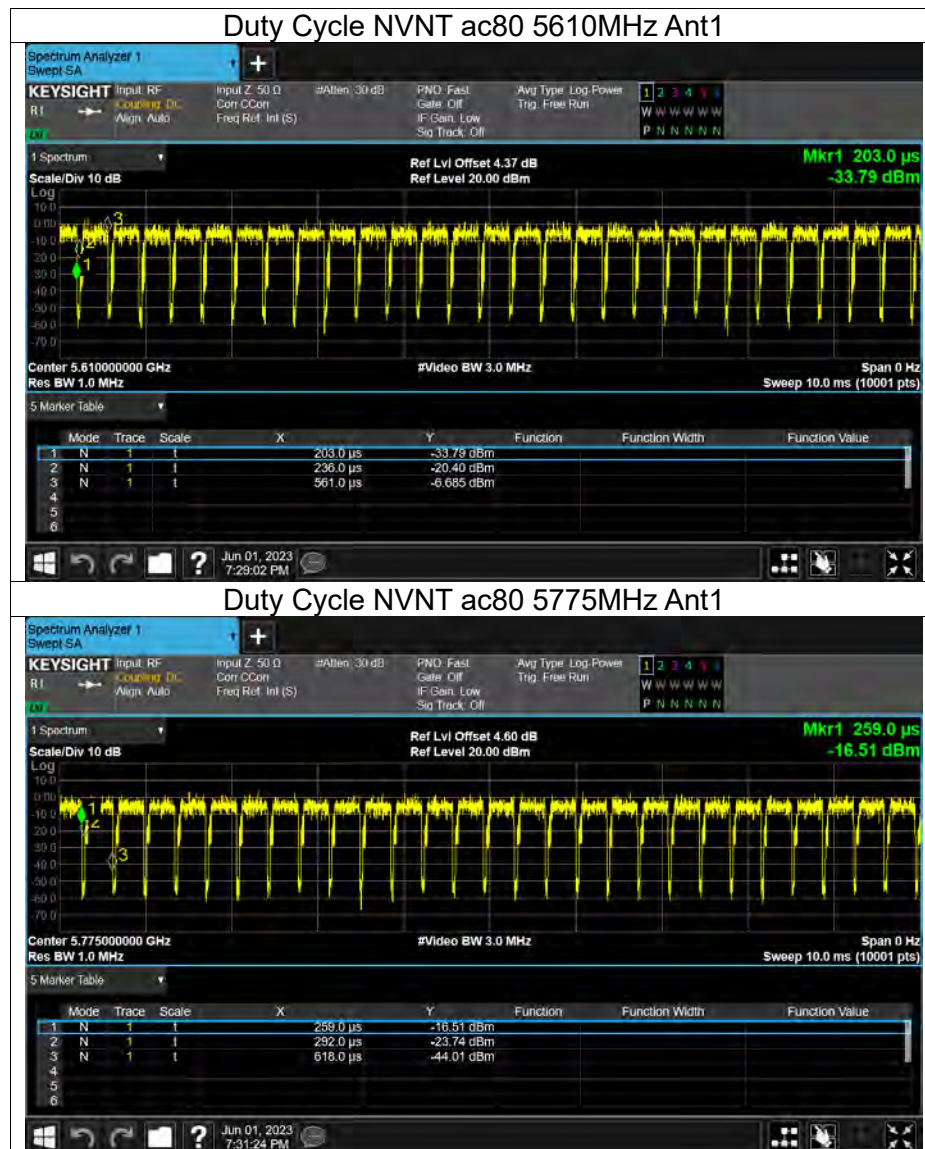



Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	12.88	0.11	12.99	24	Pass
NVNT	a	5200	Ant1	12.75	0.11	12.86	24	Pass
NVNT	a	5240	Ant1	12.94	0.11	13.05	24	Pass
NVNT	a	5260	Ant1	13.25	0.11	13.36	24	Pass
NVNT	a	5300	Ant1	13.43	0.11	13.54	24	Pass
NVNT	a	5320	Ant1	13.28	0.11	13.39	24	Pass
NVNT	a	5500	Ant1	13.54	0.11	13.65	24	Pass
NVNT	a	5580	Ant1	13.44	0.11	13.55	24	Pass
NVNT	a	5700	Ant1	13.7	0.11	13.81	24	Pass
NVNT	a	5745	Ant1	14.11	0.11	14.22	30	Pass
NVNT	a	5785	Ant1	14.24	0.11	14.35	30	Pass
NVNT	a	5825	Ant1	14.05	0.11	14.16	30	Pass
NVNT	n20	5180	Ant1	13.05	0.12	13.17	24	Pass
NVNT	n20	5200	Ant1	12.99	0.12	13.11	24	Pass
NVNT	n20	5240	Ant1	13.01	0.12	13.13	24	Pass
NVNT	n20	5260	Ant1	13.29	0.12	13.41	24	Pass
NVNT	n20	5300	Ant1	13.27	0.12	13.39	24	Pass
NVNT	n20	5320	Ant1	13.12	0.12	13.24	24	Pass
NVNT	n20	5500	Ant1	12.67	0.12	12.79	24	Pass
NVNT	n20	5580	Ant1	13.11	0.12	13.23	24	Pass
NVNT	n20	5700	Ant1	14	0.12	14.12	24	Pass
NVNT	n20	5745	Ant1	14.23	0.12	14.35	30	Pass
NVNT	n20	5785	Ant1	14.42	0.12	14.54	30	Pass
NVNT	n20	5825	Ant1	14.17	0.12	14.29	30	Pass
NVNT	n40	5190	Ant1	13.03	0.21	13.24	24	Pass
NVNT	n40	5230	Ant1	12.85	0.21	13.06	24	Pass
NVNT	n40	5270	Ant1	13.32	0.21	13.53	24	Pass
NVNT	n40	5310	Ant1	13.08	0.21	13.29	24	Pass
NVNT	n40	5510	Ant1	12.36	0.21	12.57	24	Pass
NVNT	n40	5550	Ant1	12.72	0.21	12.93	24	Pass
NVNT	n40	5670	Ant1	13.72	0.21	13.93	24	Pass
NVNT	n40	5755	Ant1	14.31	0.21	14.52	30	Pass
NVNT	n40	5795	Ant1	14.05	0.21	14.26	30	Pass
NVNT	ac80	5210	Ant1	12.59	0.43	13.02	24	Pass
NVNT	ac80	5290	Ant1	12.78	0.42	13.2	24	Pass
NVNT	ac80	5530	Ant1	12.4	0.42	12.82	24	Pass
NVNT	ac80	5610	Ant1	13.39	0.42	13.81	24	Pass
NVNT	ac80	5775	Ant1	13.93	0.42	14.35	30	Pass



-26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	19.986	0.5	Pass
NVNT	a	5200	Ant1	19.852	0.5	Pass
NVNT	a	5240	Ant1	20.06	0.5	Pass
NVNT	a	5260	Ant1	19.924	0.5	Pass
NVNT	a	5300	Ant1	20.058	0.5	Pass
NVNT	a	5320	Ant1	19.92	0.5	Pass
NVNT	a	5500	Ant1	19.931	0.5	Pass
NVNT	a	5580	Ant1	19.867	0.5	Pass
NVNT	a	5700	Ant1	19.979	0.5	Pass
NVNT	n20	5180	Ant1	20.361	0.5	Pass
NVNT	n20	5200	Ant1	20.668	0.5	Pass
NVNT	n20	5240	Ant1	21.695	0.5	Pass
NVNT	n20	5260	Ant1	20.323	0.5	Pass
NVNT	n20	5300	Ant1	20.267	0.5	Pass
NVNT	n20	5320	Ant1	20.182	0.5	Pass
NVNT	n20	5500	Ant1	20.278	0.5	Pass
NVNT	n20	5580	Ant1	20.398	0.5	Pass
NVNT	n20	5700	Ant1	20.258	0.5	Pass
NVNT	n40	5190	Ant1	39.95	0.5	Pass
NVNT	n40	5230	Ant1	39.946	0.5	Pass
NVNT	n40	5270	Ant1	39.915	0.5	Pass
NVNT	n40	5310	Ant1	39.646	0.5	Pass
NVNT	n40	5510	Ant1	39.854	0.5	Pass
NVNT	n40	5550	Ant1	39.75	0.5	Pass
NVNT	n40	5670	Ant1	39.582	0.5	Pass
NVNT	ac80	5210	Ant1	79.011	0.5	Pass
NVNT	ac80	5290	Ant1	79.701	0.5	Pass
NVNT	ac80	5530	Ant1	79.312	0.5	Pass
NVNT	ac80	5610	Ant1	78.869	0.5	Pass
NVNT	ac80	5775	Ant1	78.899	0.5	Pass



Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1



-26dB Bandwidth NVNT a 5200MHz Ant1



-26dB Bandwidth NVNT a 5240MHz Ant1





-26dB Bandwidth NVNT a 5260MHz Ant1



-26dB Bandwidth NVNT a 5300MHz Ant1



-26dB Bandwidth NVNT a 5320MHz Ant1






-26dB Bandwidth NVNT a 5500MHz Ant1



-26dB Bandwidth NVNT a 5580MHz Ant1

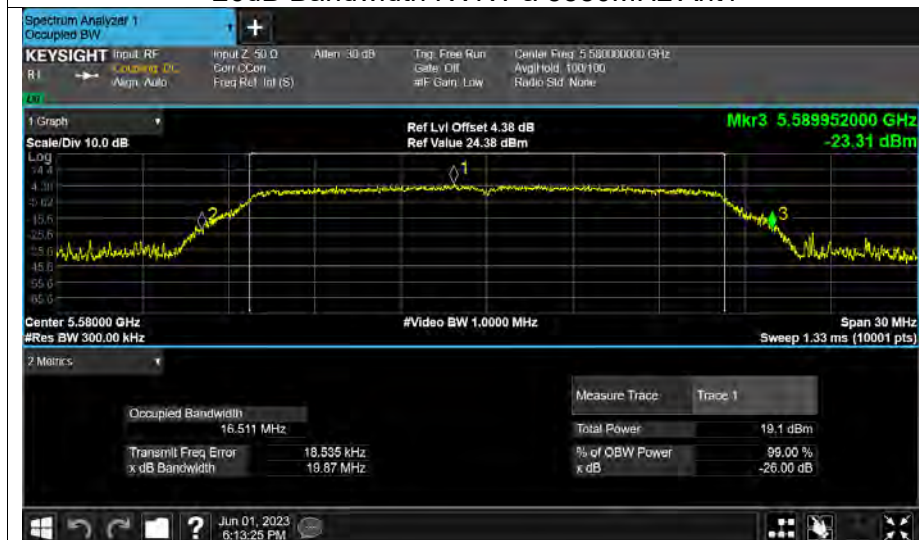


-26dB Bandwidth NVNT a 5700MHz Ant1






-26dB Bandwidth NVNT n20 5180MHz Ant1

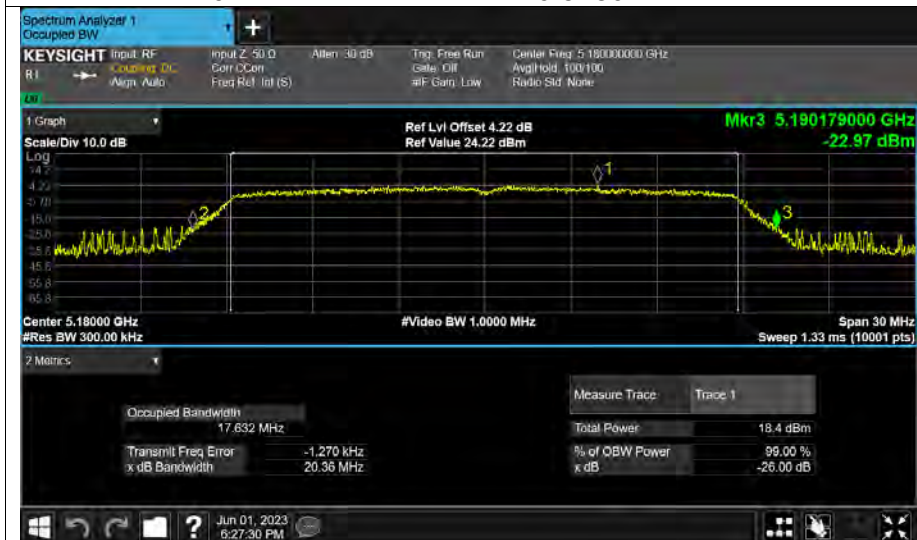

-26dB Bandwidth NVNT n20 5200MHz Ant1

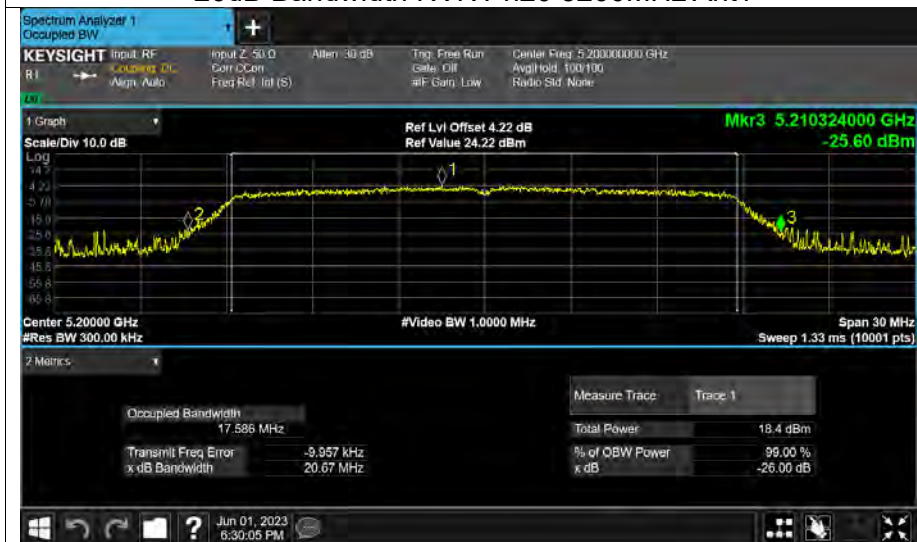


-26dB Bandwidth NVNT n20 5240MHz Ant1







-26dB Bandwidth NVNT n20 5260MHz Ant1

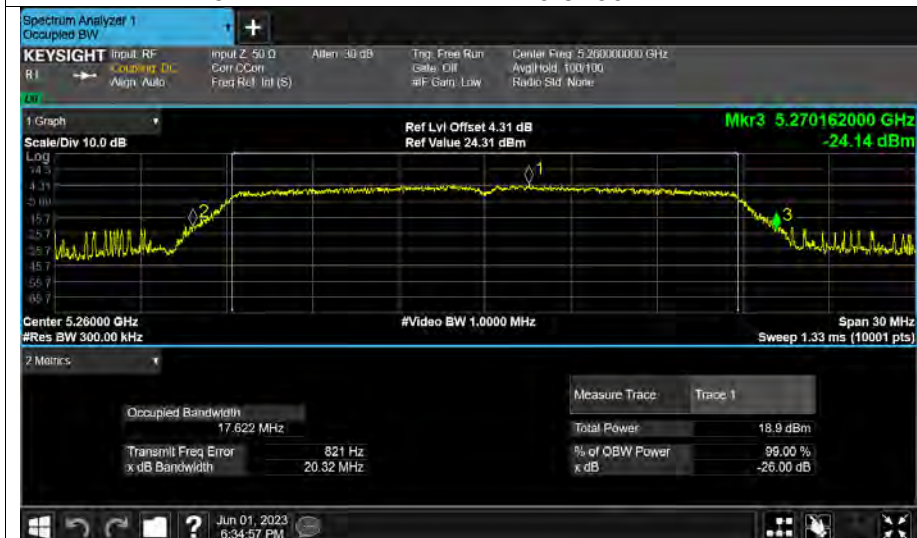

-26dB Bandwidth NVNT n20 5300MHz Ant1

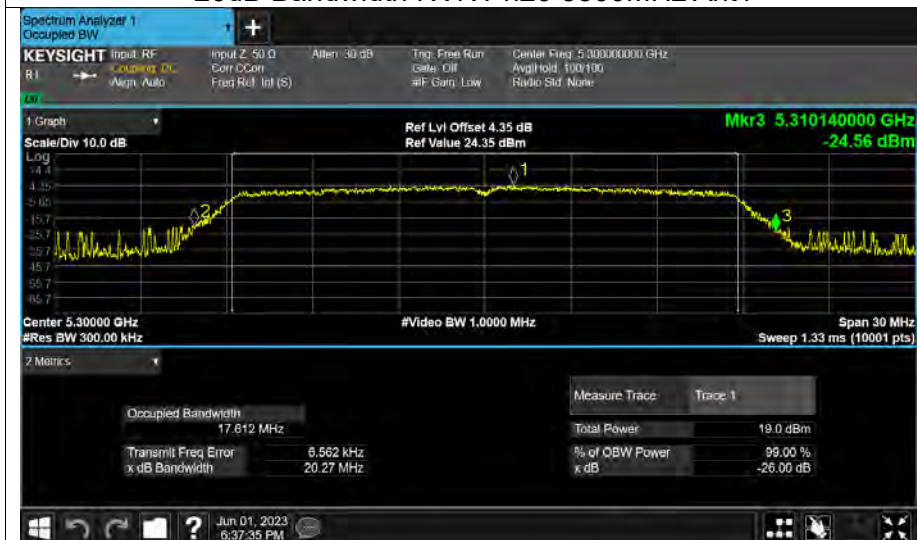


-26dB Bandwidth NVNT n20 5320MHz Ant1

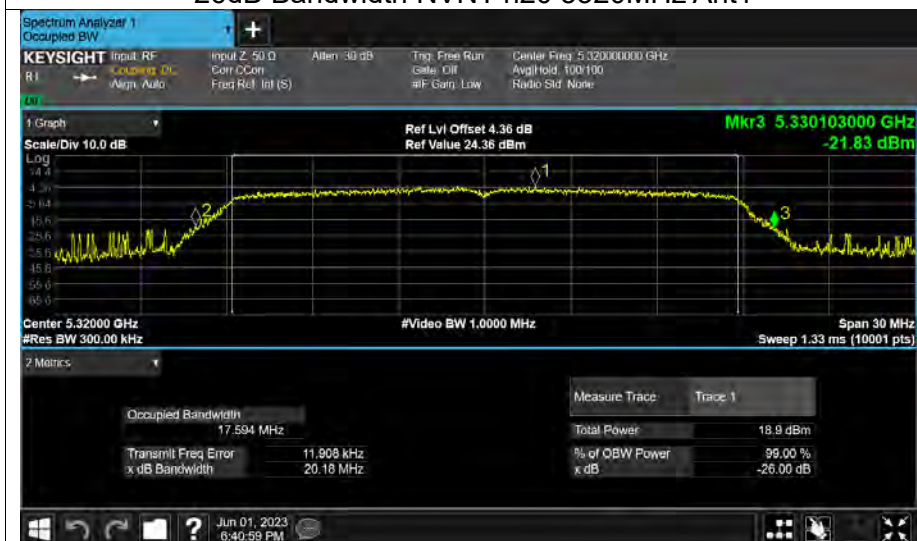





-26dB Bandwidth NVNT n20 5500MHz Ant1

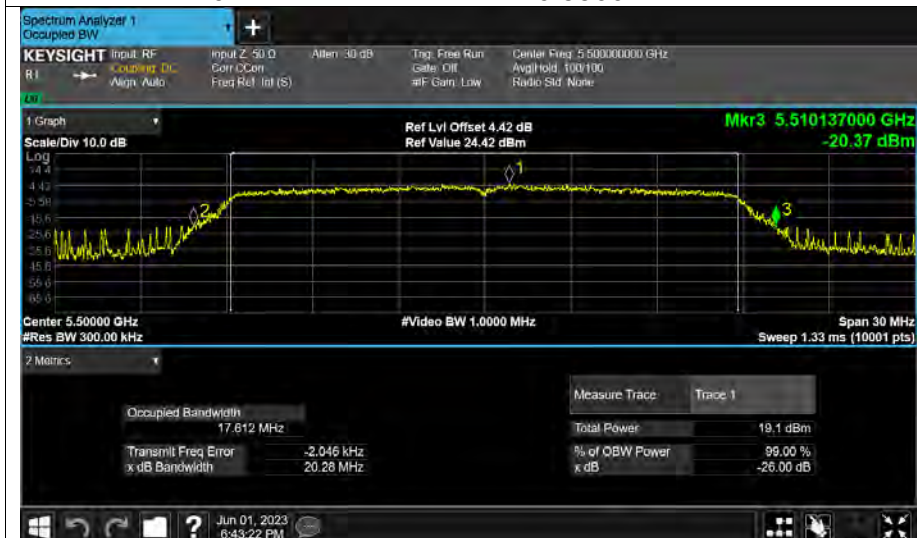

-26dB Bandwidth NVNT n20 5580MHz Ant1

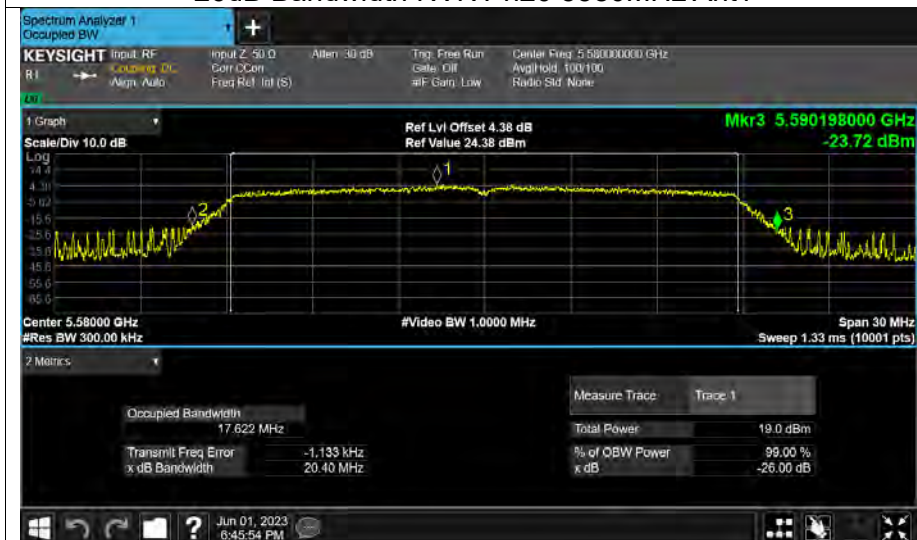

-26dB Bandwidth NVNT n20 5700MHz Ant1

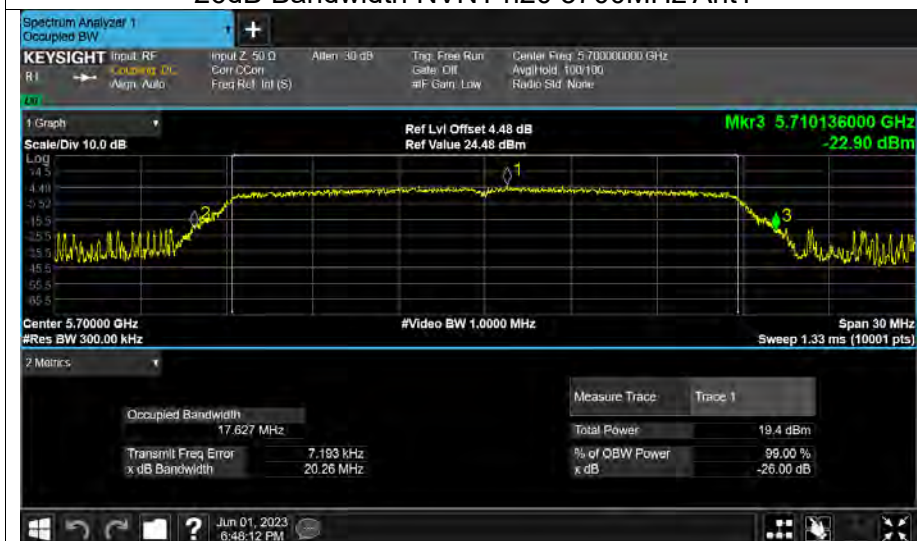



-26dB Bandwidth NVNT n40 5190MHz Ant1



-26dB Bandwidth NVNT n40 5230MHz Ant1



-26dB Bandwidth NVNT n40 5270MHz Ant1





-26dB Bandwidth NVNT n40 5310MHz Ant1



-26dB Bandwidth NVNT n40 5510MHz Ant1



-26dB Bandwidth NVNT n40 5550MHz Ant1





-26dB Bandwidth NVNT n40 5670MHz Ant1



-26dB Bandwidth NVNT ac80 5210MHz Ant1



-26dB Bandwidth NVNT ac80 5290MHz Ant1





-26dB Bandwidth NVNT ac80 5530MHz Ant1



-26dB Bandwidth NVNT ac80 5610MHz Ant1



-26dB Bandwidth NVNT ac80 5775MHz Ant1





Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.401
NVNT	a	5200	Ant1	16.414
NVNT	a	5240	Ant1	16.408
NVNT	a	5260	Ant1	16.402
NVNT	a	5300	Ant1	16.407
NVNT	a	5320	Ant1	16.387
NVNT	a	5500	Ant1	16.392
NVNT	a	5580	Ant1	16.384
NVNT	a	5700	Ant1	16.391
NVNT	a	5745	Ant1	16.376
NVNT	a	5785	Ant1	16.364
NVNT	a	5825	Ant1	16.386
NVNT	n20	5180	Ant1	17.547
NVNT	n20	5200	Ant1	17.545
NVNT	n20	5240	Ant1	17.564
NVNT	n20	5260	Ant1	17.536
NVNT	n20	5300	Ant1	17.529
NVNT	n20	5320	Ant1	17.534
NVNT	n20	5500	Ant1	17.53
NVNT	n20	5580	Ant1	17.555
NVNT	n20	5700	Ant1	17.566
NVNT	n20	5745	Ant1	17.513
NVNT	n20	5785	Ant1	17.552
NVNT	n20	5825	Ant1	17.523
NVNT	n40	5190	Ant1	35.998
NVNT	n40	5230	Ant1	36.059
NVNT	n40	5270	Ant1	35.949
NVNT	n40	5310	Ant1	35.975
NVNT	n40	5510	Ant1	36.001
NVNT	n40	5550	Ant1	35.979
NVNT	n40	5670	Ant1	35.931
NVNT	n40	5755	Ant1	35.913
NVNT	n40	5795	Ant1	35.908
NVNT	ac80	5210	Ant1	75.33
NVNT	ac80	5290	Ant1	75.166
NVNT	ac80	5530	Ant1	75.303
NVNT	ac80	5610	Ant1	75.121
NVNT	ac80	5775	Ant1	75.083





OBW NVNT a 5260MHz Ant1



OBW NVNT a 5300MHz Ant1



OBW NVNT a 5320MHz Ant1





OBW NVNT a 5500MHz Ant1



OBW NVNT a 5580MHz Ant1



OBW NVNT a 5700MHz Ant1





OBW NVNT a 5745MHz Ant1





OBW NVNT a 5785MHz Ant1




OBW NVNT a 5825MHz Ant1



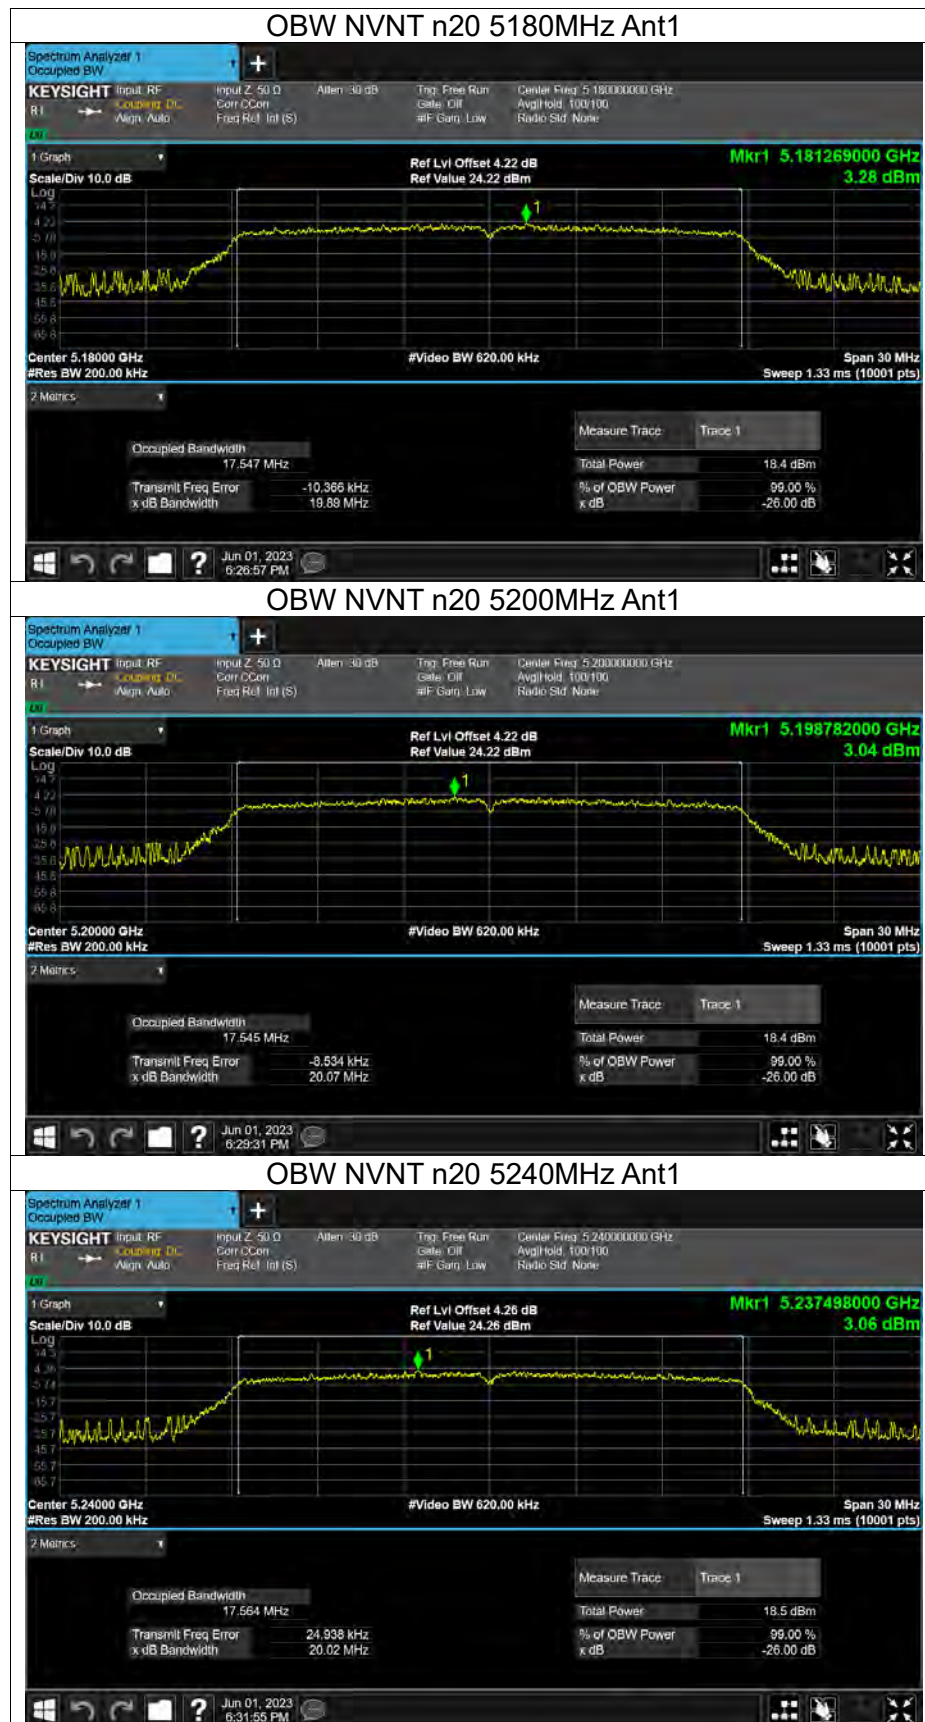

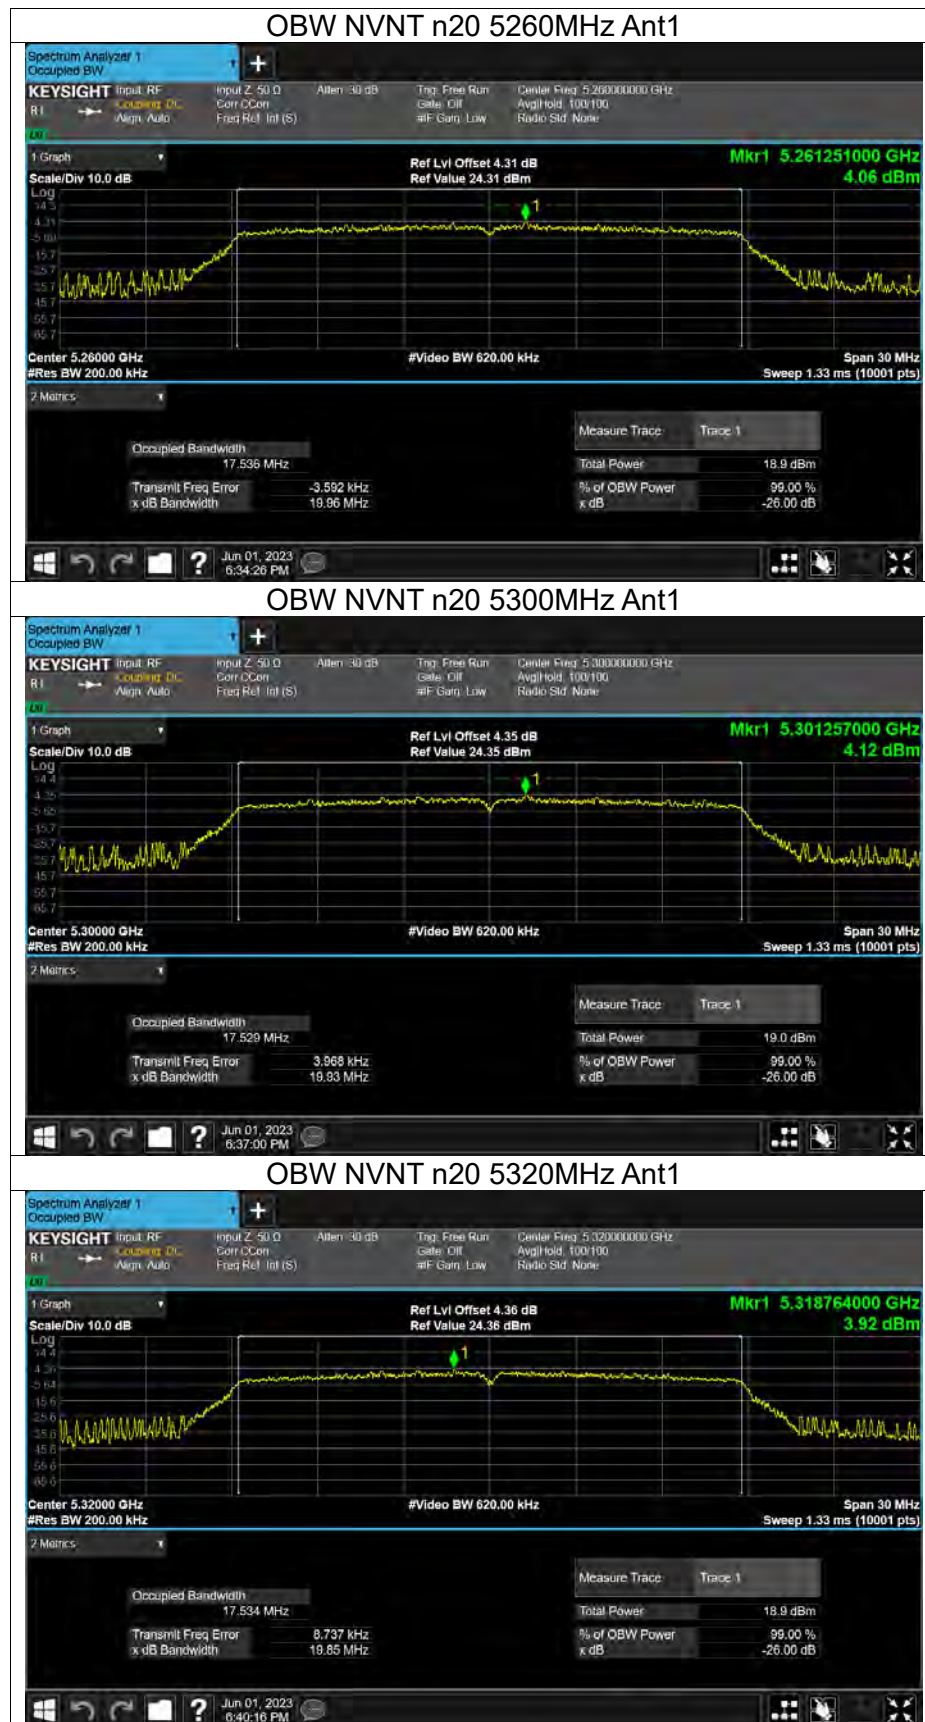

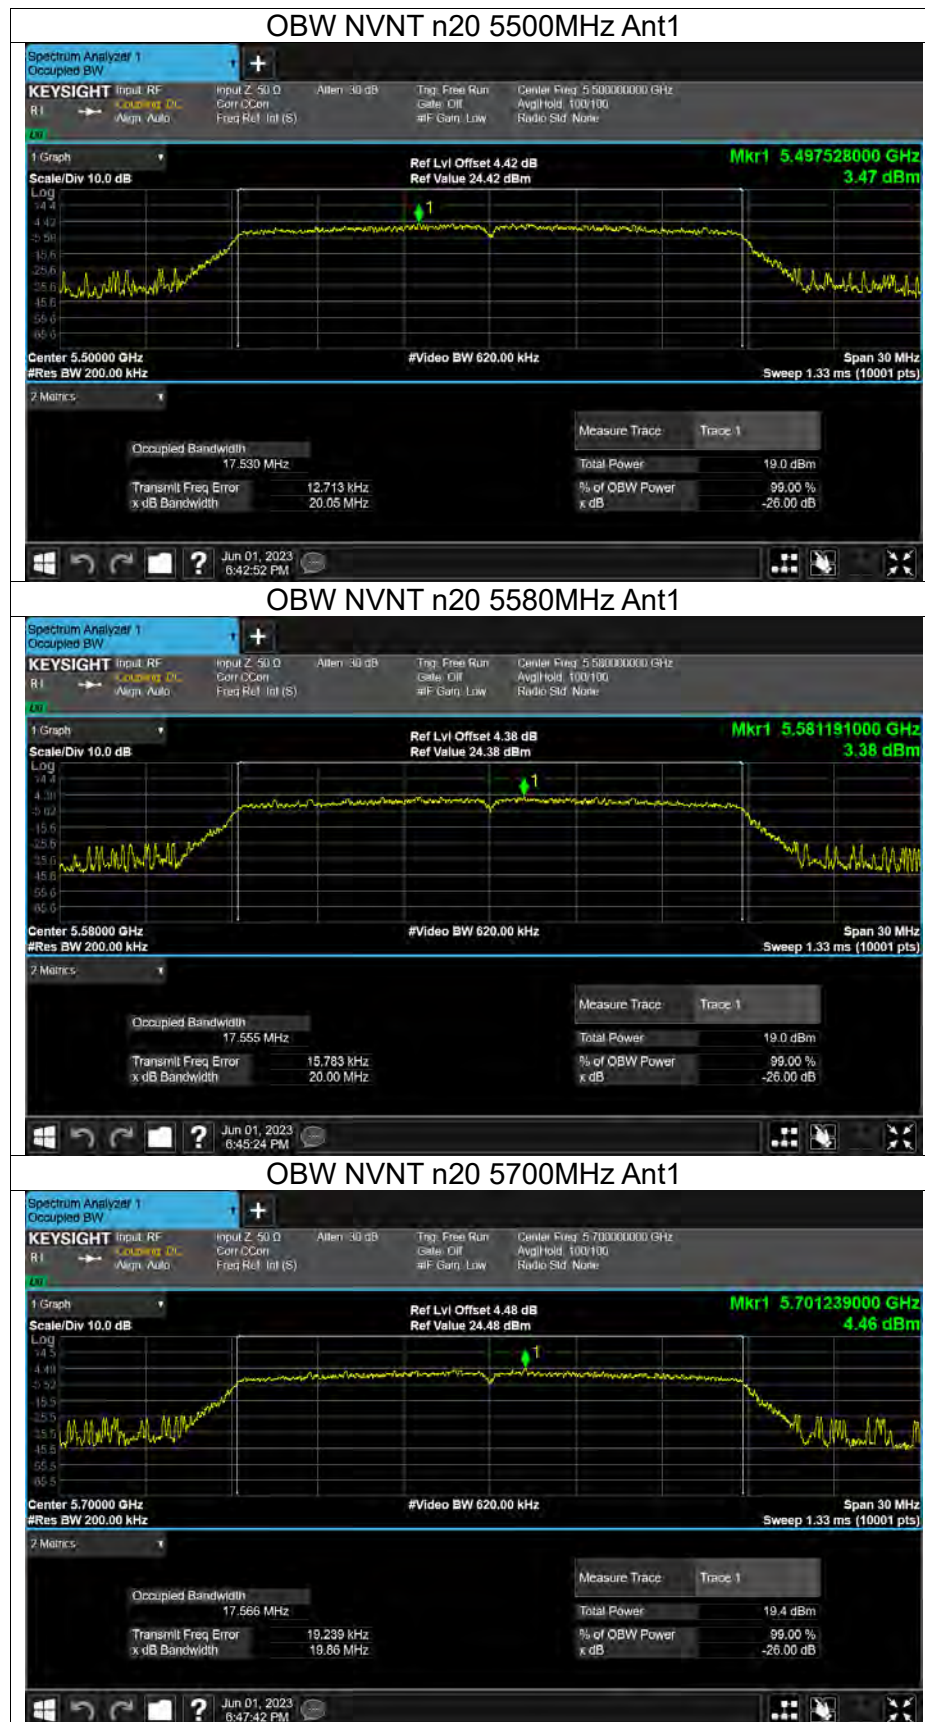



OBW NVNT n20 5745MHz Ant1



OBW NVNT n20 5785MHz Ant1



OBW NVNT n20 5825MHz Ant1





OBW NVNT n40 5190MHz Ant1



OBW NVNT n40 5230MHz Ant1



OBW NVNT n40 5270MHz Ant1





OBW NVNT n40 5310MHz Ant1





OBW NVNT n40 5510MHz Ant1




OBW NVNT n40 5550MHz Ant1



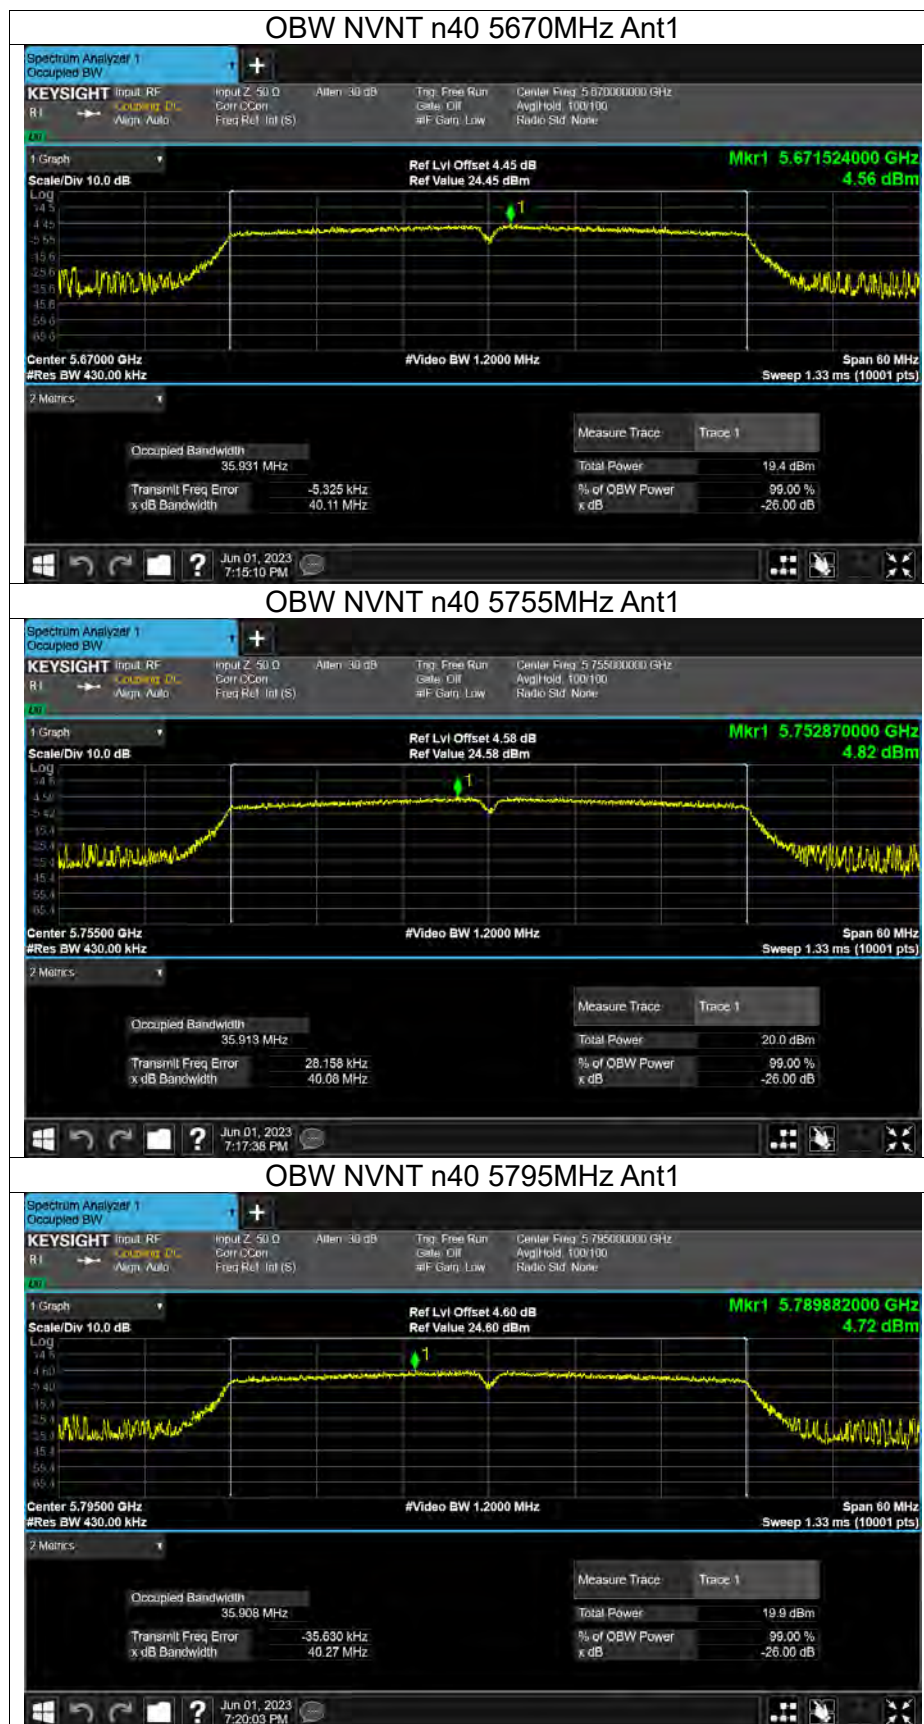

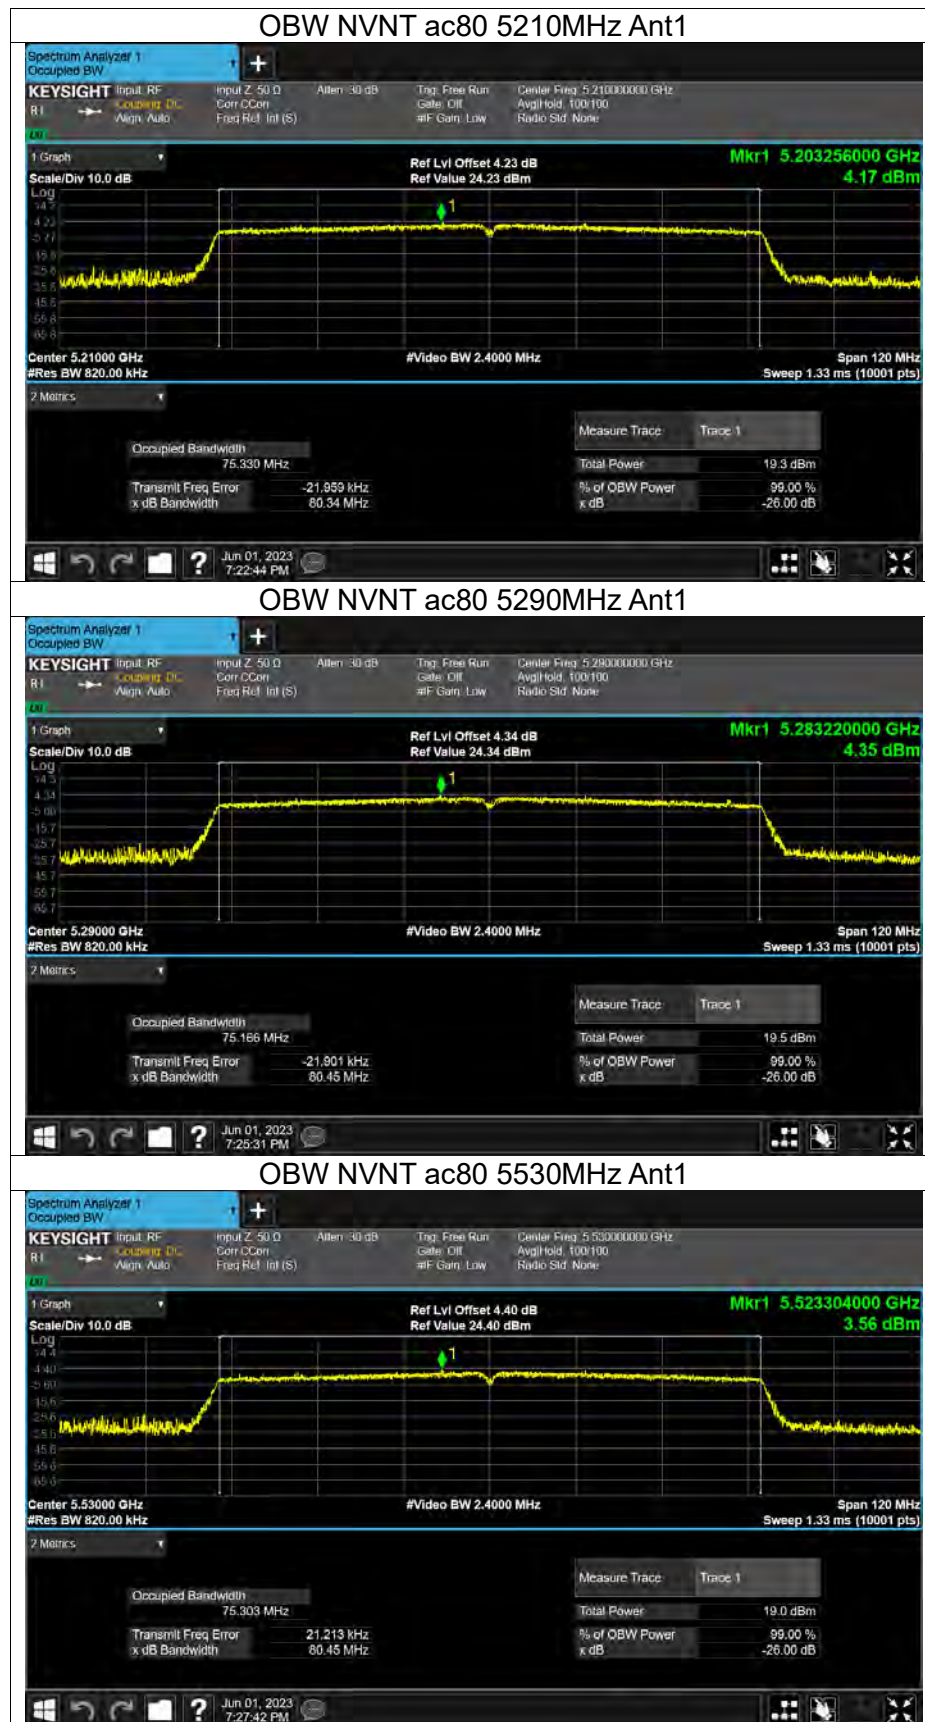


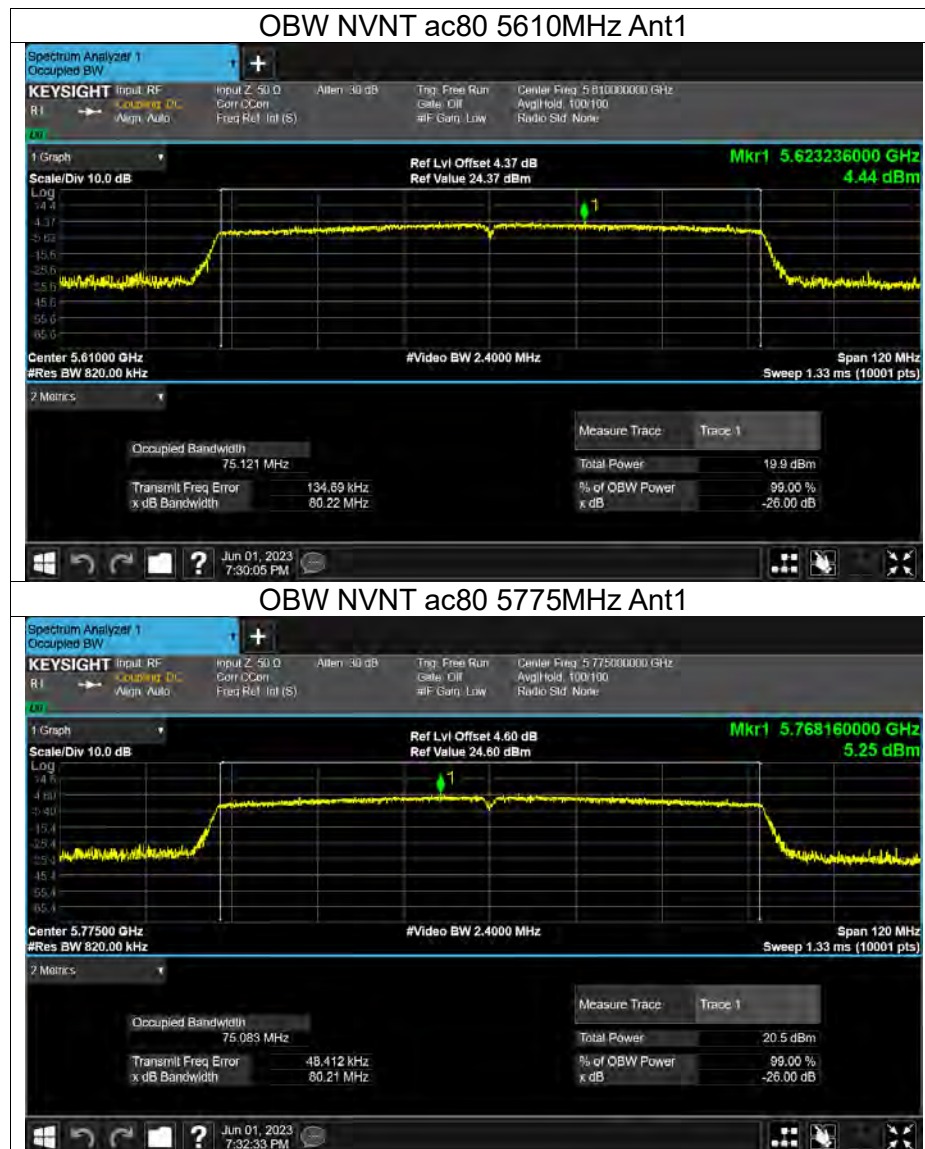



Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	1.03	0.11	1.14	11	Pass
NVNT	a	5200	Ant1	1.14	0.11	1.25	11	Pass
NVNT	a	5240	Ant1	0.77	0.11	0.88	11	Pass
NVNT	a	5260	Ant1	1.03	0.11	1.14	11	Pass
NVNT	a	5300	Ant1	1.12	0.11	1.23	11	Pass
NVNT	a	5320	Ant1	1.53	0.11	1.64	11	Pass
NVNT	a	5500	Ant1	1.47	0.11	1.58	11	Pass
NVNT	a	5580	Ant1	1.2	0.11	1.31	11	Pass
NVNT	a	5700	Ant1	2.26	0.11	2.37	11	Pass
NVNT	a	5745	Ant1	-0.24	0.11	-0.13	30	Pass
NVNT	a	5785	Ant1	-0.83	0.11	-0.72	30	Pass
NVNT	a	5825	Ant1	-0.73	0.11	-0.62	30	Pass
NVNT	n20	5180	Ant1	0.84	0.12	0.96	11	Pass
NVNT	n20	5200	Ant1	0.86	0.12	0.98	11	Pass
NVNT	n20	5240	Ant1	0.9	0.12	1.02	11	Pass
NVNT	n20	5260	Ant1	0.72	0.12	0.84	11	Pass
NVNT	n20	5300	Ant1	1.43	0.12	1.55	11	Pass
NVNT	n20	5320	Ant1	1.29	0.12	1.41	11	Pass
NVNT	n20	5500	Ant1	1.01	0.12	1.13	11	Pass
NVNT	n20	5580	Ant1	1.27	0.12	1.39	11	Pass
NVNT	n20	5700	Ant1	1.71	0.12	1.83	11	Pass
NVNT	n20	5745	Ant1	-0.83	0.12	-0.71	30	Pass
NVNT	n20	5785	Ant1	-1.02	0.12	-0.9	30	Pass
NVNT	n20	5825	Ant1	-1.06	0.12	-0.94	30	Pass
NVNT	n40	5190	Ant1	-2.91	0.21	-2.7	11	Pass
NVNT	n40	5230	Ant1	-3.67	0.21	-3.46	11	Pass
NVNT	n40	5270	Ant1	-2.47	0.21	-2.26	11	Pass
NVNT	n40	5310	Ant1	-3.04	0.21	-2.83	11	Pass
NVNT	n40	5510	Ant1	-3.58	0.21	-3.37	11	Pass
NVNT	n40	5550	Ant1	-3.05	0.21	-2.84	11	Pass
NVNT	n40	5670	Ant1	-2.18	0.21	-1.97	11	Pass
NVNT	n40	5755	Ant1	-5.08	0.21	-4.87	30	Pass
NVNT	n40	5795	Ant1	-5.12	0.21	-4.91	30	Pass
NVNT	ac80	5210	Ant1	-6.5	0.43	-6.07	11	Pass
NVNT	ac80	5290	Ant1	-5.85	0.42	-5.43	11	Pass
NVNT	ac80	5530	Ant1	-7.97	0.42	-7.55	11	Pass
NVNT	ac80	5610	Ant1	-6.55	0.42	-6.13	11	Pass
NVNT	ac80	5775	Ant1	-6.3	0.42	-5.88	30	Pass

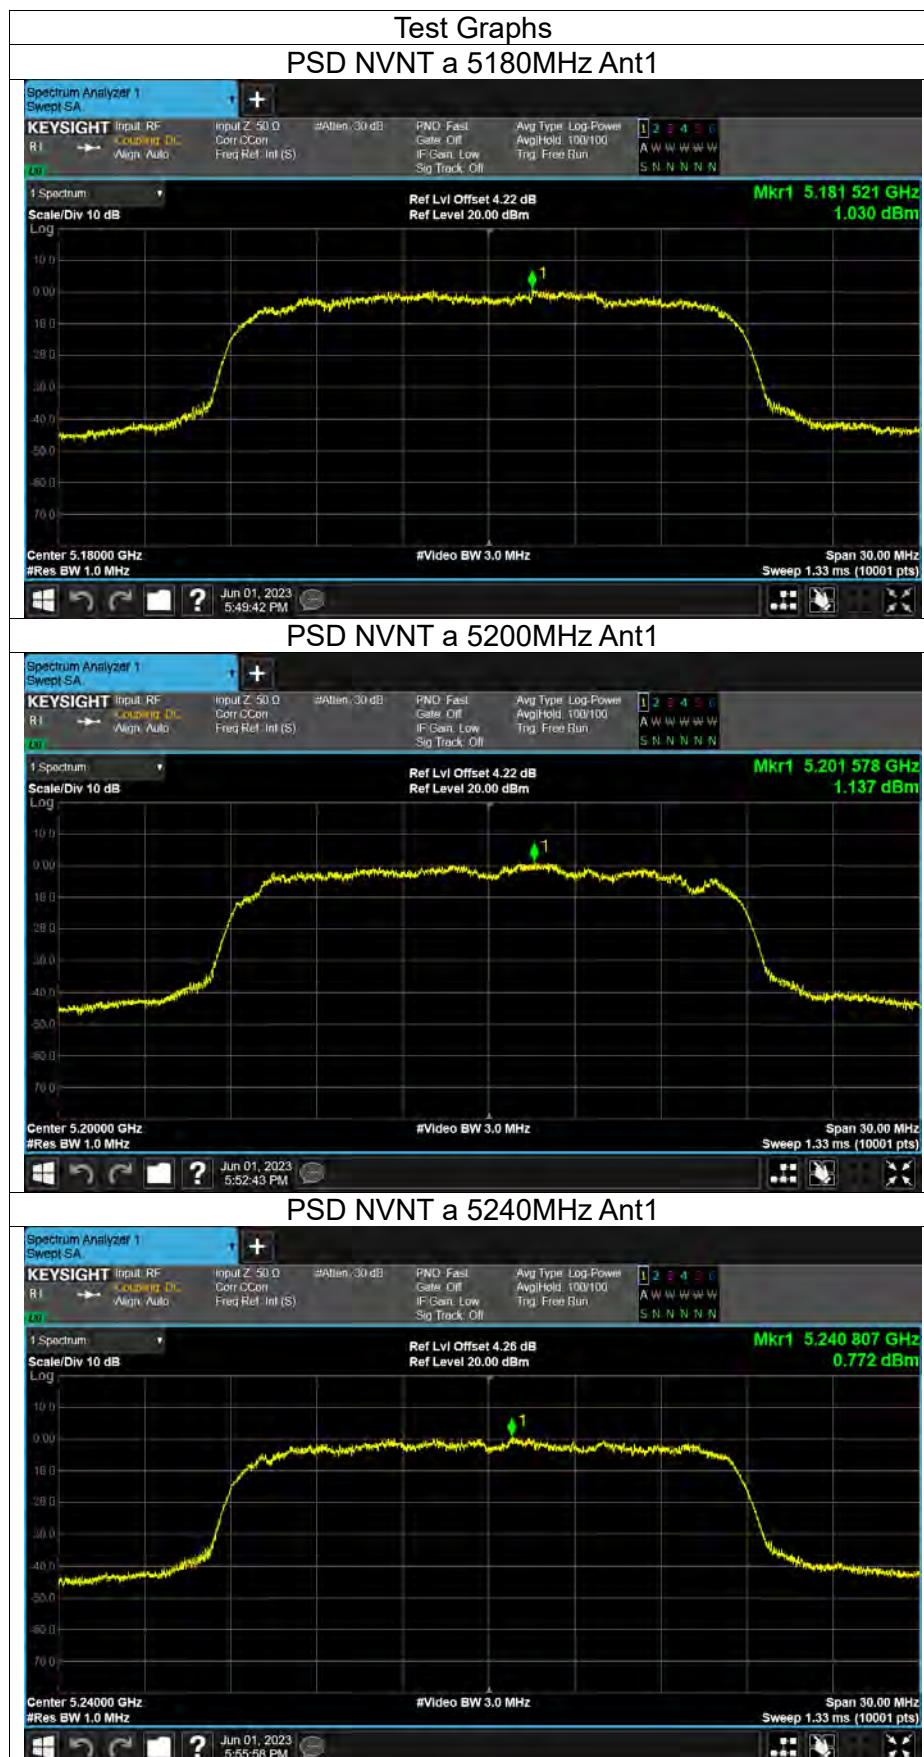



PSD NVNT a 5260MHz Ant1



PSD NVNT a 5300MHz Ant1



PSD NVNT a 5320MHz Ant1





PSD NVNT a 5500MHz Ant1



PSD NVNT a 5580MHz Ant1



PSD NVNT a 5700MHz Ant1





PSD NVNT a 5745MHz Ant1









PSD NVNT a 5785MHz Ant1









PSD NVNT a 5825MHz Ant1




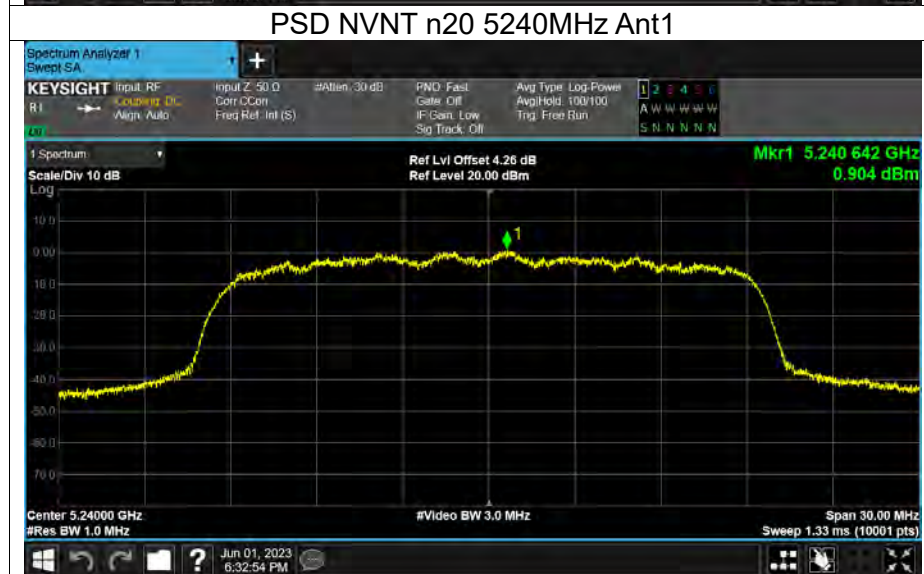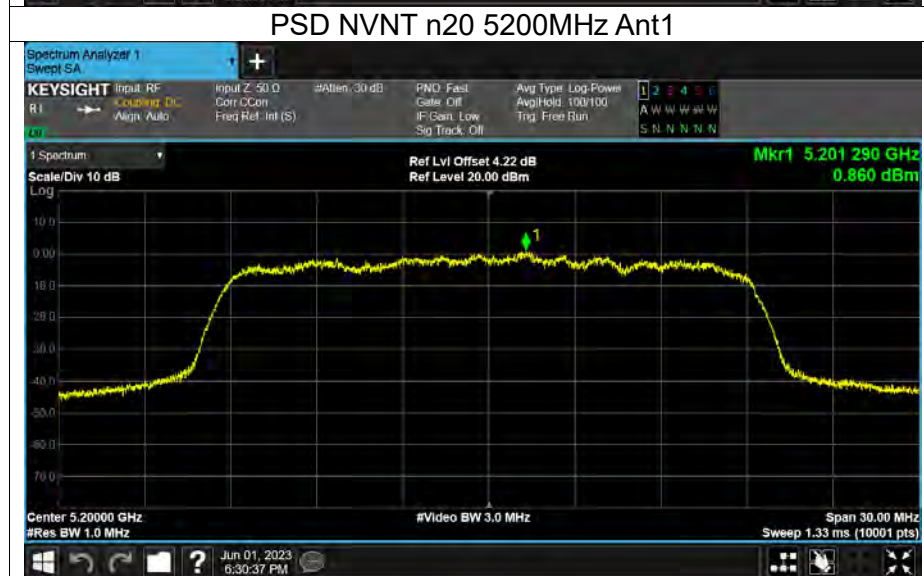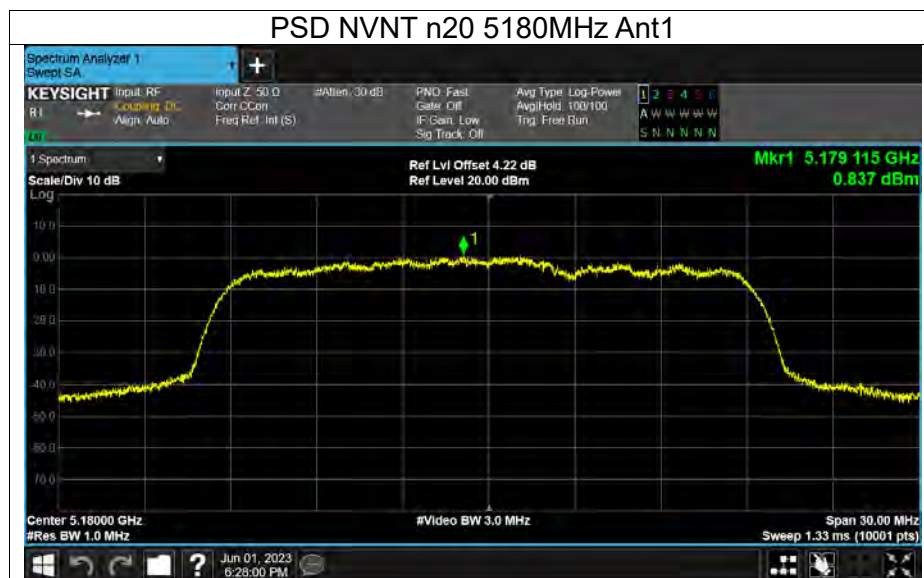


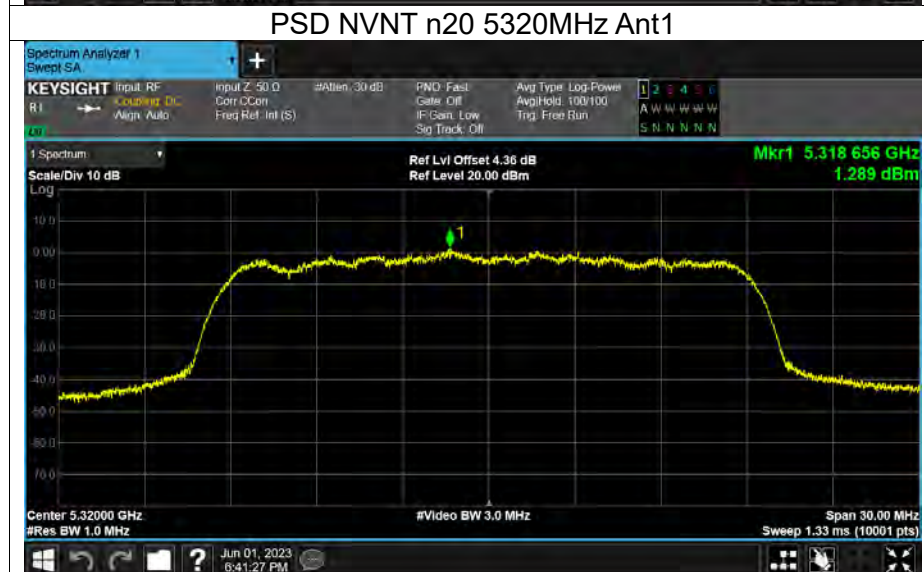
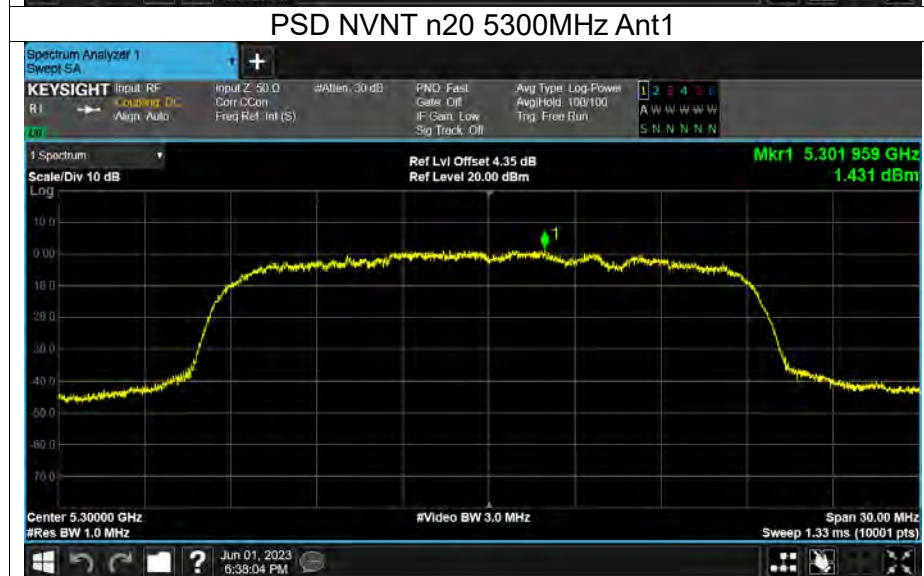
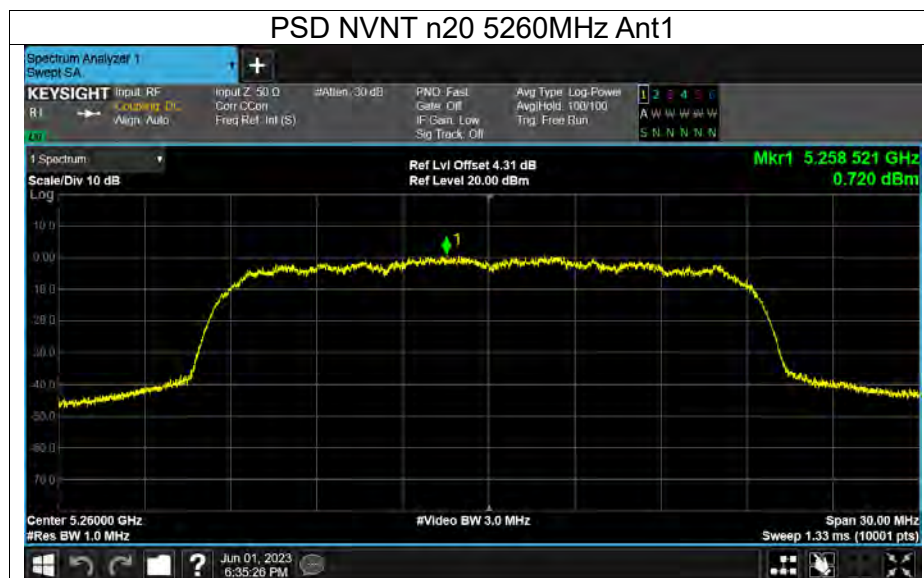


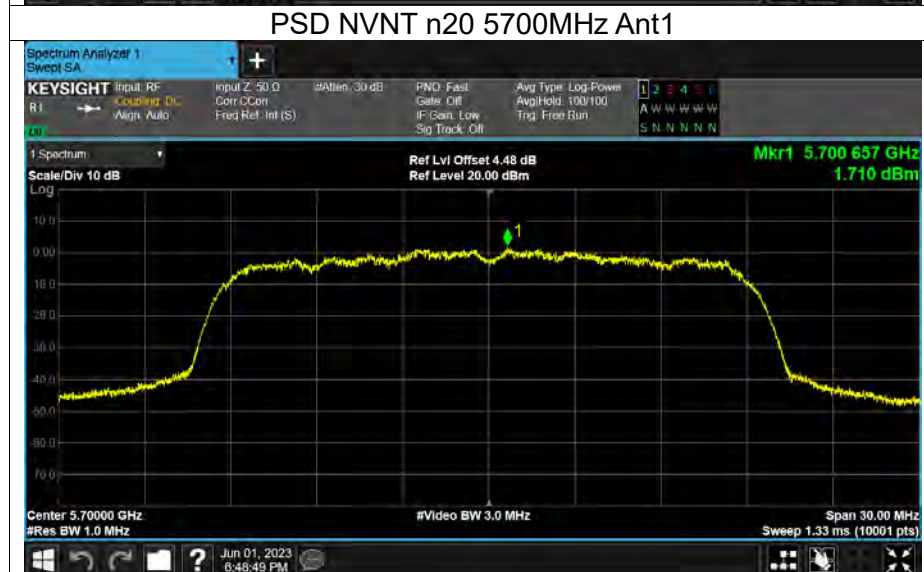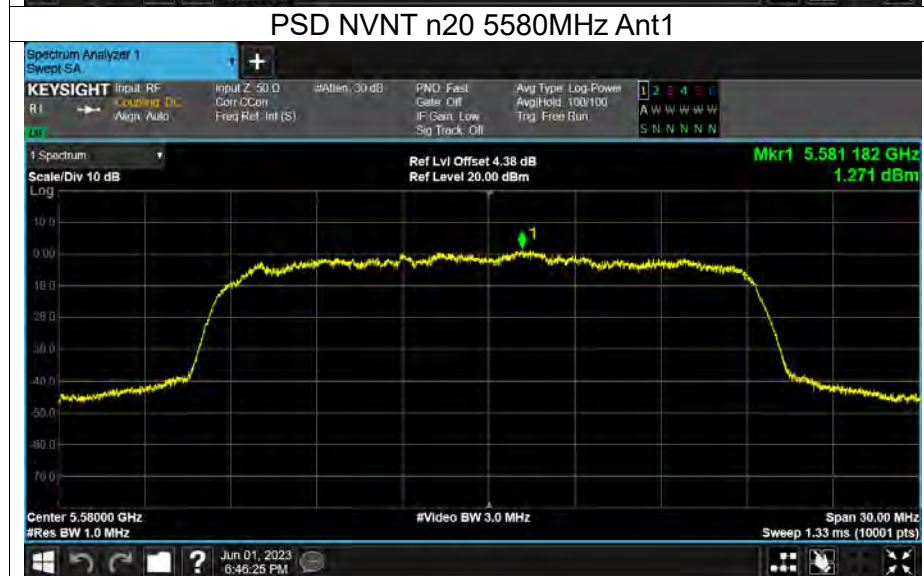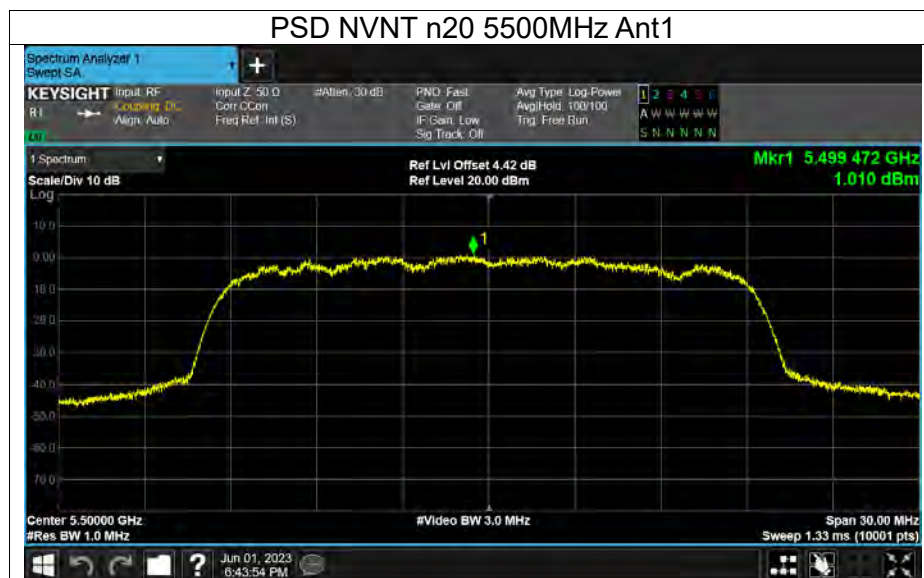


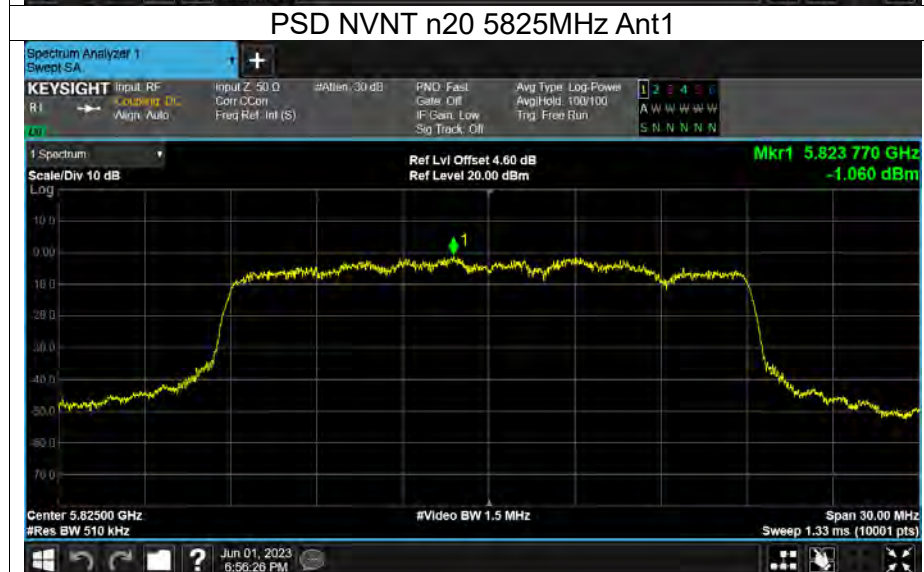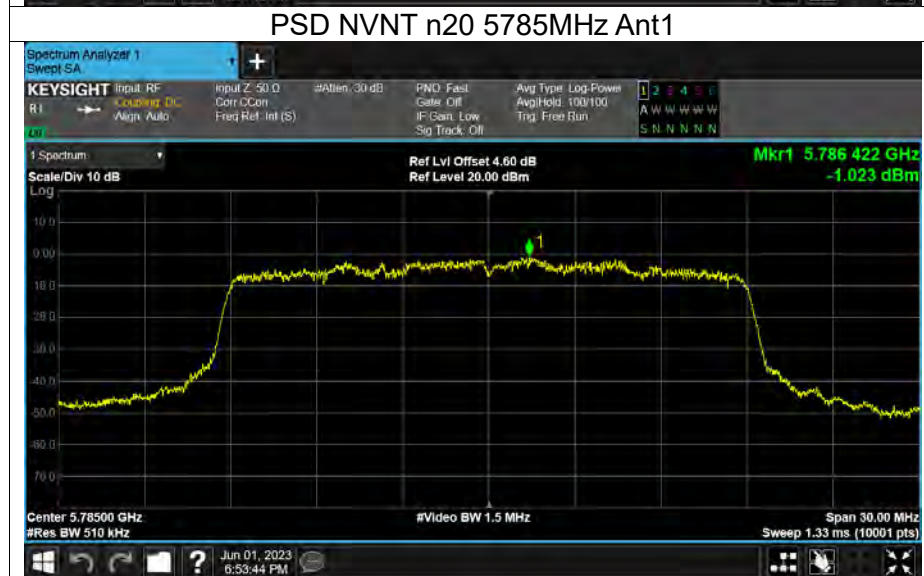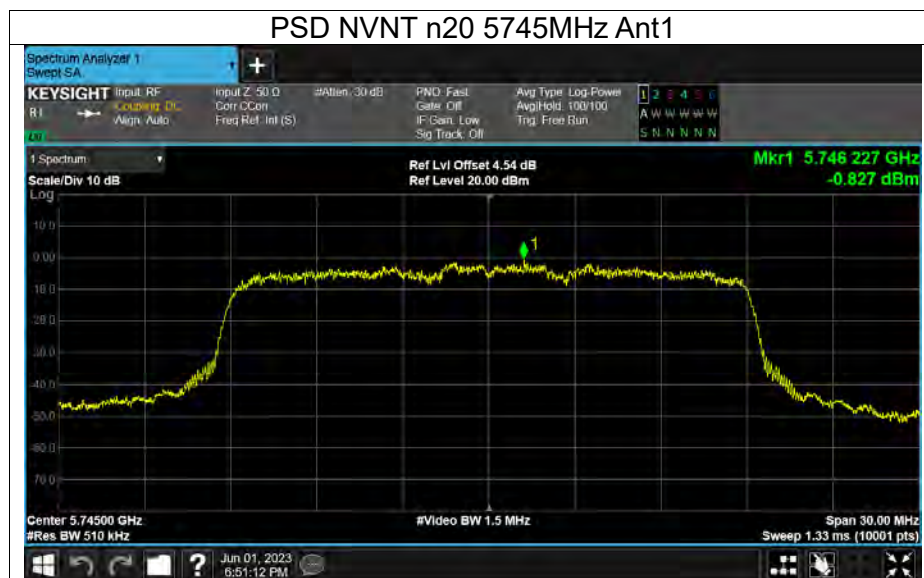

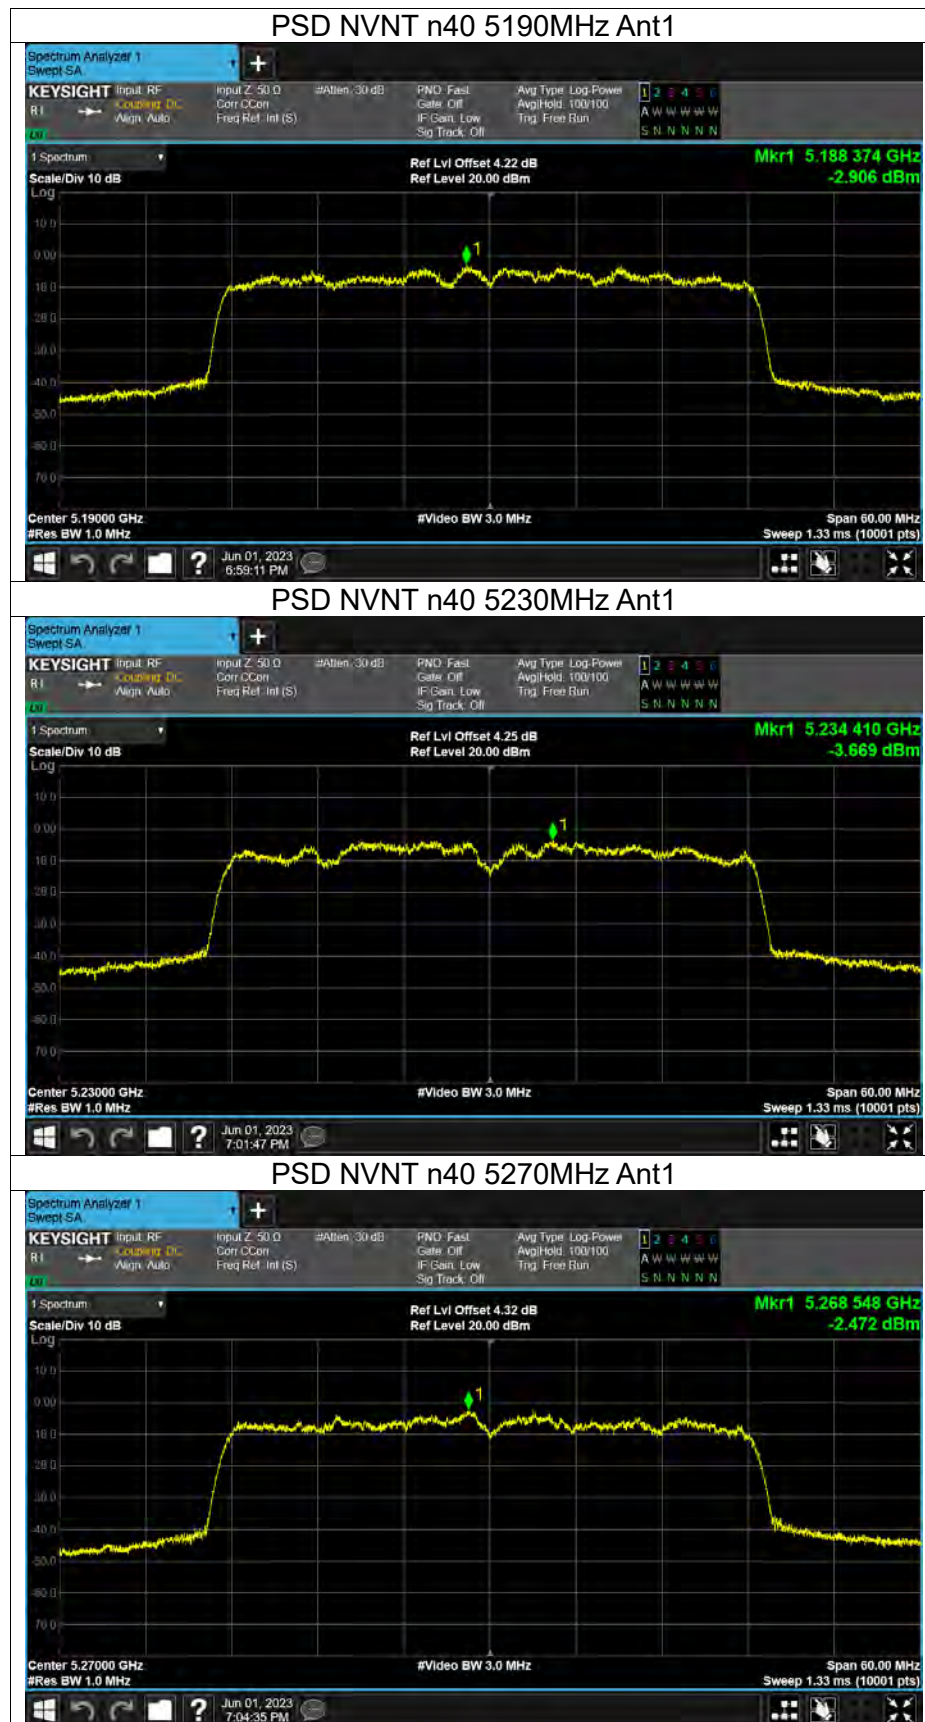

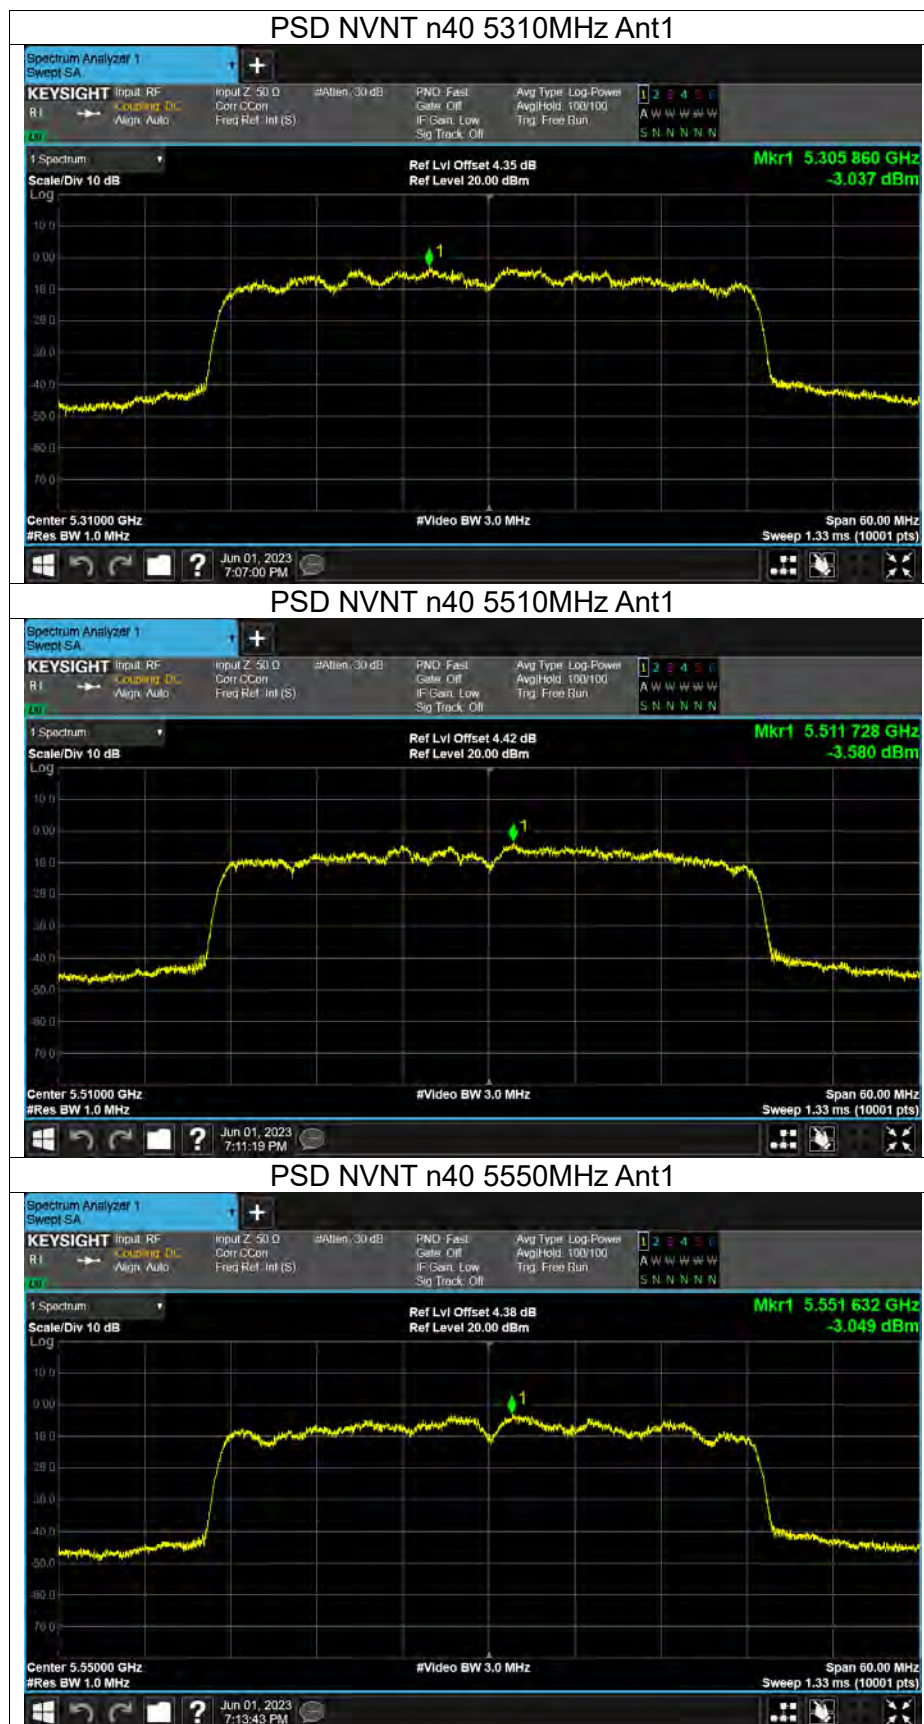

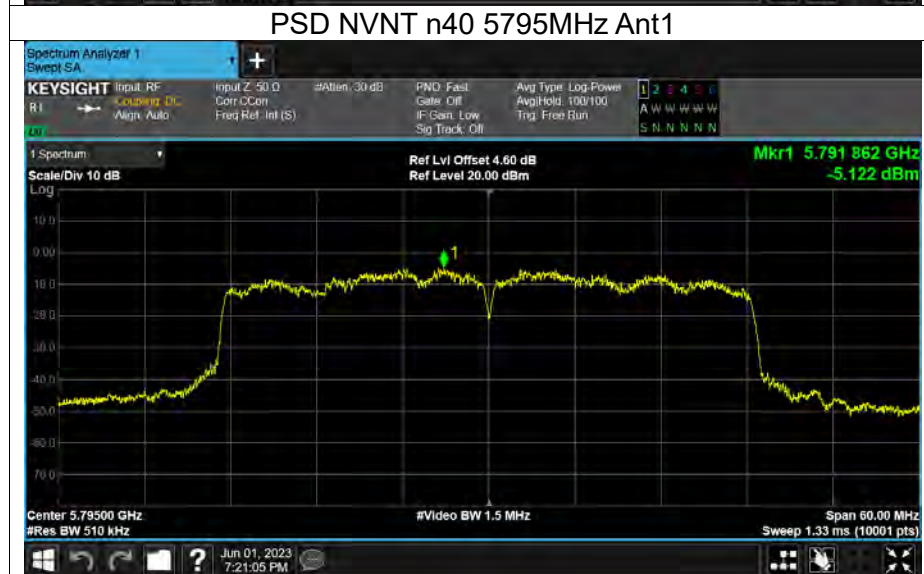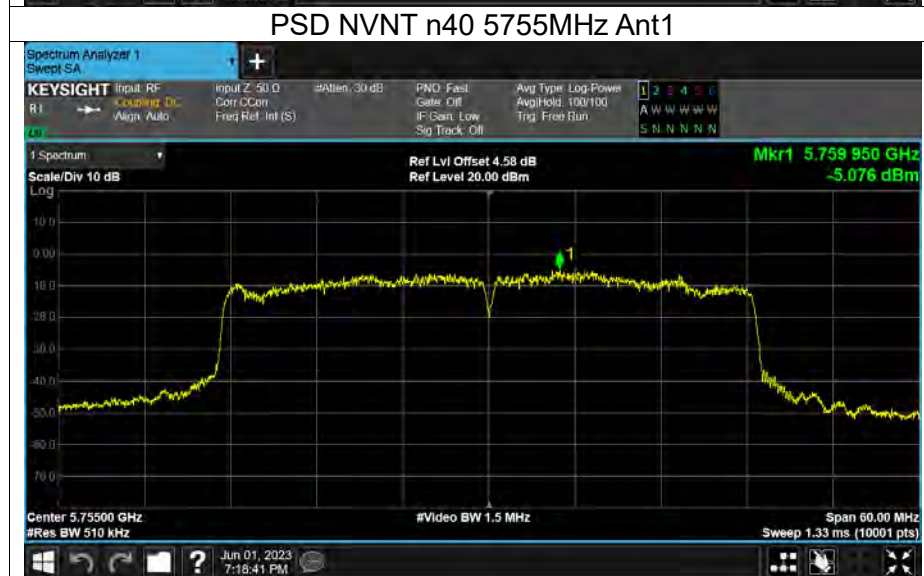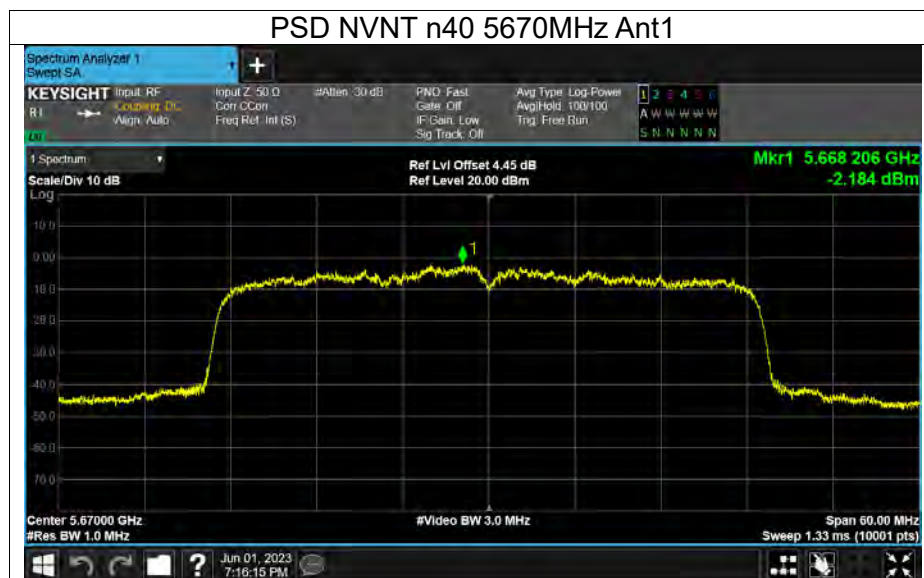

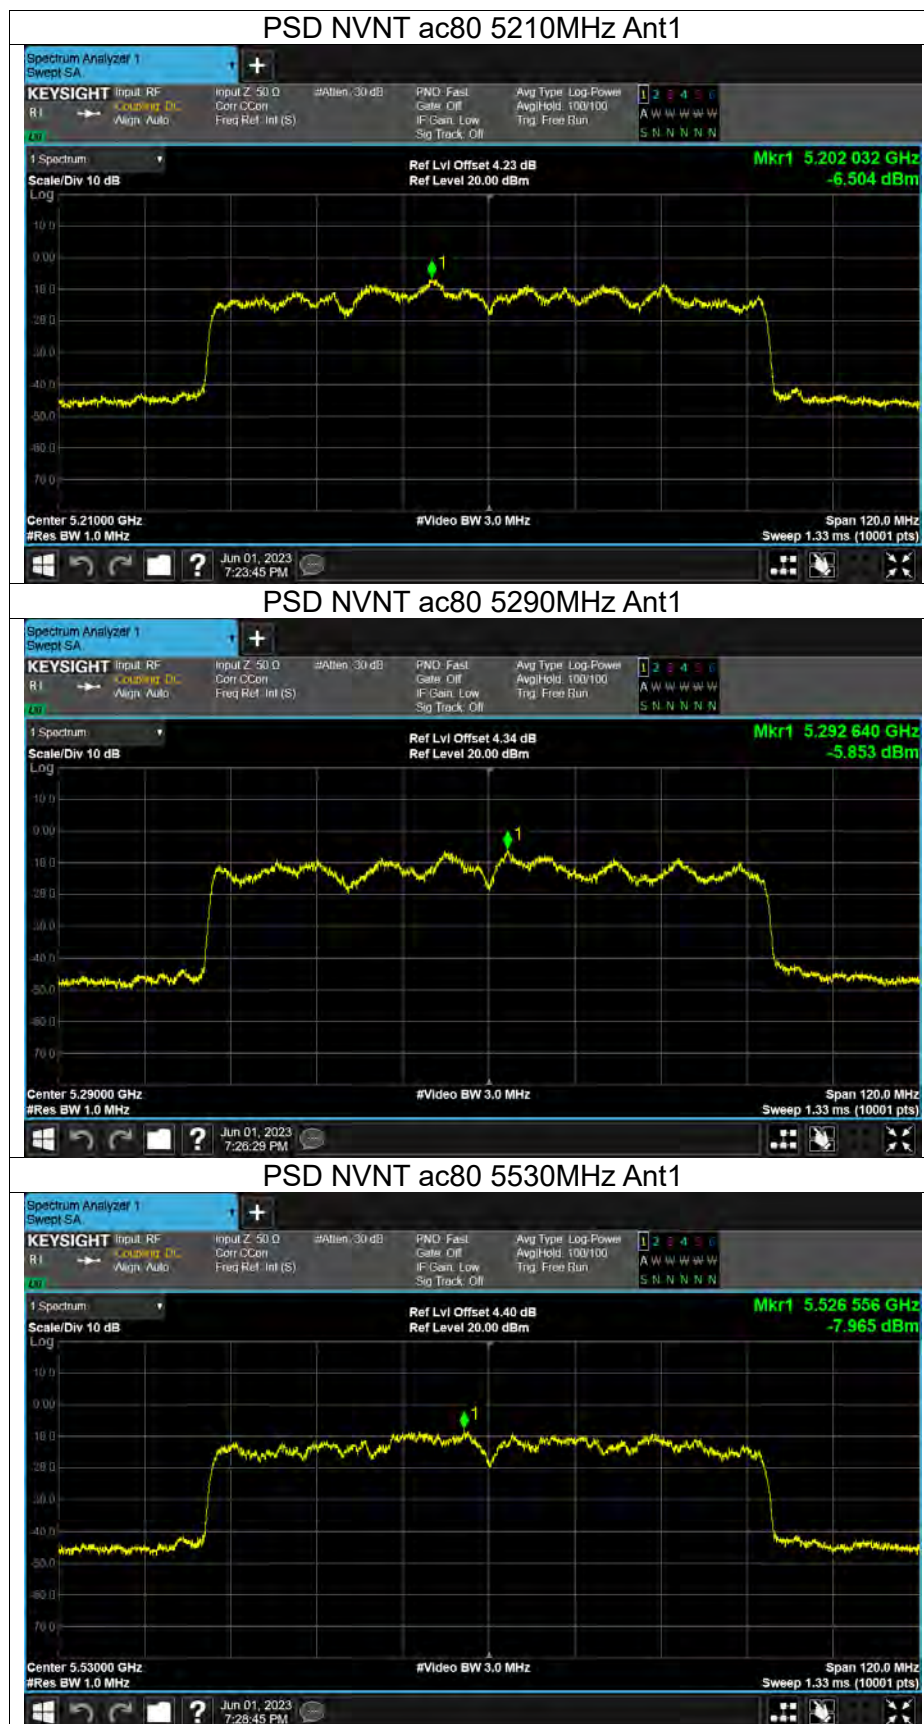





-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	14.843	0.5	Pass
NVNT	a	5785	Ant1	15.113	0.5	Pass
NVNT	a	5825	Ant1	14.07	0.5	Pass
NVNT	n20	5745	Ant1	15.092	0.5	Pass
NVNT	n20	5785	Ant1	15.009	0.5	Pass
NVNT	n20	5825	Ant1	13.805	0.5	Pass
NVNT	n40	5755	Ant1	33.828	0.5	Pass
NVNT	n40	5795	Ant1	35.089	0.5	Pass



Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant1



-6dB Bandwidth NVNT a 5785MHz Ant1



-6dB Bandwidth NVNT a 5825MHz Ant1





-6dB Bandwidth NVNT n20 5745MHz Ant1




-6dB Bandwidth NVNT n20 5785MHz Ant1



-6dB Bandwidth NVNT n20 5825MHz Ant1



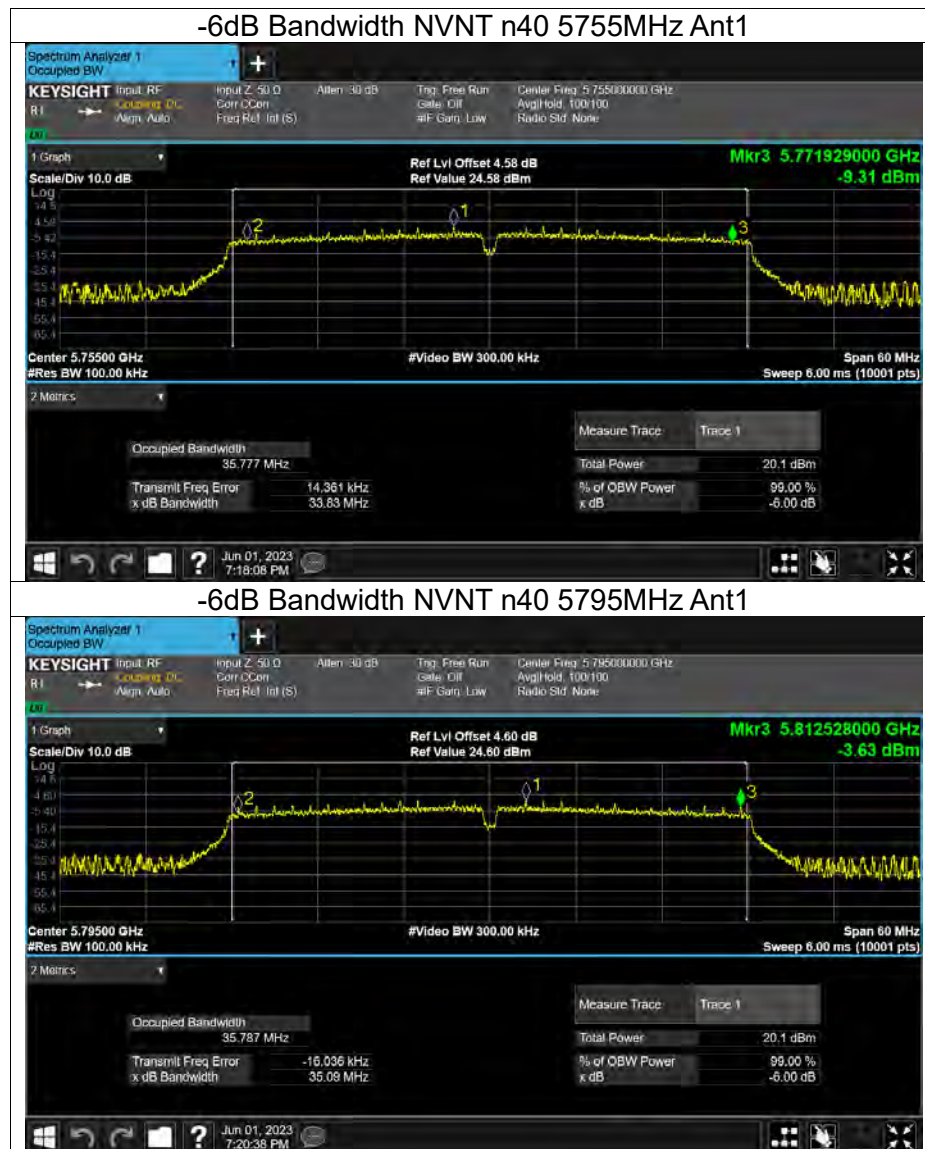

*****END OF THE REPORT*****