

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C §15.247 (DTS), subpart B, Class B,
RSS-247 Issue 3:2023, RSS-Gen Issue 5, ICES-003 Issue 7:2020

FOR:

SuperCom LTD

PureBeacon

Model: PureBeacon3.0

P/N: PRF-PUREBEACON3.0

FCC ID: 2BAX3-PUREBEACON3

IC: 22778-PUREBEACON3

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Test configuration	5
6.3	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements	7
7.1	Minimum 6 dB and 99% bandwidth	7
7.2	Peak output power	10
7.3	Field strength of spurious emissions	15
7.4	Band edge radiated emissions	33
7.5	Peak spectral power density	38
7.6	Antenna requirements	42
8	APPENDIX A Test equipment and ancillaries used for tests	43
9	APPENDIX B Test equipment correction factors	44
10	APPENDIX C Specification references	47
11	APPENDIX D Measurement uncertainties	47
12	APPENDIX E Test laboratory description	48
13	APPENDIX F Abbreviations and acronyms	49

1 Applicant information

Client name: SuperCom LTD
Address: 3 Rothschild St, Tel Aviv, 6688106, Israel 6713412
Telephone: +972-9-8890880
Fax: NA
E-mail: boazp@supercom.com
Contact name: Mr. Boaz Polak

2 Equipment under test attributes

Product name: PureBeacon
Product type: Transceiver
Model(s): PureBeacon3.0
Part number: PRF-PUREBEACON3.0
Hardware version: 3.2
Software release: 1.0.0.34.40
Receipt date: 06-Aug-24

3 Manufacturer information

Manufacturer name: SuperCom LTD
Address: 3 Rothschild St, Tel Aviv, 6688106, Israel 6713412
Telephone: +972-9-8890880
Fax: NA
E-Mail: boazp@supercom.com
Contact name: Mr. Boaz Polak

4 Test details

Project ID: 54670
Location: Hermon Laboratories Ltd. 66 HaTachana str., P.O. Box 23, Binyamina 3055001, Israel
Test started: 19-Aug-24
Test completed: 28-Aug-24
Test specification(s): FCC 47CFR part 15 subpart C §15.247 (DTS), subpart B, Class B, RSS-247 Issue 3:2023, RSS-Gen Issue 5, ICES-003 Issue 7:2020

5 Tests summary

Test	Status
Transmitter characteristics	
FCC Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth	Pass
FCC Section 15.247(b)3/ RSS-247 section 5.4(4), Peak output power	Pass
FCC Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions	Pass
FCC Section 15.247(d)/ RSS-247 section 5.5, Emissions at band edges	Pass
FCC Section 15.247(e) / RSS-247 section 5.2(2), Peak power density	Pass
FCC section 15.203 / RSS-Gen section 6.8, Antenna requirement	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mrs. N. Lenkina, test engineer, EMC & Radio	19-Aug-24 – 28-Aug-24	
Reviewed by:	Mrs. S. Peysahov Sheynin, certification specialist, EMC & Radio	25-Sep-24	
Approved by:	Mr. M. Nikishin, group leader, EMC & Radio	24-Nov-24	

6 EUT description


Note: The following data in this clause is provided by the customer and represents his sole responsibility

6.1 General information

The PureBeacon home unit is an optional accessory which enables indoor surveillance of Offenders when GPS is either not available or when the PureTrack/PureOne devices have low GPS signal reception. The PureBeacon communicates with the PureTrack/PureOne device to indicate that the Offender is currently in a pre-defined zone. The PureBeacon is AC powered and contains an internal battery backup capable of providing approximately 75 hours of operation. The AC/DC adapter manufactured by SuperCom, model PRF-QBEACON3.0-CR was used during the testing.

It incorporates a quick charging station for the PureOne's portable charger and contains an LED interface and physical Button Press for multiple added functionalities.

6.2 Test configuration

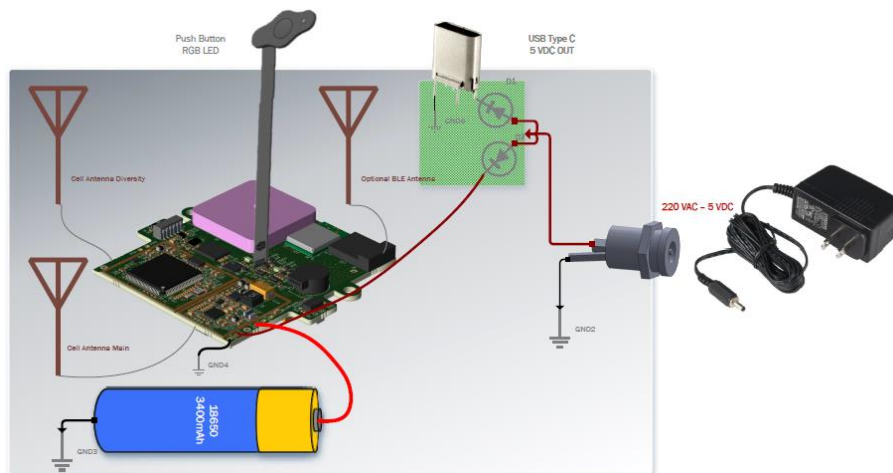

6.3 Transmitter characteristics

Type of equipment						
V	Stand-alone (Equipment with or without its own control provisions)					
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
Assigned frequency range		2400 -2483.5 MHz				
Operating frequencies		2402-2480 MHz				
Maximum rated output power		Peak output power 4.28 dBm				
Is transmitter output power variable?		V	No			
			Yes	continuous variable		
				stepped variable with stepsize dB		
				minimum RF power dBm		
				maximum RF power dBm		
Antenna connection						
unique coupling		standard connector		V	Integral	
				V	with temporary RF connector without temporary RF connector	
Antenna/s technical characteristics						
Type		Manufacturer		Model number		
Internal		2J		printed		
Gain		3 dBi				
Transmitter aggregate data rate/s			1 Mbps			
Type of modulation			GFSK			
Modulating test signal (baseband)						
Transmitter power source						
V	Battery	Nominal rated voltage	3.7 VDC	Battery type	Lithium ION battery	
	DC	Nominal rated voltage				
	AC mains	Nominal rated voltage	230 VAC	Frequency	50 Hz	



Test specification:		Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth	
Test procedure:		ANSI C63.10 section 11.8.1	
Test mode:		Verdict: PASS	
Date(s):			
19-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements

7.1 Minimum 6 dB and 99% bandwidth

7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1.

Table 7.1.1 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
902.0 – 928.0	6.0	500.0
2400.0 – 2483.5		
5725.0 – 5850.0		

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier.

7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.

Figure 7.1.1 6 dB bandwidth test setup





HERMON LABORATORIES

Report ID: SUPRAD_FCC.54670.docx

Date of Issue: 24-Nov-24

Test specification:		Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth	
Test procedure:		ANSI C63.10 section 11.8.1	
Test mode:		Verdict: PASS	
Date(s):			
19-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Table 7.1.2 6 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 2400.0-2483.5 MHz
 DETECTOR USED: Peak
 SWEEP MODE: Single
 SWEEP TIME: Auto
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 6.0 dBc
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1 Mbps


Carrier frequency, MHz	99% bandwidth, kHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
2402	1097.8	774.2	500	274.2	Pass
2426	1098.9	764.2	500	264.2	Pass
2480	1104.2	779.2	500	279.2	Pass

Reference numbers of test equipment used

HL 7585	HL 4933	HL 3903	HL 5902	HL 5622				
---------	---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.

Plot 7.1.1 6 dB bandwidth test result at low frequency

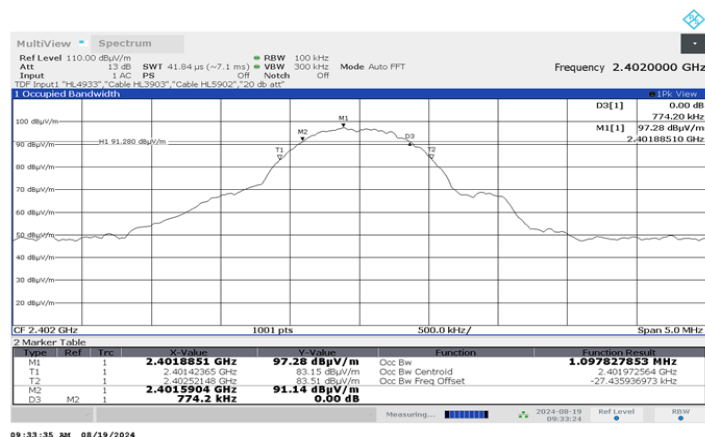




HERMON LABORATORIES

Report ID: SUPRAD_FCC.54670.docx


Date of Issue: 24-Nov-24

Test specification: Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Plot 7.1.2 6 dB bandwidth test result at mid frequency

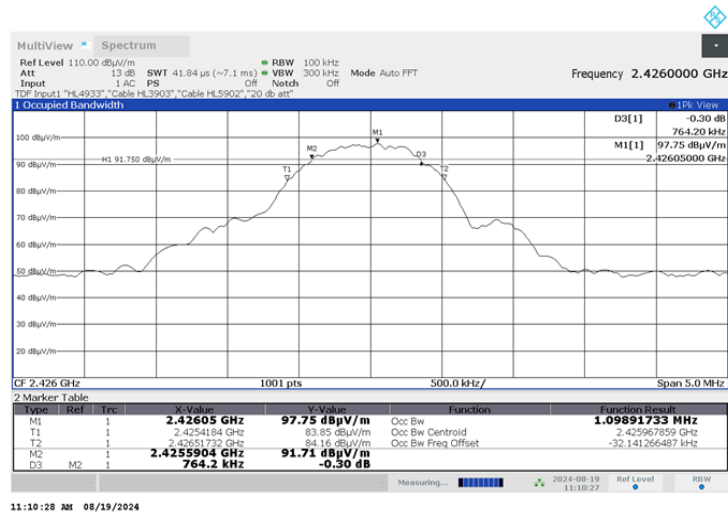

Plot 7.1.3 6 dB bandwidth test result at high frequency

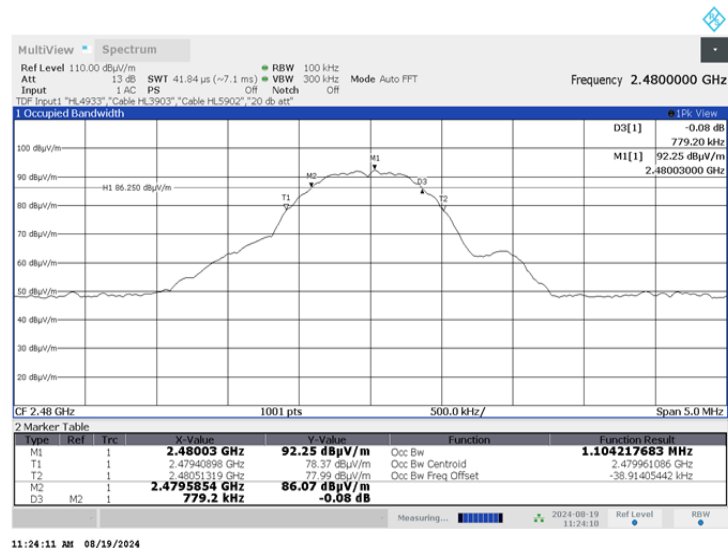



Test specification: FCC section 15.247(b)3, RSS-210 section A8.4(4) ,Peak output power			
Test procedure: FR Vol.62, page 26243, Section 15.247(b)			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

7.2 Peak output power

7.2.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)**
		W	dBm	
902.0 – 928.0	6.0	1.0	30.0	131.2
2400.0 – 2483.5				
5725.0 – 5850.0				

*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

** - Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.2.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.2.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.2.2 and associated plots.

7.2.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:


$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.2.2.6 The worst test results (the lowest margins) were recorded in Table 7.2.2.



Test specification: FCC section 15.247(b)3, RSS-210 section A8.4(4) ,Peak output power			
Test procedure: FR Vol.62, page 26243, Section 15.247(b)			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Figure 7.2.1 Setup for carrier field strength measurements

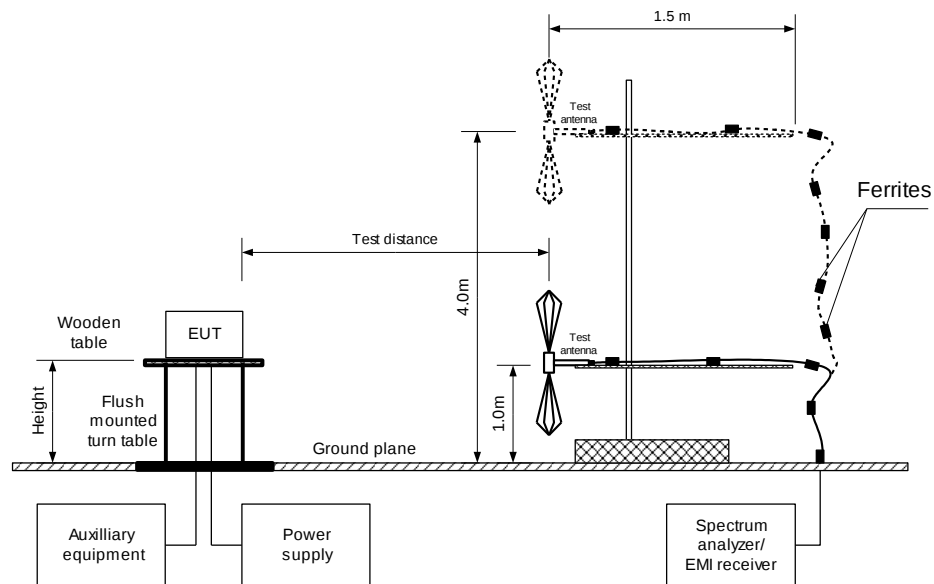



HERMON LABORATORIES

Test specification: FCC section 15.247(b)3, RSS-210 section A8.4(4) ,Peak output power			
Test procedure: FR Vol.62, page 26243, Section 15.247(b)			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Table 7.2.2 Peak output power test results

ASSIGNED FREQUENCY: 2400-2483.5 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 1.5 m
 DETECTOR USED: Peak
 TEST ANTENNA TYPE: Double ridged guide (above 1000 MHz)
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 EUT 6 dB BANDWIDTH: 779.2 kHz
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: 3 MHz

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2402	102.06	H	1.4	60	3	3.86	30	-26.14	Pass
2426	102.48	H	1.3	70	3	4.28	30	-25.72	Pass
2480	97.19	H	1.5	-40	3	-1.01	30	-31.01	Pass

*- EUT front panel refer to 0 degrees position of turntable.

** - Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.2 dB*

*** - Margin = Peak output power – specification limit.

Reference numbers of test equipment used

HL 7585	HL 4933	HL 3903	HL 5902	HL 5622			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: SUPRAD_FCC.54670.docx
Date of Issue: 24-Nov-24

Test specification: FCC section 15.247(b)3, RSS-210 section A8.4(4) ,Peak output power			
Test procedure: FR Vol.62, page 26243, Section 15.247(b)			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Plot 7.2.1 Field strength of carrier at low frequency

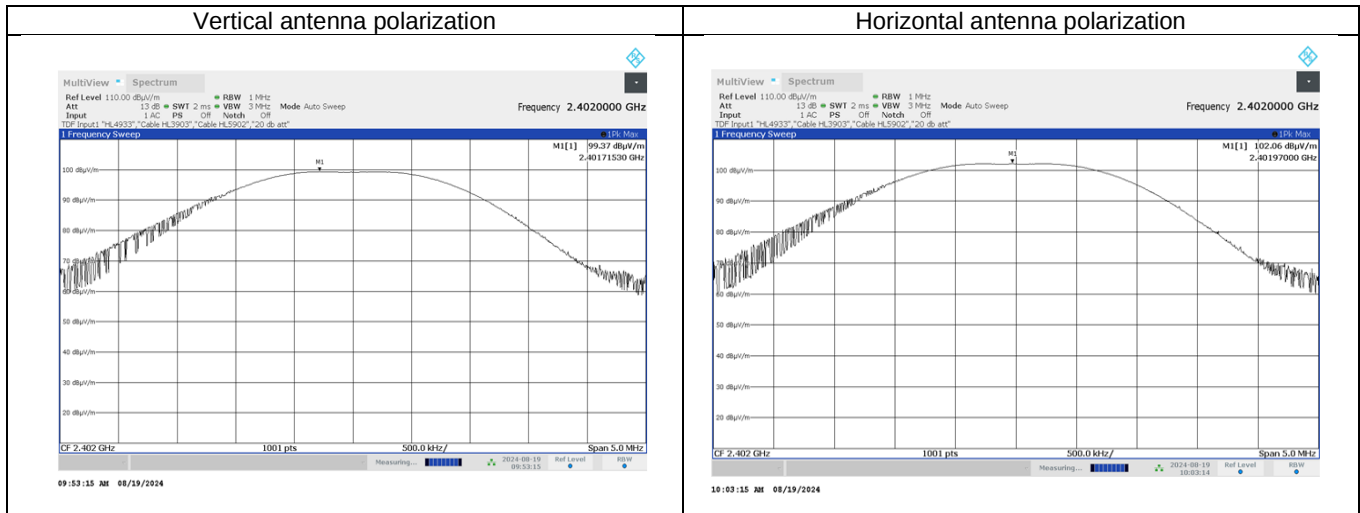





HERMON LABORATORIES

Test specification: FCC section 15.247(b)3, RSS-210 section A8.4(4) ,Peak output power			
Test procedure: FR Vol.62, page 26243, Section 15.247(b)			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Plot 7.2.2 Field strength of carrier at mid frequency

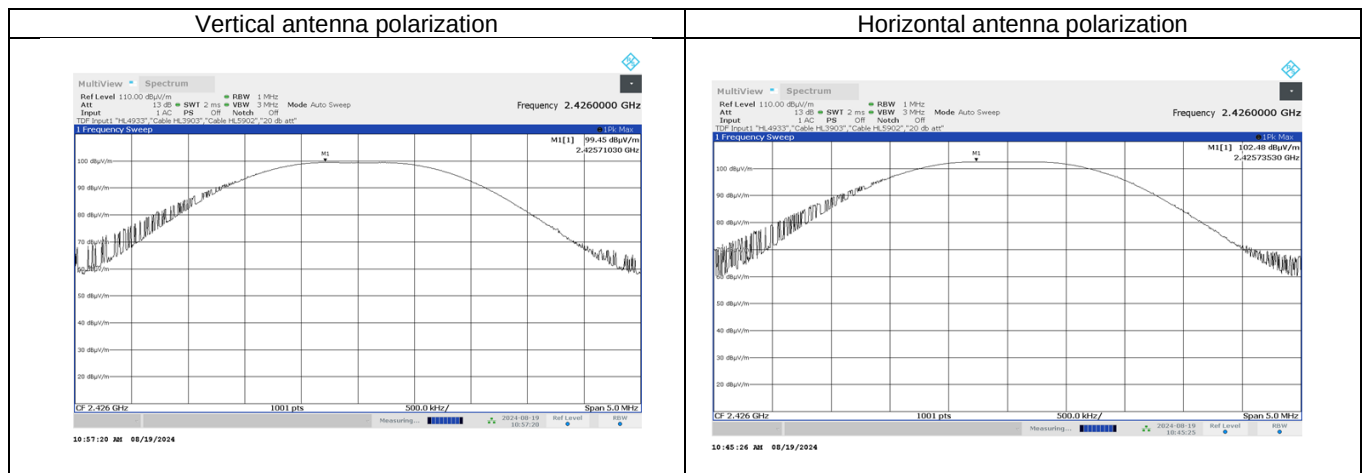

Plot 7.2.3 Field strength of carrier at high frequency

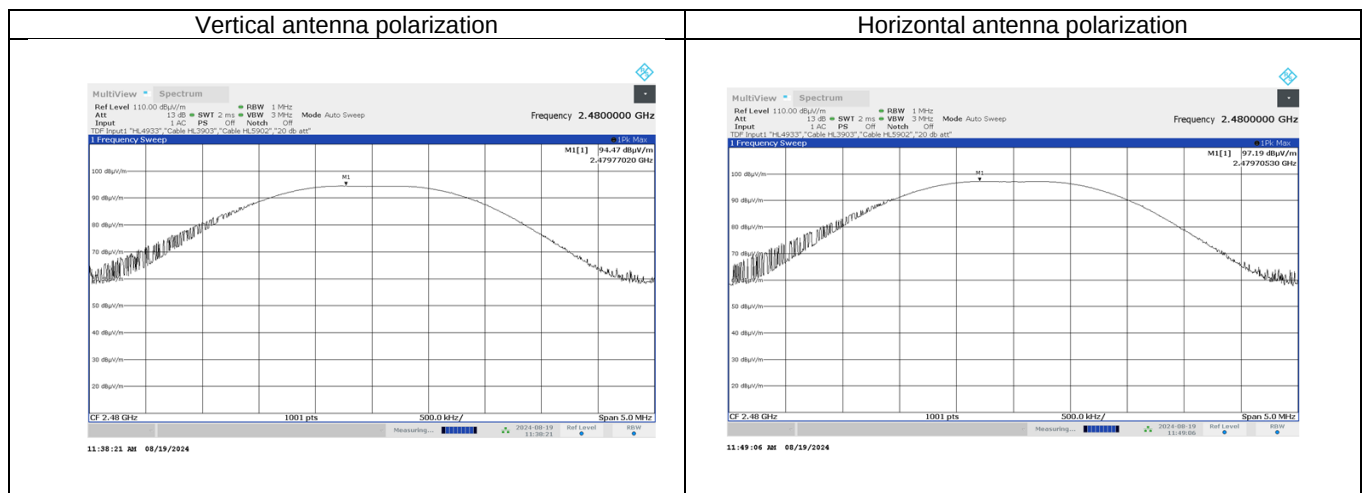



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

7.3 Field strength of spurious emissions

7.3.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)*			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.3.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.3.3.1 The EUT was set up as shown in Figure 7.3.2, Figure 1.1.3, energized and the performance check was conducted.


7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.3.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



Test specification:		Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10, sections 6.5, 6.6	
Test mode:		Verdict: PASS	
Date(s):			
21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz

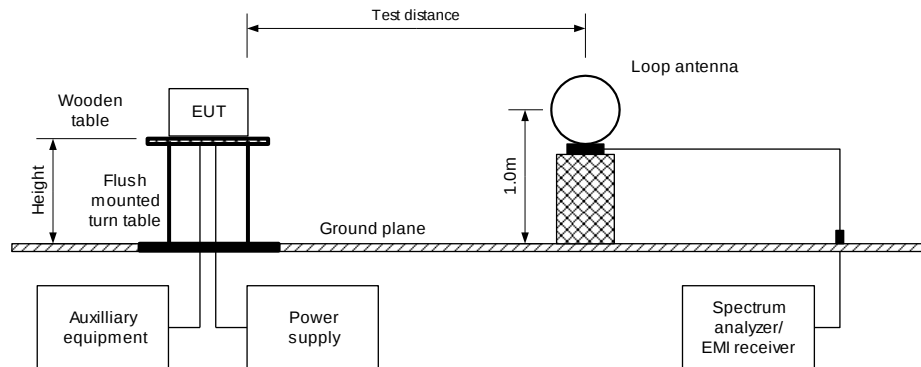



Test specification:		Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10, sections 6.5, 6.6	
Test mode:		Verdict: PASS	
Date(s):			
21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Figure 7.3.2 Setup for spurious emission field strength measurements in 30 – 1000 MHz


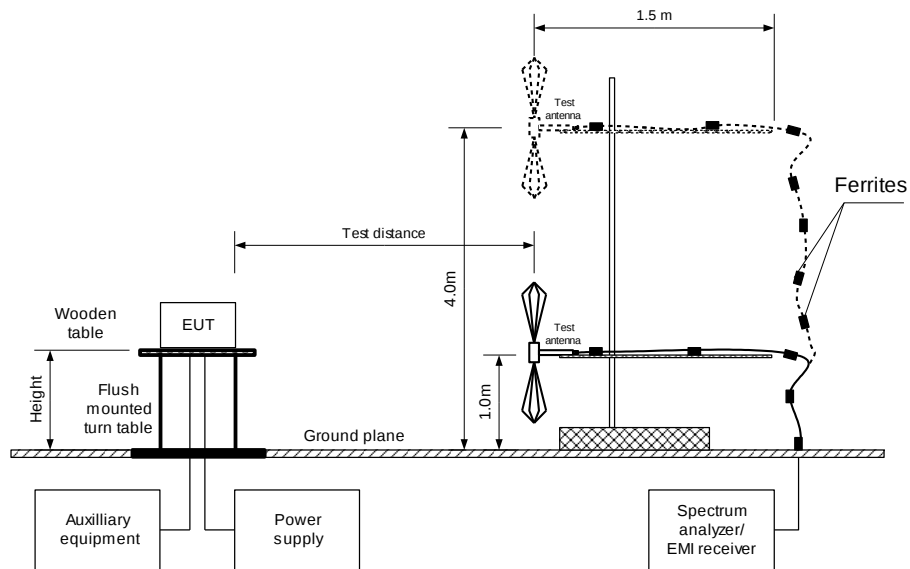


Figure 7.3.3 Setup for spurious emission field strength measurements above 1000 MHz



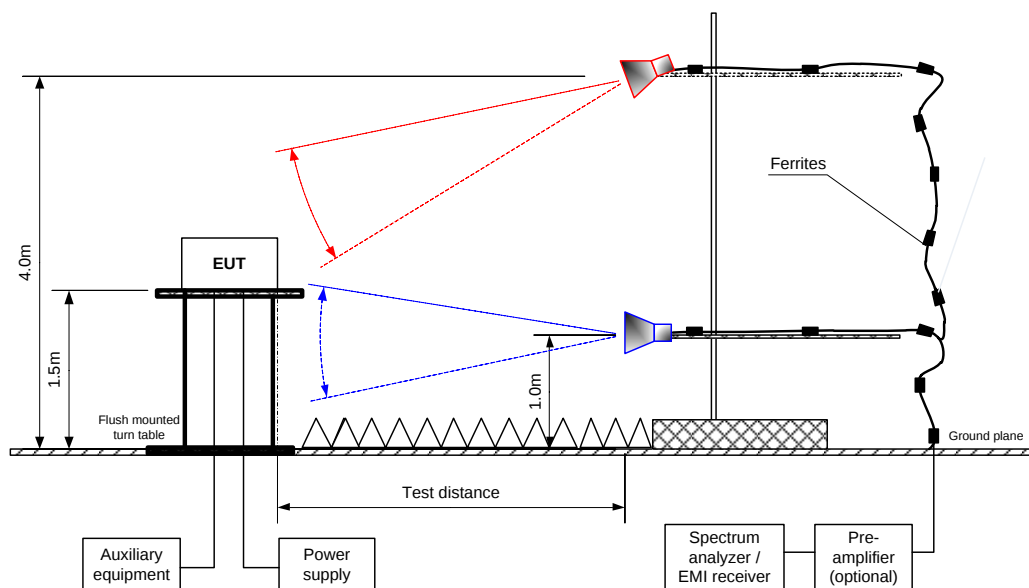

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Table 7.3.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY: 2400-2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1 Mbps
 DUTY CYCLE: 100 %
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Horn (above 1000 MHz)

Norm (above 1000 MHz)									
Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency									
56.61	24.48	Vertical	1.00	141	98.29	73.81	20.0	53.81	Pass
366.15	28.97	Horizontal	1.02	-88	101.89	72.92		52.92	
887.15	33.88	Vertical	1.04	8	98.29	64.41		44.41	
Mid carrier frequency									
56.45	23.48	Vertical	1.21	-88	98.95	75.47	20.0	55.47	Pass
366.52	28.91	Horizontal	1.00	-87	101.42	72.51		52.51	
922.88	33.60	Vertical	1.04	57	98.95	65.35		45.35	
9704.00	54.20	Vertical	1.3	100	98.95	44.75		24.75	
High carrier frequency									
55.44	23.96	Vertical	1.02	-88	94.68	70.72	20.0	50.72	Pass
365.20	31.60	Horizontal	1.00	-86	97.45	65.85		45.85	
948.02	35.01	Horizontal	2.97	180	97.45	62.44		42.44	
9920.00	55.34	Vertical	2.00	80	94.68	39.34		19.34	

*- EUT front panel refers to 0 degrees position of turntable.

** - Margin = Attenuation below carrier – specification limit.



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Table 7.3.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY: 2400-2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 -25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1 Mbps
 DUTY CYCLE: 100 %
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Horn

TEST ANTENNA TYPE: _____ FROM _____											
Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
Low carrier frequency											
18236.83	H	1.92	141	50.27	74	-23.73	50.27	1.01	54	-52.99	Pass
Mid carrier frequency											
18133.46	H	1.93	142	51.84	74	-22.16	51.84	2.58	54	-51.42	Pass
High carrier frequency											
18019.60	H	2.24	61	51.28	74	-22.72	51.28	2.02	54	-51.98	Pass

*- EUT front panel refers to 0 degrees position of turntable.

** - Margin = Measured field strength - specification limit.

*** - Margin = Calculated field strength - specification limit,
where Calculated field strength = Measured field strength + average factor.

Table 7.3.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
0.344	129	NA	NA	NA	-49.26

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



Test specification:		Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10, sections 6.5, 6.6	
Test mode:		Verdict: PASS	
Date(s):			
21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Table 7.3.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY: 2400-2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1 Mbps
 DUTY CYCLE: 100 %
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
Low, mid, high carrier frequency								
No signals were found								Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.



HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Table 1.1.6 Restricted bands according to FCC section 15.205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Table 1.1.7 Restricted bands according to RSS-Gen

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.1905	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.29 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6

Reference numbers of test equipment used

HL 0446	HL 3903	HL 5902	HL 4933	HL 5288	HL 5112	HL 7585	HL 4338
HL 4956	HL 5601						

Full description is given in Appendix A.





HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			



Plot 7.3.1 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

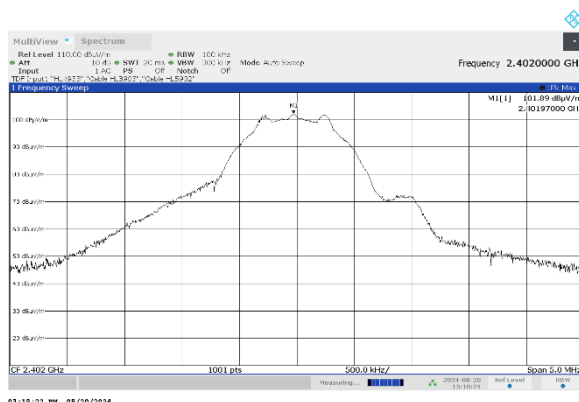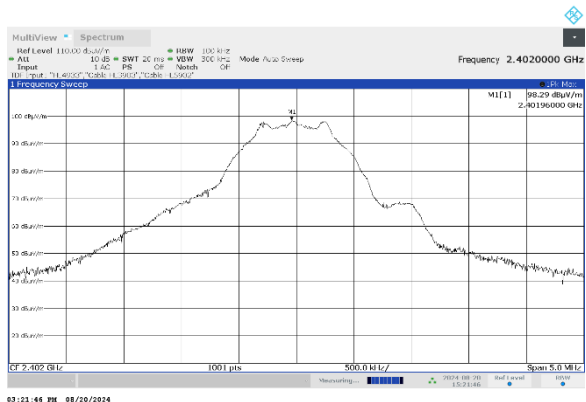

Plot 7.3.2 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

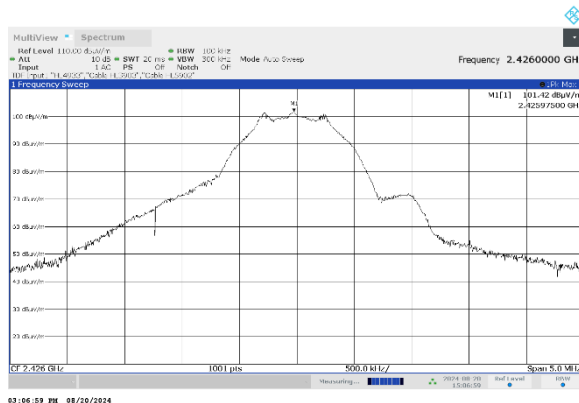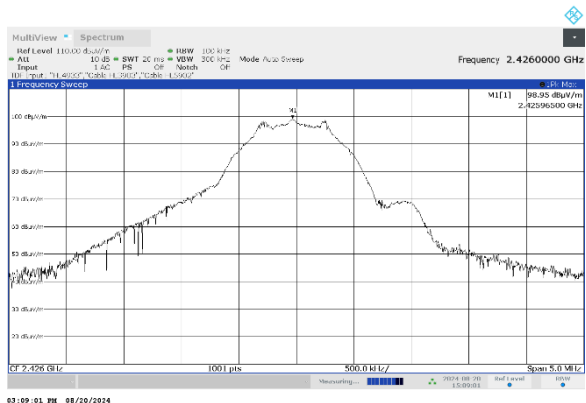





HERMON LABORATORIES

Test specification:		Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10, sections 6.5, 6.6	
Test mode:		Verdict: PASS	
Date(s):			
21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Plot 7.3.3 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

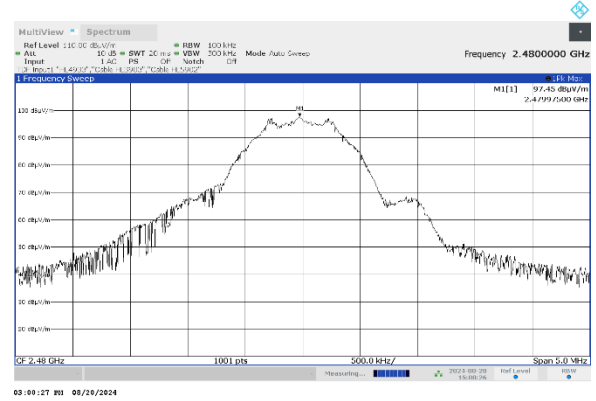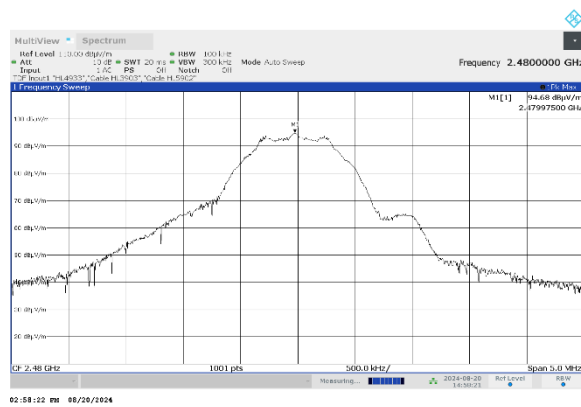




Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			


Plot 7.3.4 Radiated emission measurements from 0.009 to 30 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

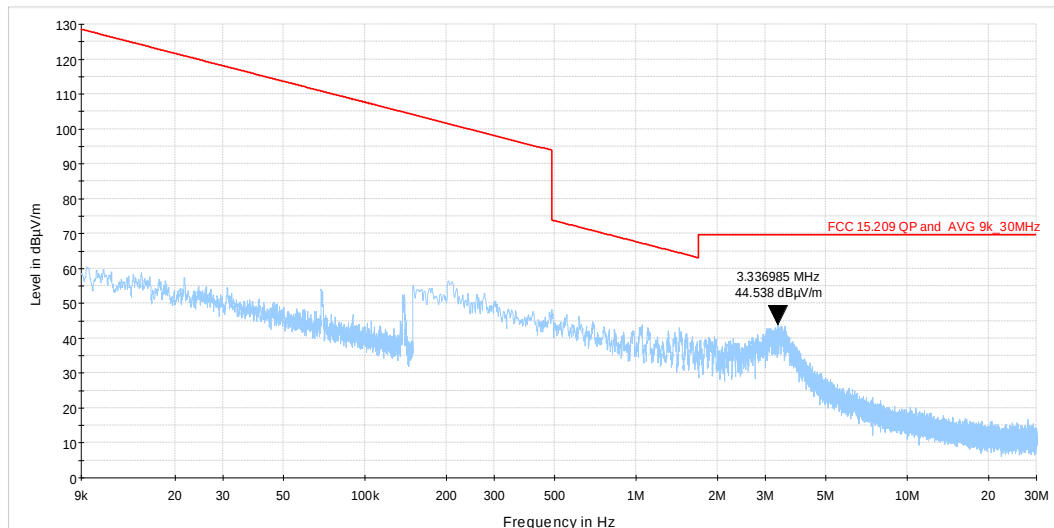

Plot 7.3.5 Radiated emission measurements from 0.009 to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

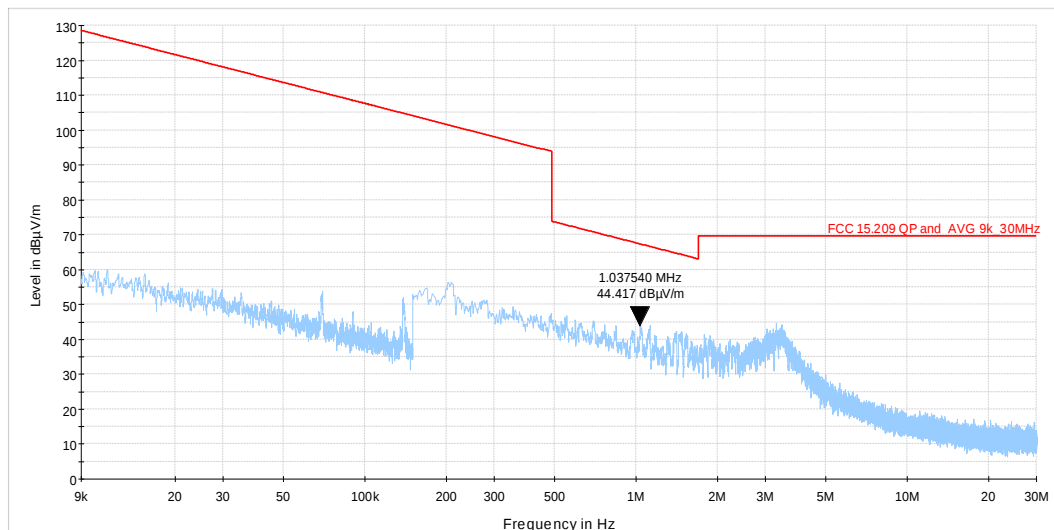




HERMON LABORATORIES

Report ID: SUPRAD_FCC.54670.docx
Date of Issue: 24-Nov-24

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Plot 7.3.6 Radiated emission measurements from 0.009 to 30 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

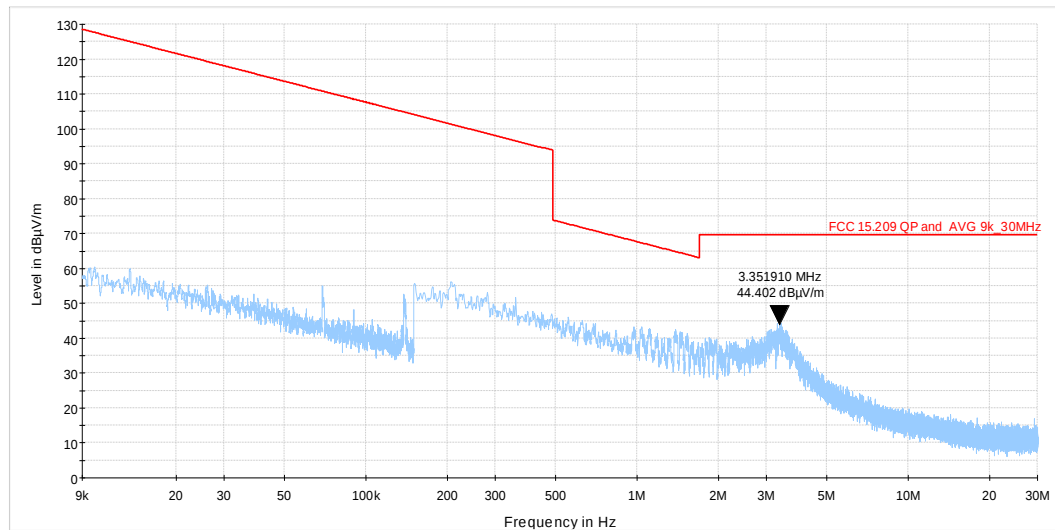




Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			


Plot 7.3.7 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

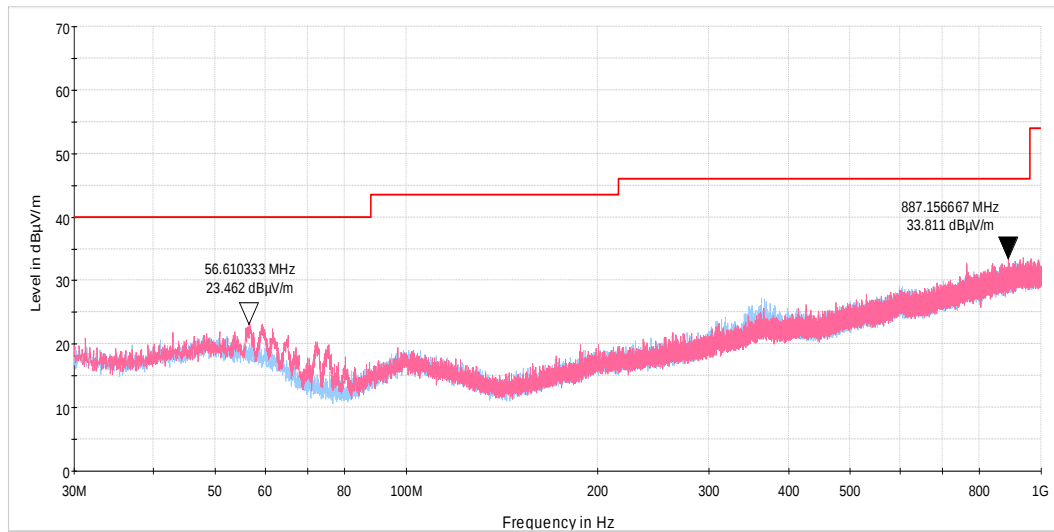

Plot 7.3.8 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

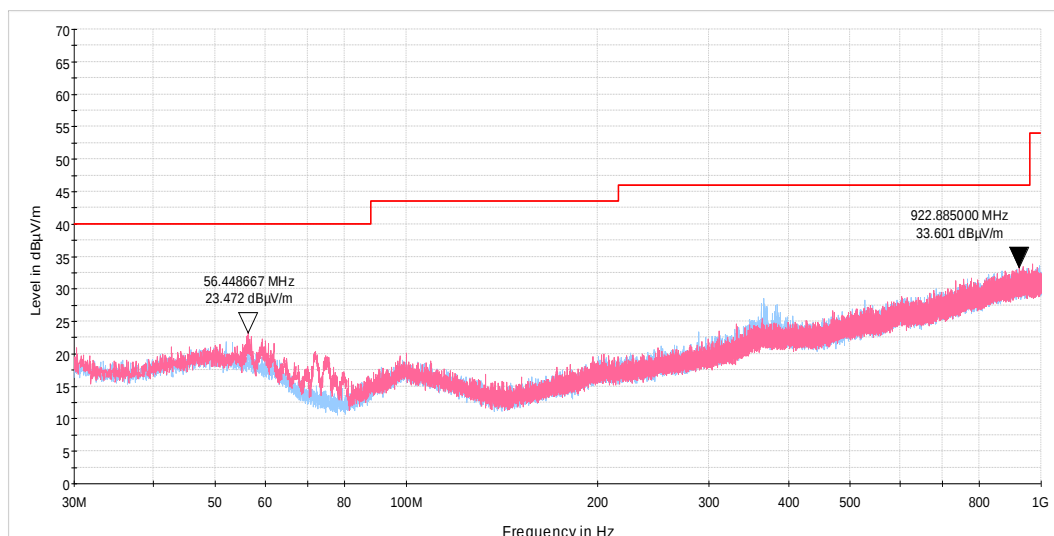




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			


Plot 7.3.9 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

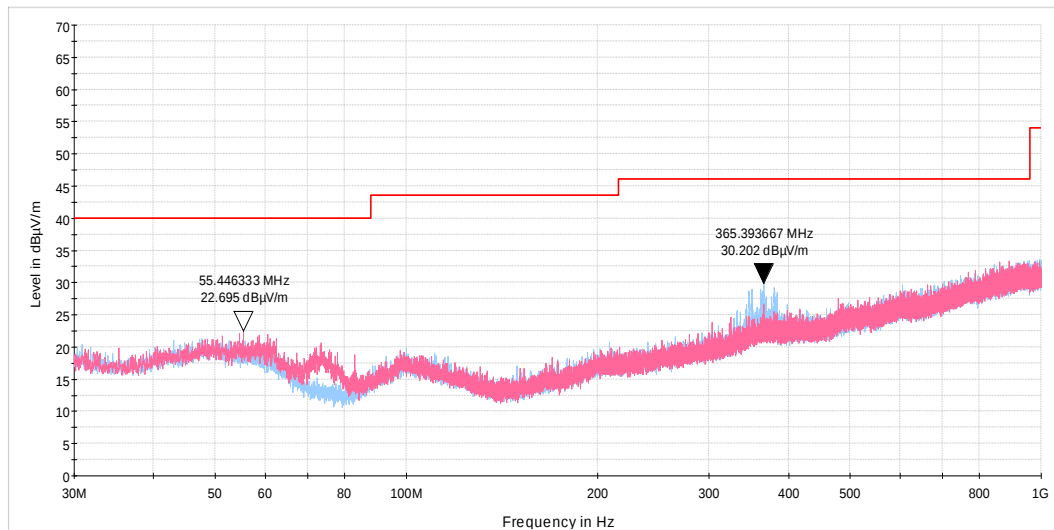

Plot 7.3.10 Radiated emission measurements from 1000 to 18000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

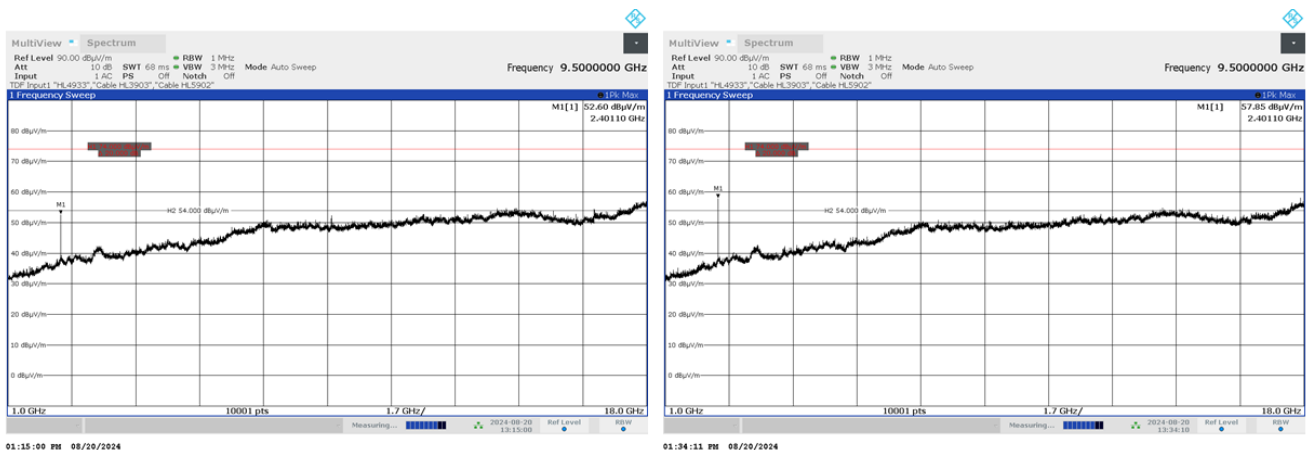

With filter HL 4338 (Stop band 2170-3000 MHz was investigated in the band edge emission tests)




HERMON LABORATORIES

Report ID: SUPRAD_FCC.54670.docx
Date of Issue: 24-Nov-24

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Plot 7.3.11 Radiated emission measurements from 1000 to 18000 MHz at the mid carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

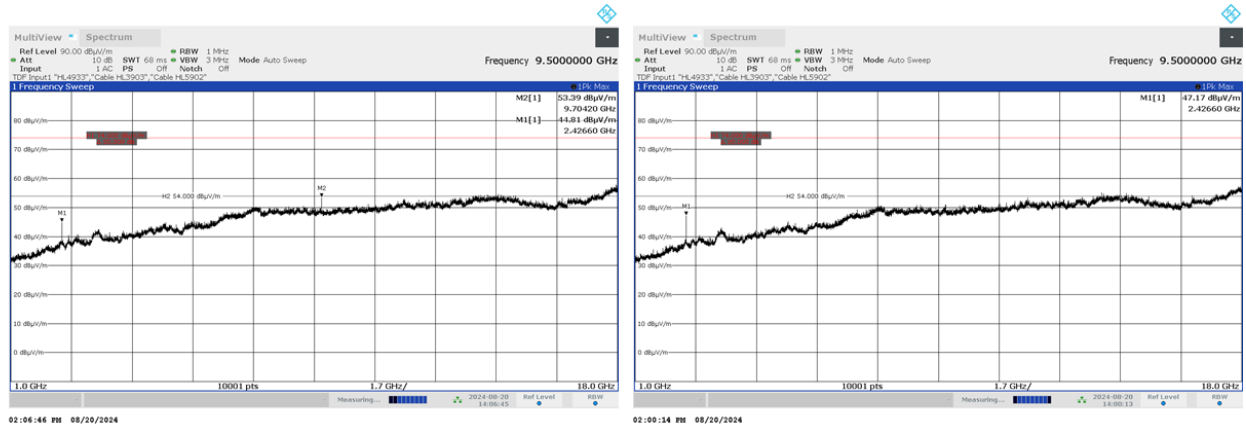

With filter HL 4338 (Stop band 2170-3000 MHz was investigated in the band edge emission tests)

Plot 7.3.12 Radiated emission measurements from 1000 to 18000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

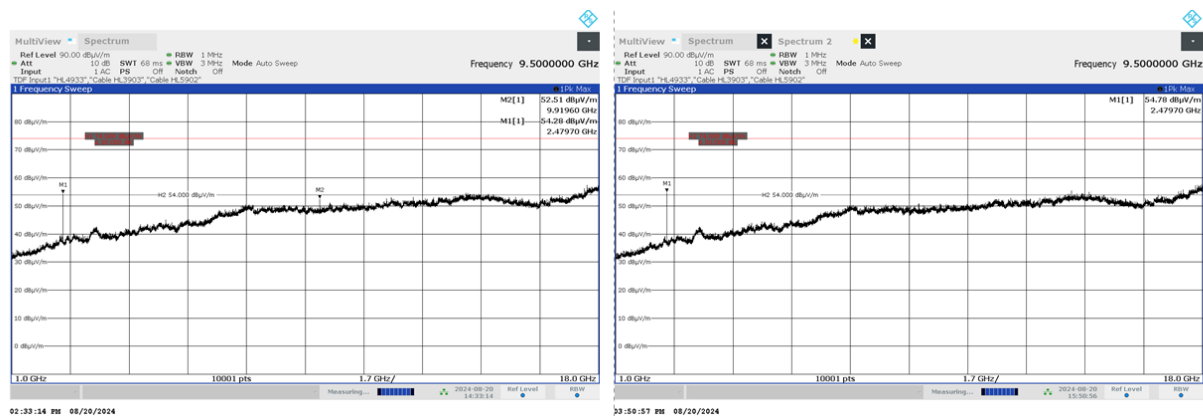


With filter HL 4338 (Stop band 2170-3000 MHz was investigated in the band edge emission tests)



Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			


Plot 7.3.13 Radiated emission measurements from 18000 to 25000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

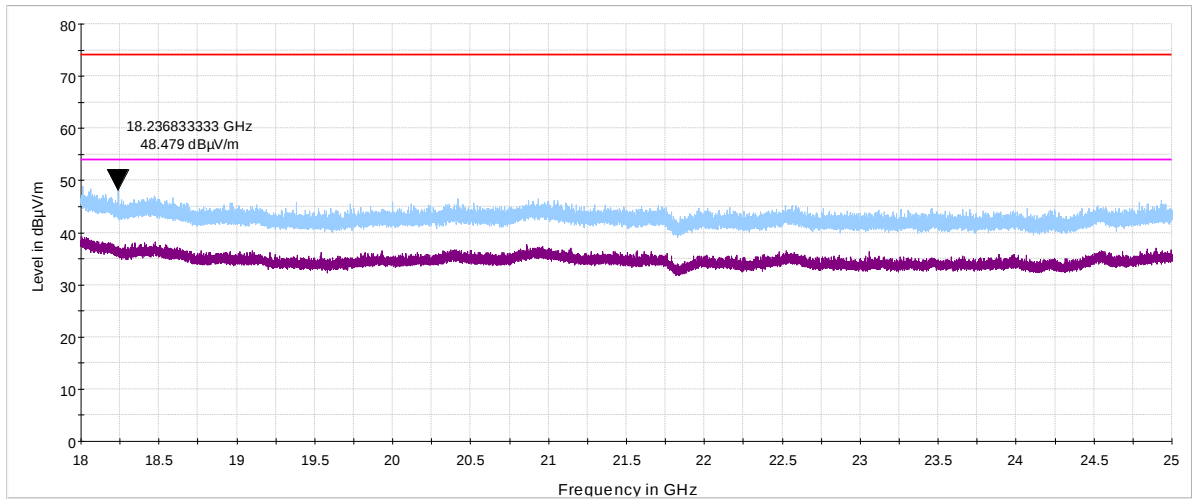

Plot 7.3.14 Radiated emission measurements from 18000 to 25000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

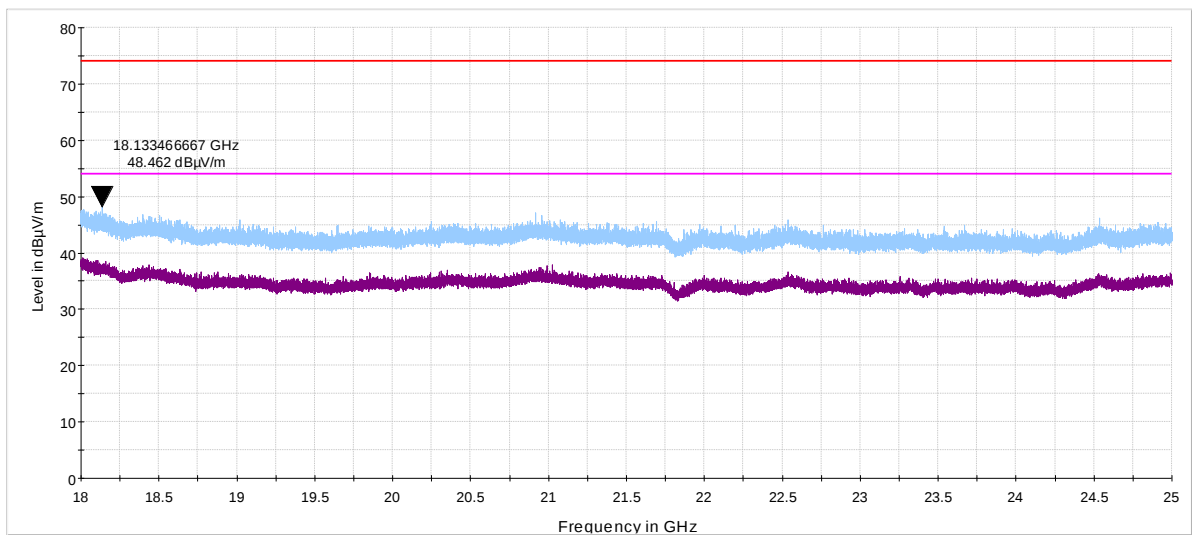




HERMON LABORATORIES

Report ID: SUPRAD_FCC.54670.docx
Date of Issue: 24-Nov-24

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Plot 7.3.15 Radiated emission measurements from 18000 to 2500 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

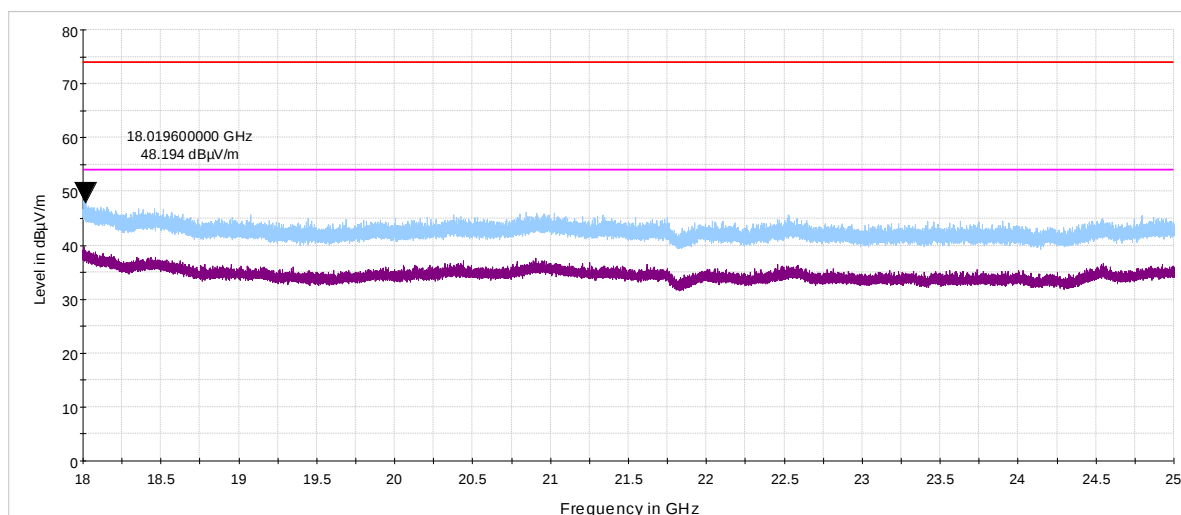




HERMON LABORATORIES

Report ID: SUPRAD_FCC.54670.docx
Date of Issue: 24-Nov-24

Test specification: Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10, sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			


Plot 7.3.16 Radiated emission measurements at the fourth harmonic of mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

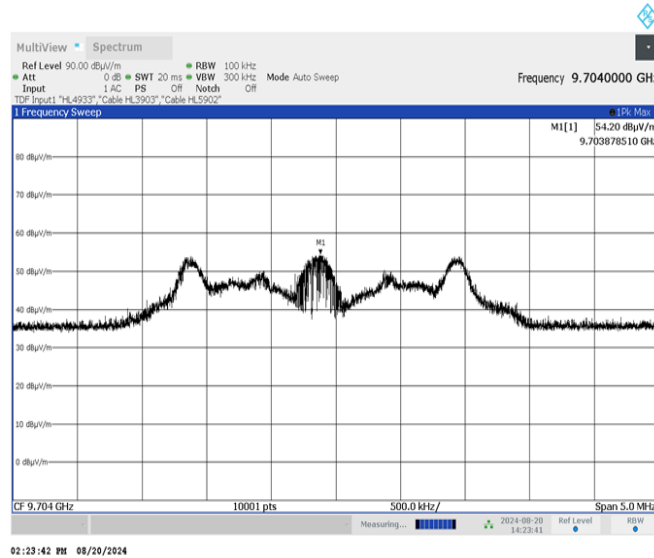

Plot 7.3.17 Radiated emission measurements at the fourth harmonic of high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

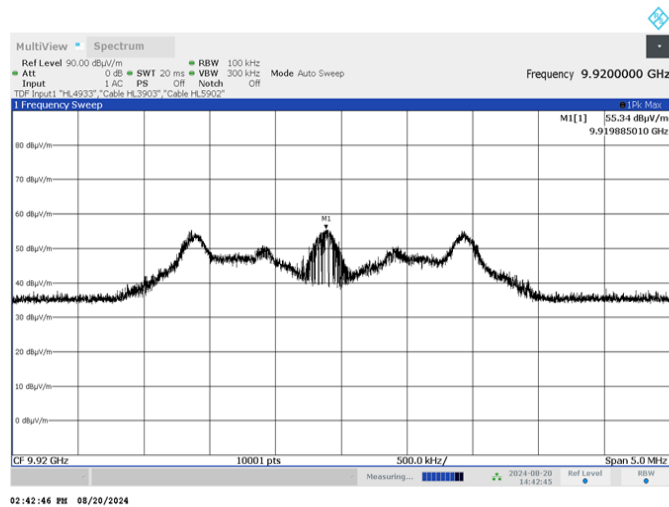




HERMON LABORATORIES

Report ID: SUPRAD_FCC.54670.docx


Date of Issue: 24-Nov-24

Test specification:		Section 15.247(d), RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10, sections 6.5, 6.6	
Test mode:		Verdict: PASS	
Date(s):			
21-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Plot 7.3.18 Transmission pulse duration

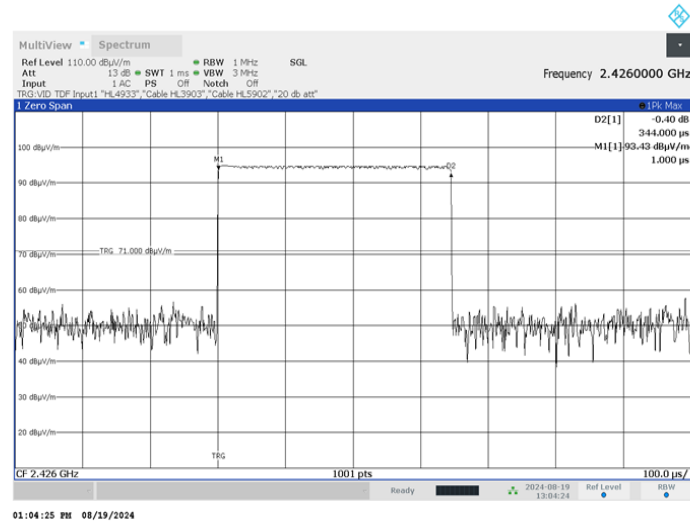

Plot 7.3.19 Transmission pulse period

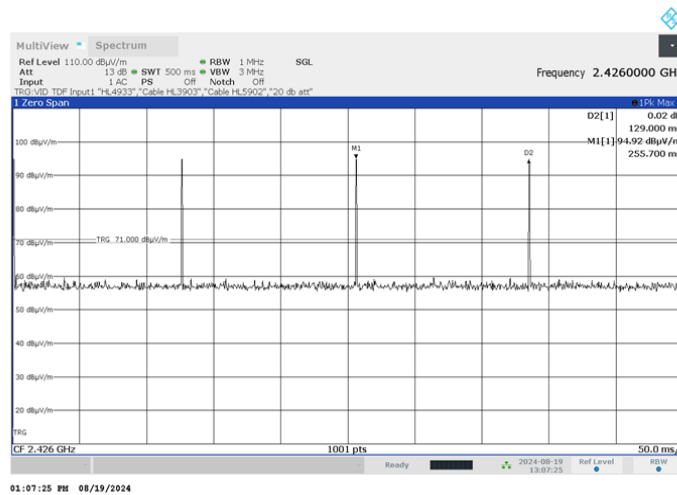



Test specification:		Section 15.247(d), RSS-247 section 5.5, Emissions at band edges	
Test procedure:		ANSI C63.10, section 7.8.6	
Test mode:		Verdict: PASS	
Date(s):			
21-Aug-24 - 19-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

7.4 Band edge radiated emissions

7.4.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Band edge emission limits

Output power	Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(μV/m)	
			Peak	Average
Peak	902.0 – 928.0	20.0	74.0	54.0
	2400.0 – 2483.5			
	5725.0 – 5850.0			


* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.4.2 Test procedure

- 7.4.2.1** The EUT was set up as shown in Figure 7.4.1, energized normally modulated at the maximum data rate and its proper operation was checked.
- 7.4.2.2** The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.4.2.3** The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.4.2.4** The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.4.2.5** The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.4.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.4.2.6** The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.4.2.7** The above procedure was repeated with the frequency hopping function enabled.

Test specification:		Section 15.247(d), RSS-247 section 5.5, Emissions at band edges	
Test procedure:		ANSI C63.10, section 7.8.6	
Test mode:		Verdict: PASS	
Date(s):			
21-Aug-24 - 19-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Figure 7.4.1 Band edge emission test setup

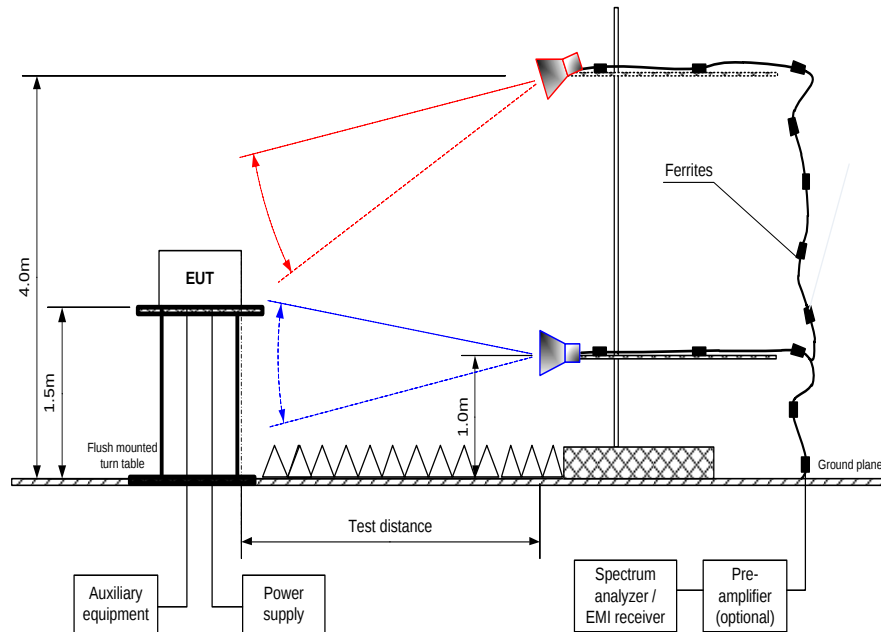



Test specification: Section 15.247(d), RSS-247 section 5.5, Emissions at band edges			
Test procedure: ANSI C63.10, section 7.8.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Aug-24 - 19-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Table 7.4.2 Band edge emission test results outside restricted bands test results

ASSIGNED FREQUENCY RANGE: 2400-2483.5 MHz
 DETECTOR USED: Peak
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
 VIDEO BANDWIDTH: $\geq$ RBW

Frequency, MHz	Band edge emission, dBuV/m	Emission at carrier, dBuV/m	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
2400	48.62	100.91	52.29	20	32.29	Pass

*- Margin = Attenuation below carrier – specification limit.

Table 7.4.3 Band edge emission inside restricted bands test results

ASSIGNED FREQUENCY RANGE: 2400.0 – 2483.5 MHz
 DETECTOR USED: Peak
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 VIDEO BANDWIDTH: $\geq$ RBW

Frequency, MHz	Peak field strength			Average field strength			Verdict
	Measured, dB(μ V/m)	Limit, dB(μ V/m)	Margin, dB**	Measured, dB(μ V/m)	Limit AVR, dB(μ V/m)	Margin, dB**	
2387.2	53.25	74.0	-20.75	53.25	54.0	-0.75	Pass
2483.5	55.70	74.0	-18.30	33.41*	54.0	-20.59	Pass

* - marker-delta method

Reference numbers of test equipment used

HL 7585	HL 4933	HL 3903	HL 5902	HL 5622			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: SUPRAD_FCC.54670.docx



Date of Issue: 24-Nov-24

Test specification:		Section 15.247(d), RSS-247 section 5.5, Emissions at band edges	
Test procedure:		ANSI C63.10, section 7.8.6	
Test mode:		Verdict: PASS	
Date(s):			
21-Aug-24 - 19-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Plot 7.4.1 The highest band edge emission outside restricted bands at low carrier frequency

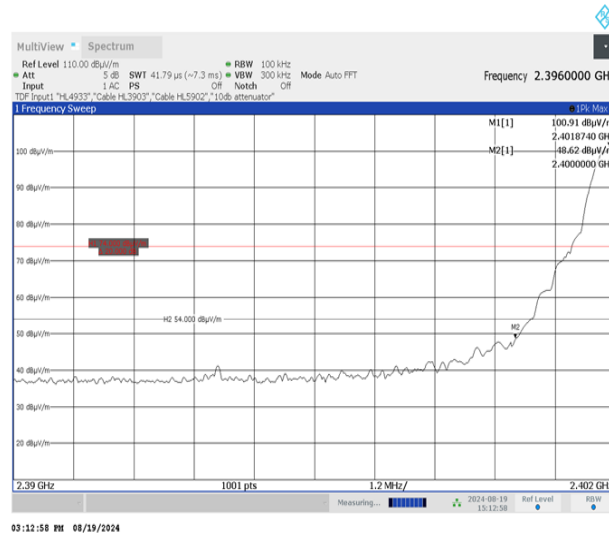

Plot 7.4.2 The highest band edge emission inside restricted bands at low carrier frequency

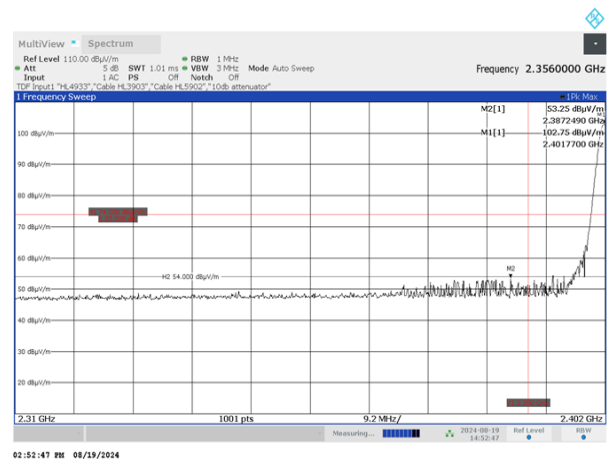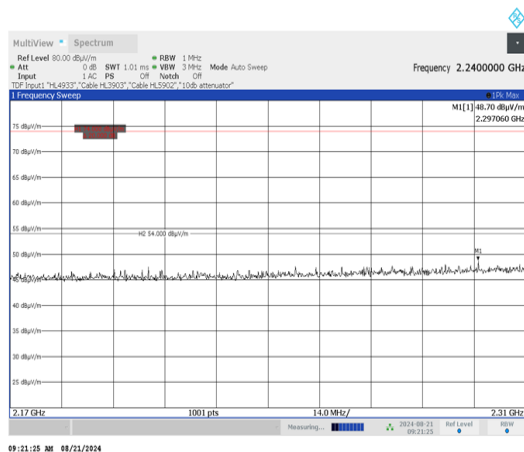



Test specification:		Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density	
Test procedure:		ANSI C63.10 section 11.10.2	
Test mode:		Verdict: PASS	
Date(s):			
21-Aug-24 - 28-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

7.5 Peak spectral power density

7.5.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB(μV/m)*
902.0 – 928.0	3.0	8.0	103.2
2400.0 – 2483.5			
5725.0 – 5850.0			

* - Equivalent field strength limit was calculated from the peak spectral power density as follows: $E = \sqrt{30 \times P} / r$, where P is peak spectral power density and r is antenna to EUT distance in meters.

7.5.2 Test procedure for field strength measurements

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.5.2.3 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.


7.5.2.4 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization. The spectrum lines spacing was verified to be wider than 3 kHz. Otherwise the resolution bandwidth was reduced until individual spectrum lines were resolved and the power of individual spectrum lines was integrated over 3 kHz band.

7.5.2.5 The peak of emission was zoomed with span set just wide enough to capture the emission peak area and sweep time was set equal to span width divided by resolution bandwidth. Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.5.2 and associated plots.



Test specification:		Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density	
Test procedure:		ANSI C63.10 section 11.10.2	
Test mode:		Verdict: PASS	
Date(s):			
21-Aug-24 - 28-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Figure 7.5.1 Setup for carrier field strength measurements

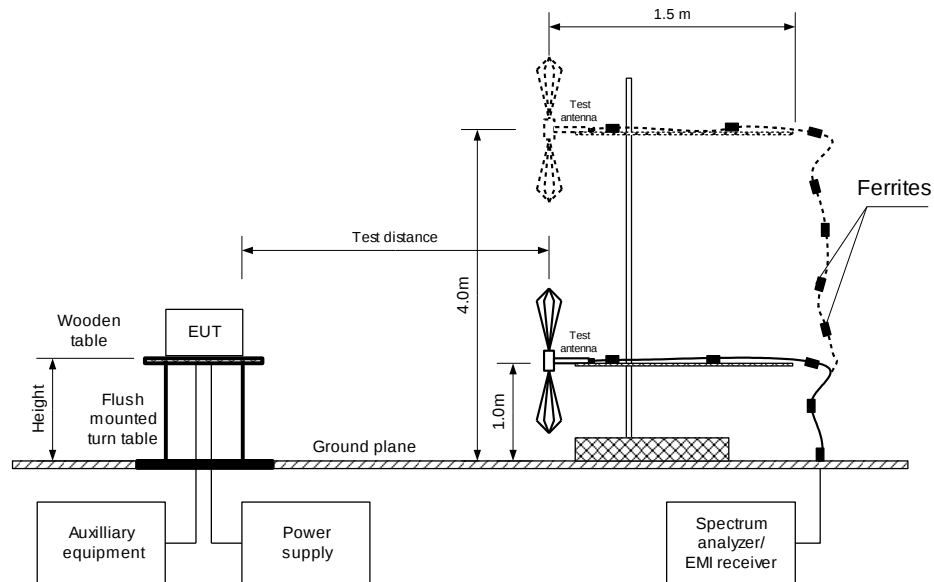



Test specification:		Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density	
Test procedure:		ANSI C63.10 section 11.10.2	
Test mode:		Verdict: PASS	
Date(s):			
21-Aug-24 - 28-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

Table 7.5.2 Field strength measurement of peak spectral power density

ASSIGNED FREQUENCY: 2400-2483.5 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 1.5 m
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 3 kHz
 VIDEO BANDWIDTH: 10 kHz
 TEST ANTENNA TYPE: Double ridged guide (above 1000 MHz)
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Field strength, dB(μV/m)	EUT antenna gain, dBi	Limit, dB(μV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
2402	87.93	3	103.2	-18.27	H	1.4	60
2426	88.88	3	103.2	-17.32	H	1.3	70
2480	83.38	3	103.2	-22.82	H	1.5	-40

*- Margin = Field strength - EUT antenna gain - calculated field strength limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 7585	HL 4933	HL 3903	HL 5902	HL 5622			
---------	---------	---------	---------	---------	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:		Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density	
Test procedure:		ANSI C63.10 section 11.10.2	
Test mode:		Verdict: PASS	
Compliance			
Date(s):		21-Aug-24 - 28-Aug-24	
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			


Plot 7.5.1 Peak spectral power density at low frequency

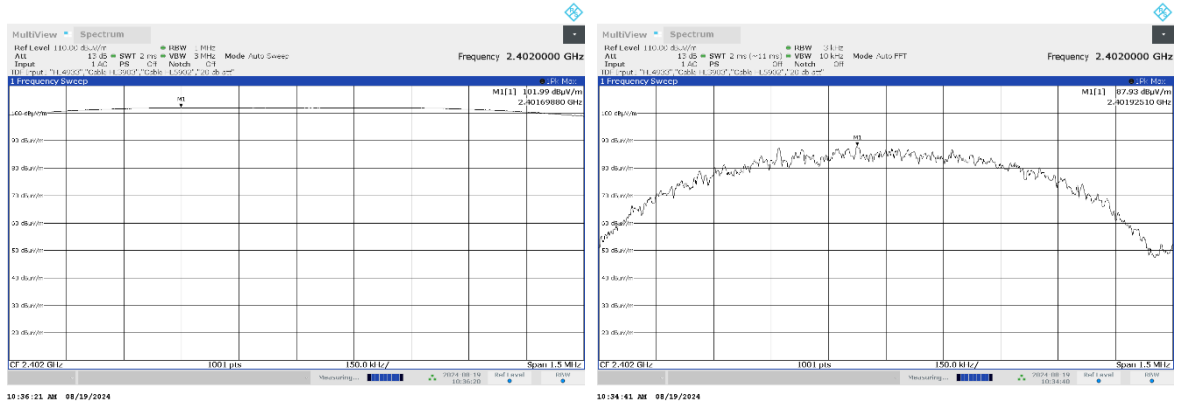

Plot 7.5.2 Peak spectral power density at mid frequency

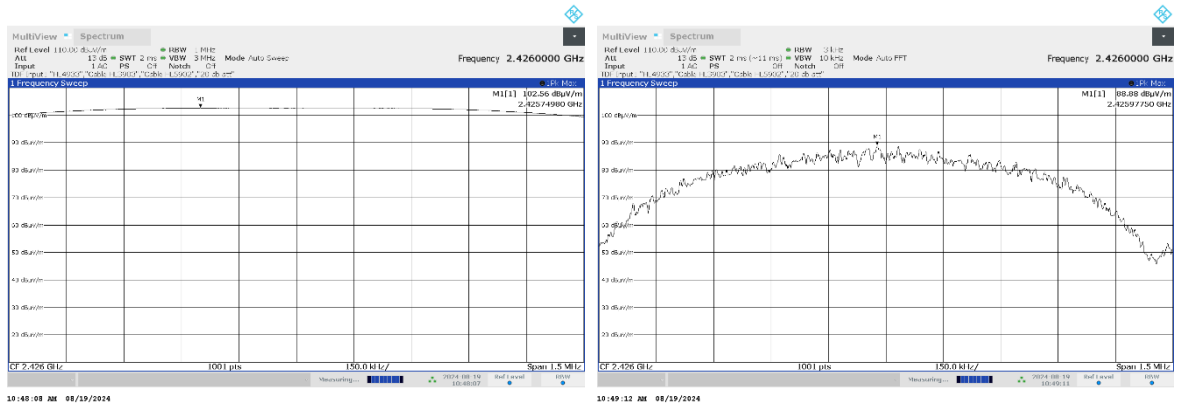

Plot 7.5.3 Peak spectral power density at high frequency

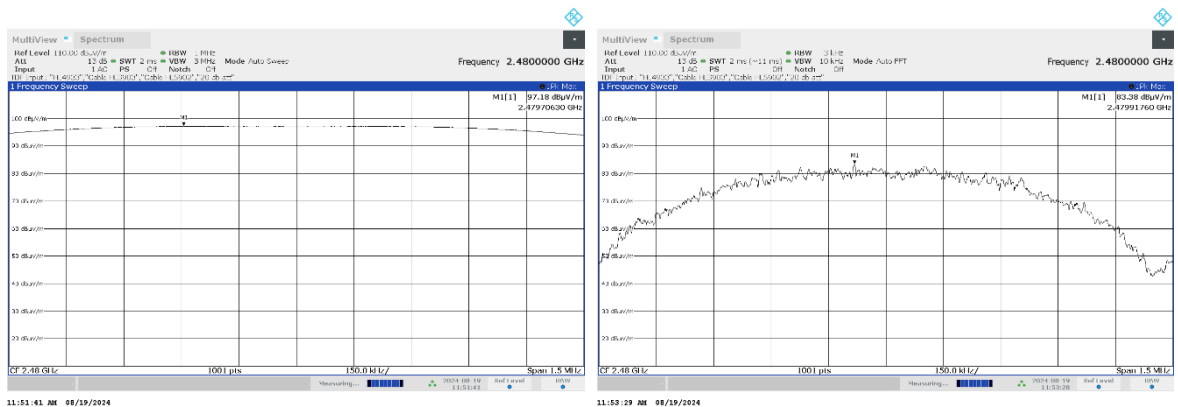



Test specification: FCC Part 15, Section 203 / RSS-Gen, Section 7.1.4, Antenna requirements			
Test procedure: Visual inspection		Verdict: PASS	
Test mode: Compliance			
Date(s): 21-Aug-24 - 28-Aug-24			
Temperature: 26 °C	Relative Humidity: 48 %	Air Pressure: 987 hPa	Power: 230 VAC, 50 Hz
Remarks:			

7.6 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.6.1.

Table 7.6.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 (9) kHz - 30 MHz	EMCO	6502	2857	29-Feb-24	28-Feb-25
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFL EX 102A	1226/2A	06-May-24	06-May-25
4114	Antenna, Double-Ridged Waveguide Horn, 1 to 18 GHz	ETS Lindgren	3117	00123515	08-Nov-23	08-Nov-24
4338	Reject Band Filter, 50 Ohm, 0 to 2170 and 3000 to 18000 MHz, SMA-FM / SMA-M	Micro-Tronics	BRM 50702-02	023	10-Jul-24	10-Jul-26
4339	High pass Filter, 50 Ohm, 1000 to 18000 MHz, SMA-FM / SMA-M	Micro-Tronics	HPM5011 5-02	001	21-Jun-23	21-Jun-25
4917	High Pass Filter, 50 Ohm, 3150 to 6500 MHz, SMA-FM / SMA-M	Mini-Circuits	VHF-2700+	NA	22-Jun-23	22-Jun-25
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	20-Feb-24	20-Feb-25
4956	Active horn antenna, 18 to 40 GHz	COM-POWER CORPORATION	AHA-840	105004	03-Mar-24	03-Mar-25
5112	RF cable, 40 GHz, 5.5 m, K-type	Huber-Suhner	SF102EA/11SK/11SK/5500M	502494/2EA	02-Jun-24	02-Jun-25
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	24-Mar-22	24-Mar-25
5601	Precision Fixed Attenuator, 50 Ohm, 5 W, 10 dB, DC to 18000 MHz	Mini Circuits	BW-N10W5+	NA	14-Aug-24	14-Aug-25
5622	Precision Fixed Attenuator, 50 Ohm, 5 W, 20 dB, DC to 18 GHz	Mini Circuits	BW-N20W5+	NA	14-Aug-24	14-Aug-25
5673	Cable SF126EA/11N(x2)/2M, 18GHz	Huber-Suhner	SF126EA	506756/126EA	19-May-24	19-May-25
5902	RF cable, 18 GHz, 6.0m, N-type	Huber-Suhner	SF126EA/11N/11N/6000	NA	19-Nov-23	19-Nov-24
5942	Signal Generator, 8.0 kHz to 6.0 GHz	Rohde & Schwarz	SMB-100B	102327	14-Jan-24	14-Jan-25
7585	EMI Test Receiver, 1 Hz to 44 GHz	Rohde & Schwarz	ESW44	103130	21-Sep-23	21-Sep-24

9 APPENDIX B Test equipment correction factors

HL 5288: Trilog Antenna
Frankonia, model: ALX-8000E, s/n: 00809
30-1000 MHz

Frequency, MHz	Antenna factor, dB/m
30	14.96
35	15.33
40	16.37
45	17.56
50	17.95
60	16.87
70	13.22
80	10.56
90	13.61
100	15.46
120	14.03
140	12.23

Frequency, MHz	Antenna factor, dB/m
160	12.67
180	13.34
200	15.40
250	16.42
300	17.28
400	19.98
500	21.11
600	22.90
700	24.13
800	25.25
900	26.35
1000	27.18

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

above 1000 MHz

Frequency, MHz	Antenna factor, dB/m
1000	26.9
1100	28.1
1200	28.4
1300	29.6
1400	29.1
1500	30.4
1600	30.7
1700	31.5
1800	32.3
1900	32.6
2000	32.5
2100	32.9
2200	33.5
2300	33.2
2400	33.7
2500	34.6
2600	34.7
2700	34.6
2800	35.0
2900	35.5
3000	36.2
3100	36.8
3200	36.8
3300	37.0
3400	37.5
3500	38.2

Frequency, MHz	Antenna factor, dB/m
3600	38.9
3700	39.4
3800	39.4
3900	39.6
4000	39.7
4100	39.8
4200	40.5
4300	40.9
4400	41.1
4500	41.4
4600	41.3
4700	41.6
4800	41.9
4900	42.3
5000	42.7
5100	43.0
5200	42.9
5300	43.5
5400	43.6
5500	44.3
5600	44.7
5700	45.0
5800	45.0
5900	45.3
6000	45.9

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

HL 0446: Active Loop Antenna
EMCO, model: 6502, s/n 2857

Frequency,	Measured antenna factor, dBS/m	Measurement uncertainty, dB
10	-33.4	±1.0
20	-37.8	±1.0
50	-40.5	±1.0
75	-41.0	±1.0
100	-41.2	±1.0
150	-41.2	±1.0
250	-41.1	±1.0
500	-41.2	±1.0
750	-41.3	±1.0
1000	-41.3	±1.0

Frequency,	Measured antenna factor, dBS/m	Measurement uncertainty, dB
2000	-41.4	±1.0
3000	-41.4	±1.0
4000	-41.5	±1.0
5000	-41.5	±1.0
10000	-41.7	±1.0
15000	-42.1	±1.0
20000	-42.7	±1.0
25000	-44.2	±1.0
30000	-45.8	±1.0

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ A/m.

HL 4933: Active Horn Antenna
COM-POWER CORPORATION, model: AHA-118, s/n 701046

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
1000	-16.1
1500	-15.1
2000	-10.9
2500	-11.9
3000	-11.1
3500	-10.6
4000	-8.6
4500	-8.3
5000	-5.9
5500	-5.7
6000	-3.3
6500	-4.0
7000	-2.2
7500	-1.7
8000	1.1
8500	-0.8
9000	-1.5
9500	-0.2

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
10000	1.8
10500	1.0
11000	0.3
11500	-0.5
12000	3.1
12500	1.4
13000	-0.3
13500	-0.4
14000	2.5
14500	2.2
15000	1.9
15500	0.5
16000	2.1
16500	1.2
17000	0.6
17500	3.1
18000	4.2

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

10 APPENDIX C Specification references

FCC 47CFR part 15: 2022	Radio Frequency Devices
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
RSS-247 Issue 3: 2023	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence- Exempt Local Area Network (LE-LAN) Devices
RSS-Gen Issue 5 with_amendment_1_2: 2021	General Requirements and Information for the Certification of Radiocommunication Equipment
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
ICES-003: 2020, Issue 7	Information Technology Equipment (Including Digital Apparatus)

11 APPENDIX D Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

12 APPENDIX E Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for relevant parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; Recognized by Innovation, Science and Economic Development Canada for wireless and terminal testing (ISED), ISED #2186A, CAB identifier is IL1001; Certified by VCCI, Japan (the registration numbers are R-10808 for OATS, R-1082 for anechoic chamber, G-10869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-11606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT