

FCC Test Report

Applicant : Shenzhen Dineng Technology Co., LTD.

Address : 202 Building A, Gang Hong Ji High-tech
Intelligent Industrial Park, 1008 Songbai
Road, Xili Street, Nanshan District, Shenzhen,
Guangdong, China

Product Name : portable power station

Report Date : May 04, 2023



Shenzhen Anbotek Compliance Laboratory Limited

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 0755-26066440 Fax: (86) 0755-26014772 Email: service@anbotek.com

Code: AB-RF-05-b



Hotline

400-003-0500

www.anbotek.com.cn



Contents

1. General Information	5
1.1. Client Information	5
1.2. Description of Device (EUT)	5
1.3. Auxiliary Equipment Used During Test	6
1.4. Description of Test Modes	6
1.5. Description Of Test Setup	8
1.6. Test Equipment List	9
1.7. Measurement Uncertainty	10
1.8. Description of Test Facility	10
2. Summary of Test Results	11
3. Conducted Emission Test	12
3.1. Test Standard and Limit	12
3.2. Test Setup	12
3.3. Test Procedure	12
3.4. Test Data	12
4. Radiation Spurious Emission	15
4.1. Test Standard and Limit	15
4.2. Test Setup	15
4.3. Test Procedure	16
4.4. Test Data	16
5. Antenna Requirement	21
5.1. Test Standard and Requirement	21
5.2. Antenna Connected Construction	21
APPENDIX I -- TEST SETUP PHOTOGRAPH	22
APPENDIX II -- EXTERNAL PHOTOGRAPH	22
APPENDIX III -- INTERNAL PHOTOGRAPH	22



TEST REPORT

Applicant : Shenzhen Dineng Technology Co., LTD.
Manufacturer : Shenzhen Dineng Technology Co., LTD.
Product Name : portable power station
Model No. : PS151032S, PS151032SAX, PS151032SBX, PS151032SCX (X=1~9)
Trade Mark : N/A
Rating(s) : Please refer to page 7

Test Standard(s) : FCC Part15 Subpart C, Paragraph 15.209

Test Method(s) : ANSI C63.10: 2020

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Mar. 14, 2023

Date of Test

Mar. 14~Apr. 11, 2023

Prepared By

Tu Tu Hong

(TuTu Hong)

Approved & Authorized Signer

Kingkong Jin

(Kingkong Jin)



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	May 04, 2023



1. General Information

1.1. Client Information

Applicant	:	Shenzhen Dineng Technology Co., LTD.
Address	:	202 Building A, Gang Hong Ji High-tech Intelligent Industrial Park, 1008 Songbai Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China
Manufacturer	:	Shenzhen Dineng Technology Co., LTD.
Address	:	202 Building A, Gang Hong Ji High-tech Intelligent Industrial Park, 1008 Songbai Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China
Factory	:	Chasing-Innovation Technology Ganzhou Co., LTD
Address	:	Building 4, Huachang Science and Technology Park, Ganzhou Economic and Technological Development Zone, Ganzhou City, Jiangxi Province, China

1.2. Description of Device (EUT)

Product Name	:	portable power station
Model No.	:	PS151032S, PS151032SAX, PS151032SBX, PS151032SCX (X=1~9) (Note: All samples are the same except the model number & appearance size, so we prepare "Ps151032s" for test only.)
Trade Mark	:	N/A
Test Power Supply	:	AC 120V, 60Hz / DC 28.8V
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A

RF Specification

Operation Frequency	:	110.1-205KHz
Modulation Type	:	FSK
Antenna Type	:	Inductive loop coil Antenna
Antenna Gain(Peak)	:	0 dBi (Provided by customer)

Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



1.3. Auxiliary Equipment Used During Test

Description	Rating(s)
Wireless charging load	Manufacturer: Shenzhen Ouju Technology Co., Ltd. M/N: CD2577 Power: 5W/7.5W/10W/15W

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Charging & Wireless Charging Mode
Mode 2	Wireless Charging Mode

For Conducted Emission	
Final Test Mode	Description
Mode 1	Charging & Wireless Charging Mode

For Radiated Emission	
Final Test Mode	Description
Mode 2	Wireless Charging Mode

Note:

(1) Test channel is 0.1248MHz.

(2) All the situation(full load, half load and empty load) has been tested,only the worst situation (full load 15W) was recorded in the report.



Rating(s)

DEENO GT**DEENO GT S1500****Model: PS151032S**

Battery capacity: 1036.8Wh (36Ah/28.8V)

Battery type: LiFePO4

Total output power: 1500W

AC charging: 750W max

AC input voltage: 100-120V~ 50Hz/60Hz, 15A

Solar charging: 12V - 32V $\equiv$ 8A, 200W maxCar charging: 12V/24V $\equiv$ 8A, 192W maxAC output $\times 3$: 1500W (peak 3000W), 120V~ 50Hz/60HzUSB-A $\times 3$: 5V $\equiv$ 3A, 9V $\equiv$ 2A, 12V $\equiv$ 1.5A

(54W max for the simultaneous output of 3 ports)

USB-C $\times 2$: 5V, 9V, 12V, 15V $\equiv$ 3A, 20V $\equiv$ 5A

(200W max for the simultaneous output of 2 ports)

Car charging output $\times 1$: 12V $\equiv$ 10A (120W max)DC5.5*2.1 $\times 1$: 12V $\equiv$ 5A (60W max)DC5.5*2.5 $\times 1$: 24V $\equiv$ 5A (120W max)Wireless charging $\times 1$: 5V $\equiv$ 3A, 9V $\equiv$ 1.67A (15W max)

LED lighting power: 12W (four modes: 25% brightness, 50% brightness, 100% brightness, and SOS)

Discharging ambient temperature: -20°C - 45°C (-4°F - 113°F)

Charging ambient temperature: 0°C - 45°C (32°F - 113°F)

CAUTION

1. This product is forbidden to be placed near heat sources, such as fire or heating oven.
2. This product is forbidden to touch any liquids. Do not use this product in the rain or in a humid environment.
3. Do not disassemble or pierce this product in any way.
4. Do not short-circuit this product with wires or other metal objects.
5. Do not stack any heavy objects on this product.
6. Do not forcibly block the fan during use, or place this product in an unventilated and dusty place.

**UN38.3
REACH**


210-210182 FCC-ID: 2BAX6-PS151032S

Shenzhen Dineng
Technology Co., Ltd.

Made in china



1.5. Description Of Test Setup

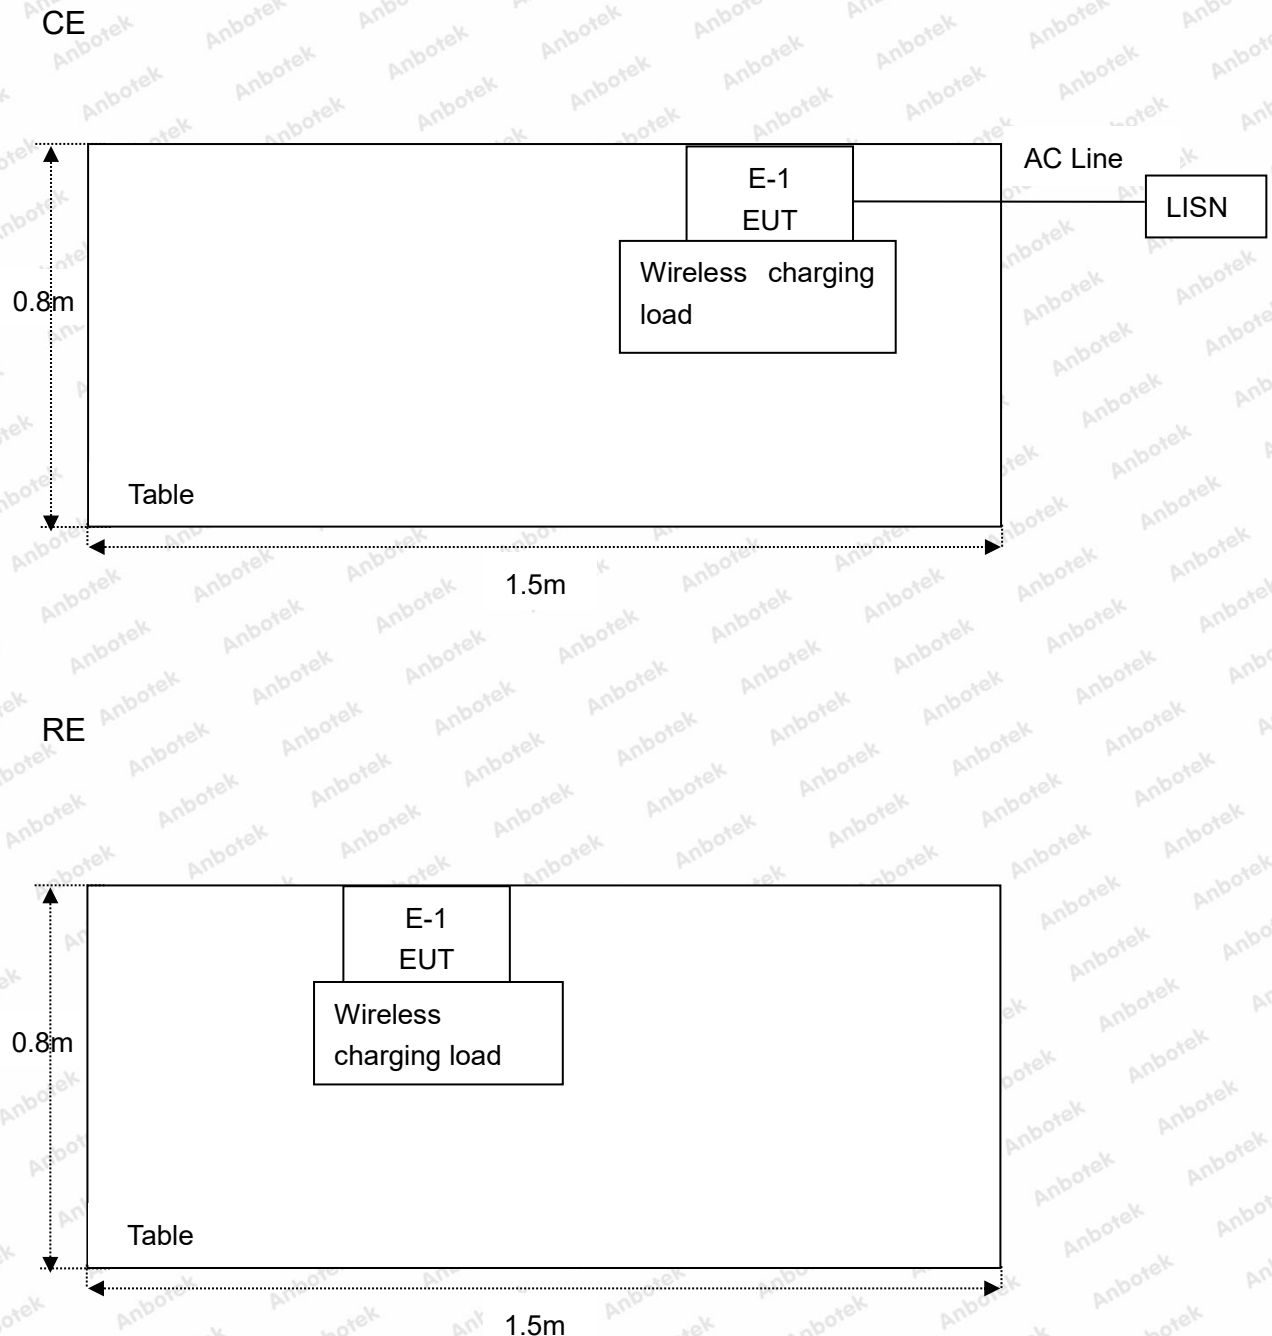

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 23, 2022	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul. 05, 2022	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 13, 2022	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 23, 2022	1 Year
5.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2022	1 Year
6.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 13, 2022	1 Year
7.	EMI Preamplifier	SKET Electronic	LNPA-0118G -45	SKET-PA-002	Oct. 13, 2022	1 Year
8.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	Oct. 16, 2022	3 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 23, 2022	1 Year
10.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 23, 2022	1 Year
11.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Oct. 23, 2022	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	Oct. 23, 2022	1 Year
13.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
14.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 13, 2022	1 Year
15.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 13, 2022	1 Year
16.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 13, 2022	1 Year
17.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2022	1 Year
18.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 19, 2022	1 Year
19.	Power Meter	Agilent	N1914A	MY50001102	Oct. 26, 2022	1 Year



1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission Test	PASS
15.205/15.209	Spurious Emission	PASS




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

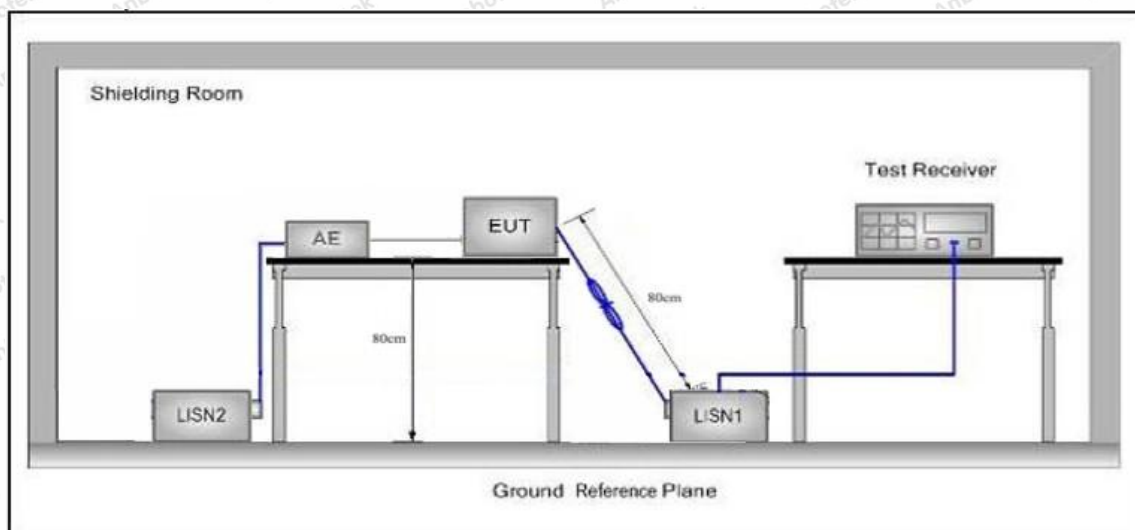

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data


AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case AC 120V/60Hz.

Please to see the following pages.



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz
Comment: Live Line
Temp.(°C)/Hum.(%RH): 22.1°C/52%RH

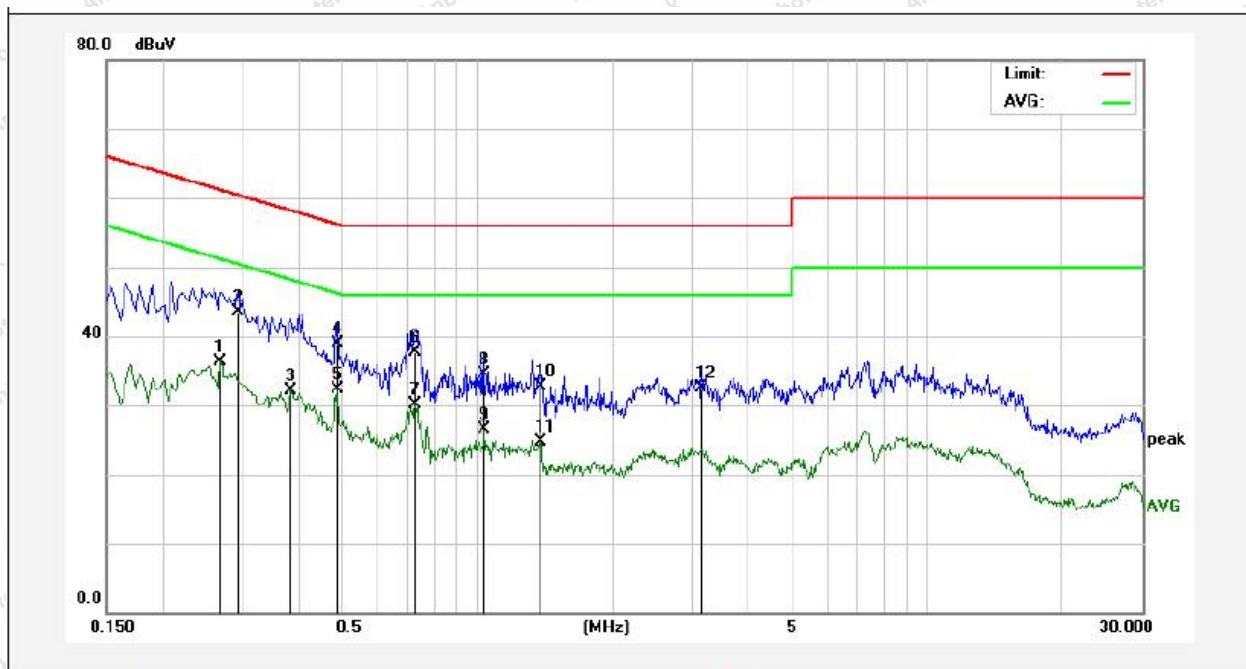


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2700	26.40	9.84	36.24	51.12	-14.88	AVG	
2	0.2940	33.69	9.84	43.53	60.41	-16.88	QP	
3	0.3860	22.28	9.81	32.09	48.15	-16.06	AVG	
4	0.4900	29.08	9.86	38.94	56.17	-17.23	QP	
5	0.4900	22.38	9.86	32.24	46.17	-13.93	AVG	
6	0.7300	27.91	9.87	37.78	56.00	-18.22	QP	
7	0.7300	20.18	9.87	30.05	46.00	-15.95	AVG	
8	1.0339	24.73	9.86	34.59	56.00	-21.41	QP	
9	1.0380	16.60	9.86	26.46	46.00	-19.54	AVG	
10	1.3860	22.86	9.86	32.72	56.00	-23.28	QP	
11	1.3860	14.91	9.86	24.77	46.00	-21.23	AVG	
12	3.1500	22.63	9.85	32.48	56.00	-23.52	QP	



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz
Comment: Neutral Line
Temp.(°C)/Hum.(%RH): 22.1°C/52%RH

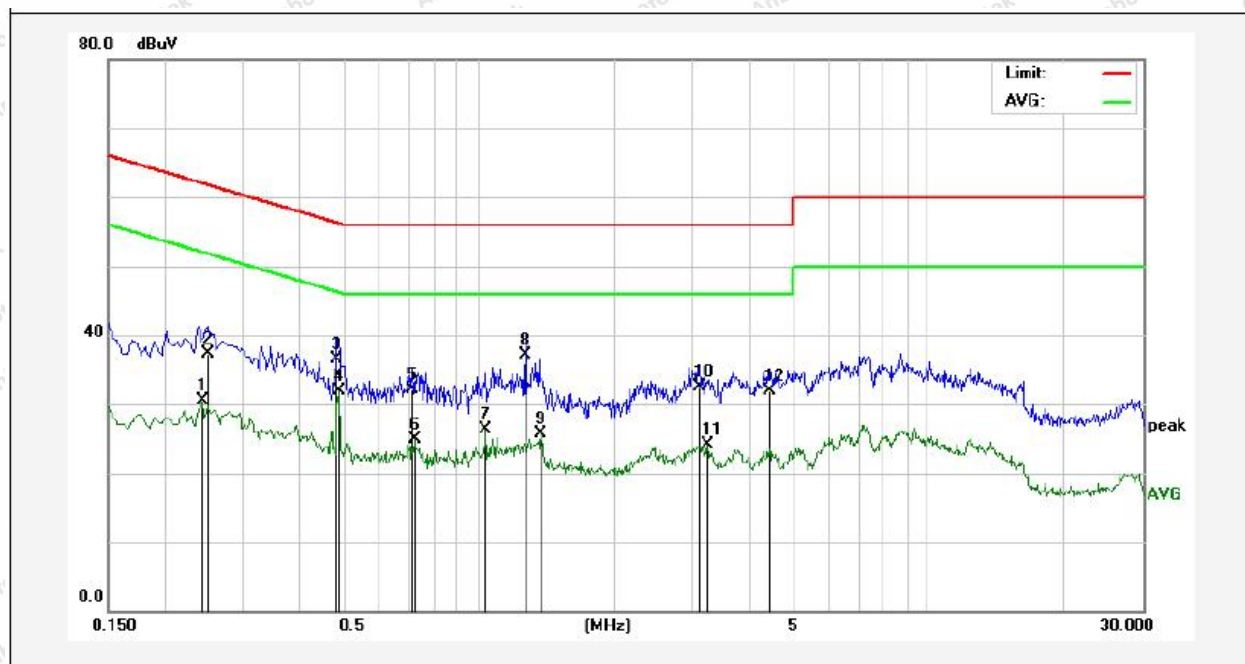

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2420	20.73	9.82	30.55	52.02	-21.47	AVG	
2	0.2500	27.51	9.82	37.33	61.75	-24.42	QP	
3	0.4860	26.61	9.85	36.46	56.24	-19.78	QP	
4	0.4900	21.98	9.86	31.84	46.17	-14.33	AVG	
5	0.7140	22.15	9.87	32.02	56.00	-23.98	QP	
6	0.7220	15.01	9.87	24.88	46.00	-21.12	AVG	
7	1.0380	16.48	9.86	26.34	46.00	-19.66	AVG	
8	1.2740	27.17	9.86	37.03	56.00	-18.97	QP	
9	1.3779	15.77	9.86	25.63	46.00	-20.37	AVG	
10	3.1060	22.62	9.85	32.47	56.00	-23.53	QP	
11	3.2380	14.23	9.85	24.08	46.00	-21.92	AVG	
12	4.4380	22.13	9.85	31.98	56.00	-24.02	QP	



4. Radiation Spurious Emission

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

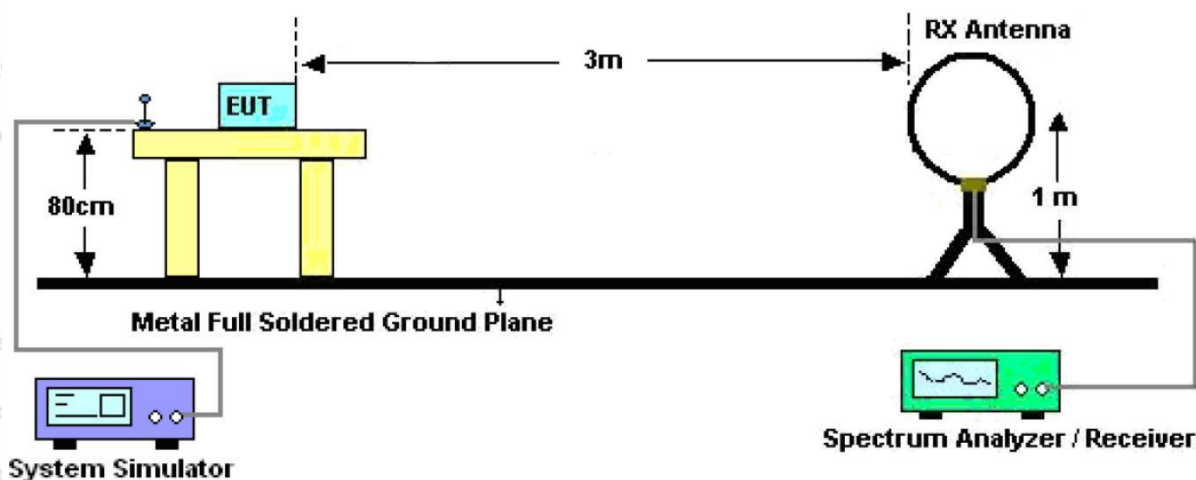


Figure 1. Below 30MHz



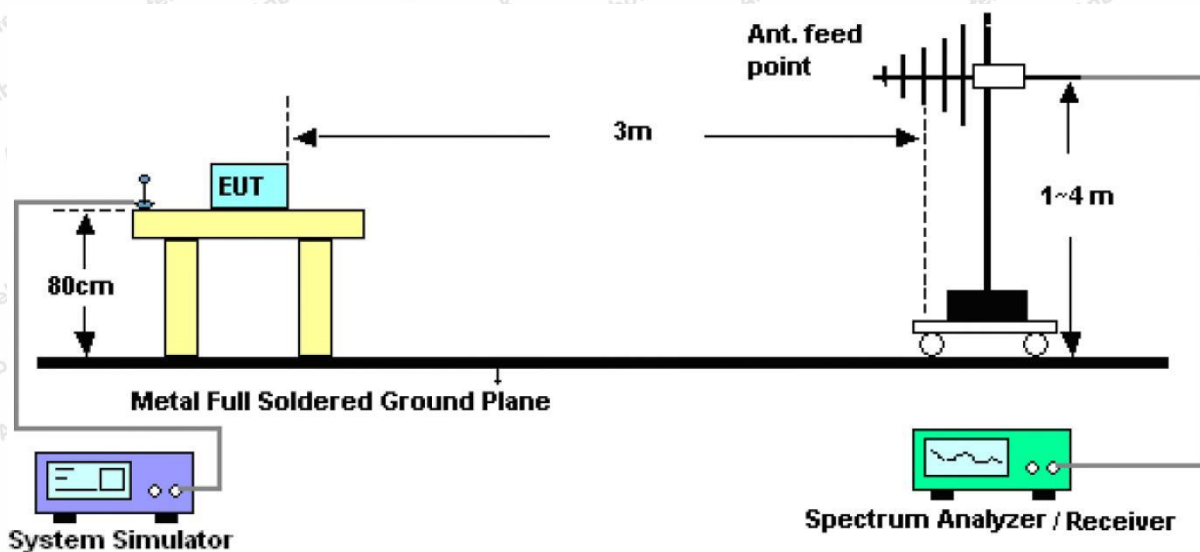


Figure 2. 30MHz to 1GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data


PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.



Test Results (Between 9KHz – 150KHz)

Test Mode: Mode 1
Distance: 3m
Power Source: DC 28.8V
Temp.(°C)/Hum.(%RH): 22.5°C/50%RH

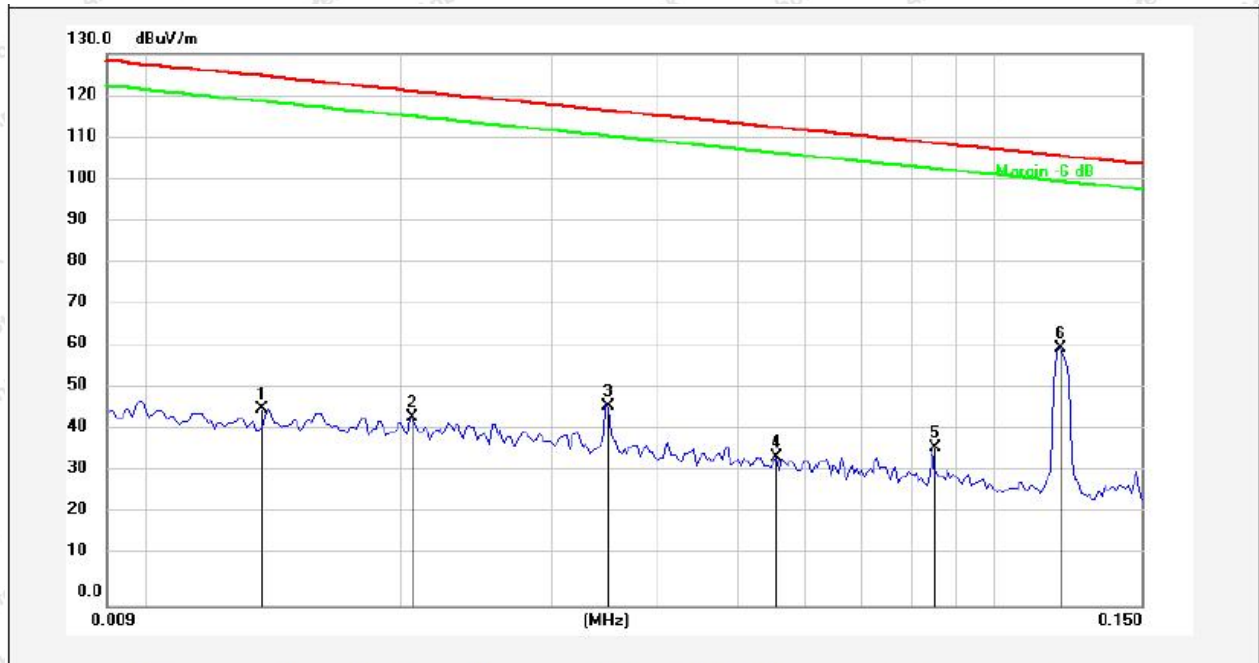


No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.0137	26.07	20.17	46.24	124.68	-78.44	peak			
2	0.0206	23.99	20.30	44.29	121.16	-76.87	peak			
3	0.0350	26.32	20.49	46.81	116.58	-69.77	peak			
4	0.0555	14.68	20.35	35.03	112.60	-77.57	peak			
5	0.0849	16.70	20.38	37.08	108.93	-71.85	peak			
6	0.1248	40.32	20.34	60.66	105.96	-45.30	peak			



Test Results (Between 0.15MHz – 30MHz)

Test Mode: Mode 1
Distance: 3m
Power Source: DC 28.8V
Temp.(°C)/Hum.(%RH): 22.5°C/50%RH

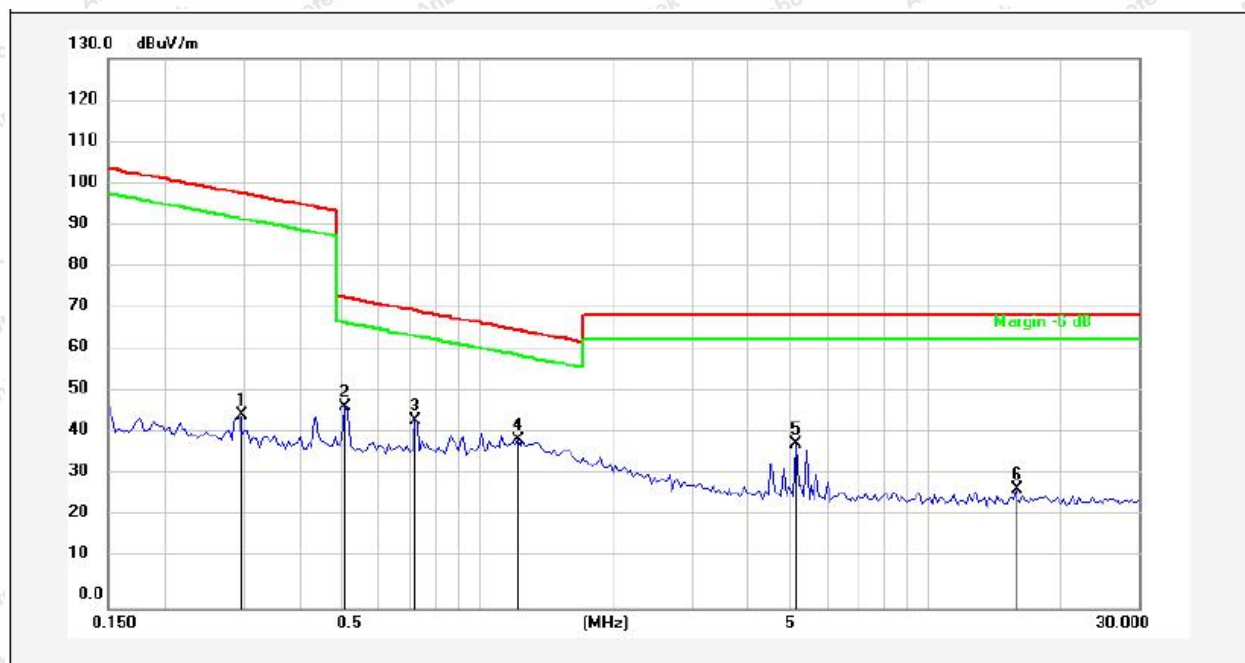

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.2948	25.23	20.30	45.53	98.19	-52.66	peak			
2	0.5070	27.27	20.27	47.54	73.50	-25.96	peak			
3	0.7255	24.04	20.25	44.29	70.40	-26.11	peak			
4	1.2319	19.55	20.26	39.81	65.81	-26.00	peak			
5	5.1524	18.42	20.40	38.82	69.50	-30.68	peak			
6	15.8854	7.60	20.55	28.15	69.50	-41.35	peak			

Remark: According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.




Report No.: 18360WC30003502

FCC ID: 2BAX6-PS151032S

Page 19 of 22

Test Results (Between 30MHz –1000 MHz)


Test Mode: Mode 1
Distance: 3m
Power Source: DC 28.8V
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 22.5°C/50%RH

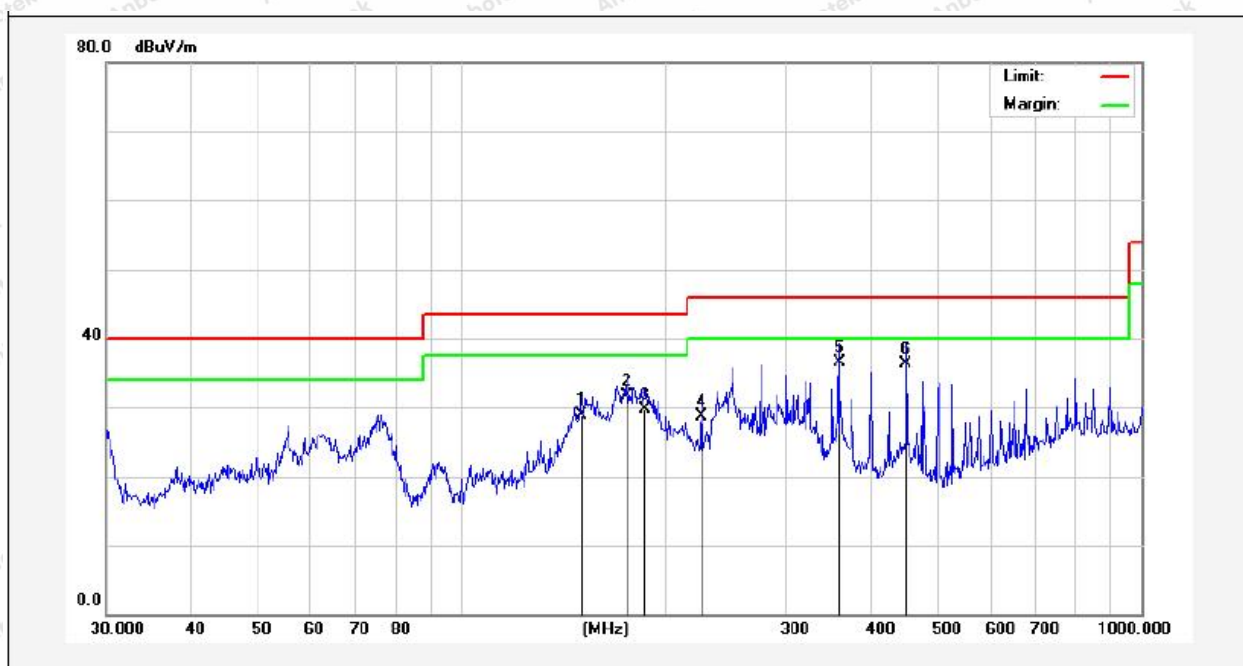

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	150.0108	51.79	-22.85	28.94	43.50	-14.56	QP			
2	175.0368	55.06	-23.39	31.67	43.50	-11.83	QP			
3	186.4409	52.52	-22.91	29.61	43.50	-13.89	QP			
4	225.3080	50.61	-21.91	28.70	46.00	-17.30	QP			
5	359.1860	52.59	-16.03	36.56	46.00	-9.44	QP			
6	451.1350	51.70	-15.44	36.26	46.00	-9.74	QP			



Test Mode: Mode 1
Distance: 3m
Power Source: DC 28.8V
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 22.5°C/50%RH

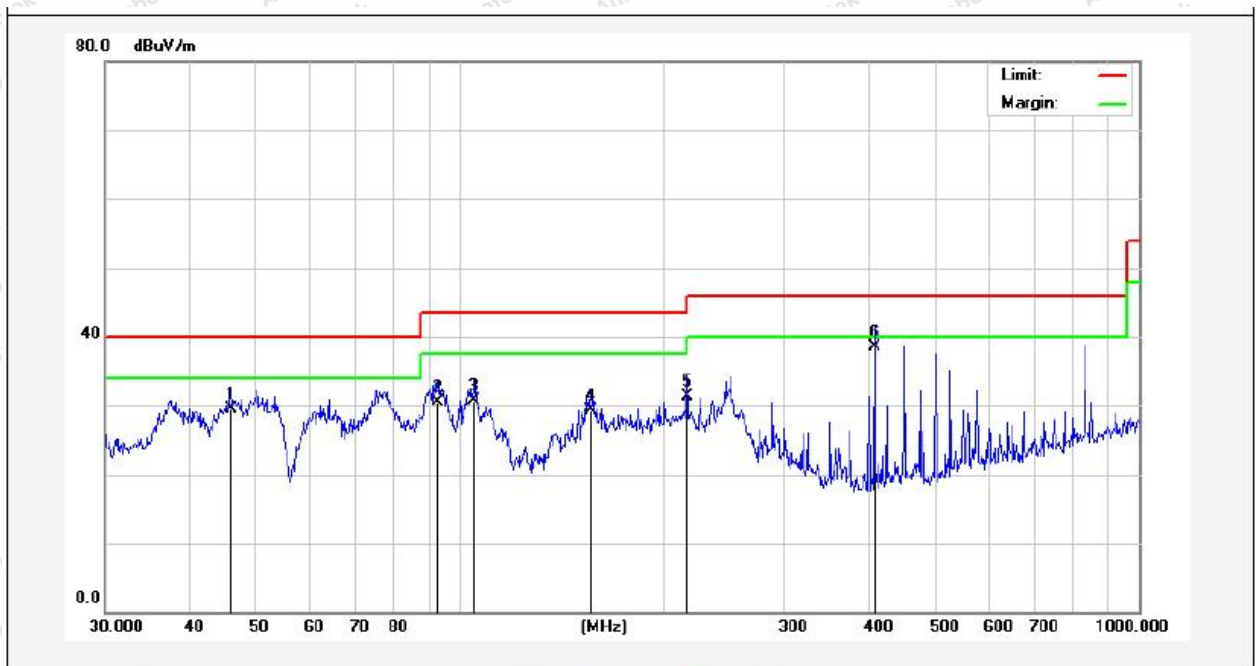

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	46.0164	44.63	-15.19	29.44	40.00	-10.56	QP			
2	92.7871	47.87	-17.37	30.50	43.50	-13.00	QP			
3	104.9033	48.00	-17.35	30.65	43.50	-12.85	QP			
4	155.9101	51.23	-21.83	29.40	43.50	-14.10	QP			
5	216.0240	50.46	-19.11	31.35	46.00	-14.65	QP			
6	407.5145	52.86	-14.32	38.54	46.00	-7.46	QP			



5. Antenna Requirement

5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

