

FCC TEST REPORT

FCC ID:2BAYR-YX-342

Report Number..... : ZKT-230421L2903

Date of Test..... April 17, 2023 to May 05, 2023

Date of issue..... : May 05, 2023

Total number of pages..... : 33

Test Result : PASS

Testing Laboratory..... : **Shenzhen ZKT Technology Co., Ltd.**

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Dongguan city Humen Yongxin Electronic Factory

Address : NO.2,hongmian road 1,danang district,Humen town,Dongguan city,China

Manufacturer's name : Dongguan city Humen Yongxin Electronic Factory

Address : NO.2,hongmian road 1,danang district,Humen town,Dongguan city,China

Test specification:

Standard..... : FCC CFR Title 47 Part 15 Subpart C

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No..... : TRF-EL-107_V0

Test Report Form(s) Originator..... : ZKT Testing

Master TRF : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : folding wireless charger

Trademark : /


Model/Type reference..... : YX-342


Ratings..... :
Input: DC9V--2A;12V2A
Charging mobile phone output: 15W/10W/7.5W/5W
Charging iwatch output output: 2.5W
Charging AirPods output: 3W

Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen,
China

Tested by (name + signature).....: Alen He 

Reviewer (name + signature).....: Joe Liu 

Approved (name + signature).....: Lake Xie 

TABLE OF CONTENTS

1. VERSION	4
2. TEST SUMMARY	5
2.2 MEASUREMENT UNCERTAINTY	5
3. GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 Test mode	6
3.3 Block Diagram of EUT Configuration	6
3.4 Test Conditions	7
3.5 Description Of Support Units (Conducted Mode)	7
3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	8
4. CONDUCTED EMISSION TEST	9
4.1 CONDUCTED EMISSION MEASUREMENT	9
4.1.1 POWER LINE CONDUCTED EMISSION Limits	9
4.1.2 TEST PROCEDURE	9
4.1.3 DEVIATION FROM TEST STANDARD	9
4.1.4 TEST SETUP	10
4.1.5 EUT OPERATING CONDITIONS	10
4.1.6 Test Result	10
5. RADIATED EMISSION MEASUREMENT	13
5.1 Radiated Emission Limits	13
5.2 Anechoic Chamber Test Setup Diagram	14
5.3 Test Procedure	14
5.4 DEVIATION FROM TEST STANDARD	15
5.5 Test Result	15
6. BANDWIDTH TEST	18
Test Result	18
7. TEST SETUP PHOTO	21
8. EUT CONSTRUCTIONAL DETAILS	21

1. VERSION

Report No.	Version	Description	Approved
ZKT-230421L2903	Rev.01	Initial issue of report	April 23, 2023

2. TEST SUMMARY

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass
20dB Bandwidth	15.215	Pass

NOTE: (1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street,
Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225
Designation Number: CN1299
IC Registered No.: 27033

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Ucertainty
1	3m camber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
3	3m chamber Radiated spurious mission(18Gz40GHz)	U=3.34dB
4	Conducted Adjacent channel power	U=1.38dB
5	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	humidity uncertainty	U=5.3%
8	Temperature uncertainty	U=0.59℃
9	Radiated disturbance(30MHz-1000MHz)	U=4.8dB
10	Radiated disturbance(1GHz-6GHz)	U=4.9dB
11	Radiated disturbance(1GHz-18GHz)	U=5.0dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	folding wireless charger
Model No.:	YX-342
Serial No.:	N/A
Model Different.:	N/A
Hardware version:	V1.0
Software version:	V1.0
Operation Frequency:	mobile phone/Airpods:115.6KHz~205KHz Iwatch:321.9KHz~336.9KHz
Test Frequency	mobile phone:124.6KHz Airpods:130.8KHz Iwatch:323.1KHz
Modulation type:	MSK
Antenna Type:	Inductive loop coil Antenna
Antenna gain:	0dBi
Power supply:	Input: DC9V--2A;12V2A Charging mobile phone output: 15W/10W/7.5W/5W Charging iwatch output: 2.5W Charging Airpods output: 3W

3.2 Test mode

Transmitting mode	
Mode1	Charging mobile phone output: 15W
Mode2	Charging iwatch output: 2.5W
Mode3	Charging Airpods output: 2.5W
Mode4	Full load test

NOTE: Mode4 is the full load mode, and the full load mode is the worst mode;

Test channel


Channel	Test Frequency(KHz)
Cellphone loop coil Antenna	124.6KHz
Airpods	130.8KHz
Iwatch	323.1KHz

3.3 Block Diagram of EUT Configuration

Conducted Emission



Radiated Emission

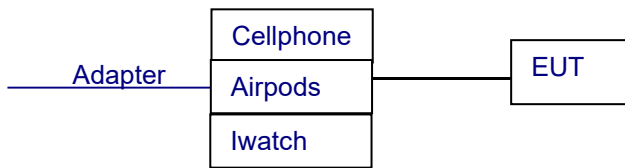

3.4 Test Conditions

Temperature: 23~26℃

Relative Humidity: 54~63 %

3.5 Description Of Support Units (Conducted Mode)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E1	power adapter	N/A	TCS-QC530	N/A	Auxiliary
E2	Watch	Apple	Apple watch	N/A	Auxiliary
E3	mobile phone	Huawei	p40pro	N/A	Auxiliary
E4	Earbuds	Apple	/	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	1.0M	DC cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	Oct. 18, 2022	Oct. 17, 2023
2	Spectrum Analyzer (1GHz-40GHz)	R&S	FSQ	100363	Oct. 17, 2022	Oct. 16, 2023
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Oct. 18, 2022	Oct. 17, 2023
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	Oct. 17, 2022	Oct. 16, 2023
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	Oct. 17, 2022	Oct. 16, 2023
6	Loop Antenna	TESEQ	HLA6121	58357	Oct. 17, 2022	Oct. 16, 2023
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	Oct. 17, 2022	Oct. 16, 2023
8	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	Oct. 18, 2022	Oct. 17, 2023
9	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Oct. 18, 2022	Oct. 17, 2023
10	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Oct. 18, 2022	Oct. 17, 2023
11	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Oct. 18, 2022	Oct. 17, 2023
12	ESG Signal Generator	Agilent	E4421B	N/A	Oct. 18, 2022	Oct. 17, 2023
13	Signal Generator	Agilent	N5182A	N/A	Oct. 22, 2022	Oct. 21, 2023
14	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	Oct. 17, 2022	Oct. 16, 2023
15	MWRF Power Meter Test system	MW	MW100-RPCB	N/A	Oct. 22, 2022	Oct. 21, 2023
16	D.C. Power Supply	LongWei	TPR-6405D	N/A	\	\
17	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
18	RF Software	MW	MTS8310	V2.0.0.0	\	\
19	Turntable	MF	MF-7802BS	N/A	\	\
20	Antenna tower	MF	MF-7802BS	N/A	\	\

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Oct. 22, 2022	Oct. 21, 2023
2	LISN	CYBERTEK	EM5040A	E1850400149	Oct. 22, 2022	Oct. 21, 2023
3	Test Cable	N/A	C01	N/A	Oct. 18, 2022	Oct. 17, 2023
4	Test Cable	N/A	C02	N/A	Oct. 18, 2022	Oct. 17, 2023
5	EMI Test Receiver	R&S	ESCI3	101393	Oct. 17, 2022	Oct. 16, 2023
6	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\

4. CONDUCTED EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quas-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

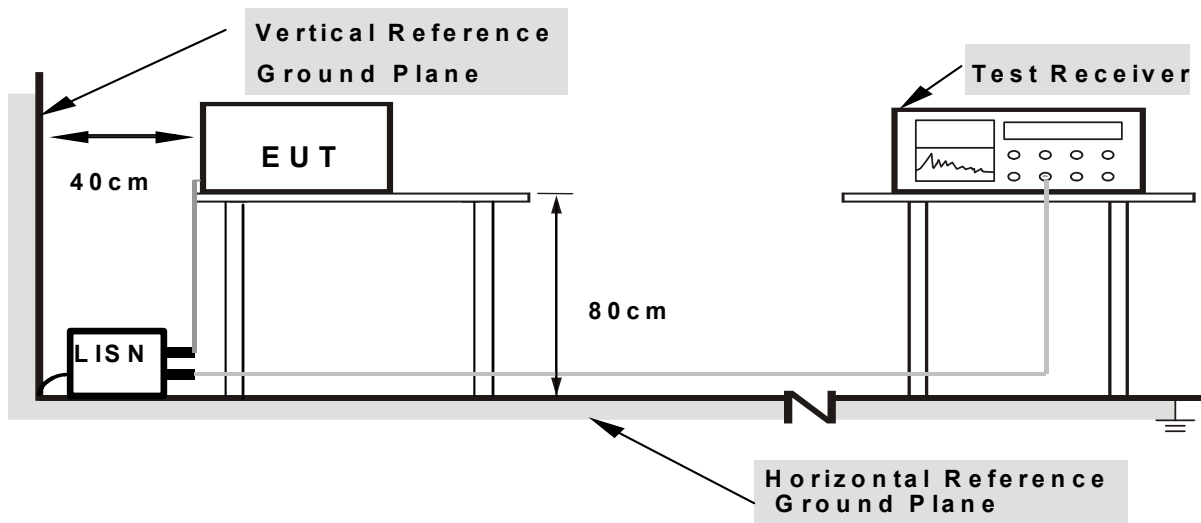


- Note:** 1.Support units were connected to second LISN .
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80
from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 Test Result

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test mode	Mode 4

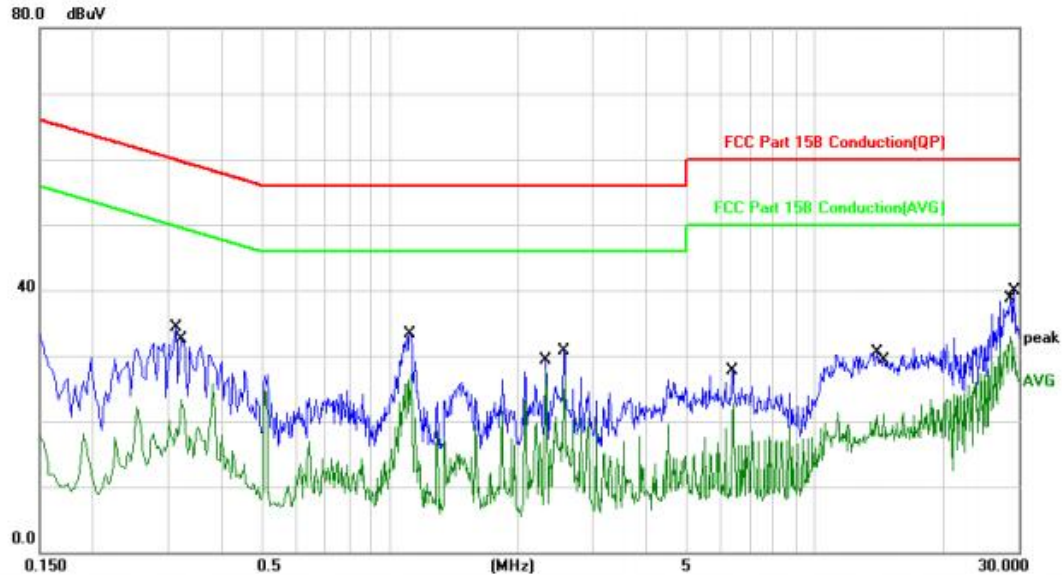


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.3140	24.47	9.87	34.34	59.86	-25.52	QP	
2	0.3220	13.37	9.87	23.24	49.65	-26.41	AVG	
3	1.1140	23.61	9.74	33.35	56.00	-22.65	QP	
4	1.1220	17.42	9.74	27.16	46.00	-18.84	AVG	
5	2.3300	18.34	9.63	27.97	46.00	-18.03	AVG	
6	2.5620	20.89	9.72	30.61	56.00	-25.39	QP	
7	6.3780	18.09	9.63	27.72	60.00	-32.28	QP	
8	6.3859	13.05	9.63	22.68	50.00	-27.32	AVG	
9	13.9580	20.81	9.71	30.52	60.00	-29.48	QP	
10	14.5020	11.46	9.68	21.14	50.00	-28.86	AVG	
11 *	28.6900	23.44	9.51	32.95	50.00	-17.05	AVG	
12	29.3500	30.31	9.50	39.81	60.00	-20.19	QP	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. Mode 4 is the full load mode, and the full load mode is the worst mode;

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test mode	Mode 4

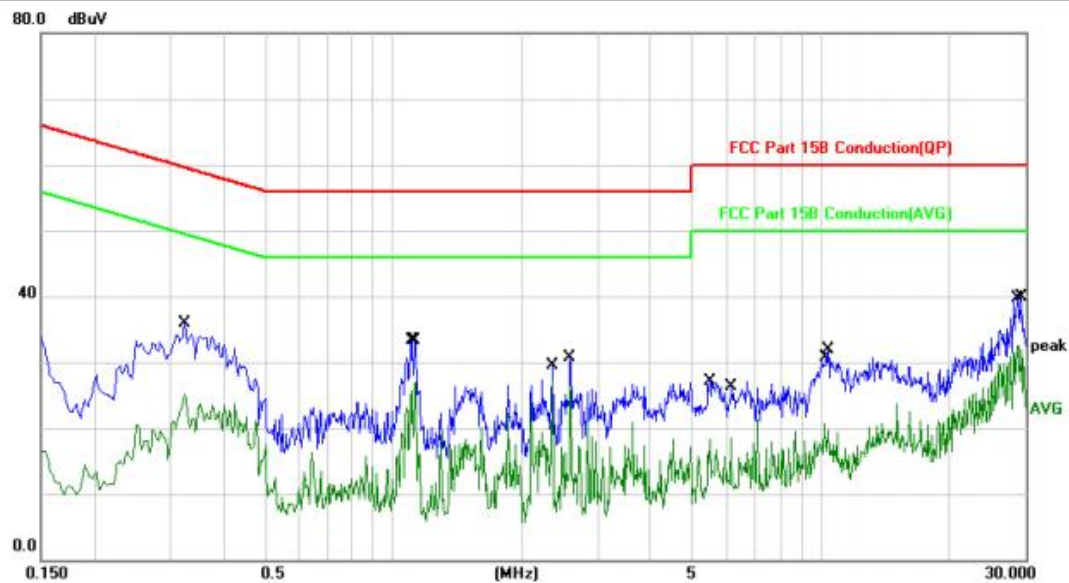

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3260	26.11	9.86	35.97	59.55	-23.58	QP	
2		0.3260	15.25	9.86	25.11	49.55	-24.44	AVG	
3		1.1019	23.65	9.74	33.39	56.00	-22.61	QP	
4		1.1220	17.13	9.74	26.87	46.00	-19.13	AVG	
5		2.3500	17.43	9.63	27.06	46.00	-18.94	AVG	
6		2.5940	20.89	9.72	30.61	56.00	-25.39	QP	
7		5.4860	17.46	9.65	27.11	60.00	-32.89	QP	
8		6.1300	8.77	9.64	18.41	50.00	-31.59	AVG	
9		10.1380	10.88	9.76	20.64	50.00	-29.36	AVG	
10		10.3860	22.10	9.78	31.88	60.00	-28.12	QP	
11	*	28.8020	23.02	9.51	32.53	50.00	-17.47	AVG	
12		29.3540	30.37	9.50	39.87	60.00	-20.13	QP	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. Mode 4 is the full load mode, and the full load mode is the worst mode;

5. RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

5.1 Radiated Emission Limits

Limits for frequency below 30MHz


Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Limits for frequency Above 30MHz


Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value

5.2 Anechoic Chamber Test Setup Diagram

(A) Radiated Emission Test-Up Frequency Below 30MHz

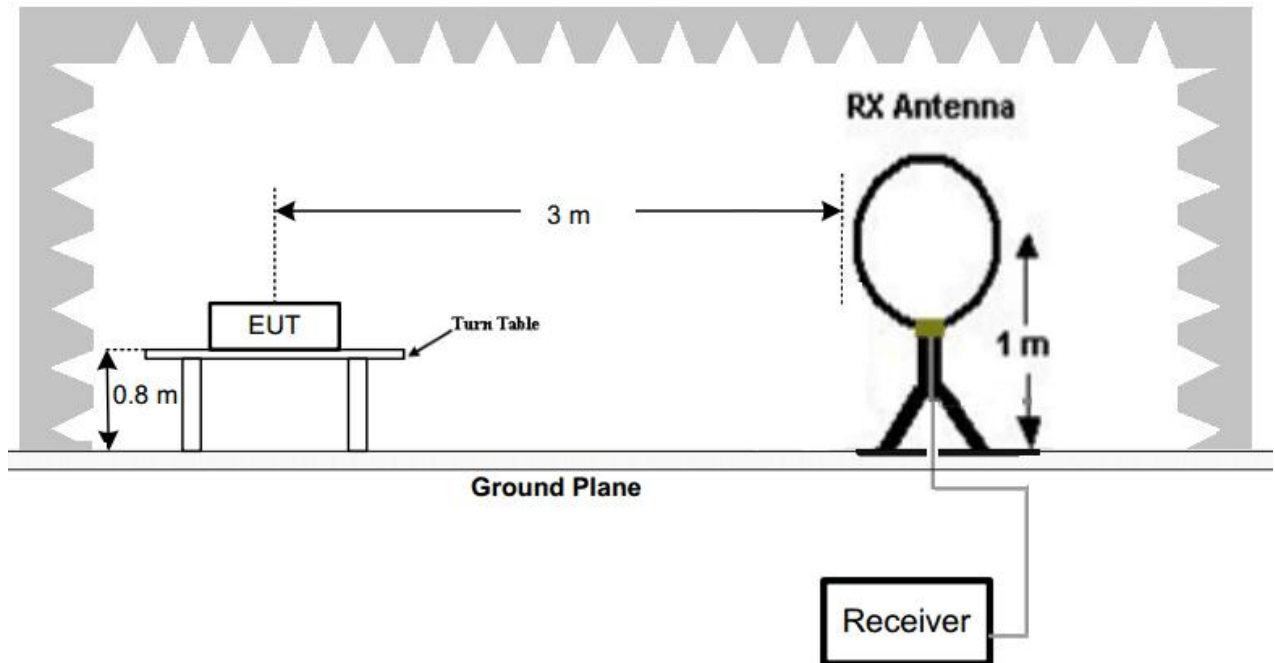

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

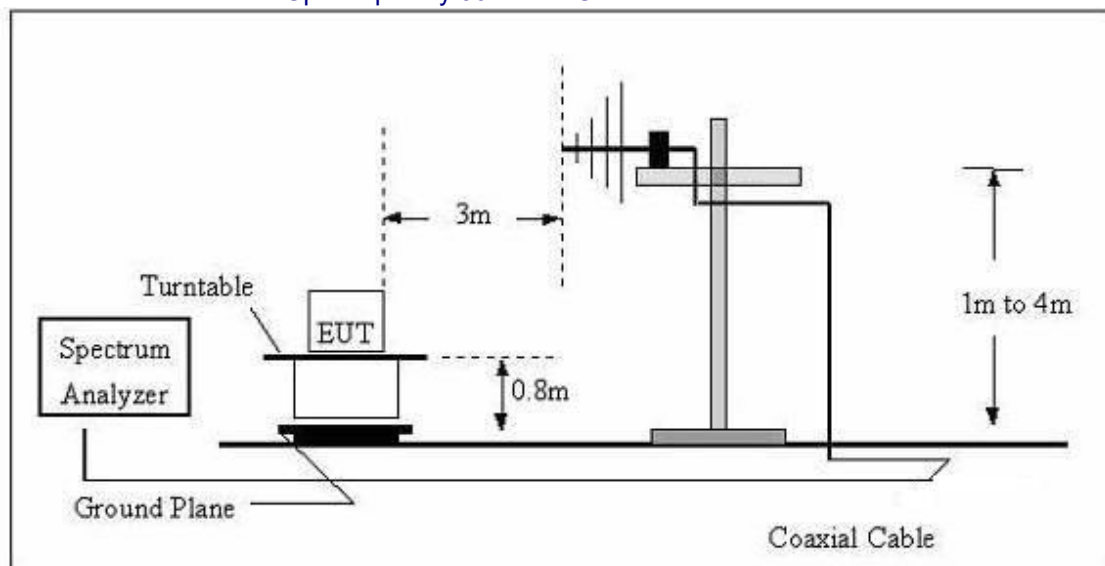

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.

5.3 Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on an antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5 Test Result

Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m+ 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40

9 kHz~30 MHz

Frequency	Reading	Polar	Antenna Factor	Cable Loss	Emission Levels	Limits at 3m	Margin	Detector Mode
(MHz)	(dBμV/m)	Loop	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dBμV/m)	
0.0103	43.76	Loop	23.62	-0.17	67.21	127.35	-60.14	QP
0.1246	73.85	Loop	23.62	-0.17	97.30	105.69	-8.39	QP
0.1308	68.47	Loop	23.62	-0.17	91.92	105.27	-13.35	QP
0.2041	47.50	Loop	23.61	0.01	71.12	101.41	-30.29	QP
0.3231	56.45	Loop	25.13	0.01	81.59	117.42	-35.83	QP
1.242	31.68	Loop	27.15	-0.25	58.58	65.72	-7.14	QP
12.182	36.33	Loop	23.72	-0.24	59.81	69.54	-9.73	QP

Note:

Pre-scan in the all of mode, the worst case in of was recorded.


Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level- Limit.

Mode 4 is the full load mode, and the full load mode is the worst mode;only recorded worst date.

30MHz-1GHz


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test mode	Mode 4

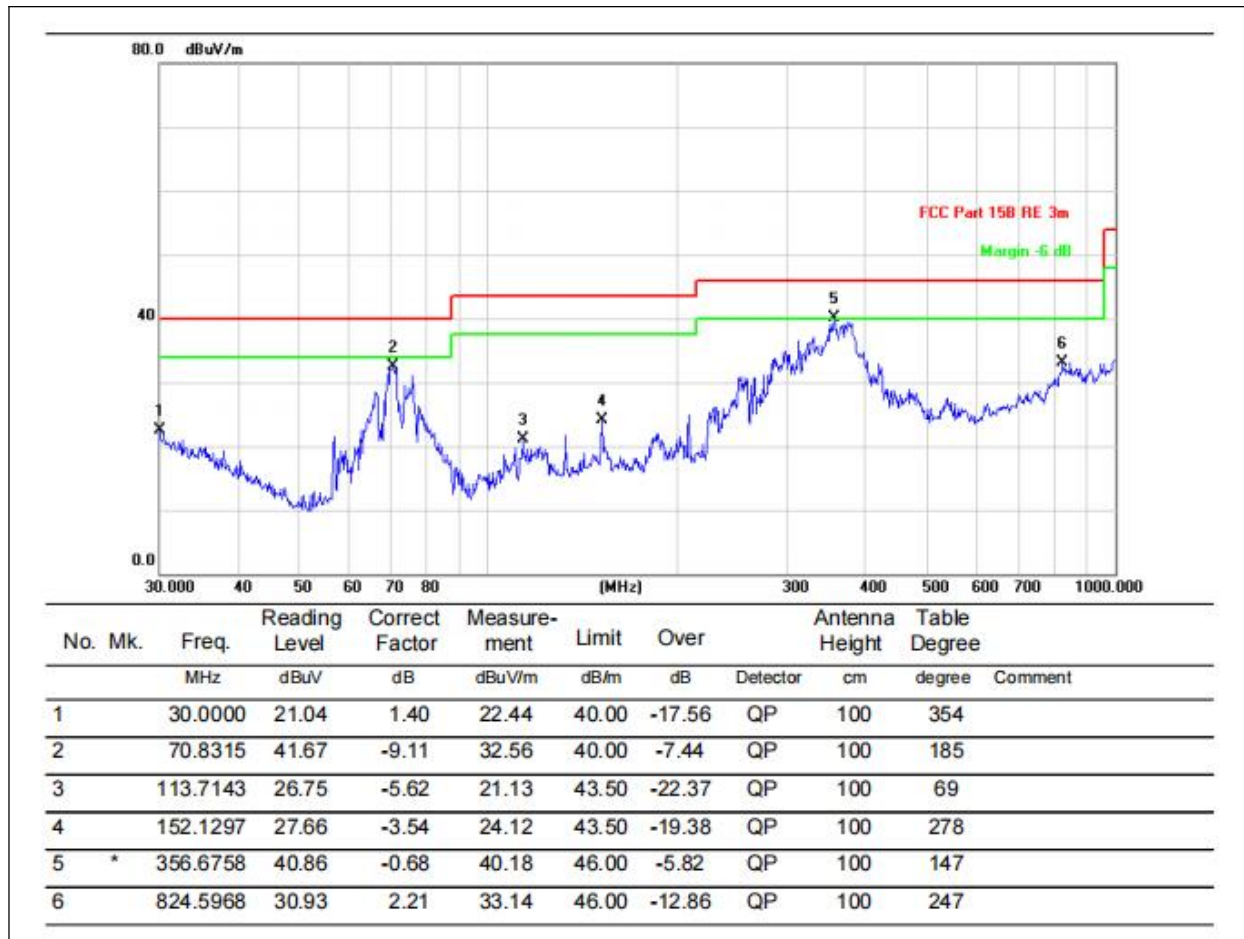

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. Mode 4 is the full load mode, and the full load mode is the worst mode;

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test mode	Mode 4

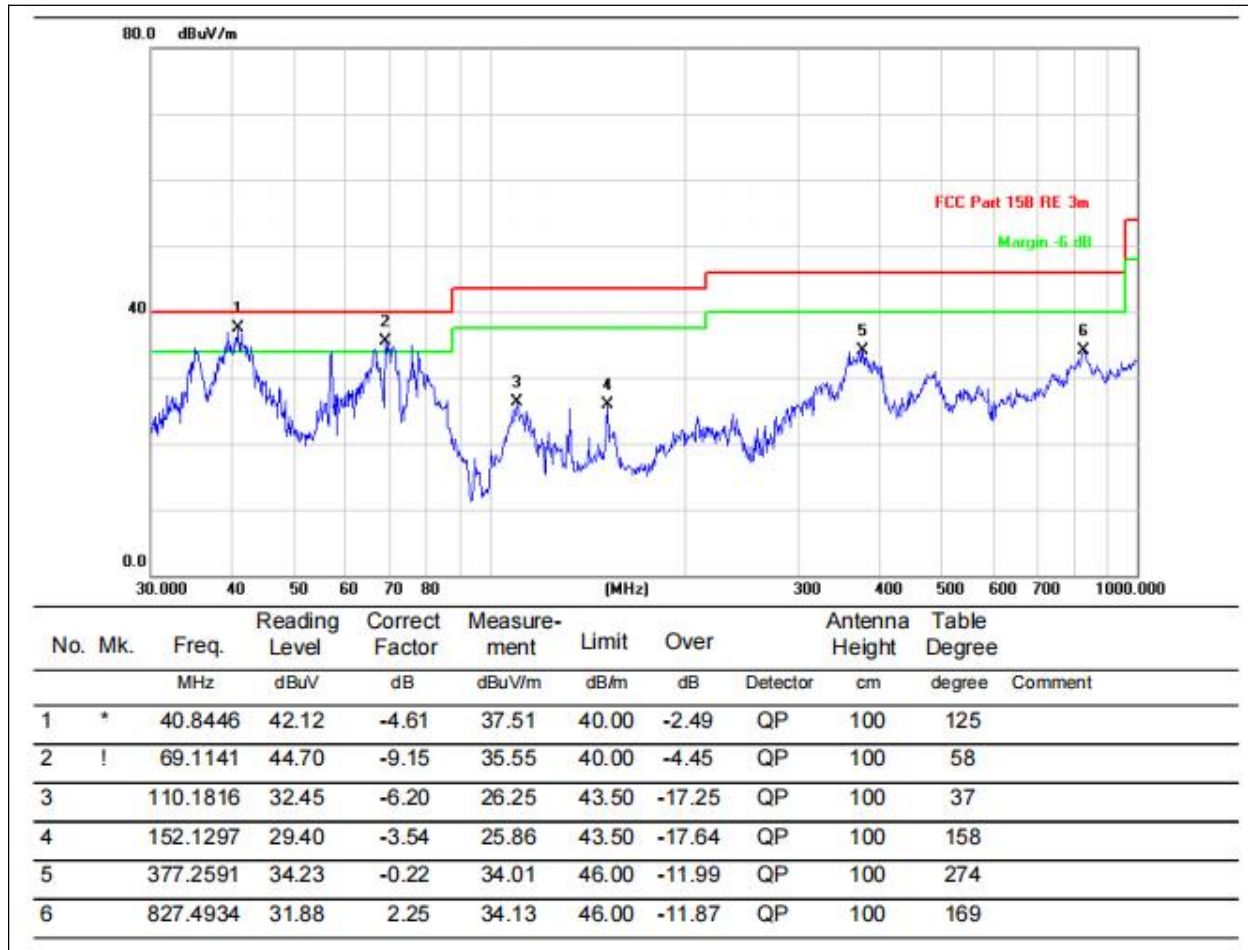

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. Mode 4 is the full load mode, and the full load mode is the worst mode;

6. BANDWIDTH TEST

1. Set RBW = 10 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP




Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa		

Frequency (KHz)	Antenna	20dB bandwidth (KHz)	99% bandwidth (KHz)	Result
124.6KHz	mobile phone	25.75	21.894	Pass
130.8KHz	Airpods	25.83	21.910	Pass
323.1KHz	iwatch	41.62	30.598	Pass


Test Frequency:124.6KHz--mobile phone--ANT

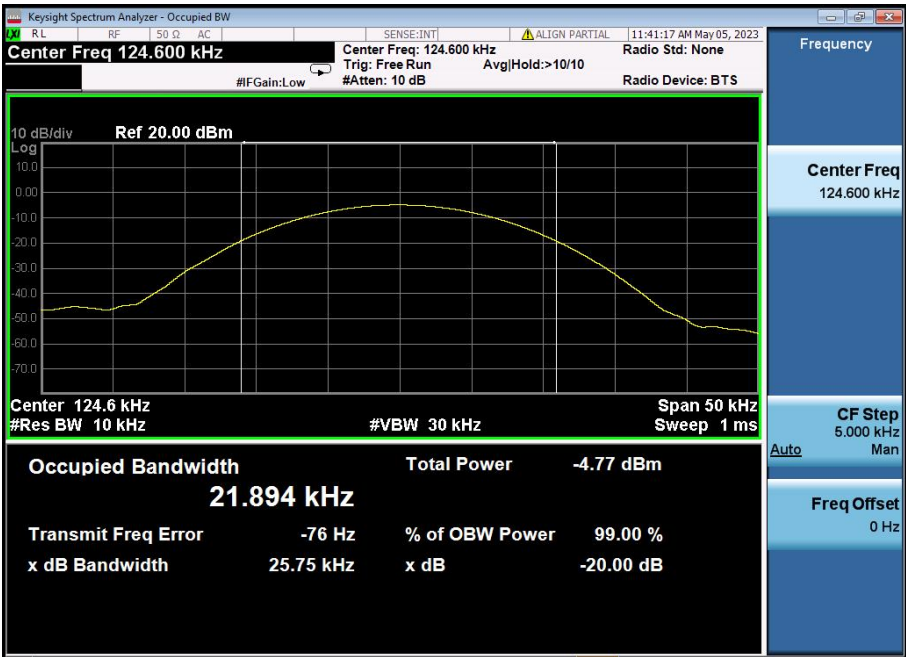

Test Frequency:130.8KHz--Airpods--ANT



Test Frequency:323.1KHz--iwatch--ANT

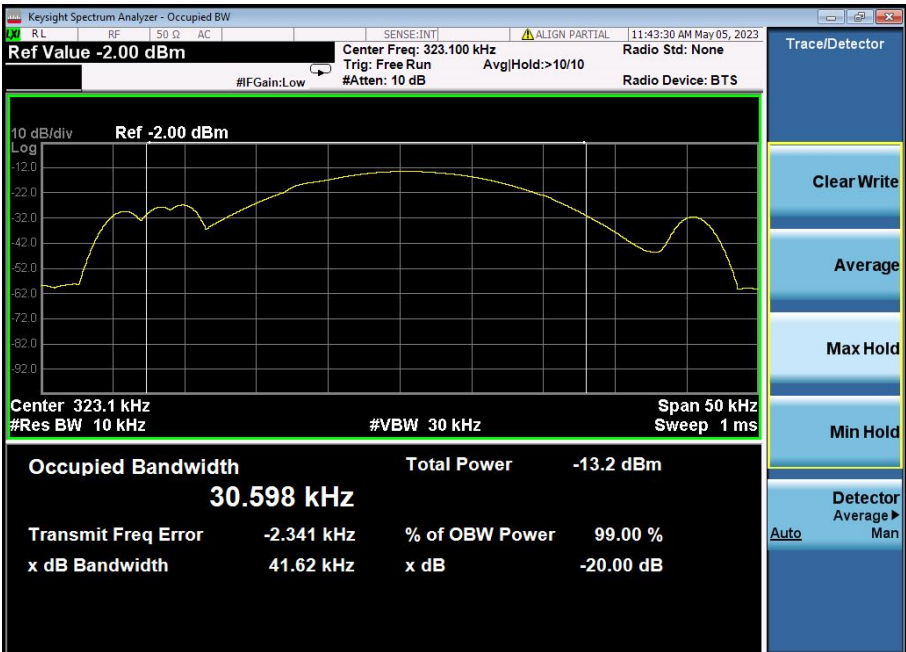

7. TEST SETUP PHOTO

Reference to the Setup Photos for details.

8. EUT CONSTRUCTIONAL DETAILS

Reference to the external photos file and internal photos file for details.

***** **END OF REPORT** *****