


NBOX

NBOX 2 Pro User Guide

Know about NBOX 2 Pro

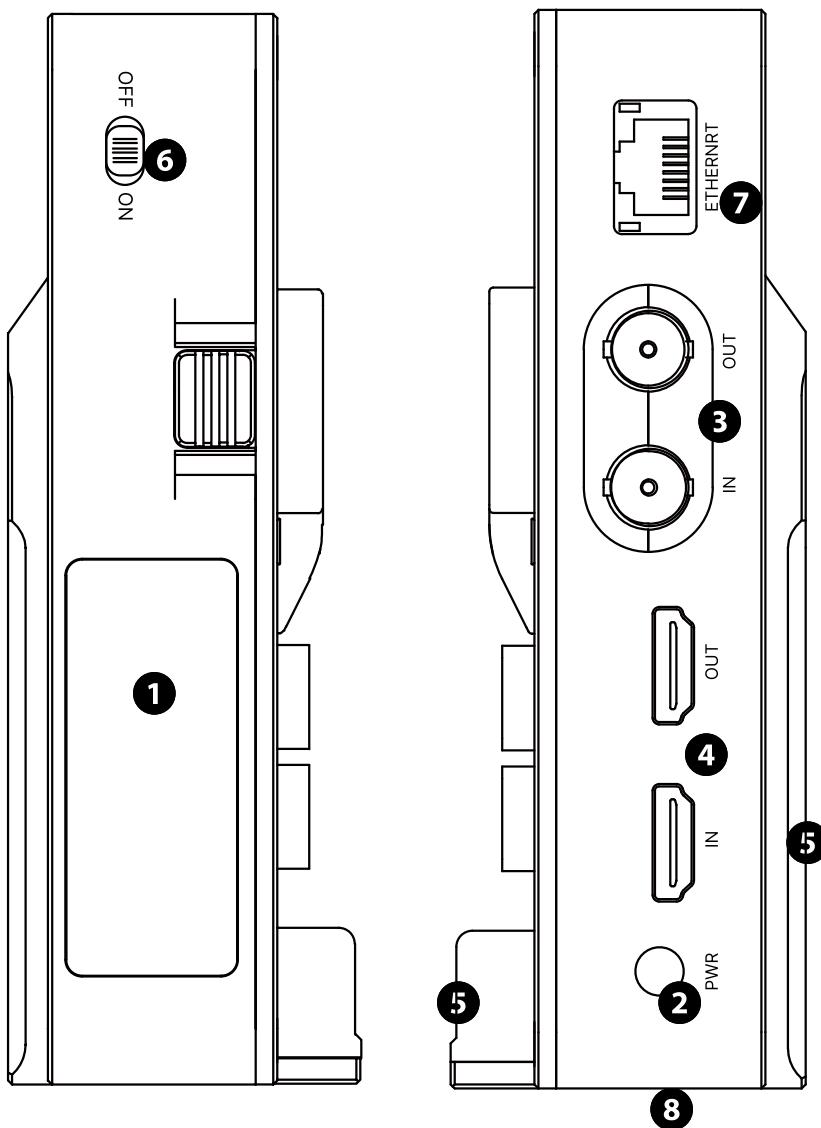

1 Status screen

2 DC power jack

3 SDI port

4 HDMI Port

5 Battery mount

6 ON/OFF Switch

7 Ethernet Port

8 1/4 threaded hole

Bind NBOX 2 Pro in FILMING App



Open FILMING App

Click ON/OFF Switch
on NBOX 2 mini
scan the qr code

Select the slot you want to bind
Or create new projects
Click "OK" to complete

**If NBOX 2 mini
already binded by others
press reset button
on bottom side for 3 seconds**

NBOX 2 Pro

status information



- ① Input status
- ② NBOX battery status
- ③ NBOX rec status
- ④ NBOX live streaming status
- ⑤ Cloud server connectiong status
- ⑥ Real-time network status

NBOX 2 Pro Specs

Rec resolution	1920x1080 up to 60fps
Rec codec	Video: H.264 \ HEVC up to 32Mbps Audio: AAC up to 128Kbps
Built-in storage	128GB
Video port	HDMI 1.4a 3G - SDI up to 1920 × 1080 60fps input
Network	WI-FI 5 AP、STA
Camera support	ARRI - ALEXA SONY - FX 、 FS CANON - EOS Cinema SONY - Alpha 7、 Alpha 9 CANON - EOS R PANASONIC - S、 GH、 BGH、 BS
Form factor	About 100×60×22mm, Aluminum alloy housing, weight about 357g
Power	V-mount Battery 12-19V DC input

This device has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This device generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this device does cause harmful interference to radio or television reception, which can be determined by turning the device off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the device and receiver.
- Connect the device into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

FCC Radiation Exposure Statement

The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located for operating in conjunction with any other antenna or transmitter.

FCC **CE** **RoHS** 

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation